



UzAssytem

SURKHANDARYA (1600 MW)

CCPP PROJECT

Draft Environmental & Social Impact Assessment Report

ASE-UZA-571-REP-ESA-0001-04

Rev	Date	Purpose of issue	Issuer	Checker	Approver
0	15/10/2021	Initial issuance	U.GÜNGÖR	H.BEKAR	A. PONSARDIN
1	15/11/2021	Revised as per the Client's comments	U.GÜNGÖR	H.BEKAR	A. PONSARDIN
2	16/12/2021	Revised as per the Client's comments	U.GÜNGÖR	H.BEKAR	A. PONSARDIN
3	29/04/2022	Revised as per the Client's comments	U.GÜNGÖR	H.BEKAR	A. PONSARDIN
4	25/07/2022	Revised as per the Lenders' comments	M. ACIRLI	H.BEKAR	A. PONSARDIN



UzAssytem

SURKHANDARYA (1600 MW) CCPP PROJECT

DRAFT ENVIRONMENTAL & SOCIAL IMPACT ASSESSMENT REPORT

ASE-UZA-571-REP-ESA-0001-04

Rev	Date	Purpose of issue	Issuer	Checker	Approver
0	15/10/2021	Initial issuance	U.GÜNGÖR	H.BEKAR	A. PONSARDIN
1	15/11/2021	Revised as per the Client's comments	U.GÜNGÖR	H.BEKAR	A. PONSARDIN
2	16/12/2021	Revised as per the Client's comments	U.GÜNGÖR	H.BEKAR	A. PONSARDIN
3	29/04/2022	Revised as per the Client's comments	U.GÜNGÖR	H.BEKAR	A. PONSARDIN
4	25/07/2022	Revised as per the Lenders' comments	B.KADIOĞLU M. ACIRLI	H.BEKAR	A. PONSARDIN



..... **1**

ABBREVIATIONS & DEFINITIONS..... 12

1. INTRODUCTION..... 36

2. PROJECT INFORMATION..... 37

2.1 PROJECT DESCRIPTION 37

 2.1.1 Project Facilities 38

 2.1.2 Ancillary/Support Facilities 45

 2.1.3 Associated Facilities..... 47

 2.1.4 National EIA Requirements regarding OTLs and Natural Gas Pipelines 51

 2.1.5 Likely Impacts of Overhead Transmission Lines and Mitigation Measures 52

2.2 PROJECT LOCATION 59

2.3 LAND USE AND SITE CONDITION..... 63

 2.3.1 Land Ownership 64

2.4 PROJECT SPATIAL SCOPE AND AREAS OF INFLUENCE 64

2.5 CONSTRUCTION PHASE 70

 2.5.1 Water Consumption 71

 2.5.2 Sanitary Services 71

 2.5.3 Temporary Construction Area 71

 2.5.4 Accommodation and Logistics 71

 2.5.5 Workforce Requirement 71

 2.5.6 Vehicles, Equipment, and Machinery Requirement 72

2.6 COMMISSIONING PHASE 73

2.7 OPERATION PHASE 74

2.8 CLOSURE AND DECOMMISSIONING PHASE	75
2.9 PROJECT SCHEDULE AND MILESTONES	75
3. APPROACH TO ESIA.....	76
3.1 OBJECTIVES OF THE ESIA.....	76
3.2 STRUCTURE OF THE ESIA	76
3.3 ESIA TEAM.....	80
3.4 ESIA METHODOLOGY.....	82
3.5 SIGNIFICANCE DETERMINATION METHODOLOGY	83
3.6 SCOPE AND OBJECTIVES OF THE ESIA	86
3.7 ENVIRONMENTAL AND SOCIAL CATEGORIZATION AND ITS RATIONALE	87
3.8 BASELINE STUDIES AND RESEARCH	89
3.9 SCOPING REPORT	91
3.10 PROJECT STAKEHOLDER ANALYSIS AND CONSULTATIONS.....	92
3.10.1 Uzbekistan Requirements	92
3.10.2 Lender Requirements	92
3.10.3 Project Stakeholders	93
4. PROJECT ALTERNATIVES	100
4.1 DO-NOTHING SCENARIO	100
4.2 ALTERNATIVE DESIGN OPTIONS.....	101
4.2.1 Cooling Technology	102
4.3 BEST AVAILABLE TECHNIQUES.....	105
5. REGULATORY FRAMEWORK	105
5.1 NATIONAL ENVIRONMENTAL POLICY AND LEGAL FRAMEWORK.....	105
5.1.1 Environmental Regulator.....	106
5.1.2 Key Environmental Laws of Uzbekistan	107
5.1.3 Land Rights, Acquisition and Resettlement Laws.....	110
5.1.4 Employment and Labor Laws	110
5.1.5 National Environmental Impact Assessment Process	111
5.2 INTERNATIONAL CONVENTIONS/PROTOCOLS.....	115
5.3 INTERNATIONAL ENVIRONMENTAL STANDARDS	118
5.3.1 Equator Principles.....	118



5.3.2	AIIB Environmental and Social Policy	118
5.3.3	IFC Standards.....	119
5.3.4	Other Relevant Standards, Guidelines and Good Practices	120
6.	AIR EMISSIONS AND AMBIENT AIR QUALITY.....	122
6.1	STANDARDS AND REGULATORY REQUIREMENTS	122
6.1.1	National Standards.....	122
6.1.2	Lender Requirements.....	125
6.2	OBSERVATION AND BASELINE CONDITIONS	128
6.2.1	Local Meteorological Conditions.....	133
6.2.2	Local Influences on Air Quality	142
6.2.3	Existing Ambient Air Quality Data	143
6.3	SENSITIVE RECEPTORS	149
6.4	POTENTIAL IMPACTS, MITIGATION, MANAGEMENT & RESIDUAL IMPACT	150
6.4.1	Construction Phase.....	150
6.4.2	Operational Phase	156
6.5	CUMULATIVE IMPACTS	188
6.6	MONITORING	188
7.	NOISE LEVEL	190
7.1	STANDARDS AND REGULATORY REQUIREMENTS	190
7.1.1	National Standards.....	190
7.1.2	Lender Requirements.....	191
7.2	OBSERVATION AND BASELINE CONDITIONS	193
7.2.1	Sensitive Receptors	201
7.3	POTENTIAL IMPACTS, MITIGATION, MANAGEMENT & RESIDUAL IMPACT	202
7.3.1	Construction Phase.....	202
7.3.2	Operational Phase	237
7.4	CUMULATIVE IMPACTS	246
7.5	MONITORING	246
8.	WATER RESOURCES AND WATER ENVIRONMENT	248
8.1	STANDARDS AND REGULATORY REQUIREMENTS	248



8.1.1 National Regulations	248
8.1.2 Lender Requirements.....	253
8.2 NATIONAL CONTEXT	256
8.2.1 Basin Water Organisation of Amudarya (Amu Darya)	257
8.2.2 Existing Water Management Issues	258
8.3 LOCAL CONTEXT	259
8.3.1 Water Resources Near the Project Site	259
8.4 BASELINE STUDIES.....	260
8.4.1 Water Quality	260
8.4.2 Sensitive Receptors	269
8.5 POTENTIAL IMPACTS, MITIGATION, MANAGEMENT & RESIDUAL IMPACT	270
8.5.1 Construction Phase.....	270
8.5.2 Operational Phase	280
8.6 CUMULATIVE IMPACTS	288
8.7 MONITORING	288
9. ECOLOGY	291
9.1 STANDARDS AND REGULATORY REQUIREMENTS	291
9.1.1 National Regulations	291
9.1.2 International Conventions/Protocols	292
9.1.3 Lender Requirements	293
9.2 BIODIVERSITY IN UZBEKISTAN.....	293
9.2.1 General Overview	293
9.2.2 Protected and Important Biodiversity Areas.....	294
9.3 TERRESTRIAL ECOLOGY	297
9.3.1 Baseline Conditions	298
9.3.2 Survey Methodology.....	299
9.3.3 Habitat Classification	302
9.3.4 Terrestrial Ecological Surveys	313
9.3.5 Terrestrial Sensitive Receptors	363
9.4 AQUATIC ECOLOGY.....	364



9.4.1	Baseline Conditions	364
9.4.2	Survey Methodology.....	367
9.4.3	Aquatic Ecological Surveys.....	372
9.4.4	Aquatic Sensitive Receptors	394
9.5	PRELIMINARY CRITICAL HABITAT ASSESSMENT	395
9.5.1	The Critical Habitat Assessment Process	395
9.6	POTENTIAL IMPACTS, MITIGATION, MANAGEMENT & RESIDUAL IMPACT	415
9.6.1	Construction Phase	415
9.6.2	Operational Phase	423
9.7	CUMULATIVE IMPACTS	427
9.8	MONITORING	428
10.	SOIL, GEOLOGY AND GROUNDWATER.....	430
10.1.1	National Standards	430
10.1.2	Lender Requirements	431
10.1.3	Other Requirements.....	433
10.2	BASELINE DATA	433
10.2.1	Survey Methodology	433
10.2.2	Geomorphological Structure and Hydrographic Network	433
10.2.3	Local Geology	434
10.2.4	Geotechnical investigations.....	437
10.2.5	Hazardous Phenomena.....	438
10.2.6	Sand Dune Migration and Aeolian sand transportation	441
10.2.7	Groundwater.....	442
10.2.8	Soil.....	446
10.3	POTENTIAL IMPACTS, MITIGATION, MANAGEMENT & RESIDUAL IMPACTS.....	454
10.3.1	Construction Phase	456
10.3.2	Operational Phase	458
10.4	CUMULATIVE IMPACTS.....	460
10.5	MONITORING	460
11.	SOLID WASTE & WASTEWATER MANAGEMENT	462



11.1 STANDARDS AND REGULATORY REQUIREMENTS	462
11.1.1 National Requirements	462
11.1.2 Lenders’ Requirements	462
11.2 LOCAL CONDITIONS AND OBSERVATIONS	463
11.2.1 Waste Management at the Project Area	464
11.2.2 Waste Management Hierarchy	468
11.2.3 Hazardous Waste	470
11.3 POTENTIAL IMPACTS, MITIGATION, MANAGEMENT & RESIDUAL IMPACTS.....	474
11.3.1 Construction Phase	474
11.3.2 Operation Phase	481
11.4 CUMULATIVE IMPACTS.....	486
11.5 MONITORING	486
12. TRAFFIC AND TRANSPORTATION	489
12.1 STANDARDS AND REGULATORY REQUIREMENTS	489
12.1.1 National Requirements	489
12.1.2 Lenders Requirements	489
12.2 OBSERVATION AND BASELINE CONDITION	489
12.2.1 General view	489
12.2.2 Project Site Observations	491
12.3 SENSITIVE RECEPTORS	493
12.4 POTENTIAL IMPACTS, MITIGATION, MANAGEMENT & RESIDUAL IMPACT	493
12.4.1 Construction Phase	493
12.4.2 Operational Phase	497
12.5 CUMULATIVE IMPACTS.....	497
12.6 MONITORING	498
13. ARCHAEOLOGY AND CULTURAL HERITAGE	499
13.1 STANDARDS AND REGULATORY REQUIREMENTS	499
13.1.1 National Requirements	499
13.1.2 Lender Requirements	499
13.2 OBSERVATIONS AND BASELINE CONDITIONS	500

13.2.1 Sensitive Receptor	502
13.3 POTENTIAL IMPACTS, MITIGATION, MANAGEMENT & RESIDUAL IMPACT	502
13.3.1 Construction Phase	502
13.3.2 Operational Phase	502
13.4 MONITORING	503
14. LANDSCAPE AND VISUAL AMENITY	505
14.1 STANDARDS AND REGULATORY REQUIREMENTS	505
14.2 OBSERVATIONS AND BASELINE CONDITIONS	505
14.2.1 Sensitive Receptors	506
14.3 POTENTIAL IMPACTS, MITIGATION, MANAGEMENT & RESIDUAL IMPACT	506
14.3.1 Construction Phase	506
14.3.2 Operational Phase	509
14.4 CUMULATIVE IMPACTS.....	514
15. GHG EMISSIONS AND CLIMATE CHANGE	515
15.1 STANDARDS AND REGULATIONS	515
15.1.1 National Context and Regulations	515
15.1.2 Lender Requirements	516
15.2 NATIONAL CONTEXT.....	518
15.3 CLIMATE CHANGE IMPACTS AND MITIGATION	522
15.3.1 GHG Emissions.....	522
15.3.2 Mitigation Measures	532
15.3.3 CO ₂ Reduction Estimation	533
15.4 CLIMATE RISK ASSESSMENT	536
15.4.1 Physical Risk Assessment	536
15.4.2 Transition Risks.....	544
16. SOCIO-ECONOMICS	548
16.1 INTRODUCTION	548
16.1.1 Purpose.....	548
16.1.2 Importance of Social Impact Assessment.....	548
16.1.3 Scope	549



16.1.4 Definition of Project Impact Area	555
16.2 BASELINE SOCIO-ECONOMIC DATA.....	559
16.2.1 Social Structure.....	559
16.2.2 Demography	562
16.2.3 Population Distribution	567
16.2.4 Education	569
16.2.5 Health.....	572
16.2.6 Social Services.....	579
16.2.7 General Economic Structure and Sectors	583
16.2.8 Income sources.....	597
16.2.9 Labor Force	601
16.3 ADDITIONAL SOCIAL SITE SURVEY	603
16.3.1 Household survey	604
16.3.2 Local Administrator survey	605
16.3.3 Interviews with Governmental Institutions.....	605
16.4 SOCIAL IMPACT ASSESSMENT	608
16.4.1 General Social Aspect.....	608
16.4.2 Evaluation of the Field Survey Findings	614
16.5 POTENTIAL IMPACTS, MITIGATION, MANAGEMENT & RESIDUAL IMPACT MEASURES	638
16.5.1 Construction Phase	638
16.5.2 Operation Phase.....	644
16.5.3 Cumulative Impacts.....	646
17. STAKEHOLDER ENGAGEMENT	647
17.1 REGULATIONS AND REQUIREMENTS	647
17.1.1 National Requirements	647
17.1.2 International Requirements	647
17.1.3 Project Stakeholders	651
17.1.4 Stakeholder Engagement Plan.....	653
17.1.5 Public Consultation Timeline.....	654

17.1.6 ESIA Disclosure Process	657
17.1.7 Grievance Mechanism	657
18. LIVELIHOOD RESTORATION	663
18.1 LEGISLATION – INSTITUTIONAL FRAMEWORK & INTERNATIONAL STANDARDS	663
18.2 ASSESSMENT OF EXISTING SITUATION	664
18.3 IMPACT ON LIVELIHOODS	664
18.4 ELIGIBILITY	665
18.5 LIVELIHOOD RESTORATION AND COMMUNITY DEVELOPMENT PROGRAMS	665
18.6 PRINCIPLES AND VALUES.....	666
18.7 MONITORING & EVALUATION	666
18.8 IMPLEMENTATION SCHEDULE AND BUDGET	666
19. LABOUR & WORKING CONDITIONS	666
19.1 STANDARDS AND REGULATORY REQUIREMENTS	666
19.1.1 National Requirements	666
19.1.2 Lenders Requirements	670
19.2 OBSERVATIONS AND BASELINE CONDITIONS	675
19.3 POTENTIAL IMPACTS, MITIGATION, MANAGEMENT & RESIDUAL IMPACT	676
19.3.1 Construction Phase	676
19.3.2 Operational Phase	687
20. COMMUNITY HEALTH, SAFETY AND SECURITY.....	693
20.1 NATIONAL REQUIREMENTS	694
20.2 LENDERS REQUIREMENTS	694
20.3 OBSERVATIONS AND BASELINE CONDITIONS	696
20.3.1 Sanitary Protection Zone	697
20.4 POTENTIAL IMPACTS, MITIGATION, MANAGEMENT & RESIDUAL IMPACT	697
20.4.1 Construction Phase	697
20.4.2 Operation Phase	708
21. HUMAN RIGHTS IMPACT ASSESSMENT	711
21.1 OVERVIEW	711
21.2 STANDARDS AND REGULATIONS	711
21.2.1 National Context and Regulations	711



21.2.2 Lender Requirements	712
21.3 POTENTIAL IMPACTS UPON HUMAN RIGHTS	716
21.3.1 Construction	716
21.3.2 Operational Phase	717
22. REFERENCES	719



Abbreviations & Definitions

AELs	Air Emission Limits
%	Percent
°C	Centigrade Degree
AAS	Atomic Absorption Spectrometry
ACC	Air-Cooled Condenser
AEL	Air Emission Limits
AIIB	Asian Infrastructure Investment Bank
AQMS	Air Quality Monitoring Station
As	Arsenic
B	Boron
Ba	Barium
BAT	Best Available Techniques
BERN	Berne Convention on the Conservation of European Wildlife and Natural Habitats
BOD	Biochemical Oxygen Demand
BPI	Biotic Periphyton Index
BREFs	Eu Best Available Techniques Reference Documents
BWO	Basin Water Office
CA	Competent Authority
CAREC	Central Asia Regional Economic Cooperation
CCGT	Combined Cycle Gas Turbine
Cd	Cadmium
CE	Critically Endangered
CH₄	Methane
CITES	Convention On International Trade In Endangered Species Of Wild Fauna And Flora
CM	The Cabinet Of Ministers
cm	Centimeter
CO	Carbon Monoxide
CO₂	Carbon dioxide
COD	Chemical Oxygen Demand
Conductivity	A Measure Of A Material's Ability To Conduct An Electric Current
Cr	Chromium
CR	Critical



CT	Cooling Tower
Cu	Copper
dB	Decibel
DCS	Distributed Control System
DD	Data Deficient
deg	Degree
dm	Decimeter
E	East
E&S	Environmental And Social
EHS	Environmental Health And Safety
EIA	Environmental Impact Assessment
EN	Endangered
EP	Equator Principles
ESIA	Environmental And Social Impact Assessment
ESMS	Environmental And Social Management System
ESP	Environmental and Social Policy
ESS	Environmental and Social Standards
EU	European Union
EU BAT	European Union Best Available Techniques
EW	Extinct In The Wild
EX	Extinct
F	Fluoride
FC "SCE- QUVVAT" LLC CCPP	Stone City Energy- Quvvat-Combined Cycle Power Plant Joint
FGD	Focus Group Discussions
g	Gram
GBV	Gender Based Violation
g/dm³	Gram Per Cubic Decimeter
GIIP	Good International Industry Practice
GIP	Good International Practice
GN	Guidance Notes
GRP	Gross Regional Product
Goskomprirod a	State Committee For Nature Protection
GOST	Gosudarstvennyy Standart
GOU	Government Of The Republic Of Uzbekistan



GSE	General Secondary Education
GT	Gas Turbine
HAZMAT	Hazardous Material
ha	Hectare (1 Ha = 10,000 M2)
HES	Higher Education System
HFCs	Hydrofluorocarbons
Hg	Mercury
HRSR	Heat Recovery Steam Generator
Hz	Hertz
IAQM	UK's Institute of Air Quality Management
IBA	International Bird Area
ICWC	Interstate Coordination Water Commission Of Central Asia
IEC	International Electrotechnical Comity
IFC-PS's	International Finance Corporation Project Standards
IFI	International Financial Institutions
ILO	International Labor Organization
IPCC	Intergovernmental Panel On Climate Change
ISO	International Organization for Standardization It Is a Worldwide Federation of National Standards Bodies (ISO Member Bodies). The Work Of Preparing International Standards Is Normally Carried Out Through ISO Technical Committees.
IT	Information Technology
IUCN	International Union For Conservation Of Nature
IWWTS	Industrial Wastewater Treatment System
JSC "Uztransgaz"	Uzbekistan gas supplier ad gas transportation company
KBA	Key Biodiversity Area
kg	Kilogram
Khokim	The Heads Of Local District, City And Regional Administrator Appointed By The Central Government (Governor Of Region)
KMK/SHNK	National acronym for Construction Norms and Regulations
LA_{eq}	Equivalent Continuous Sound Level
LA_{max}	Maximum Equivalent Continuous Sound Level
LC	Least Concern
LCP	Large Combustion Plant
LRP	Livelihood Restoration Plan
m	Meter
m/s	Meter Per Second



MAC	Maximum Allowable Concentration
MAE	Maximum Allowed Emissions
MBI	Modified Biotic Index
MCR	Maximum Continuous Rating It Is Defined as The Maximum Output (MW) That an Electric Power Generating Station Is Capable of Producing Continuously Under Normal Conditions Over a Year. Under Ideal Conditions, The Actual Output Could Be Higher Than The MCR
mg/m³	Milligram Per Cubic Meter
min	Minute
MELR	Ministry of Employment and Labour Relations
mIn m³	Million cubic meter
mm	Millimeter
mmHg	Millimeter Of Mercury
Mn	Manganese
MPC	Maximum Permissible Concentration
MPD	Maximum Permissible Discharges
MPE	Maximum Permissible Emission
MPI	Methodology Of The Accredited Laboratuvar
MSDS	Material Safety Data Sheet
MVI	Methodology Of The Accredited Laboratuvar
MW	Megawatt Watt Is A Unit Of Power In The International System Of Units (1 MW = 10 ⁶ Watt)
N	North
NE	Northeast
NE	Not Evaluated
NEGU	National Electric Grid of Uzbekistan
N₂O	Nitrous Oxide
NO₃-N	Nitrate Nitrogen
NT	Near Threatened
NW	Northwest
O'z DST	Uzbekistan State Standard
O'z O'U	Uzbekistan O'lchov Uslubiyati
O₂	Oxygen
OHL	Overhead Transmission Line
OHSAS	Occupational Health and Safety Assessment Series
OHS	Occupational Health and Safety
OM	Oliy Majlis Supreme Assembly of Parliament Of Uzbekistan



OVOS	OVOS National Acronym For EIA
P	Phosphorus
Pb	Lead
PDS	National Acronym Of The Ecological Normative Regarding Water
PDV	National Acronym Of The Ecological Normative Regarding Air
PFCs	Perfluorocarbons
pH	A Scale Used To Specify The Acidity Or Basicity Of An Aqueous Solution
PLC	Power Line Control
POWTS	Plant Oily Water Treatment System
PPE	Personal Protective Equipment
Project	Stone City Energy 1600 Mw-Combined Cycle Power Plant
PS	Performance Standard
PSEI	Preliminary Statement Of The Environmental Impact
PZVOS	National Acronym Of The Concept Statement On Environmental Impact
Resolution	Resolution of The President of the Republic of Uzbekistan Dated 04.10.2019 No. PP-4477
Reservoir	Uchkizil Reservoir
RUz	Republic of Uzbekistan
S	Sulfur
SanPin	Sanitary Norms And Regulations Of The Russian Federation
Sb	Antimony
SC	State Committee
SCE-CCPP	Stone City Energy-1600 Mw Combined Cycle Power Plant
SCEEP	The State Committee on Ecology and Environmental Protection
SCNP	The Main Governmental Organization Responsible For Nature Protection In Uzbekistan
Se	Selenium
SE	Southeast
sec	Second
SEC	Statement on Environmental Consequences
SEA	Sexual Exploitation and Abuse
SEE	State Environmental Expertise
SF6	Sulfur Hexafluoride
SEP	Stakeholder Engagement Plan
SIA	Social Impact Assessment
SO₂	Sulfur Dioxide



SPT	Standard Test Method for Standard Penetration Test
ST	Steam Turbine
STD	Sexually Transmitted Diseases
STI	Sexually Transmitted Illnesses
SS	Substation
SSVE	Secondary Specialized Vocational Education
SW	Southwest
TKN	Total Kjeldahl Nitrogen
Total-N	Total Nitrogen
TSEL	Approximately Safe Exposure Levels
Uchkizil	Uchkizil Reservoir
UNDP	United Nations Development Programme
UNECE	United Nations Economic Commission For Europe
UNFCCC	United Nations Framework Convention On Climate Change
UNGP	United Nations Guiding Principles On Business And Human Rights
UzRDB	Uzbekistan Red Data Book
Viloyat	Region
VOC	Volatile Organic Compounds
VR	Vulnerable
VU	Vulnerable
W	West
WBG	World Bank Group
ZEP	National Acronym Of The Statement On Environmental Consequences
Zn	Zinc
ZVOS	National Acronym Of The Statement On Environmental Impact



EXECUTIVE SUMMARY

The Need for the Project

The Government of the Republic of Uzbekistan aims to modernize and increase electricity production in the country to foster economic growth. Uzbekistan would like to increase the amount of gas exported to the region, and so any reduction in domestic gas consumption means that there is more gas available for export. In line with the national energy strategy, the Ministry of Energy has signed an agreement with Stone City Energy for designing, financing, building, commissioning, operating, and managing the 1,600MW power plant for 25 years.

Stone City Energy (hereinafter referred as the Project Company) B.V. is a special purpose company, which operates in the fields of electricity generation and distribution. The launch is scheduled for 2025 and the project will introduce the latest technologies, including advanced HL class steam-gas units of the HL class (manufactured by Siemens Energy) with an efficiency of 63%.

The CCPP will allow saving 1.1 billion cubic meters of natural gas against an annual consumption of 2.2 billion cubic meters.

The Surkhandarya CCCP 1600 MW Project is considered as Category I of environmental impact with a high risk according to the Law "On Environmental Expertise" and the Decree of the Cabinet of Ministers of 07.09.2020 No541 on "further improvement of the mechanism of environmental impact assessment". Hence, first stage of the Environmental Impact Assessment report (national acronym - PZVOS) was developed for this facility and a positive Conclusion of the State Environmental Expertise of the Republic of Uzbekistan No.04-01/10-08-1655 dated September 29, 2021 was obtained. As the Stage III of national EIA process the 'Statement on Environmental Consequences' ('ZEP' is the national acronym) represents the final stage of national EIA process and it will be conducted before the project is commissioned.

UzAssystem has been appointed by the Project Company in June 2021 to undertake an Environmental and Social Impact Assessment Report (ESIA) in compliance with the Asian Infrastructure Investment Bank (AIIB) Environmental and Social Policy (ESP) and International Finance Corporation (IFC) Standards for the Project.

In line with the international standards the Project is considered as "Category A" and the ESIA

The ESIA Report has been prepared by Uzassystem based on the outcomes of the Scoping Report (finalized in July 2021), technical Project documentation provided by the Project Company, publicly available information, outcomes of the stakeholder consultations, findings of the baseline studies performed in 2021 and assessment of Project's likely impacts and/or risks in accordance with internationally accepted methodologies as part of the ESIA process. However, the baseline studies are currently being updated in line with the requirements of international standards and the **Final ESIA report will be published with the outcomes of the additional surveys in October 2022.**

As part of the ESIA study, a stand-alone Stakeholder Engagement Plan is developed.



The Project Company will be responsible to implement described measures to mitigate the potential impacts in the ESIA Report. In addition, the Project Company is in charge to comply with the relevant national legislation, IFC PSs and AIIB Environmental and Social Policy and to ensure that all contractors that provide services to the Project Company duly follow these requirements throughout the project life.

According to the 1998 Land Code of the Republic of Uzbekistan, all land in Uzbekistan is state property and permits for use of land are granted and monitored by the State through the rayon and oblast administrations. The official letter of the Surkhandarya Region Khokin, dated 30 August 2021, the Project area is allocated for the construction of a CCPP with the capacity of 1600 MW. The decision was published on the official website of the regional administration (surkhandaryo.uz).

Baseline Studies

The ESIA has been prepared by a review of relevant desktop information as well as a series of physical site surveys which have been summarized in the relevant environmental and social impact assessment Sections of this report. The environmental baseline surveys carried out as part of the ESIA included is given in Table 13.

Table 1: Environmental and Social Baseline Surveys

Site Surveys	Period
Terrestrial Ecology Surveys	17 th July 2021
Irrigation Reservoir(lake)	15 th July 2021
Soil Survey	15 th July 2021
Groundwater and surface water sampling	9-16 th July 2021
Sediment and lake sampling	13 th July 2021
Zooplankton and phytoplankton sampling	13 th July 2021
Noise Monitoring Survey	10 th to 14 th July 2021
Air Quality Monitoring Survey	10 th to 16 th July 2021
Socio Economic Data Collection	28 th July 2021
Stakeholder Consultations	This has been completed with different stakeholders on July 2021 through official letters, calls and public consultation meetings conducted.
Livelihood Restoration Surveys	15 th October 2021
Terrestrial Flora and Fauna Survey	April 2022
Planned Additional Site Surveys	
Air Quality Monitoring Survey	20 th 2022-20 th August 2022
Noise Monitoring Survey	20 th to 23 rd July 2022 -
Socio Economic Data Collection	July 2022-August 2022
Terrestrial Flora and Fauna Survey	September 2022



Aquatic Survey

September 2022

Project Location

The Project site is located in the Angor district of the Surkhandarya region of the Republic of Uzbekistan, on the northeastern coast of the Uchkizil Reservoir, which is an off-stream reservoir type used for irrigation.

Distance of the Project area to the regional center of Uchkizil village is approximately 2.0 km, and 14 km to Termez city centre.



Figure 1: Project Location (Regional Context)



The Site is at an average elevation of 337 m above sea level whereas the level of the Uchkizil Reservoir reserve is 318 m above sea level.

The project area can be considered as a flat terrain and there is no agricultural and/or economic activity within the project area. Project area consists mainly typical representatives of the flora of sandy and saline deserts of the southern part of Central Asia. Photos showing the project site are presented below.



Figure 2: Project Area – General View (July, 2022)

The nearest residential buildings are located in the south (Uchkizil Village, ~1.4 km) and the west (Kattakum Village, ~1.0 km) (see Figure 3).



Figure 3: Project Location



Project Characteristics

The proposed Project is a Combined Cycle Power Plant (CCPP) project. The CCP consists of two combine cycle gas turbines and a steam turbine (one unit). The main features of the power plant is presented Table 5.

Table 2: Main characteristics of the designed combined cycle power plant

Feature	Description
Type of technology	Combined Cycle Power Plant
The total area of the allocated land for construction	73.4 hectares.
Number of units of combined cycle plants	2
Power Generation	1600 MW
Capacity of each unit	Gas Turbine – 551 MW Gas Turbine – 551 MW Steam Turbine – 538 MW
Configuration	2 Gas Turbines + 2 Heat Recovery Steam Generators + 1 Steam turbine
CCGT type	Siemens
CCGT efficiency	60%
Working hours per year	8000 h
Fuel	Natural gas
Natural gas consumption per hour	283.000 m ³ /h
Annual consumption of natural gas	283.000 m ³ /h x 8.000 h per year = 2.264.000.000 m ³ /year
Condenser cooling type	Water cooled
Cooling tower type	Dry cooler system
Source water - cooling water	Source water comes from the lake "Uchkizil"Uchkizil Reservoir
Initial water	Uchkizil Reservoir
Source of Raw Water	Uchkizil Reservoirake
Process water - for boilers	Process demineralized water will be supplied from our own demineralization plant through a connection to the demineralized water system
Stack height	65 m
Stack diameter	8,24 m
Auxiliary equipment	- Feed Water and Steam System



Feature	Description
	<ul style="list-style-type: none"> - Fuel Gas System Incl. Gas Compressor Station - Dry Cooler System - Closed Condenser System - Water Treatment System - Waste Water System - Sampling System - Dosing System - Firefighting System - Lifting System - Electrical System - Standby Diesel Generator - C&I System - Civil Works System
Number and type of transformers	2 transformers 600 MVA, 2 auxiliaries 27/44 MVA, various auxiliary transformers

The following elements of the plant will also be part of the Project:

- Site entrance and security building;
- Administration building, offices and amenities;
- Central Control Room;
- HVAC system;
- Electrical Systems;
- Laboratory;
- Workshops;
- Warehouse and stores;
- Emergency Diesel Generator;
- Fire-fighting system; and
- Other mobile plant and vehicles.

A dedicated firefighting team will be based on-site during operations. A simplified version of the project layout is presented in Figure 9.



Figure 4 Simplified Version of the Project Layout

Workforce Requirements

It is expected the number of construction workers will be around 2050 during the peak period of the construction. It is expected that approximately 30 % of the workforce could be available to unskilled staff whereas the rest will require technical qualifications. It is foreseen that the ratio of foreign workers will be close to the number of local people to be employed. It is anticipated that the EPC Contractor will have approximately 130 people and the Project Company will have 10-15 permanent staff at the site during the construction stage.

During the operation phase of the proposed project, it is anticipated that the number of the workforce will be around 300 staff.

It should be noted that the given number of the workforce may change depending on Project needs during the construction and operation activities.

Accommodation and Logistics

It is planned that there will not be any accommodation facilities within the construction area. Based on the previous experiences in similar projects, it is expected the EPC contractor will arrange accommodation off-site and will use the existing housing compounds located in Uchkizil. Since the EPC contractor has not been awarded yet, the location of such



accommodation is not readily determined. However, it will be ensured that the Project Company will specify the standards of facilities for worker accommodation in line with the IFC/EBRD Worker Accommodation Guidelines.

The EPC contractor will provide the transfer of the workers to the construction site and will perform a Traffic and Logistics Study to assess roads and determine access requirements via other modes of transport. It is foreseen that the existing M-39 main road will be adequate during the construction activities and no additional access road will be opened to reach the project site

Project Schedule

The key milestones of project timeline are given below.

Table 3 Key Milestones

Milestones	Date
Limited Notice to Proceed	September 2022
Notice to Proceed	October 2022
Site Preparation and Mobilization	November 2022
GT 1 Erection and Commissioning	August 2024
GT 2 Erection and Commissioning	October 2024
Scheduled Project Commercial Operation Date	October 2025

Project Alternatives

The project forms part of the Strategy of Action for the Five Priority Development Areas of Uzbekistan (2017 -2021) to introduce new technologies for generating thermal energy as the Project is being implemented as heat recovery in order to generate electricity.

In 2018, Uzbekistan ratified the Paris Agreement and adopted a national commitment to reduce GHG emissions per unit of GDP by 10% of the 2010 level by 2030. In addition, In 2020, the Ministry of Energy published its plans for the Power capacity development in Uzbekistan for the 2020-2030 period in a document called "Concept note for ensuring electricity supply in Uzbekistan in 2020-2030". The document talks in length about Uzbekistan's plans to rebuild its existing power plants, invite private power developers to take part in the power sector development to increase the power production capacity, lays out the plans for reforms, etc. The Concept Note states that "*Construction of a 1300MW TPP utilizing CCGT technology is planned in Kashkadarya or **Surkhandarya** regions to be commissioned in 2025-2026.*"

Taking into consideration of Uzbekistan's national electricity strategy, "Do-Nothing scenario" is considered as not applicable alternative, since it does not align with objectives of the Ministry of Energy. Besides, the project will lead decommissioning of inefficient existing thermal power plants and will contribute to the effective use of natural gas resources that will result in decreasing CO₂/kWh intensity.

The Project Company will meet the requirements described in the EU Best Available Techniques Reference Document prepared for Large Combustion Plants, 2017. The project will use most advanced technologies that are currently available to reduce environmental impacts.



Associated Facilities

The ESIA study evaluated the scope of the associated facilities in line with the AIIB Environmental and Social Policy. There are three facilities that are considered in the analysis of associated facilities.

- Air insulated substation, wherein the electric power will be evacuated from the Project.
- 9 km overhead transmission lines (OHL) connecting between the substation and the existing grid facilities.
- Gas pipelines and the gas distribution station that feeds the gas to the Project.

According to the analysis, the substation will be built within the project area, hence impacts and mitigations measures associated with the substation are included in the ESIA study. The 9-km OHL is considered Associated Facility in accordance with lenders' standards while the gas pipelines are not. Thus, the gas pipelines are not considered in the scope of this ESIA study. However, the Project Company will not have any control or influence on the overhead transmission line. Therefore, a brief explanation on likely impacts and risks of the overhead electricity transmission lines are summarized in the ESIA study. Requirements in accordance with the national environmental legislation should be followed during the construction and operation of these facilities and relevant impact assessment studies are conducted.

Assessment and Management of E&S Impacts

Air Quality

During construction phase, local ambient air quality may potentially be affected by increased dust, particularly during the site preparation stage (site clearance and earthworks etc.) and by the exhaust gas of construction vehicles, equipment and temporary power generators. The typical air emissions resulting from these activities include nitrogen oxides (NO_x), sulphur dioxides (SO₂), carbon monoxide (CO), carbon dioxide (CO₂), volatile organic compounds (VOC), particulates and benzene, toluene, ethylbenzene and xylene (BTEX).

Excavations and earthworks and vehicle movements cause dust which typically comprises large diameter particles, settle rapidly and close to the source. The operation of construction vehicles and fuel consuming construction equipment will be the only sources of gaseous emissions during construction phase

Activities associated with the operational phase of the Project will result in the emissions of gaseous pollutants from the operation of the CCGT power blocks. These emissions will occur under combined cycle operating modes using natural gas fuel only. Impacts from the CCGT are likely to be associated with emissions from the two main stacks associated with the HRSG.

The key pollutants arising from natural gas combustion and emitted via the stacks will be oxides of nitrogen (NO and NO₂) and carbon monoxide (CO). A detailed air quality dispersion modelling assessment has been undertaken to determine impacts associated with the proposed Project. The key pollutants considered in this assessment are: oxides of nitrogen (NO₂ and NO) and carbon monoxide (CO) are the key pollutants emitted from combustion of natural gas that may potentially lead to exceedances of any relevant standards. Predicted



concentrations are compared with the most stringent applicable standards and guidelines incorporated into Uzbekistan law and also the European Union (EU) standards, the International Finance Corporation (IFC) guidelines and the World Health Organisation (WHO) Guidelines.

According to modelling results for NO₂, NO, and CO, for all periods highest level concentration values are under both National Ambient Air Quality Standards, IFC/WB EHS Guideline Fundamental Principles and EU Environmental Standards.

During commissioning, the stack emissions will be tested for NO, NO₂, CO to ensure that the control systems are operating correctly and that emission values comply with applicable standards and guidelines.

During operation there will be continuous emission monitoring system (CEMS) of stack emissions of NO, NO₂ and CO to ensure compliant conditions are maintained through appropriate process controls.

GHG Emissions and Climate Change

During the construction and operation phases, significant amount of direct and indirect GHG gases (namely CH₄, CO₂, N₂O, SF₆, HFCs, PFCs and NF₃) are released due to earthworks, cement and steel use, maintenance activities, stationary combustion of natural gas, vehicles and equipment that works with diesel fuel. Greenhouse gases of the project through its life cycle calculated by establishing a system boundary with cradle to gate approach. Having considered only on-site emissions, all GHG emission estimations are calculated in CO₂ equivalent with conversion factors of EPA by using existing data.

Table 4: Summary of GHG emissions estimated for construction phase

Item	Estimated GHG in tons of CO ₂ equivalent (for 1-year activity)
Scope 1 – combustion of fuel	244.5
Scope 2 – purchased electricity	1573
Scope 3 – water supply	4.3
Annual Total	1822 tons of CO₂ equivalent

The total estimated GHG emission for operation phase is summarized in the table below.

Item	Estimated GHG in tons of CO ₂ equivalent (for 1-year activity)
Scope 1 – combustion of fuel	4.63 x10⁶
Scope 2 – purchased electricity	230.6
Scope 3 – natural gas supply	826,182



Scope 3 – water supply	89.4
Annual Total	5.46 x 10⁶ tons of CO₂/year
Total Emission during operation phase (25 years)*	5.46 x 10⁶ x 25 = 136.5 x 10⁶ tons = 0.136 Gigatons

Noise and Vibration

The main noise sources during construction phase are the heavy machineries to be used in construction activities. Four receptors were selected in regards to assessment of noise generated during the construction and operation of the projects. Three of these receptors are residential areas in the vicinity of the project area whereas the remaining one is the waste processing facility approximately 250 m away from the project area.

Based on the calculations, noise levels during construction phase of the project is under the limit values specified for the day and night time in both national and international limits. In addition to this, it is stated in IFC's EHS Guidelines that noise levels should not result in a maximum increase in background levels of 3 dB at the nearest receptor location off-site. and the calculations revealed that there is no any increase in background levels of 3 dB.

In regards to operation, the design of the project includes selection of state-of-art technologies to have low noise level equipment to prioritise the reduction of noise at the source. Where noise levels exceed 80dB(A), additional mitigation measures will be taken to reduce noise at source. Additionally, noise protection devices will be provided to personnel on-site and the area marked as a high-noise zone where ear protection is mandatory.

Water Resources and Wastewater Management

During construction, the main activities that could negatively impact the aquatic life and water quality can be listed as follows:

- Laying of the outfall and water intake pipelines to the reservoir;
- Water usage for construction and domestic purposes
- Groundwater dewatering discharge on the reservoir banks from the construction activities on site;
- Habitat fragmentation as a result of construction of the intake and outfall.
- Discharge of dust into air and water due to heavy duty vehicles and working machines activities.
- Erosion due to soil movement in case unappropriated management of top soil, surplus soil, dumpsites and borrow pits.

At the construction stage of the Plant, water is mainly needed to prepare mortars, as well as to irrigate the territory in order to reduce dusting on the construction site. In addition, household and drinking water needs will consist of drinking needs, showers, and cooking. The water needs during construction phase will be supplied from the nearby districts via trucks. The drinking water will be supplied by bottled water from the market.



Therefore, no water is planned to be supplied from both Uchkizil reservoir and groundwater during the construction phase of the Project. On the other hand, the water will be supplied from the Uchkizil Reservoir during the commissioning phase.

The water intake structure will be at a sufficient depth below minimum water level to avoid collisions with boats and intake of warm surface water and at sufficient distance from the bed of the reservoir to avoid the intake of sediments and sludge. The water intake velocity will be limited with 0.15 m/s and a bubble curtain shall be applied to prevent fish and fauna to enter the intake.

The discharge point will be at a sufficient distance from the shore to promote mixing with the main water body. Following the detailed design together with performing bathymetry, hydraulic and nearshore topography survey, the exact locations will be determined and necessary relevant permits will be obtained from the national authorities.

Soil, Geology, and Groundwater

Soil contamination during construction work is possible with the spill of oil products used as fuel for mobile vehicles and construction equipment. However, the pollution will be minor and localized. Due to poor solubility, oil products will have a low migration capacity and will not pose a hazard to groundwater. The likelihood of a fire occurring due to fuel spills is also low. In general, during the construction period, soils and groundwater contaminated with oil products will have a minor risk to the environment and personnel safety.

The presence and use of such dangerous and hazardous chemicals increase the probability of accidental spills or releases of minor quantities of these materials into the receiving hydrological environments. Further, site preparation activities and associated construction of infrastructure can result in increased sediment loads in reservoir. Any leaks/damage to the soil and groundwater will be prevented through appropriately designed storage options. Any leaks/damage to the soil and groundwater will be prevented through appropriately designed storage options.

Waste Management

During construction, waste will be generated during earthworks, construction of the fences, paths and buildings. Typical construction wastes include concrete, asphalt, scrap steel, glass, plastic, wood, packaging materials and domestic waste from construction workers (i.e. relating to food consumption). Household wastewater generated during construction is planned to be directed to a temporarily installed storage tank (a waterproof cesspool) with subsequent removal to the nearest treatment facilities in the city of Termez. The EPC Contractor will also seek other options such as establishment of package (small-scale) wastewater treatment plant in accordance with the requirements set in the national legislation.

The operation of the proposed Project will generate small amounts of non-hazardous domestic waste from the operation of the administration facilities and from activities of the employees.

This waste can be classified as both recyclable and non-recyclable. Recyclable waste includes paper, tin cans, plastics, cartons, rubber, and glass, while non-recyclables will consist mainly of food residues and other organic waste. Other solid non-hazardous waste generated during operation will be landscaping waste and uncontaminated replacement parts and packaging.



Hazardous waste to be generated during the operation stage will be stored in allocated impervious hard standing areas in sealed containers stored with impermeable bases, sufficient containment and separation capacity, sun/rain shelter, separate drainage system, good ventilation and equipped with spill kits & spill response procedures. This area must be placed away from any sources of ignition. Waste containers will be marked with appropriate warning labels to accurately describe their contents and detailed safety precautions. Labels will be waterproof, securely attached, and written in English and other languages as required such as Uzbek and Russian. Wherever possible, chemicals will be kept in their original container.

Ecology

The area is adjacent to the western end of the Kattakum sandy massif, which is home to rare and endemic plant and animal species. The landscape of the peripheral part of the Kattakum sands is a wavy or slightly hilly sandy plain, the central part is occupied by a rather extensive massif of semi-fixed hilly sands (the height of the hillocks is 3–7 m), among which there are small saline settlements. The Uchkizil Reservoir has an area of about 10 km² and a depth of maximum 37 m, a sandy bottom, and mostly low and gentle sandy and sandy loam shores, but its northern coast, adjacent to the Project area, has relatively steep, eroded slopes, composed of outcrops of gypsum and saline depressions.

The preliminary list of the flora of the Kattakum sands, compiled on the basis of reports, literature, herbarium data and photographs taken by field team during the field survey includes 131 species, mainly typical representatives of the flora of sandy and saline deserts of the southern part of Central Asia. The vast majority of species are native; the number of alien plant species is extremely insignificant. According to the estimates, anthropogenically disturbed areas occupy about 1/3 of the project area.

Only 3 species included in the Red Book of Uzbekistan (*Allium rhodanthum*, *Dipcadi turkestanicum*, *Oligochaeta vvedenskyi*) are noted based on literature and herbarium data for the sandy massifs of Kattakum and Khaudaktau in the central part of the Surkhan-Sherabad valley, the first two of them are known only from Khaudaktau and have not been noted for the past several decades, despite special searches. Nevertheless, there is a possibility of finding these species in the Kattakum sands (not excluding the project area).

There are 27 species of reptiles belonging to 12 families on a relatively small and rather highly urbanized project area.

A total of 149 bird species can be identified for the region around the project area, which are rare or listed. The only endemic bird of Uzbekistan, *Podoces panderi* does not live here. Among them, 21 species have IUCN statuses (NT-10 species, VU - 7 species and EN - 4 species). 33 species are included in the Red Book of Uzbekistan (2019) 4 species with the EN status, 23 - VU and 6 NT species. During the field surveys, 49 bird species were recorded, 26 of them directly in the planned area.

Approximately 22 species of mammals belonging to 6 families have been recorded in project area and its surrounding area based on available literature sources.

The territory is potentially inhabited by 6 species of mammals included in the Red Book of the Republic of Uzbekistan; *Otonycteris hemprichi*, *Vulpes corsak turkmenicus*, *Vormela peregusna*, *Lutra lutra seistanica*, *Hyaena hyaena*, *Felis margarita*, *Caracal caracal michaelis*,



Vormela peregusna. and the 5 species are included CITES (*Lutra lutra*, *felis chaus*, *Felis lybica*, *Felis margarita*, *Caracal caracal michaelis*). Two species are Central Asian endemics that *Rhinolophus bocharicus* and *Allactaga severtzovi*. *Gazella subgutturosa* that used to inhabit the area has been completely exterminated.

A Preliminary Critical Habitat Assessment was performed based on the outcomes of the surveys conducted in July 2021 and April 2022. None of plant and animal species observed during the field survey in the project area meet the criteria for CHA.

Socio-economy

The ESIA study identified several positive and negative impacts likely to arise during the construction of the Project. These impacts are;

- Employment generation,
- Local economic development,
- Labour influx,
- Impacts on social services

The primary economic impact during construction is likely to result from employment creation during this phase. This Project is expected to create employment opportunities during the construction phase for unskilled and applicably skilled workers. To prevent social conflicts between local employee and expats, should be paid attention to the balance between in the employment shares.

In addition to the direct monetary increase to the families of the employed, the money paid to the workers will also stimulate the local economy with a multiplier effect, so that the money earned from the locally spent Project will recirculate within the local economy.

The Project construction will require involvement of significant workforce (direct and contracted) Approximately 30% of the workforce is estimated to be non-qualified and 70% of will be qualified. The Contractor prioritise localisation of workforce (including subcontractors through contractual requirements) and it is anticipated that 50 % of the workforce will be national people. This policy will maximise the use of local workers and reduce the influx of non-local workers to the area.

Livelihood Restoration

During the social site surveys conducted in 2021 and 2022, no legal and/or informal landusers are observed within the project area. Although the project does not have any impact on livelihood, a framework Livelihood Restoration Plan is presented within this ESIA Report to ensure that the Project company will follow the minimum requirements set in this plan, in case required.

Community Health and Safety

Potential impacts of the project on community health and safety arise from the necessity of accomodation of the workforce, illnesses and diseases, and sexually transmitted diseases due to increase in local population.



The provision of accommodation for self-sufficient workers accommodation will be the responsibility of the contractor. It is expected that the workforce required for the construction activities will accommodate in nearby cities and there will no accommodation in the project area. All worker accommodation facilities will be designed and operated in accordance with IFC Workers Accommodation Guidance. The workforce will be transferred to the project area by shuttle buses.

Material transport vehicles, shuttle buses, and vehicles transporting the waste generated at construction sites may result in increased traffic on off-site roads during the construction period.

The project area will require site-based security at the gates and on patrol around the site and access road during construction in order to prevent the public from trespassing to the construction areas. This is so as to minimize the potential for construction site incidents or damage of construction machinery. It is anticipated that the security personnel will be unarmed.

The ESIA Report presents a detailed mitigation measures and mitigation plan in each dedicated chapter in order to avoid, minimize and offset above listed potential impacts that can arise during the project life. The ESIA Report concluded that with the implementation of proposed mitigation measures, the project will have minor to medium residual impacts on the receptors.

Environmental and Social Management System

The Project will establish Environmental and Social Management Systems (ESMS) in order to effectively manage the environmental and social impacts of the project from the land preparation and construction phase to the closing phase. During the creation of the ESMS, the following subject / documents will be taken into consideration.

- Compliance with relevant national laws and regulations and EU directives
- IFC PSs
- AIIB Environmental and Social Policy
- IFC EHS General Guidelines
- Environmental and Social Action Plan (ESAP) prepared within the scope of the ESIA study

The defined measures to eliminate impacts and risks identified at various stages of the project should be adopted not only by the Project Company, but also by the EPC Contractor and, if any, Sub-Contractors. The Company Owner will be responsible for the implementation of the issues in the ESIA by all parties.

The Project Company will appoint an ESMS Manager who will be responsible for the establishment, implementation and maintenance of the ESMS. The ESMS Manager and his team will work closely with the employees of the project owner and contractors to ensure the most effective implementation of the ESMS.



The Project Company. will prepare the necessary procedures to establish and maintain an effective internal and external communication mechanism. Efficient communication will be provided through the website of the project owner and mechanisms such as meetings.

Stakeholder Engagement

Project Stakeholders

The details of the stakeholders defined for the project are presented in the SEP.

Stakeholder Engagement Activities to Date

According to the Resolution of the Cabinet of Ministers of the Republic of Uzbekistan No. 541 dated 07.09.2020 "On further improvement of the mechanism for assessing environmental impact", objects of I and II categories of environmental impact are subject to the procedure for passing public hearings about environmental impact. In accordance with, the Public Hearing Meeting was conducted in Angor District 17 of August 2021.

Besides, during the ESIA study, qualitative and quantitative techniques were applied for public disclosure as Household Survey, Local Authority Disclosure and Focus Group Discussion. Household survey covered 83 household, which of 57 were in Angor and 26 of them were in Termez.

Local Authority Disclosure were conducted among 8 local authority representatives in Angor and Termez districts from 22 to 29 July, 2021.

First Focus Group Discussion (FGD) was held in Uchqizil with 24 attendances, who were the representative of Khokiyat, district statistic department, district health department, labor and social protection, mahalla on 28 July 2021.

At the same day the 2nd FGD was held in Angor with 37 attendances, who were the representative of Khokiyat, district statistic department, district health department, finance and investment department, labor and social protection, mahalla.

The main concerns raised during the first social site survey were related to the usage of Uchkizil Reservoir which has significant importance to the local people regarding irrigation, and recreational activities. The majority of the respondents highlighted that their school needs well-equipped sports center so that youth could have an opportunity to develop their skills in sports.

Stakeholder Engagement Plan

The ESIA Report includes a stand-alone SEP which is prepared based on the social site surveys. The SEP aims to establish and maintain constructive dialogue between the Project and the local communities, other stakeholders and interested groups.

The Project Company will assist and collaborate with the EPC Contractor to implement the SEP throughout the construction phase of the Project. The implementation of the SEP



throughout the operation phase of the Project will be under the responsibility of the Project Company.

All stakeholders (individuals, groups, or entities) directly and/or indirectly affected by the Project or have a direct or indirect influence/impact on the Project are identified in the SEP. Besides, to establish and maintain a constructive relationship through public consultation and information disclosure, relevant mechanisms and tools are defined in the SEP. In addition, the SEP establishes external and internal mechanisms that will ensure timely and appropriate implementation of actions for the management of grievances and feedback received.

Grievance Mechanism

Grievance Redress Mechanism (GRM) will be developed enable stakeholders to raise grievances to the project and seek redress when stakeholders perceive an adverse impact arising from the project activities. The mechanism sets out clear systematic steps for affected individuals and communities to submit complaints and feedback and simultaneously for the Project in responding to queries, feedbacks and complaints received. This mechanism will be applied to guarantee the project is responsive to any concerns and grievances particularly from affected stakeholders and communities.

GRM will be available to personnel, workers, project staff and people living or working in the areas impacted by the project activities. Any impacted or concerned person or group of people about the project activities have the right to participate in the GRM and be encouraged to use it. Moreover, the developed GRM does not replace the public mechanisms for filing complaints and resolving conflicts in the legal system of Uzbekistan, but, on the contrary, seeks to minimize its use as much as possible.

The external and internal grievance collection channels to be used during the construction and operation phase are described in the ESIA Report. The Project Company will review and adapt these channels, as appropriate and consistent with their internal/institutional procedures and mechanisms, within the SEP to be updated prior to start of operation phase and implemented throughout the operation phase.



1. INTRODUCTION

The government of the Republic of Uzbekistan aims to modernize and increase electricity production in the country to foster economic growth.

Uzbekistan is an energy-intensive country. The investment in CCGT technology will assist Uzbekistan in moving toward a low-carbon economy. Power generation from burning gas in a CCGT is the cleanest method of generation using fossil fuels. The CCGT turbines burning natural gas produce significantly fewer greenhouse gases than traditional coal or oil-fired thermal power stations, as a result of both the less greenhouse-intensive nature of natural gas and the greater inherent energy conversion efficiency of CCGT technology. The introduction of CCGT technology will therefore begin the process in Uzbekistan of reducing the average greenhouse intensity of power generation. This process will accelerate as older less efficient plants burning coal or oil are retired and more CCGT plants are added to the total asset mix.

In addition, Uzbekistan is actively involved in energy trading with neighboring countries and is an active participant in the Central Asia Regional Economic Cooperation (CAREC). In 2008, the CAREC countries defined their long-term strategy for developing the region's energy sector as "to ensure energy security through the balanced development of the region's energy infrastructure and economic growth through energy trade." Uzbekistan would like to increase the amount of gas exported to the region, and so any reduction in domestic gas consumption means that there is more gas available for export.

In line with national energy strategy, Ministry of Energy has signed an agreement with Stone City Energy for designing, financing, building, commissioning, operating, and managing the 1,600MW power plant for a period of 25 years.

This report is prepared in pursuance of the agreement mutually signed between FC "SCE-QUVVAT" LLC and JV "UzAssystem" LLC. UzAssystem is appointed to undertake an Environmental and Social Impact Assessment Report (ESIA) in compliance with the Asian Infrastructure Investment Bank (AIIB) Environmental and Social Policy (ESP) and International Finance Corporation (IFC) Standards for the project of the CCGP.

It should be noted the proposed project is considered as Category I of environmental impact with a high risk according to the Law "On Environmental Expertise" and the Decree of the Cabinet of Ministers of 07.09.2020 № 541 "On further improvement of the mechanism of environmental impact assessment". Hence, first stage of the Environmental Impact Assessment report (national acronym - PZVOS) was developed for this facility and a positive Conclusion of the State Environmental Expertise of the Republic of Uzbekistan No.04-01/10-08-1655 dated September 29, 2021 was obtained. As the Stage III of national EIA process The 'Statement on Environmental Consequences' ('ZEP' is the national acronym) represents the final stage of national EIA process and it will be conducted before the project is commissioned.

The Surkhandarya 1600 MW Combined Cycle Power Plant will be referred to as "The Project" entire of the report.



2. PROJECT INFORMATION

2.1 Project Description

The proposed Project is a CCGP project. The combined cycle power plant consists of two CCGTs and a steam turbine (one unit). The baseload capacity of the Project is 1,600 MWe. The fuel to be used at the plant is natural gas and it will be supplied from a pipeline to be constructed by the Government. The electrical high voltage system of the plant will have a 500 kV grid connection with an air-insulated switchyard to be constructed in the Project area. The plant will have two transformers (600 MVA), two auxiliary transformers (27/44 MVA), and various auxiliary transformers.

In the CCGPs, compressed air and natural gas enter the combustion section of the gas turbine plant. Combustion products in a gas turbine with a temperature of approximately 1500°C enter the gas turbine converting kinetic energy into mechanical energy. After the gas turbine, the exhaust gases at a temperature of 670°C enter into the heat recovery steam generator in which steam is generated by transferring thermal energy from the feed water. Exhaust gases from the heat recovery steam generator are discharged into the atmosphere through the stack at a temperature of 85° to 140°C, depending on the content of sulfur. The exhaust gas that loses its heat leaves the power plant via the stack and is emitted to the atmosphere via two stacks 65 m in height and 8.24 m in diameter.

The generated steam in the two heat recovery steam generators enters into the steam turbine, where the kinetic energy of the steam drives the turbine, generating mechanical energy. The exhaust steam is sent to the condenser and, due to heat exchange with the cooling air, is converted into condensate, which is then sent back to the boiler. To replenish the technological losses of steam and water, the power unit is continuously fed with demineralized water. In this process, additional electricity is generated without the use of additional fuel. The Schematic Illustration of a Combined-Cycle Gas Power Plant is presented in Figure 5.

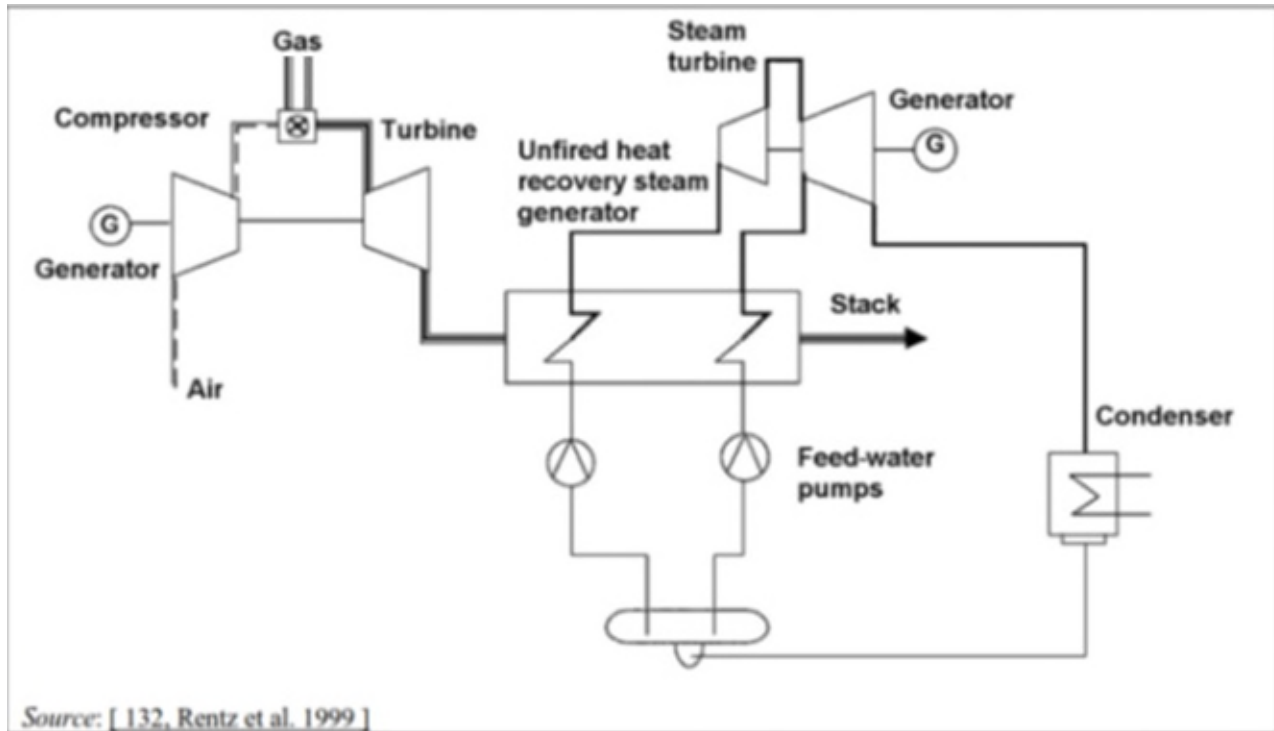


Figure 5: Sample of the Schematic Illustration of a Combined-Cycle Gas Power Plant [1]

2.1.1 Project Facilities

The main features of the power plant is presented Table 5. The overall project layout with legend is provided in Attachment B.

2.1.1.1 Design and Principle of Operation of a CCGP

The air compressed in the CCGT compressor continuously enters the combustion chamber, where it promotes the combustion of gaseous fuel at constant pressure. The combustion products enter the gas turbine, where the kinetic energy of the gas flow is converted into mechanical work of the turbine rotor rotation, where electrical energy is obtained. The gas temperature in front of the gas turbine, depending on the turbine series, is in the range of 1100-1500 ° C.

After the CCGT unit, the exhaust gases at a temperature of 670 ° C are fed into a waste-heat generator (waste-heat boiler), in which steam is generated by transferring thermal energy from gases from the gas turbine to feed water and steam. The gases from the waste heat boiler are discharged into the atmosphere through the chimney/stack at a temperature of about 85-140 ° C.

The generated steam in two waste heat generators enters a steam turbine, where the kinetic energy of the steam drives the turbine, generating secondary mechanical energy and, accordingly, obtaining additional electrical energy.



The combined cycle plant consists of two separate units: a steam power unit and a gas turbine unit. In combined cycle plants, the first generator is located on the same shaft as the gas turbine, which generates an electric current due to the rotation of the rotor. Passing through the gas turbine, the combustion products give it only part of their energy and still have a high temperature at the outlet of the turbine. Further, the combustion products enter the steam power plant, into the waste heat boiler, where water vapor is heated. The flue gas temperature is sufficient to bring the steam to the state required for the rotation steam turbine and additional electrical energy (temperature 500 degrees Celsius and pressure 80 atmospheres) (see Figure 6).

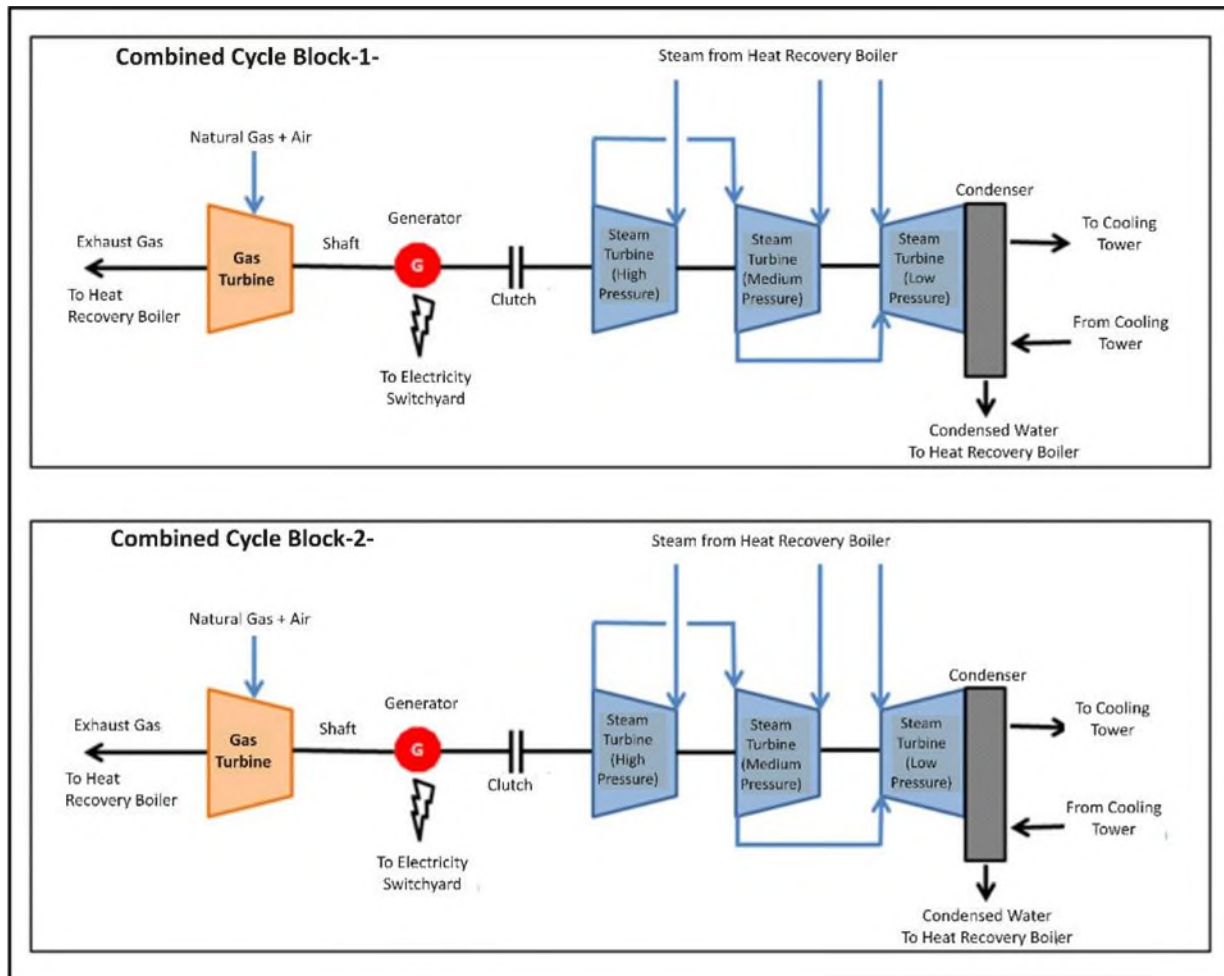


Figure 6: Process Flow Chart for Electricity Generation

The exhaust steam is sent to the condenser and, due to heat exchange with the cooling air, is converted into condensate, which is then sent back to the boiler. To replenish the technological losses of steam and water, the power unit is constantly fed with chemically demineralized water.

Gas will be supplied to the territory of the section of the combined-cycle power plant with a total capacity of 1600 MW through newly constructed pipelines. Fuel gas enters the gas



treatment station, equipped with coarse filters and a commercial gas flow meter, and then to the gas control station (GRP), where it is cleaned for subsequent throttling before afterburning (if necessary), then to the gas booster compressor station and then to the enters the main body for combustion in the combustion chamber of the gas turbine.

It is expected that the efficiency of each of the two CCGT units will be 60%, which is 1.6-1.7 times higher than the efficiency of the existing power plants in the energy system of Uzbekistan (34-37% on average).

The maximum consumption of natural gas at each CCGT unit is 141,500 m³/h (i.e. 283,000 m³/h for two CCGT units). The consumption of natural gas at the new combined cycle power plant as a whole will amount to 283,000 m³/h x 8,000 h = 2,264 billion m³/year (working hours per year will be 8,000h).

A gas booster compressor station (GDSC) is used to supply natural gas to the CCGT combustion chambers.

The gas booster station is designed to compress a mixture of hydrocarbon gases, which serves as a fuel for a gas turbine, during continuous operation of a combined cycle power plant with necessary breaks for preventive maintenance (topping up oil, cleaning filters, etc.). The booster compressor station is designed to operate the CCGT unit with maximum gas consumption. Gas is supplied to the compressor station with a pressure of at least 9 kg / cm² and is supplied from the gas compressor station to the CCGT unit to the input block for operational regulation and measurement of the gas flow rate.

Flue gases from the installed CCGT units, containing nitrogen oxides (NO, NO₂), carbon monoxide (CO), and sulfur dioxide (SO₂ negligible), will be discharged through two individual chimney/stacks 65 m high and 8.24 m in diameter.

The main advantage of the proposed design solution from the standpoint of ecology is the reduction of nitrogen oxide emissions in comparison with the currently operated power units, which is achieved due to the use of combustion chambers with dry low-toxic burners when burning natural gas.

At each source of emissions from CCGT units, an automated system for tracking emissions is provided, which provides for continuous instrumental measurements of the concentrations of pollutants (NO_x, SO₂, CO). In addition, the following parameters of flue gases will be monitored: volumetric flow rate of flue gases, temperature, pressure, total carbon, and water vapor.

The new installation will be controlled using an automated control system, which, along with operational control, will create high operational reliability and reduce emergency risks.



Table 5: Main characteristics of the designed combined cycle power plant

Feature	Description
Type of technology	Combined Cycle Power Plant
The total area of the allocated land for construction	73.4 hectares.
Number of units of combined cycle plants	2
Power Generation	1600 MW
Capacity of each unit	Gas Turbine – 551 MW Gas Turbine – 551 MW Steam Turbine – 538 MW
Configuration	2 Gas Turbines + 2 Heat Recovery Steam Generators + 1 Steam turbine
CCGT type	Siemens
CCGT efficiency	60%
Working hours per year	8000 h
Fuel	Natural gas
Natural gas consumption per hour for one unit	283.000 m ³ /h
Annual consumption of natural gas	283.000 m ³ /h x 8.000 h = 2.264.000.000 m ³ /year
Condenser cooling type	Water cooled
Cooling tower type	Dry cooler system
Source water - cooling water	Source water comes from the lake "Uchkizil"
Initial water	Uchkizil Reservoir
Source of Raw Water	Uchkizil Reservoir
Process water - for boilers	Process demineralized water will be supplied from our own demineralization plant through a connection to the demineralized water system
Stack height	65 m
Stack diameter	8,24 m
Auxiliary equipment	- Feed Water and Steam System - Fuel Gas System Incl. Gas Compressor Station - Dry Cooler System



Feature	Description
	<ul style="list-style-type: none"> - Closed Condenser System - Water Treatment System - Waste Water System - Sampling System - Dosing System - Firefighting System - Lifting System - Electrical System - Standby Diesel Generator - C&I System - Civil Works System
Number and type of transformers	2 transformers 600 MVA, 2 auxiliaries 27/44 MVA, various auxiliary transformers

A purification system will be used for water purification, which includes:

- Pre-processing systems;
- Demineralization systems; demineralization system (reverse osmosis or anion axion filters) volume
- Drinking water treatment systems.

The operating mode of the new combined cycle power plant is basic, year-round, round-the-clock with the maximum possible number of hours of electric power use.

The main power generation equipment consists of:

- New generation combined cycle plants of the type - 2 units. (manufacturer "Siemens", Germany) (see Figure 7);
- Steam turbine - 1 unit. ("Siemens" manufacturer Germany) (see Figure 8).



Figure 7: Sample of the Combined Cycle Gas Turbines with a capacity of 1600 MW



Figure 8: Sample of the Steam turbine "Siemens"



The overall electrical efficiency of the proposed CCGT unit is ~ 60%. The proposed CCGT unit belongs to a relatively new type of power plant operating on natural gas. Combined-cycle power plants are designed to obtain the maximum (primary and secondary from hot exhaust gases) amount of electricity. The main characteristics of the steam turbine are presented in Table 6.

Table 6: The main characteristics of the steam turbine

Characteristic	Description / meaning
Rotational speed	15,000 rpm
Steam pressure	30 bar
Steam temperature	400 °C
Rated frequency	50-60 Hz

The composition of natural gas to be used as fuel for CCGT unit, according to JSC "Uztransgaz" (gas supply and gas transportation company in Uzbekistan) is given below in Table 7.

Table 7: Natural gas composition

Components	Calculated gas composition in% molar
Methane	98.72
Ethane	0.48
Nitrogen	0.74
Carbon dioxide	0.056
Oxygen	absent
Hydrogen sulfide, g/m³	0.0044
Mercaptan sulfur, g/m³	<0.001
The lowest heat of combustion in terms of 20 °C and 101.32 kPa, MJ/m³	33.23
Mechanical impurities weight, g/m³	absent
Gas density at standard conditions, kg/m³	0.675
Molecular weight of gas, g/mol	16.2



2.1.2 Ancillary/Support Facilities

The following elements of the plant will also be part of the Project:

- Site entrance and security building;
- Administration building, offices and amenities;
- Central Control Room;
- HVAC system;
- Electrical Systems;
- Laboratory;
- Workshops;
- Warehouse and stores;
- Emergency Diesel Generator;
- Fire-fighting system; and
- Other mobile plant and vehicles.

A dedicated firefighting team will be based on-site during operations. A simplified version of the project layout is presented in Figure 9 and the project layout is provided in Figure 10.



Figure 9 Simplified Version of the Project Layout



Figure 10 Project Layout

2.1.3 Associated Facilities

As per AIIB ESP, Associated facilities are activities that are not included in the description of the Project set out in the Legal Agreements governing the Project, but which, following consultation with the Client, the Bank determines are:

- directly and materially related to the Project;
- carried out, or planned to be carried out, contemporaneously with the Project; and
- necessary for the Project to be viable and would not be carried out if the Project did not exist.

The AIIB requires the Client, as part of its environmental and social assessment, to identify and assess the potential environmental and social risks and impacts of Associated Facilities, and implement measures as follows.

- To the extent the Client controls or has influence over the Associated Facilities:
 - the Client is required to comply with the requirements of the ESP and applicable ESSs with respect to such facilities, to the extent of its control or influence; and
 - if the Associated Facilities are financed by another MDB, bilateral development organization or development finance institution, the Bank may rely on the requirements of such other development partner in place of all or some of the requirements set out in the ESP and ESSs, provided that, in the Bank's judgment, such requirements do not materially deviate from what would otherwise be required under the ESP and ESSs.
- If the Client does not control or have influence over the Associated Activities, it identifies in the environmental and social assessment the environmental and social risks and impacts the Associated Facilities may present to the Project, as well as potential mitigation measures that are within the Client's control. The Client is required to demonstrate, to the Bank's satisfaction, the extent to which it does not exercise control or have influence over the Associated Facilities by providing details of the relevant considerations, which may include legal, regulatory and institutional factors.

This section aims to provide the details of the associated infrastructures in order to identify the ESIA study requirement for those facilities. Hereafter the list of potential associated facilities considered:

- Air insulated substation, wherein the electric power will be evacuated from the Project.
- 9 km overhead transmission lines (OHL) connecting between the substation and the existing grid facilities.
- Gas pipelines and the gas distribution station that feeds the gas to the Project.

2.1.3.1 Air Insulated Substation

The Project Company and National Electric Grid of Uzbekistan (NEGU) has signed a Power Purchase Agreement (PPA) regarding the construction of 1600 MW CCPP. The official letter received from NEGU dated 10 June 2022 indicates that in accordance with the PPA, the Project Company is responsible for the construction of the power plant itself and 500/220 kV AIS.

It is mentioned that, the AIS facility has been planned separately and before the acceptance of the Project due to the forecasted demand in the project area. Since the planned project will secure the uninterrupted supply of electricity, the AIS project has been integrated to the plant area to decrease CAPEX of the required grid construction and to secure its completion in shorter time. Upon completion of the construction activities, AIS will be transferred to NEGU. Therefore, AIS is considered as project component and impacts related with the AIS are part of this ESIA study. The AIS is located within the project area and the ESIA study therefore covered the impact area of the AIS.

2.1.3.2 Overhead Electricity Transmission Line

The grid infrastructure present in the relevant region is part of the national backbone extension towards the southern border of Uzbekistan.

The southern segment of the national backbone is expected to handle the cross-border power flow requirements with Tajikistan and Afghanistan, in addition to enabling reliable power evacuation from the southern operational region, Surkhandarya, towards the central and south-west operational regions which are expected to have an increasing demand over the coming years based on population growth, economic growth and industrialization trends in the country.

Moreover, the region is among the most convenient areas in Uzbekistan for the construction of new solar PV plants, which is a big part of the country's energy transformation and decarbonization strategy for the coming years. In this respect, there is already a 450 MW solar PV plant project in Sherabad, which is also going to connect to the substation SS Surkhon. Shortly, the region is expected to host an increasing capacity of solar PV plants and contribute to the renewable power generation capacity increase.

The Grid Impact Assessment study conducted by UzAssystem has revealed that the best grid connection strategy for full power evacuation from the Project is through grid integration at both 220 kV and 500 kV voltage levels. Figure 11 provides a visual description of the proposed OHL connection.

- One generation substation at 220/500kV to have 2 sets of autotransformers 3x167 MVA.
- Two double circuits (4 lines) of new 9km 220 kV OHLs from the generation substation to be connected as 'Line-in/Line-out' (LILO) connection to the existing 220 kV OHLs: 'L-Naibabad 1', 'L-Naibabad 2', 'L-Amu 1', 'L-Amu 2'.
- One single circuit (2 lines) of new 9km 500 kV OHL from the generation substation to be connected as LILO connection to existing 500 kV OHL called 'L-Surkhon – Puli-Khumri' (Afghanistan)

Since the generation substation is part of the project component as mentioned in Section 2.4.3.1, the OHL listed above is considered associated facility of this Project, for the reasons:

- The 9 km 220/500kV OHL is directly and materially related to the substation which is part of the Project;
- The 9 km 220/500kV OHL will be carried out contemporaneously with the substation, which is part of the Project; and
- The 9 km 220/500kV OHL is necessary for the Project to evacuate the electricity; and would not be carried out if the substation which is part of the project did not exist.

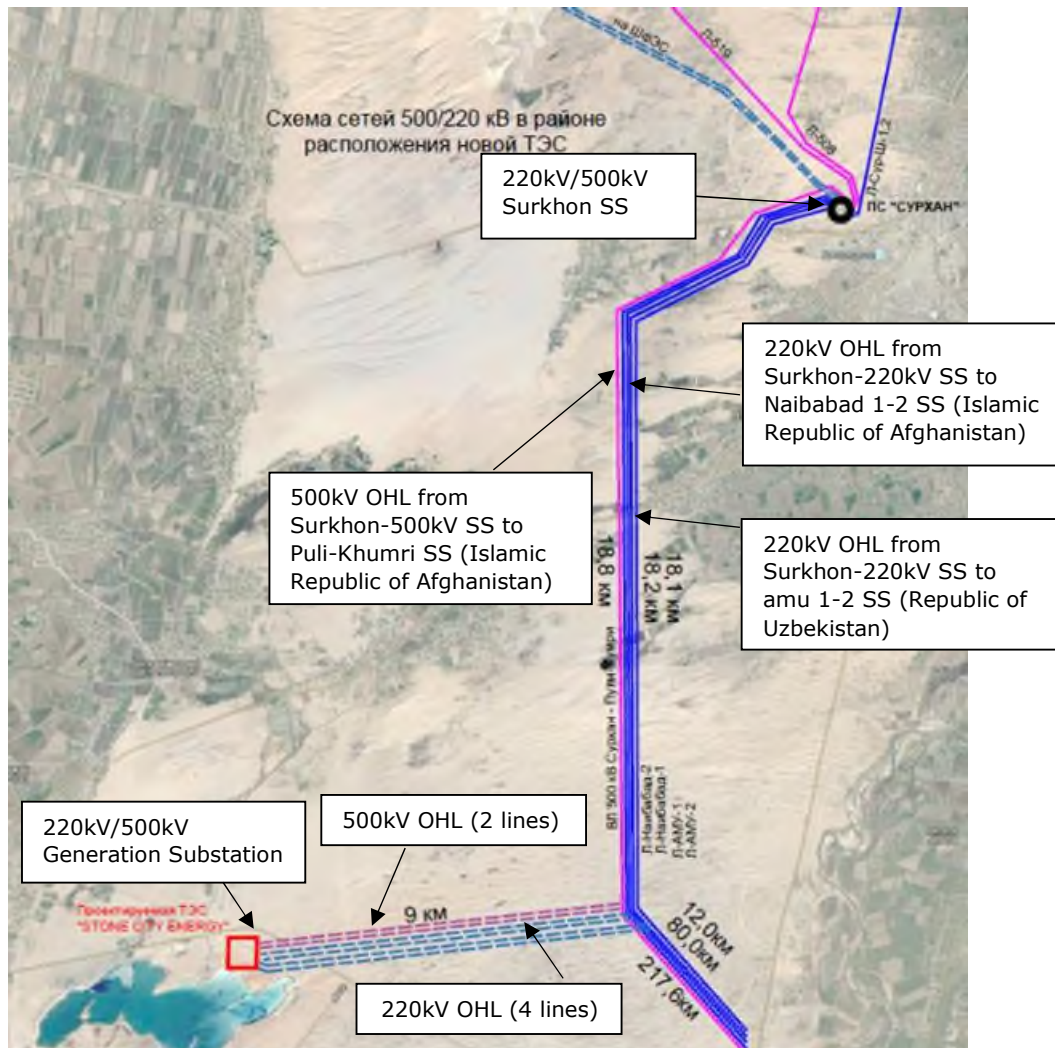


Figure 11. Proposed Grid Connection Strategy for SCE CCPP

The 9 km 220/500kV OHL as associated facility will be designed, built and operated by National Electric Grid of Uzbekistan (NEGU, the Purchaser) according to the PPA. The selection of the OHL corridor has been optimized to minimize the E&S impacts.

An important point is that the proposed grid connection strategy enables the transmission system operator, NEGU, to mitigate technical and environmental impacts for the power supply schemes to the city of Termez, which is located towards the south of the Project site. Thus, required investments for power evacuation arise directly from the operational requirements of NEGU to manage the power grid in its southern operational region, Surkhandarya, and also the Project investment will cancel new additional NEGU substation investment for Termez city (mentioned in the previous subsection). Additionally, the generation substation at the Project site will also be transferred to NEGU after its construction. Since as a private investor the Project has more flexibility to be able to conduct the project faster and shorten the period, construction-related environmental and social impacts are also mitigated as well as accelerating the reliable electricity in the region. All grid investments are going to be built as per NEGU's operational requirements for the region, separate from the Project, and grid assets will be transferred to NEGU following the commissioning phase.

This would also mean that the OHL routes (without cancelation of the planned substation) would be significantly longer than the currently proposed 9 km. LILO solution due to the distance of the load center from the 500 kV transmission line between SS Surkhon and SS Puli-Khumri in Afghanistan.

It has also been calculated that integration of the Project in this configuration will not cause any overload in the grid even if the cross-border connection between Uzbekistan and Afghanistan is disconnected and the generated power can be evacuated towards other parts of the national transmission grid without causing any overloading on any of the existing grid equipment.

2.1.3.3 Gas Pipeline Connection

As it can be seen from Figure 12, the Construction of both gas distribution pipeline and gas distribution station is planned, by the government, to be located at the border of the Project area.

These constructions of both gas distribution pipeline and station will be conducted independently from the Project realization.

Therefore, only the gas pipeline connection between the plant from the gas distribution station will be built specifically for the Project.

Based on the location of the planned gas distribution station (at the border of the CCPP areas), this gas pipeline connection, between the distribution station and the CCPP will be routed only to the area of the plant.

Under Article 6 of Presidential Decree No. 5193 dated 24th July 2021 ("Presidential Decree"), JSC Uztransgas has been instructed to construct a new gas pipeline connecting the M25 gas fields to the Project. Ministry of Finance has been made responsible for arranging the financing for the gas pipeline by September 2023 and JSC Uztransgas is responsible for completing the construction within the timelines.

Pursuant to the Presidential Decree, JSC Uztransgas has commenced the route surveys and studies for the construction of the pipeline. The proposed route is sparsely populated and does not require the resettlement of any population. The overall length of the pipeline till the site is expected to be ~110 kms and will be constructed on an EPC basis. The overall construction is expected to be completed before Q4 2024.

Once completed, the gas pipeline will allow the integration of the gas from the M25 field with the overall gas network in Uzbekistan. The gas pipeline is a strategic asset for the Government of the Republic of Uzbekistan and all aspects of the design, construction, and operation of the pipeline will be under the control of Uztransgas. The construction and operations of the pipeline will be in accordance with the applicable environmental and social regulations in Uzbekistan.

The Project Company, as per the project agreements, will only be responsible for the interface with the gas pipeline in accordance with the design agreed upon and approved by Uztransgas.

Thus, the gas pipeline and the distribution station are not associated facilities to this Project.



Figure 12: Proposed Gas Pipeline Network Connection Strategy for SCE CCPP

2.1.3.4 Analysis of Associated Facilities

As mentioned above, Government enhancing and enlarging both the electric grid network and gas pipeline network in the Surkhandarya region. The Project is located near the current planning of enlargement projects. Uzbekistan Government will realize these enlargement projects independently from the Project. These facilities are planned for the benefit of the region.

In conclusion, the 9km 220/500kV OHL is associated facility of the Project. However, the Project Company will not have any control or influence on the overhead transmission line. Therefore, a brief explanation on likely impacts of the overhead electricity transmission lines and natural gas pipeline are summarized in the following subsections. Requirements in accordance with the national environmental legislation should be followed during the construction and operation of the OHL and relevant impact assessment studies should be conducted. Requirements according to the national legislation for the associated facilities are summarized below.

2.1.4 National EIA Requirements regarding OTLs and Natural Gas Pipelines

According to the Decree of the Cabinet of Ministers of RUz No. 541 dated 07.09.2020, following power transmission and gas transmission lines are subjected to the state environmental expertise:

- power transmission lines and gas pipelines of republican and interstate significance are subjected to Category I of environmental impact (high risk).
- Power transmission lines and gas pipelines of the Republic of Karakalpakstan, regions and Tashkent city are subjected to Category II of environmental impact (medium risk).
- Power transmission lines and gas pipelines of regional and urban application (except Tashkent) are subjected to Category III of environmental impact (low risk).

The natural gas pipeline that is planned to be built to supply the Surkhandarya CCCP is listed under the Category II, whereas the overhead transmission line is listed under the Category III. For Category II and III projects all stages of EIA (see Table 16) are required.

Environmental protection during construction and operation of high-voltage power lines shall be ensured by making design decisions in strict compliance with the by-laws and regulatory documents effective in the Republic of Uzbekistan.

a) The distance to the nearest constructions when designing power lines shall be regulated in accordance with the requirements of SanPiN No 0350-17 "Sanitary norms and rules for protection of atmospheric air in populated places in the Republic of Uzbekistan".

b) The boundaries of the sanitary protection zone are determined in accordance with the SanPiN No. 2971-84 "Sanitary norms and rules for protection of population from impact of electric field created by overhead power lines".

c) Construction of electrical networks in protected areas shall be determined on the basis of the Decree of the Cabinet of Ministers of the Republic of Uzbekistan No. 93. "On approval of the rules for the protection of electrical networks and structures" dated May 17, 2010.

d) Determination of persons carrying out felling of trees or pruning of trees, when electric networks pass through forest areas growing in close proximity to wires, is determined on the basis of the Decree of the Cabinet of Ministers of the Republic of Uzbekistan No. 93 "On Approval of the Rules for Protection of Electrical Networks and Structures" dated May 17, 2010.

2.1.5 Likely Impacts of Overhead Transmission Lines and Mitigation Measures

The following environmental and social impacts shall be considered during construction activities of the overhead electricity transmission lines. The measures to mitigate the impacts shall be described in the environmental documents to be prepared by relevant parties. Among others, some generic mitigations are recommended for NEGU's consideration under each subsections.

Soil and Geology

Possible Impacts

- Temporary land use change (construction site, temporary access and transportation roads, storage of the vegetable soil layer and the excavated and extracted rocks that will be used afterwards for landscaping and filling, etc.) that has impacts such as degradation of the soil profile,
- Soil degradation in the excavation site:
- Topsoil stripping
- Earth compaction
- Soil erosion and landslide
- Dust accumulation in contaminated soil with other air pollutants due to soil excavation, transportation traffic, loading and unloading raw materials etc.

- Accumulation of contaminants (SO₂, NO_x and heavy metals) in the soil due to wet deposition (due to snow and rain)
- Infiltration to the wastewater collection network in the construction site, dispersion to the soil of the water filled with material such as cement
- Penetration of leachate arising from the uncontrolled storage of the wastes and construction materials into the soil

Measures to be Taken

- Limitation of temporarily and permanently occupied lands;
- Using appropriate transportation and construction equipment with low-pollutant engines
- Compliance of the transportation and construction equipment operators with the temporary service routes specified,
- Measures to prevent and control pollution: Regular maintenance of the transportation and construction equipment; temporary storage of the stripped topsoil and extracted rocks in the specially designated areas and under suitable conditions; management of other wastes; and management of asphalt and concrete preparation facilities
- Prevention of the soil erosion during the use of the road by means of the rehabilitation of the road surface where necessary
- Proper collection and treatment of the wastewater that will be generated during the road maintenance works; disposal of the treated effluent in accordance with the legal provisions

Noise and vibration

Possible Impacts

- The vehicles and equipment to be used in the construction works causing noise that might affect the workers, locals and animals around the operation points
- The vibration generated by the construction works such as blasting, stone and rock extraction, establishment of building foundations, piling and the truck traffic especially on the uneven surface leading to the following:

Measures to be Taken

- Timely and regular maintenance of machinery and equipment to be used
- Creating a schedule for the construction activities on the route in a way that will reduce impacts (in hours during the day);
- Preparing a plan for the arrangement of the vehicle traffic with the purpose of limiting the frequency of passage from the residential areas during the construction phase
- Checking and ensuring the compliance with the speed limit and tonnage for the trucks passing from the residential areas during the construction phase
- Performing background noise level measurements in order to take the corrective measures for the excessive noise pollution during the construction phase
- Regular maintenance of the vehicles and equipment by authorized service providers

Air Pollution

Possible Impacts

- Generation of dust from the soil removal, excavation works, transportation traffic, loading and discharging of the materials etc.
- The emissions of the air pollutants caused by the equipment used for transportation and construction (particulate matter emissions from diesel motors, NOx, volatile organic compounds, carbon monoxide, benzene and other various hazardous air pollutants).

Measures to be Taken

- Checking the roadworthiness of the vehicles and construction equipment,
- Ensuring the service roads and the construction sites where construction equipment operates remain damp by using a street sprinkler
- Periodically washing the tires of the vehicles in order to prevent dust emissions during the transportation of the excavation materials
- Checking and cleaning the loose materials on the vehicles and at the sites used for the storage of the excavation materials
- Covering the tops of the trucks used to transport the excess excavation materials with a tarpaulin

General socioeconomic impacts including the impacts on public health

Possible Impacts

- Disturbance caused by noise, vibration and air pollution, and airborne diseases (asthma, allergy etc.)
- Economic impacts arising from changes in land use
- Health and safety impacts arising from the use of explosives, use of heavy construction equipment etc,
- Adverse impacts such as noise, etc. on the residential areas in the vicinity of construction sites and transportation routes in the event that night works are performed

Measures to be Taken

- Reducing the Workplace Health Risks
- Using personal protective equipment and providing seasonal work clothes
- Using high-quality fuel and proper equipment
- Regular performance of emission control
- Building underpasses and overpasses in the residential areas where the route passes in order to ensure safe passage
- Reducing the health risks for the local community
- Using brand new, highly efficient and safe road construction machinery and equipment
- Determining a precise route for the construction vehicles and equipment, and observing the working hours
- Working in coordination with the local health units

Impacts on the Surface and Ground Waters

Possible Impacts

- Damage in seasonally or continuously flowing stream beds during the construction works; change in the waterbeds; temporary disruption of other morphologic factors and/or flow profile (speed, level), and possible temporary impacts on the level of groundwater
- The physical, chemical and biological qualities of the waters changing due to the aforementioned factors; observing pollution on surface and ground waters.

Measures to be Taken

- Suitable designs and construction techniques that aim to limit/restrict the activities that cause the waterbed to change/get disrupted
- Impact-mitigating measures that aim to prevent and control the pollution (very similar to those described for Soil and Geology)

Impacts on flora and fauna, eco-systems, landscape and protected areas

Possible Impacts

- Loss of vegetation cover in the areas where construction corridor and filling-splitting works are performed
- Loss of nesting sites of rare or endangered species, and/or habitats with high biodiversity,
- deterioration of water courses,
- setting barriers against wildlife movement,
- visual and auditory disturbance due to the presence of machinery, construction workers and related equipment,
- sedimentation and erosion caused by construction activities and rainwater flow; increased turbidity of surface waters,
- destruction of the landscape areas.

Measures to be Taken

- Positioning so as to avoid critical land and water habitats (e.g, old-growth forests, wetlands and spawning habitats),
- Preventing or changing the construction activities in breeding seasons and other sensitive seasons or at particular times of the day;
- Preventing the short and long term impacts on the quality of the water habitats minimizing the clearing and deterioration of the river bank vegetation cover, providing sufficient protection against landslide and erosion, and considering the beginning of the rainy season according to the construction schedule;

Wastes

Possible Impacts

- The following activities will be carried out during the preparation and construction stage: operations such as stripping vegetable soil, levelling, preparation of the construction site, construction and installation of the office and auxiliary facilities.
- The wastes from such activities include the following:
 - Domestic wastes (municipal wastes),
 - packaging and packing wastes of the equipment (wood, cardboard, plastic, etc.),
 - hazardous wastes (chemical substances such as paints and solvents and their containers, oily packages and fabrics, etc.)
 - special wastes (waste oils, accumulators and batteries, filters, etc.)
 - excavation and construction wastes (i.e. scrap deal, wood, concrete waste, etc.)

Measures to be Taken

- domestic wastes, including the organic wastes such as biodegradable food wastes must temporarily be collected inside containers with closed tops separated from other wastes, and it must be ensured that they are regularly collected by the related municipalities and disposed of at landfills.
- non-hazardous packaging wastes arising from the materials, parts and equipment should be collected separately from the other wastes at a temporary storage area reserved within the site, and should be collected by the licensed institutions/firms authorized by the Ministry of Environment and Urbanization of Turkey as per the provisions of the Regulation on Packaging Wastes Control.
- limited amount of wastes that are considered as hazardous according to the annexes of the Regulations on Waste Management must be collected in temporary storage areas segregated onsite separate from the non-hazardous wastes, and it must be ensured that they are collected by authorized vehicles, and recovered or disposed of in authorized plants in compliance with the provisions of the Regulation on Waste Management.

The impacts regarding the operation of overhead electricity transmission lines, but not limited to, are summarized below:

Soil and Geology

Possible Impacts

- Permanent change in land use in the construction area of tower feet as well as in transformer center and switchyard areas,
- Dispersion and leaking of pollutants into soil as a result of the accidents and breakdowns in the vehicles and equipment to be used in the maintenance works,
- The erosion of soil due to the removal of the plants along the working corridor and the deterioration of the basin structures.

Measures to be Taken

- Compensation of the losses for the loss of land users
- Limitation of temporarily and permanently occupied lands;
- Prevention of soil erosion by re-planting.

Noise and vibration

Possible Impacts

- Noise generated by the vehicles and equipment to be used during maintenance work,
- The corona noise, which may occur in the conductors used in transmission lines.

Measures to be Taken

- Regular maintenance of the vehicles and equipment to be used for the maintenance works, and non-performance of the maintenance work during the night hours in the vicinity of the residence,
- During the design work, the route should be selected at an adequate distance from the vulnerable residential areas in order to reduce the impact of corona.

Air Pollution

Possible Impacts

- Dust emissions resulting from the stripping of vegetation and similar activities during the maintenance work,
- Exhaust generated by the vehicle and equipment to be used in maintenance work.

Measures to be Taken

- Settling the dust by spraying water with sprinklers during the stripping of the vegetation or other activities that generate dust emission
- Regular maintenance of vehicles and equipment at authorized service centers

General OHS and socioeconomic impacts including the impacts on community health and safety

Possible Impacts

- Unauthorized persons might climb up the towers and receive electric shock and/or fall,
- Electromagnetic field effect caused by the electric current,
- Economic impacts arising from changes in land use (forest, agriculture etc.),
- If glass insulators are used, these insulators might fall down, get broken and cause a fire due to lens effect under the sun.
- Landscape aesthetics impacts
- Radio interference from the transmission lines.
- Occupational health and safety risks to construction workers during maintenance activities (working at height etc.),

Measures to be Taken

- Mounting of mechanical components that will prevent climbing during the service of the transmission line,
- Announcement of the commissioning date of the line and high voltage of the line to the locals; and placement of the necessary warning signs,
- Prevention of fires originating from ETL by use of silicon insulators.

Impacts on the Surface and Groundwater

Possible Impacts

- Contamination of the surface and groundwaters with the leakages of oil that is used for the maintenance of vehicles and equipment,
- Domestic wastewater generated by the facilities such as transformer center.

Measures to be Taken

- Preventing the performance of vehicle and equipment maintenance in areas close to the stream beds; prevention of leakage with petroleum / fuel leak intervention kits in the event that dangerous substances are poured into the soil,
- Disposal of the domestic waste within the scope of the relevant legislation.

Impacts on flora and fauna, eco-systems, landscape and protected areas

Possible Impacts

- In the event that the ETL route passes through the forest areas, chopping down of the trees might affect the wild life in the region and might cause the loss of forest habitats,
- Adverse impacts on fauna due to corona noise,
- Deaths caused by birds nesting on transmission towers,
- Risk of fire in the event that the ETL is broken due to natural disasters or accidents.
- Collision of avifauna (e.g. Lesser Whitethroat - *Sylvia curruca*, Egyptian Vulture- *Neophon percnopterus*, Masked Wagtail - *Motacilla personata*, Chiffchaff - *Phylloscopus collybitis* species) on the OHL;
- Electrocutation of avifauna (w.g. Lesser Whitethroat - *Sylvia curruca*, Egyptian Vulture- *Neophon percnopterus*, Masked Wagtail - *Motacilla personata*, Chiffchaff - *Phylloscopus collybitis* species) on the OHL.

Measures to be Taken

- Selection of a route that will minimize the impacts on flora and fauna as much as possible during design works,
- Placement of anti-bird devices to deter birds from nesting and perching,

- Installment of bird divertors on the OHL and the bird marker balls on the earth wire near the bird habitats, forest areas and water bodies in the light of detailed avifauna surveys,
- Erection of line protection relays to ensure the electricity will be cut off in the event of a rupture in the ETL due to a natural disaster or accident.

Wastes

Possible Impacts

- Wastes generated by the personnel and by the maintenance of vehicle and equipment

Measures to be Taken

- Disposal of the hazardous and non-hazardous wastes according to the relevant legislation
- Disposal of the domestic waste generated within the scope of the relevant legislation

2.2 Project Location

The Project site is located in the Angor district of the Surkhandarya region of the Republic of Uzbekistan, on the northeastern coast of the Uchkizil Reservoir, which is an off-stream reservoir type used for irrigation. The earth dam type Uchkizil reservoir is in operation since 1957.

Distance of the Project area to the regional center of Uchkizil village is approximately 2.0 km, and 14 km to Termez city centre. The location of the Project area in Uzbekistan is presented in Figure 13 and the Project location (regional) is presented in Figure 14.



Figure 13: General Project Site Location



Figure 14: Project Location (Regional Context)

The EIA positive consent decision dated September 29, 2021 and numbered 04-01/10-08-16-55 indicates that a total area of 73.4 hectares was allocated for the implementation of the Surkhandarya Project by referring the decision of the Khokim (Governor of Region) of Angor district No. 131-8-0-Q dated August 26, 2021, a land plot in Kattakum village community assembly, (see Attachment A).

The Site is at an average elevation of 337 m above sea level whereas the level of the Uchkizil Reservoir reserve is 318 m above sea level. The coordinates of the Project area is presented in Table 8.

Table 8: Geographic Coordinates of the Project Area

Geographic Coordinate System WGS 84		
No	North	East
1	37°22'25.33	67°14'54.80
2	37°22'54.68	67°14'50.03
3	37°22'54.70	67°14'49.93
4	37°22'55.63	67°14'56.58
5	37°22'56.17	67°15'1.55
6	37°22'56.21	67°15'5.65
7	37°22'55.87	67°15'10.66
8	37°22'55.28	67°15'15.08
9	37°22'54.50	67°15'19.19
10	37°22'52.25	67°15'24.44
11	37°22'25.74	67°15'20.23
12	37°22'20.01	67°15'1.14

The project area can be considered as a flat terrain and there is no agricultural and/or economic activity within the project area. Project area consists mainly typical representatives of the flora of sandy and saline deserts of the southern part of Central Asia. Photos showing the project site are presented below.



Figure 15: Project Area – General View (July, 2022)

2.3 Land Use and Site Condition

The three largest land use categories in Uzbekistan are listed as:

- agricultural land (46.1% or 20,473 thousand ha),
- lands of the forest fund (21.7% or 9 635 thousand ha),
- lands of the reserve (27.6% or 12,262 thousand ha).

In total, these land categories cover more than 42 million hectares (95% of the country).

For the construction of the combined cycle power plant, unused land of the Kattakum with an area of 73.4 hectares was allocated (please see Attachment A).

Key aspects of the vicinity of the project boundary:

- uncultivated and unused lands in the north, west, and east,
- Uchkizil Reservoir in the south,
- one of the tributaries of the Zang Canal that discharges into Uchkizil Reservoir in the west at a distance of 450-550 meters,
- M-39 main road in the north, northeast and,
- the main railway line Kagan-Termez-Dushanbe in the south at a distance of 7 km.

The nearest residential buildings are located in the south (Uchkizil Village, ~1.4 km) and the west (Kattakum Village, ~1.0 km) (see Figure 16).



Figure 16: Project Location

2.3.1 Land Ownership

According to the 1998 Land Code of the Republic of Uzbekistan, all land in Uzbekistan is state property and permits for use of land are granted and monitored by the State through the rayon and oblast administrations. The official letter of the Surkhandarya Region Khokin, dated 30 August 2021, the Project area is allocated for the construction of a CCPP with the capacity 1600 MW. The decision was published on the official website of the regional administration (surkhandaryo.uz).

2.4 Project Spatial Scope and Areas of Influence

Area of Influence (AoI) or the spatial scope is the physical area, which is the minimum study area of the ESIA studies. AoI is always larger than the project area to assess the potential impacts and the spatial scope varies depending on the topic being studied. The total spatial scope of the ESIA is the result of the sum of all the areas of influence from each assessed topic. The AoI is the geographic area

that may directly or indirectly experience impacts to the biological and, physical or socio-economic environments from resettlement, earthworks, construction, and operation of the Project components. The proposed Project AoI includes the receptors that may be permanently and temporarily affected by the Proposed Project features.

Based on desktop studies and field surveys, potential environmental and social receptors that are likely to be affected by the proposed Project are determined as per the type of the Project related activities. Accordingly;

- Air Quality: The AoI for the likely impacts on air quality is determined as 7 km by considering wind direction and nearby settlements (see Figure 17).
- Noise Level: The AoI for the likely impacts on noise levels is determined as 4 km by considering noise emissions and nearby receptors (see Figure 18).
- Ecology: The AoI for the likely impacts on ecological features is determined as per the Uchkizil Reservoir and its surrounding including the Project area (see Figure 19).
- Surface Water: The AoI for the likely impacts on surface water is determined as per the Uchkizil Reservoir (see Figure 20).
- Socioeconomy: The AoI for the likely impacts on social features is determined as per the settlements around the Project area and utilization purposes of the Uchkizil Reservoir (see Figure 21).

-

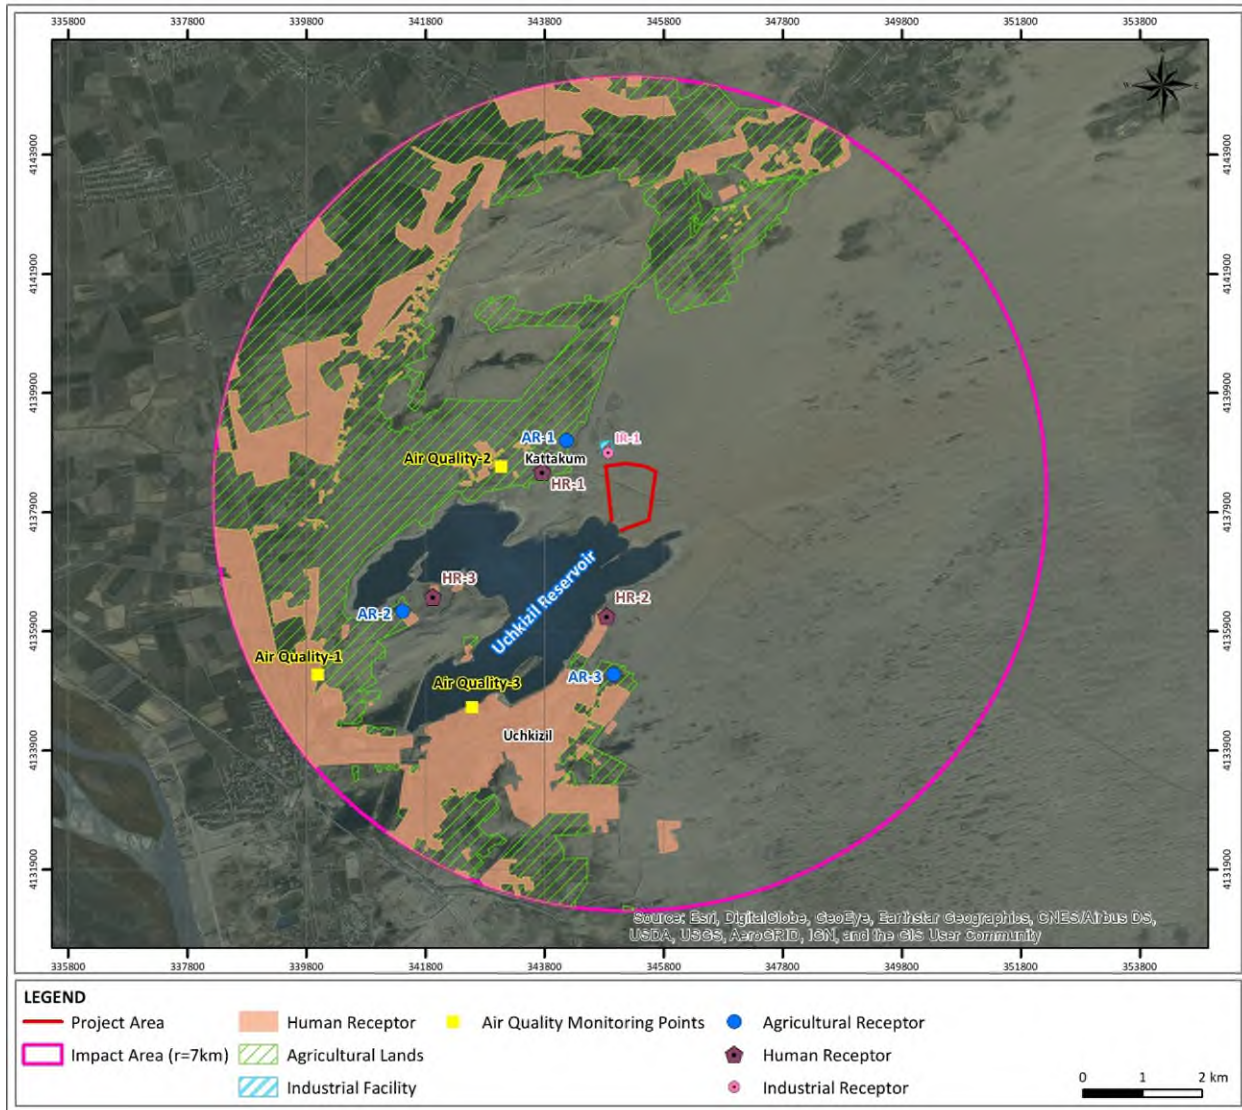


Figure 17 AoI for Air Quality

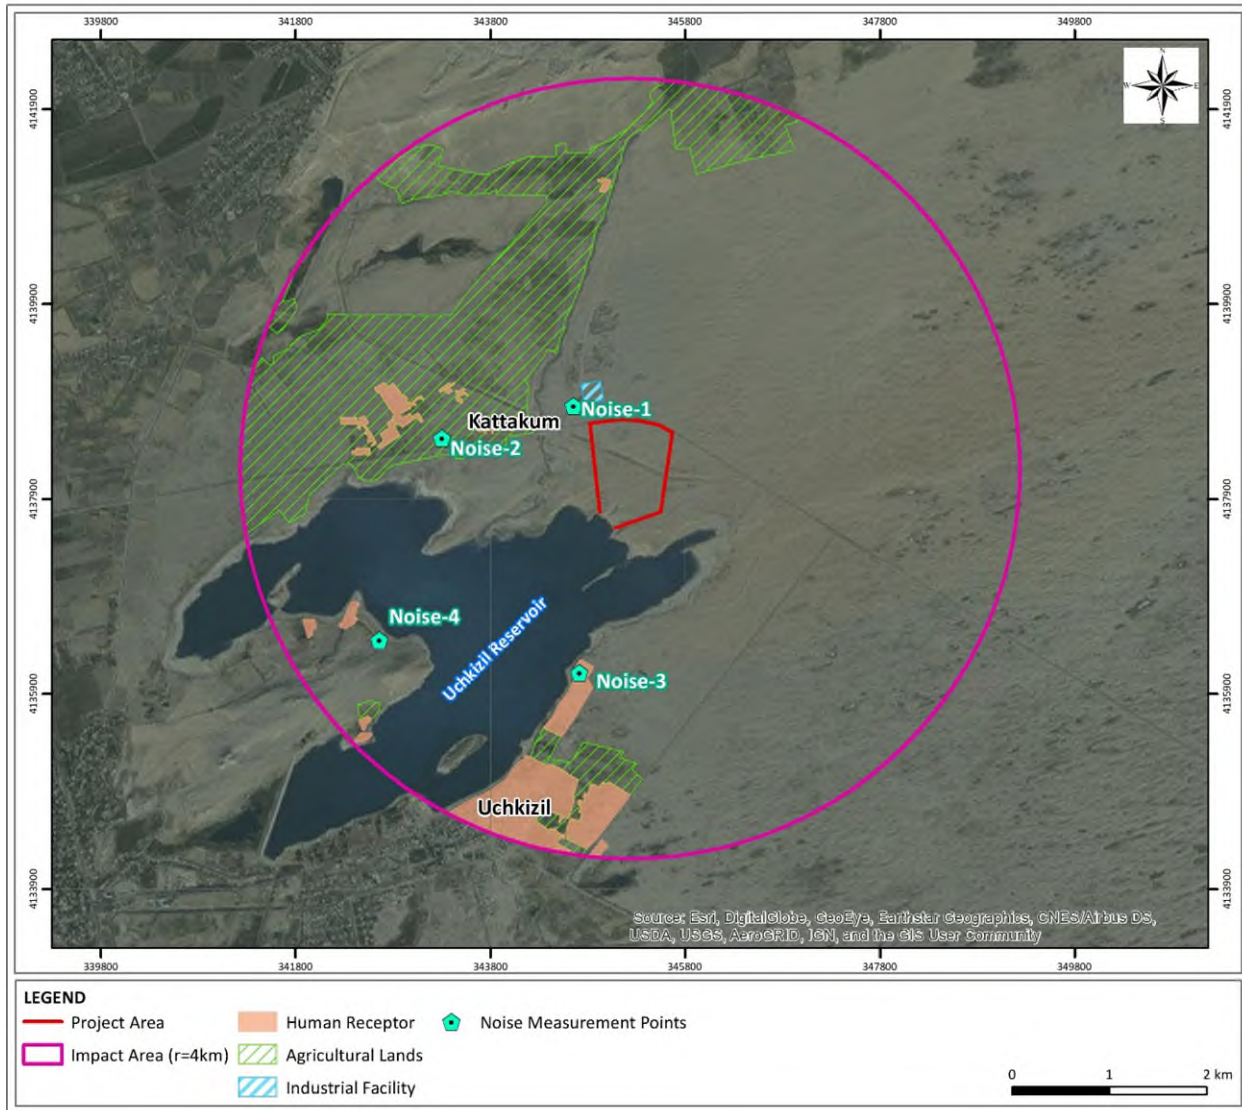


Figure 18 AoI for Noise Levels

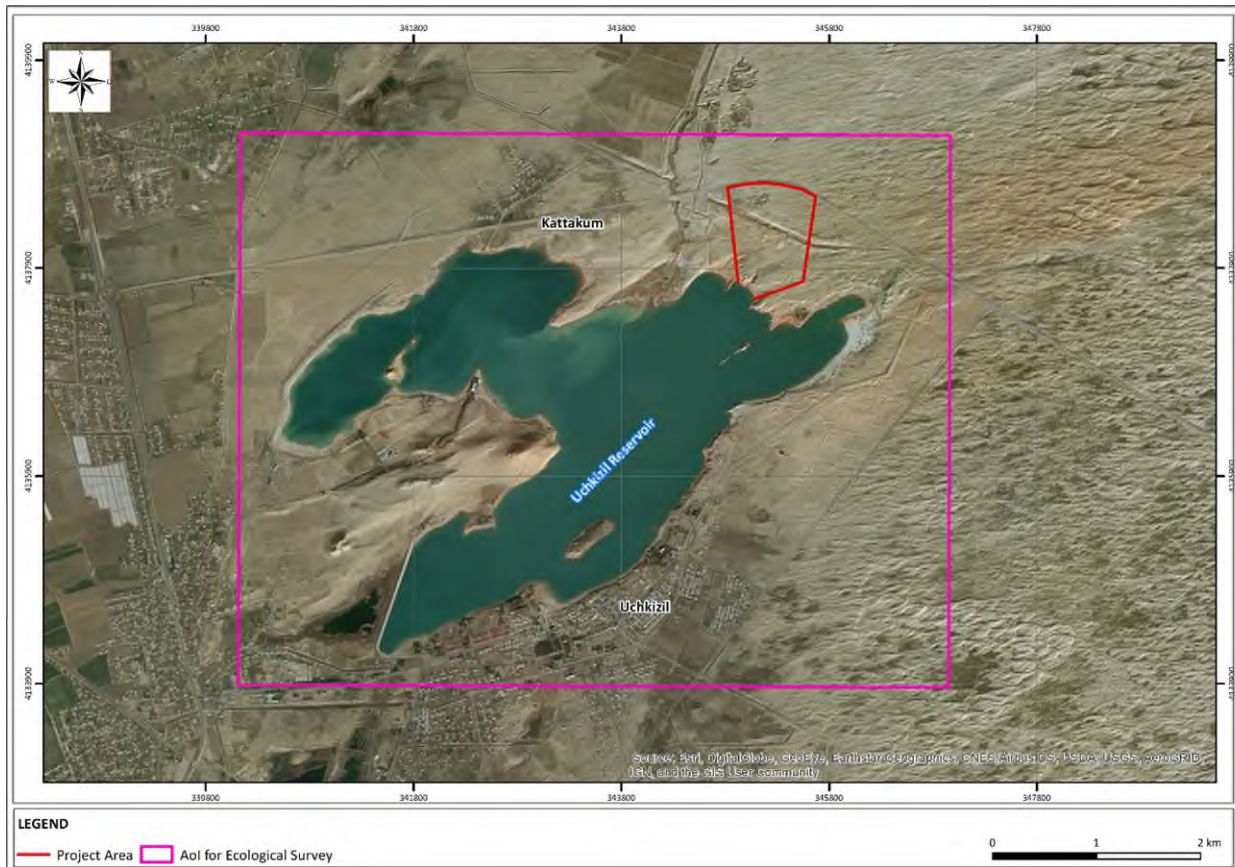


Figure 19 AoI for Ecology



Figure 20 AoI for Surface Water

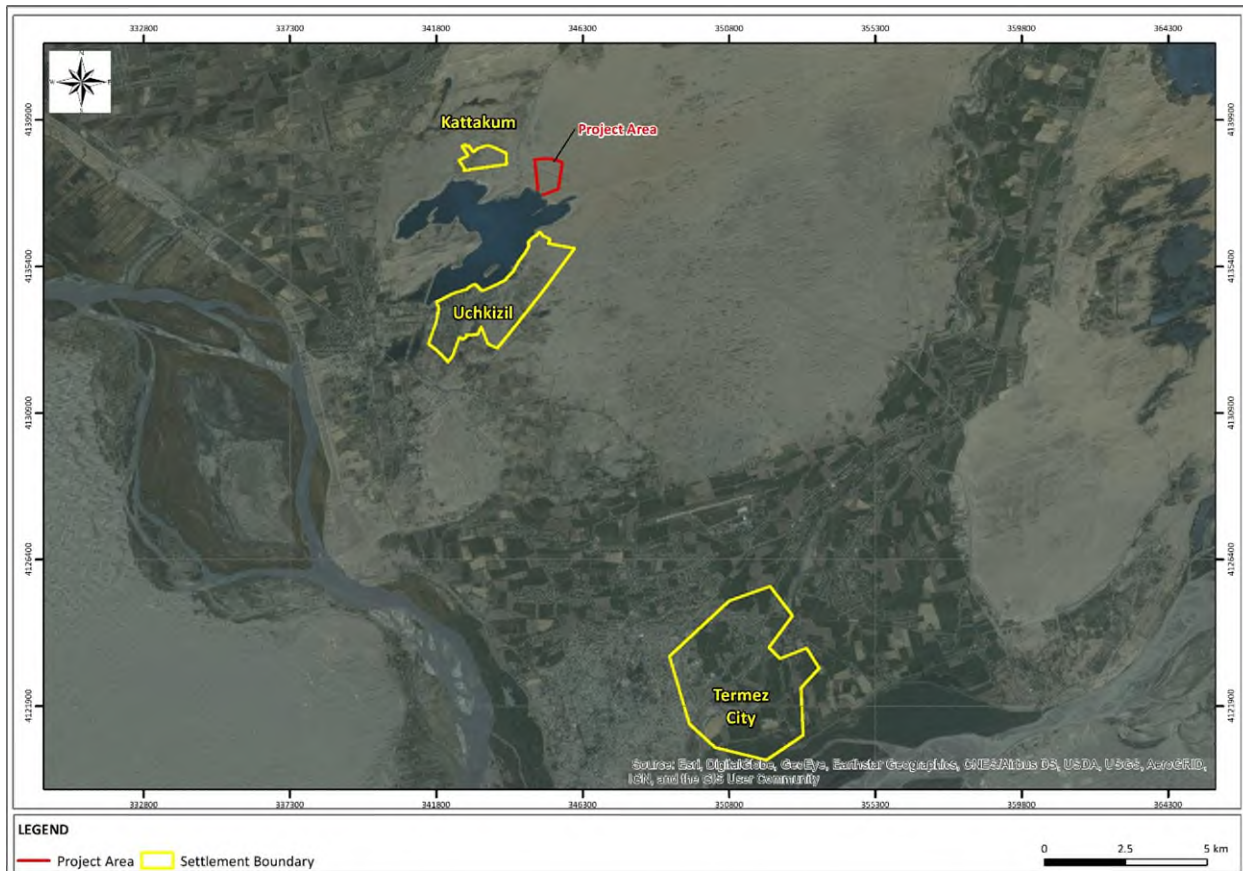


Figure 21 AoI for Social

2.5 Construction Phase

The awarded Engineering Procurement and Construction (EPC) Contractor will be responsible to prepare the Construction Execution Plan, which will be progressively updated through the construction’s different stages. The Construction Execution Plan will commence with the preparation of a preliminary construction plan and schedule for each work package; this includes all of the key dates throughout the construction phase. Critical aspects such as road access, construction seasons, construction labor availability, and camp requirements are assessed and integrated into the plan. This information is also to be incorporated into the Health, Safety, Security, and Environment (HSSE) Plan for the area, which will also address aspects such as traffic management, access, and egress, etc.

The construction activities will consist of site grading, the opening of the access roads, the construction of administrative, control, and maintenance buildings, and the installation of the power plant facilities. It is expected that site grading will be minimal due to the current level nature of the site. The general earthwork activities will consist of cut and fill activities for degrading the site, construction of dikes,

foundation, and pavement sub-grade preparation, and excavation and backfill for utilities. It is anticipated that the construction activities will commence in November 2022 and commissioning will take place in August 2024 (see Table 10).

2.5.1 Water Consumption

The daily water consumption including domestic needs, irrigation purposes, and concrete production during the construction stage will be approximately 170 m³/day and it is expected that the water will be brought in containers from nearby containers.

2.5.2 Sanitary Services

Domestic wastewater generated during construction is planned to be collected in septic tanks with subsequent removal to the nearest treatment facilities in the city of Termez.

2.5.3 Temporary Construction Area

During the construction stage it is anticipated that temporary site offices, workshops and warehouses, batching plant and outdoor laydown area will be located within the project area (see Figure 9).

2.5.4 Accommodation and Logistics

It is planned that there will not be any accommodation facilities within the construction area. Based on the previous experiences in similar projects, it is expected the EPC contractor will arrange accommodation off-site and will use the existing housing compounds located in Termez city. Since the EPC contractor has not been awarded yet, the location of such accommodation is not readily determined. However, it will be ensured that the Project Company will specify the standards of facilities for worker accommodation in line with the IFC/EBRD Worker Accommodation Guidelines.

The EPC contractor will provide the transfer of the workers to the construction site and will perform a Traffic and Logistics Study to assess roads and determine access requirements via other modes of transport. It is foreseen that the existing M-39 main road will be adequate during the construction activities and no additional access road will be opened to reach the project site [3].

2.5.5 Workforce Requirement

It is expected the number of construction workers will be around 2050 during the peak period of the construction. It is expected that approximately 30% of the workforce could be available as unskilled staff whereas the rest will require technical qualifications. It is foreseen that the ratio of foreign workers will be close to the number of local people to be employed, approximately 50%. It is anticipated that the EPC Contractor will have approximately 130 people and the Project Company will have 10-15 permanent staff at the site during the construction stage.

It should be noted that the given number of the workforce may change depending on Project needs during the construction activities.

2.5.6 Vehicles, Equipment, and Machinery Requirement

The EPC contractor will be in charge for construction activities and will make use of different vehicles, equipment, and machinery during the construction stage. The expected number of vehicles according to their fuel types are presented below.

Table 9: List of Vehicles and Construction Equipment During Construction Phase

Vehicles & Equipment Name	Quantity	Fuel
750t Crawling Crane	1	Diesel
150t Crawling Crane	1	Diesel
Hydraulic Lifting Device and Lifting Frame	1	Electrical
250t Crawling Crane	1	Diesel
50t Crawling Crane	1	Diesel
50t Truck Crane	1	Diesel
Gantry Crane	2	Electrical
Truck	3	Diesel
Forklift	2	Diesel
Electric Welding Machine	301	Electrical
Diesel Generator	1	Diesel
Tower Crane	2	Electrical
Vehicle Crane	2	Diesel
Wheel Loader	1	Diesel
Backhoe Excavator	7	Diesel
Crawler Bulldozer	1	Diesel
Road Roller	2	Diesel
Dump Truck	10	Diesel
Platform Lorry	1	Diesel
Batch Plant	2	Electrical




Vehicles & Equipment Name	Quantity	Fuel
Concrete Pump Truck	3	Electrical
Concrete Delivery Truck	6	Electrical
Piling Machine	4	Diesel

2.6 Commissioning Phase

Commissioning and testing sequence of the project is given below.

COMMISSIONING & TESTING SEQUENCE

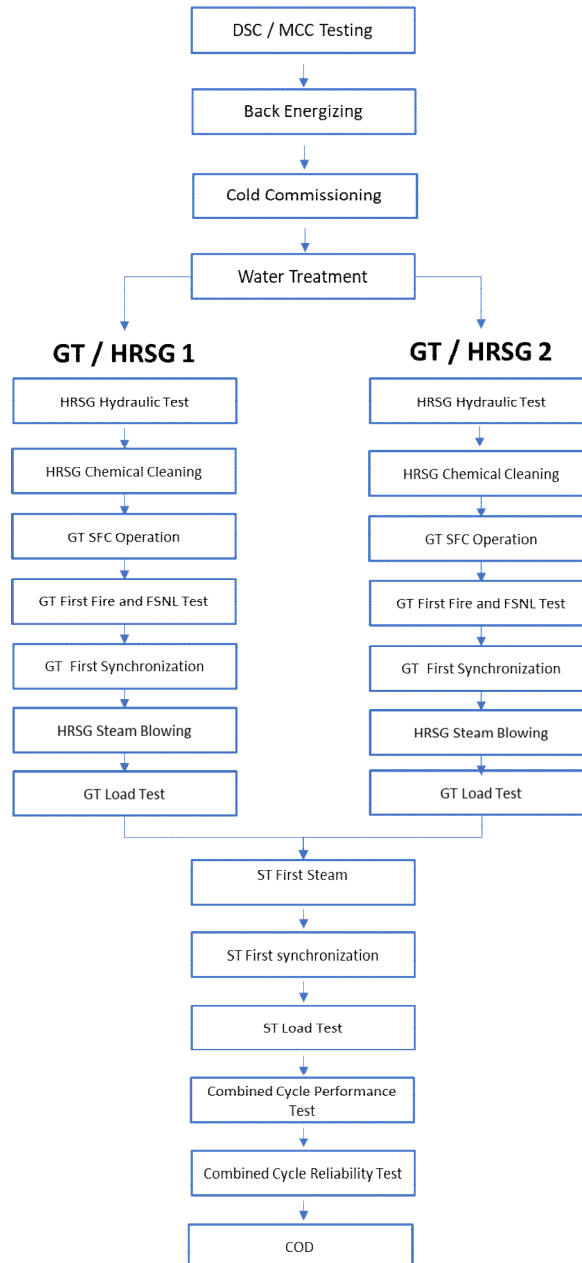

2.7 Operation Phase

During the operation phase of the proposed project, it is anticipated that the number of the workforce will be around 300 staff. During the operational phase, it is foreseen that project personnel will be responsible to arrange their own accommodation facilities, which will be most likely located in Termez.

The annual natural gas consumption will be around 2.3 million m³ for the generation of electricity.

2.8 Closure and Decommissioning Phase

The proposed plant will have a minimum lifespan of 25 years and after this period operation of the plant will be handed over to Uzbekistan Government. The closure and decommissioning activities will consist of dismantling and demolition of all structures and removal of above-ground structures. The potential impacts likely to occur during decommissioning will be similar to the ones defined for construction activities. Therefore, it has been considered that mitigation measures that are described for construction activities are valid for the decommissioning stage and shall be applied accordingly.

The decommissioning programme is uncertain and will be developed towards the end of project life. Environmental and social conditions of the receptors may be different than the current state and there might be changes in relevant legislation and technologies to be applied. Therefore, it is recommended that the Project owner shall develop the Decommissioning Plan 24 months prior to the decommissioning activities. In conclusion, the assessment of impacts during closure and decommissioning has not been considered in detail in this ESIA.

2.9 Project Schedule and Milestones

The project schedule is presented in Attachment B and key milestones are given below.

Table 10 Key Milestones

Milestones	Date
Limited Notice to Proceed	September 2022
Notice to Proceed	October 2022
Site Preparation and Mobilization	November 2022
GT 1 Erection and Commissioning	August 2024
GT 2 Erection and Commissioning	October 2024
Scheduled Project Commercial Operation Date	October 2025

3. APPROACH TO ESIA

3.1 Objectives of the ESIA

The main objectives of this ESIA in relation to the Project are as follows:

- Provide an overview of the Project design, identification of sensitive receptors in the Project's area of influence, and assessment of Project alternatives including Best Alternative Technique (BAT);
- Assessment of baseline conditions (existing conditions) prior to the development of the Project through review of available data and conducting surveys;
- Assessment of the Project's environmental and social impacts during the construction, operation, and decommissioning phases;
- Review of compliance obligations, including applicable Uzbekistan regulations and international regulations and standards as well as international lender requirements;
- To engage with key stakeholders and Project affected people to disclose Project information, study outcomes, gain lay knowledge about the local environmental and social context, and seek feedback on Project;
- Determination of applicable mitigation and management measures including monitoring requirements to be implemented in order to avoid or minimize potential impacts and maximize potential environmental and social gains;
- Prepare a framework from which the construction, commissioning and operational phases respective environmental and social management systems and plans can be developed and implemented.

3.2 Structure of the ESIA

To comply with the requirements for environmental and social assessment established by international good practices, this report is presented in the following format developed by UzAssystem:

- **Volume 1:** Non-technical Summary (Non-technical Summary of the ESIA, including the main outcomes, and conclusions).
- **Volume 2:** Main Text, Abbreviation, List of Tables, and List of Figures and Environmental and Social Management Plan
- **Volume 3:** Attachments
- **Volume 4:** Stakeholder Engagement Plan

Volume 2 consists of the main text of the ESIA, which identifies and elaborates the impact assessment with mitigation, management, and monitoring measures.

Table 11 ESIA Report Structure

Section	Contents
Volume 1: Non-Technical Summary	
Non-Technical Summary	A brief summary of the ESIA report and summary of key findings/results
Volume 2: Main Report	
Table of Contents	Provides an overview of each section including the main level headings
List of Tables	Provides a list of all tables provided in the report
List of Figures	Provides a list of all figures provided in the report
Abbreviations and Definition	Provides an explanation of the units and the key terms used within the report
Executive Summary	Summary of the main outcomes of the ESIA study
1. Introduction	Presents a general information on the project
2. Project Information	Sets out an overall description of the project activities including the activity objectives and rationale, project location, activities during the activity phases, required space for the project, activity resources and their types and sources, and the project schedule
3. Approach to ESIA	Describes the service provider who prepared the study, assessment of significant impacts, which will include methodology used for impact identification, analysis and assessment, analysis and assessment of potential impacts (for each applicable environmental component) expected to take place during the different phases of the project including cumulative and residual impacts, summary of assessment of anticipated impacts before mitigation, summary of the baseline studies and the scoping report
4. Project Alternatives	Describes the assessment methodology, "Do-nothing scenario" alternative, location determination alternatives, design alternatives, and comparison of alternatives, when applicable
5. Regulatory Framework	Outlines the relevant legal framework and guidance applicable to the Project which are considered in the study
6. Air Emissions and Ambient Air Quality	Presents Standards and Regulation, baseline condition, sensitive receptors, potential impacts, cumulative impacts and monitoring table related with air quality
7. Noise Level	Presents Standards and Regulation, baseline condition, sensitive receptors, potential impacts, cumulative impacts and monitoring table related with noise
8. Water Resources and Water Environment	Presents Standards and Regulation, baseline condition, sensitive receptors, potential impacts, cumulative impacts and monitoring table related with water resources
9. Ecology	Presents Standards and Regulation, baseline condition, sensitive receptors, potential impacts, cumulative impacts and monitoring table related with ecological conditions



Section	Contents
10. Soil, Geology and Groundwater	Presents Standards and Regulation, baseline condition, potential impacts, cumulative impacts and monitoring table related with geology
11. Solid Waste and Wastewater Management	Presents Standards and Regulation, potential impacts, cumulative impacts and monitoring table related with waste management practices
12. Traffic and Transportation	Presents Standards and Regulation, baseline condition, potential impacts, cumulative impacts and monitoring table related with traffic and transportation
13. Archaeology and Cultural Heritage	Presents Standards and Regulation, baseline condition, potential impacts, cumulative impacts and monitoring table related with archaeology
14. Landscape and Visual Amenity	Presents Standards and Regulation, baseline condition, sensitive receptors, potential impacts, cumulative impacts and monitoring table related with visual aspects
15. GHG Emissions and Climate Change	Presents impacts related with climate change and GHG generation
16. Socio-Economics	Outlines the baseline social and economical condition of the project affected area, potential impacts
17. Public Consultations	Describes the public consultations that are already performed and planned consultation activities
18. Livelihood Restoration	Sets out the legislation and the framework regarding livelihood restoration
19. Labor and Working Conditions	Presents Standards and Regulation, baseline condition, sensitive receptors, potential impacts, cumulative impacts and monitoring table related with working conditions
20. Community Health, Safety & Security	Presents Standards and Regulation, baseline condition, sensitive receptors, potential impacts, cumulative impacts and monitoring table related with community health and safety
21. Human Rights Impact Assessment	Presents Standards and Regulation, baseline condition, sensitive receptors, potential impacts, cumulative impacts and monitoring table related with human rights
Volume 3: Attachments	
Attachment A	Letter & Conclusions from State Committee on Ecology & Environmental Protection
Attachment B	Overall Project Layout, Water Balance Diagram and Project Schedule
Attachment C	List of Archaeological & Cultural Sites within the Surkhandarya Region
Attachment D	Laboratory Analyzes Results



Section	Contents
Attachment E	Socio-Economic Annex
Attachment F	Environmental Social Management Plan (ESMP)
Attachment G	Chance Find Procedure
Volume 4	Stakeholder Engagement Plan (SEP)

3.3 ESIA Team

UzAssystem has engaged in preparing Local EIA and ESIA Report for this project. This includes supporting the Project consortium up to Financial Close with their prospective lenders.

In order to ensure that the Project meets the requirements of the State Committee on Ecology and Environmental Protection, UzAssystem has been subcontracted and will be responsible for some elements of the ESIA process, including baseline studies, stakeholder identification and engagement/consultation, and liaison with relevant government authorities in Uzbekistan. The team of the ESIA Project is presented Table 12.

Table 12: Project ESIA Team

Name	Position	Profession	Contribution to Relevant Chapter of ESIA	Company
Merve ACIRLI	Project Director	Environmental Engineer	Entire ESIA	UzAssystem
Ulas GUNGOR	Project Manager	Environmental Engineer	Entire ESIA	UzAssystem
Hakan Bekar	Senior ESIA Specialist	Environmental Engineer	Entire ESIA	UzAssystem
H.Bülent Kadioğlu	Senior ESIA Specialist	Environmental Engineer	Entire ESIA	UzAssystem
Ugur AKCAY	ESIA Specialist	Environmental Engineer	Chapter 6 Air Emissions and Ambient Air Quality (Air Quality Modelling)	UzAssystem
Ayse AKKURT	ESIA Specialist	Chemist	Chapter 11 Solid Waste and Wastewater Management	UzAssystem
Eylul KIRBAC	ESIA Specialist	Environmental Engineer	Chapter 11 Solid Waste and Wastewater Management	UzAssystem
Elif ALTUNTAS	ESIA Specialist	Environmental Engineer	Chapter 4 Regulatory Framework	UzAssystem
Farrukh SATTAROV	Local EIA Specialist	Environmental Expert	Chapter 4 Regulatory Framework	UzAssystem
Ozden AFACAN	GIS Manager	Hydrogeological Engineer	Preparation of maps	UzAssystem
Burcu SAHIN	GIS Specialist	Geological Engineer	Preparation of maps	UzAssystem
Damla SARACMAVIS	GIS Specialist	Geological Engineer	Preparation of maps	UzAssystem



Name	Position	Profession	Contribution to Relevant Chapter of ESIA	Company
Mert EKER	Geology Manager	Geological Engineer	Chapter 10 Soil, Geology and Groundwater	UzAssystem
Bijan DIZECI	Project Engineer	Geological/Geophysical Engineer	Chapter 10 Soil, Geology and Groundwater	UzAssystem
Huseyin EKICI	Project Engineer	Civil Engineer	Chapter 10 Soil, Geology and Groundwater	UzAssystem
Gizem ARIKAN	Biodiversity Specialist	Biologist	Chapter 9 Ecology	UzAssystem
Ozge CELIK	Social Specialist	Sociologist	Chapter 16 Socio-economics, Chapter 17 Public Consultations, Chapter 18 Livelihood Restoration, Chapter 20 Community Health, Safety and Security	UzAssystem
Buse Nur Hayta	GHG Expert	Environmental Engineer	Chapter 15 GHG Emissions and Climate Change	UzAssystem
Ercan Özbulut	Social Specialist	Sociologist	Chapter 16 Socio-economics, Chapter 17 Public Consultations, Chapter 18 Livelihood Restoration, Chapter 20 Community Health, Safety and Security	Freelance Expert
Timur Abduraupov	Herpetologist	Ecological Expert	Chapter 9 Ecology	Freelance Expert
Anna Ten	Ornithologist	Ecological Expert	Chapter 9 Ecology	Freelance Expert
Maria Gritsyna	Theriologist	Ecological Expert	Chapter 9 Ecology	Freelance Expert
Zuri Mustafayeva	Hydrobiologist	Ecological Expert	Chapter 9 Ecology	Freelance Expert
Ulugbek Mirzaev, PhD	Ichthyologists	Ecological Expert	Chapter 9 Ecology	Freelance Expert
Askar Kuvatov	Ichthyologists	Ecological Expert	Chapter 9 Ecology	Freelance Expert

Name	Position	Profession	Contribution to Relevant Chapter of ESIA	Company
------	----------	------------	--	---------

3.4 ESIA Methodology

This section provides information about the data collection and consultation process undertaken to inform the ESIA and the methodology that has been used to describe the sensitivity of environmental and social receptors; predict the magnitude of environmental and social impacts and assess the significance of impacts upon applicable environmental parameters.

The purpose of an ESIA is to identify the positive and negative impacts caused by project implementation. This is assessed through an analysis of the effects resulting from the interaction between environmental and social components and the various activities of a project and its development, including temporary (for example, during construction) and associated facilities.

The international ESIA flowchart is presented in Figure 22.

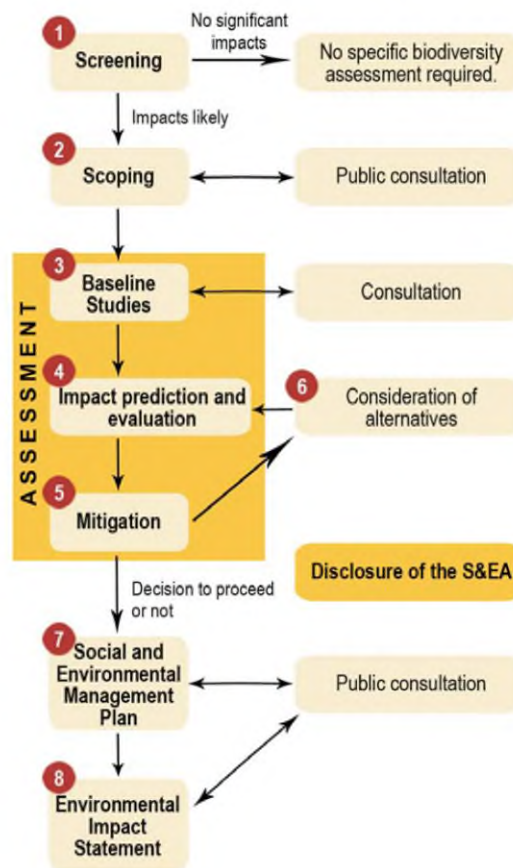


Figure 22: International ESIA Process Flowchart (extracted from IFC, A Guide to Biodiversity for Private Sector)

3.5 Significance Determination Methodology

Environmental and Social impacts can be characterized as interactions between some of the project's features and some of the surrounding environment's features. The assessment of significant effects or impacts is an essential concept, which limits the consideration of the effects or impacts a project may have on the environment to those, which are significant enough to merit the costs of assessment, review, and decision-making.

The assessment of significance relies on experts' judgments about what is important, desirable, or acceptable with regard to changes triggered by the project in question.

At present, there is no international consensus among practitioners on a single or common approach for assessing the significance of impacts. This makes sense considering that the concept of significance differs across the varying political, social, and cultural contexts that Projects face.

Nevertheless, the determination of impacts' significance can vary considerably, depending on the approach and methods selected for the assessment. The choice of appropriate procedures and methods for each judgment varies depending on the Project's characteristics. Several methods, be they quantitative or qualitative, can be used to identify, predict, and evaluate the significance of an impact.

The significance of the impact will be determined in three steps as described below.

Environmental Receptors can be described as below:

- Elements of the environment that are of value to the functioning of natural or human systems (i.e. areas or elements of ecological, landscape or heritage value, soil and sediment, air and water bodies); and
- Human receptors, such as people (i.e. users of dwellings, places of recreation, places of employment, and community facilities), and human systems (e.g.employment market).

It should be noted that the sensitivity of the social receptors has been identified according to the field survey observations, which has taken into consideration the stakeholder feedback received through the ESIA study. The overall magnitude of the impacts has been determined by using professional judgement in consideration of the geographical extent, reversibility, duration and frequency of the impact.

The receptors are described in terms of their spatial importance and/or the sensitivity of that receptor to change due to potential impacts. The environmental value (or sensitivity) of the receptors identified will be defined using the criteria in Step 1.

Step 1: The value and sensitivity of the receiving environment/receptor will be rated according to the following scales.

Value and Sensitivity	Physical Receptor	Human Receptor	Biodiversity Receptor
High	Little or no capacity to absorb proposed changes and has national or international value e.g. receptors where people or operations are particularly susceptible to noise or air quality changes)	Receptors with high vulnerability and permanent presence within the direct or indirect AOI (e.g. school, poor or vulnerable household, hospital). No capacity to absorb project changes or no opportunity for mitigation.	Substantial loss of ecological functionality
Medium	Moderate capacity to absorb proposed changes e.g where it may cause some uncomfot or distraction or disturbance	Receptors with moderate to high vulnerability and or somewhat affected by project impacts. Limited capacity to absorb changes. Potential opportunities for mitigation	Moderate but sustainable change which stabilises under constant presence of impact source, with ecological functionality maintained
Low	Good capacity to absorb proposed changes and not protected or has low value e.g. receptors where the disturbance is minimal .	Receptors with low to moderate vulnerability, or are located in the AOI infrequently. Good capacity to absorb changes with no lasting effects, or good access to mitigation measures.	Species or community unaffected or marginally affected
Negligible	No or negligible importance and rarity, site scale. The receiving physical environment is	No or negligible importance and rarity, site scale. The receiving human environment is tolerant of the proposed change	No or negligible importance and rarity, site scale. The receiving biological environment is

	tolerant of the proposed change		tolerant of the proposed change
--	---------------------------------	--	---------------------------------

The impact is the change of state of the environment which is caused by project activity. In general, this change can be measured or estimated in some manner. The magnitude of the impacts is classified as mentioned in Step 2.

Step 2: The magnitude of impacts will be rated according to the following scales.


The magnitude of the Impact scale	
High	Loss of resources and/or quality and integrity over a significant area; severe change/damage to key characteristics, features or elements, for more than 2 years
Medium	Loss of resources, but not adversely affecting the integrity over a significant area; partial loss of/damage to key characteristics, features or elements, for more than 6 months but less than 2 years
Low	Some measurable change in attributes, quality or vulnerability; minor loss of, or alteration to, one (maybe more) key characteristics, features or elements.
Negligible	Little or no measurable change in attributes, quality or vulnerability

Once the value and sensitivity of the receptor and magnitude of the impacts are assessed, the significance of the impact will be derived as mentioned in Step 3.

Step 3: The significance of impacts will be assessed as below.

		Receptor Sensitivity			
		High	Medium	Low	Negligible
Impact Magnitude	High	Major	Major	Moderate	Minor
	Medium	Major	Moderate	Minor	Negligible
	Low	Moderate	Minor	Minor	Negligible
	Negligible	Minor	Negligible	Negligible	Negligible

After completion of the significance of the impact determination, mitigation and enhancement measures is evaluated. The mitigation hierarchy is used to limit the negative impacts and manage risks. Mitigation hierarchy is a step-by-step process as given below. In this hierarchy, avoid at source is more preferable and compensate is undesirable.

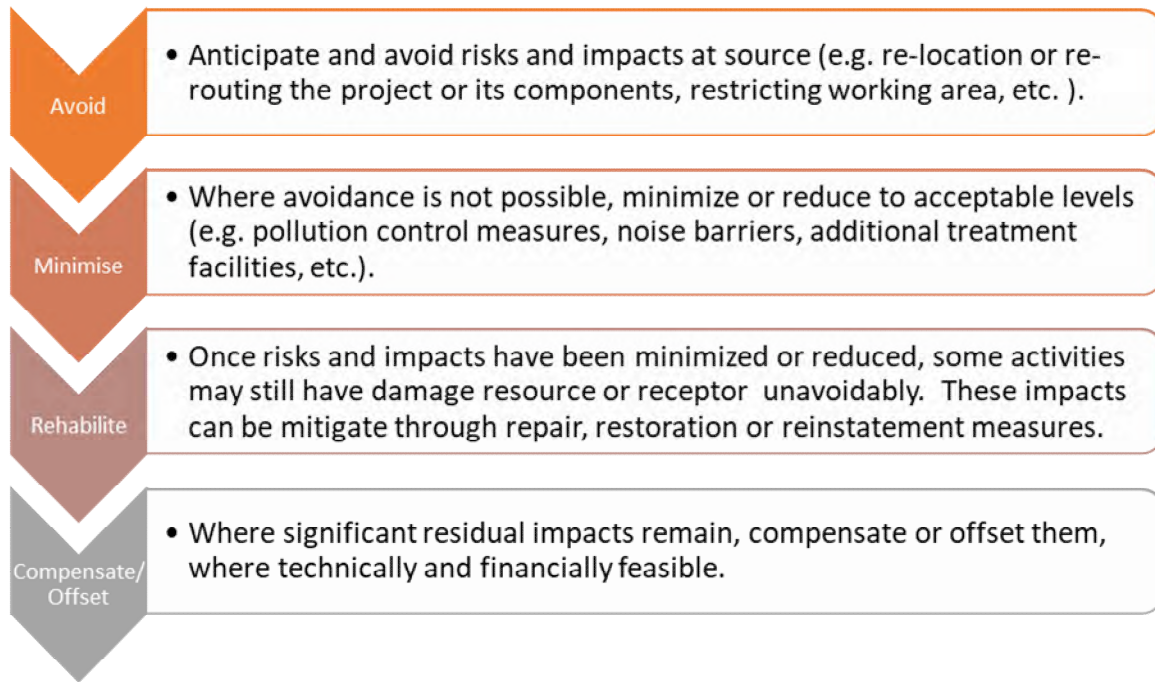

Residual impacts are those impacts that are predicted to remain after the application of all the proposed mitigation measures. Residual significant impacts need to be carefully monitored and managed during the implementation phase of the project. The adverse impacts that cannot be avoided or removed completely should be minimized, and finally, those which remain significant and cannot be reduced further have to be accepted. For significant residual effects, it may be necessary to provide compensation or offsetting. This is where some other aspect of the environment is developed or managed in a manner that offsets unavoidable significant effects.

3.6 Scope and Objectives of the ESIA

The project investor plans to apply to international finance institutions (IFIs) for the financing of the Project. Therefore, the Project owner requested this ESIA to meet the IFIs' requirements in accordance with AIIB and IFC.

The purpose of this ESIA is, like local EIA, to identify potential environmental and social impacts to be originated from the project activities during construction, operation, and decommissioning phases, and to propose concrete measures to avoid, reduce or mitigate such potential impacts and risks to the extent possible.

The most significant disparity between the local EIA and international ESIA processes is baseline environmental surveys. However, there are similar approaches for illuminating the public about the project and presenting EIA to the public. In accordance with World Bank processes, at the ESIA procedure period at the beginning phase of the work, acknowledgment of the public process is conducted. During this process, it may be easily presented that the public becomes sensitive and has valued issues and expectations about decreasing the environmental impacts to the lowest level.

ESIA processes are being conducted in compliance with European Union EIA instructions (97/11/EC numbered instruction and varied 85/337/EEC numbered instruction). On the other hand, the projects financed jointly with the World Bank's common finance supply are accepted by other finance

institutions. To determine the environmental and social expectations from the projects, the standard assessment and examination procedure has been applied that is called "IFC-PS's" which is accepted by most of the finance corporations.

The national EIA procedure usually does not bring out the need for conduction of a socio-economic survey, usually existing literature data is satisfactory to make a social impact assessment of a project for both projects. Therefore, further studies were carried out for understanding the existing socio-economic conditions and the perception of the affected communities about the project with the intention to get the real impacts of the project on the communities in compliance with the IFIs' requirements. The social study was initiated with the determination of the objectives of the study and the desktop studies to gather secondary data. During the following data collection process, determination of the study area covering the potentially affected settlements, design, and selection of the sampling, training of the personnel to be assigned for the site survey and the data collection were the steps. This phase of the social study is followed by the analysis of the data collected, evaluation of identified impacts and mitigation, and reporting. The primary data was collected through literature data.

During the following data collection process, determination of the study area covering the potentially affected settlements, design, and selection of the sampling, training of the personnel to be assigned for the site survey and the data collection were the steps. This phase of the social study is followed by the analysis of the data collected, evaluation of identified impacts and mitigation, and reporting. The primary data was collected by using questionnaires, interviews with the authorities, and stakeholders.

Another difference between the national EIA Report coverage and internationally accepted ESIA Report coverage is the need for the development of appropriate environmental and social monitoring program. For this purpose, the Environmental and Social Management System (ESMS) was developed.

Other additional studies conducted within the context of the international ESIA Report coverage are as follows:

- Detailed social and environmental impact assessment was conducted.
- Applicable national and international social and environmental standards are presented.
- Environmental Management System is explained for application during the implementation of the project.
- A grievance procedure is developed to forward any complaints, which the public may be faced, to a competent person/authority, promptly and transparently.

Furthermore, the agreements including all the commitments mentioned in the Report should be prepared and signed mutually with construction and operation contractors (if any). During the period of construction and operation, all activities and results thereof should be inspected and reported by an independent environmental consultant or by an environment monitoring firm. All progress and events should be reported to the institutions that provide financial support during all phases of the project, regularly.

3.7 Environmental and Social Categorization and its Rationale

The project is considered as Category I of environmental impact with a high risk according to the national Law "On Environmental Expertise" and the Decree of the Cabinet of Ministers of 07.09.2020 No.541 "On further improvement of the mechanism of environmental impact assessment". Hence, first stage of the Environmental Impact Assessment report (national acronym - PZVOS) was developed

for this facility and a positive Conclusion of the State Environmental Expertise of the Republic of Uzbekistan No.04-01/10-08-1655 dated September 29, 2021 was obtained. As the Stage III of national EIA process The 'Statement on Environmental Consequences' ('ZEP' is the national acronym) represents the final stage of national EIA process and it will be conducted before the project is commissioned.

The project investor plans to apply to international finance institutions ("IFIs") for the financing of the Project. Therefore, the project owner requested this ESIA to meet the IFIs' requirements in accordance with AIIB and IFC.

Although AIIB and IFC standards are used in the report, equator principles are also taken into consideration to determine project categorization and used in some relevant parts of the project report.

As per AIIB ESP, the AIIB screens and categorizes each Project as early as feasible at the outset of its due diligence assessment of the Project in order to determine the nature and level of the required environmental and social assessment, information disclosure and stakeholder engagement required of the Client for the Project. In its categorization, the AIIB takes into consideration the type, nature, location, sensitivity and scale of the Project, so that the Client's assessment is proportional to the significance of the Project's potential environmental and social risks and impacts.

The AIIB determines the Project's category on the basis of the Project's component presenting the highest environmental or social risk and potential impacts (including direct, indirect, cumulative and induced impacts, as relevant, in the Project area). The Bank reviews these environmental and social risks and impacts, regardless of the categorization being considered.

As per categorization of AIIB ESP, the Project is considered as Category A, which is s likely to have significant adverse environmental and social impacts that are irreversible, cumulative, diverse or unprecedented. These impacts may affect an area larger than the sites or facilities subject to physical works and may be temporary or permanent in nature. For Category A projects it is required to prepare:

- an environmental and social impact assessment (ESIA) or equivalent environmental and social assessment, for each Category A Project, and
- an environmental and social management plan (ESMP) which is included in the ESIA report for the Project.

The ESIA for a Category A Project examines the Project's potential environmental and social risks and impacts, both positive and adverse, compares them with those of feasible alternatives (including the "without Project" alternative), and recommends any measures needed to avoid, minimize, mitigate, offset or compensate for adverse impacts and improve environmental and social performance of the Project.

Pursuant to Equator Principle 1, the project(s) is categorized as per the magnitude of potential impacts. As part of their review of a project's expected social and environmental impacts, EPFIs uses a system of social and environmental categorization, based on the IFC's environmental and social screening criteria, to reflect the magnitude of impacts understood because of assessment.

In that regard, the Project is a Category A project in accordance with Equator and IFC's Environmental and Social Sustainability Policy.

Key environmental and social items considered applicable to this appraisal include:

- The company's capacity;

- Identify, assess and manage Environmental and Health&Safety risks and impacts associated with its construction and operation of the Project,
- Identify and manage Occupational Health and Safety ("OHS") risks and impacts associated with;
- The primary supply chain of operations;
- Labor and working conditions;
- Management of wastewater, air emissions, wastes and hazardous materials; and
- Land acquisition.

In conclusion, since the project is assessed as High Risk project both under the national legislation and international standards, which require a full ESIA study.

3.8 Baseline Studies and Research

Forming an integral part of the ESIA, the baseline surveys provide a benchmark of the existing conditions by which the potential impacts of the proposed project can be assessed for the construction and operational phase. This ESIA has been informed by a review of relevant desktop information as well as a series of physical site surveys which have been summarized in the relevant environmental and social impact assessment Sections of this report. The environmental baseline surveys carried out as part of the ESIA included is given in Table 13.

Table 13: Environmental and Social Baseline Surveys

Site Surveys	Period
Terrestrial Ecology Surveys	17 th July 2021
Irrigation Reservoir(lake)	15 th July 2021
Soil Survey	15 th July 2021
Groundwater and surface water sampling	9-16 th July 2021
Sediment and lake sampling	13 th July 2021
Zooplankton and phytoplankton sampling	13 th July 2021
Noise Monitoring Survey	10 th to 14 th July 2021
Air Quality Monitoring Survey	10 th to 16 th July 2021
Socio Economic Data Collection	28 th July 2021
Stakeholder Consultations	This has been completed with different stakeholders on July 2021 through official letters, calls and public consultation meetings conducted.
Livelihood Restoration Surveys	15 th October 2021
Terrestrial Flora and Fauna Survey	April 2022

It should be noted that air quality measurements were performed in line with GOST Standards via a local accredited laboratory (see Chapter 6) by taking into consideration of the following issues;

- During the operation stage, the same measurement method will be followed, to assess the current air quality and the results will be submitted to the competent authority to ensure that the proposed mitigation measures are effective.
- There are no existing major sources of emission in the vicinity of the project area, although, not wholly representative of long-term conditions, short-term measurements were deemed as acceptable to check if there exist any extreme unexpected conditions in the ambient air quality.

However, in order to assess medium term air quality, additional air quality measurements are being performed via passive diffusion tubes sampling and concentrations of SO₂, NO₂, and NO_x are monitored. The total duration of sampling period with diffusion tubes will be 4 weeks between 20 July 2022 and 20 August 2022. For each pollutant, duplicate diffusion tubes are deployed at all monitoring locations for increased accuracy. The results of the additional air quality samplings will be provided in the Final ESIA Report together with the updated air quality modelling study. Since there are no major industrial sources in the vicinity of the project area, it is anticipated that there would be no significant changes in the results of the air quality modelling study with the new measurement results. Chapter 6 of this ESIA Report will be updated in the Final ESIA Report to include additional survey results. However, impacts on sensitive receptors described in this ESIA Report are not expected to be changed.



Figure 23 Passive diffusion tube sampling campaign in July-August 2022

Similarly, noise measurements were performed according to the GOST standards by the local accredited laboratory (see Chapter 7). It should be noted that the time interval for each noise measurement was 15 minutes and the accredited laboratory has performed noise measurement every hour for two days at each sampling point, which represents a clear picture of the sampling locations. However, additional noise level measurements will be performed according to the ISO 1996-2 standard at the same locations to increase the accuracy of the previous measurements. Chapter 7 of this ESIA Report will be updated in the Final ESIA Report to include additional survey results. However, impacts on sensitive receptors described in this ESIA Report are not expected to be changed.

Regarding the social baseline survey performed in July 2021, although the number of the sampling and household surveys was calculated by using the internationally accepted statistical formula, due to Covid-19 restrictions, the planned sampling size could not be achieved and vulnerable groups couldn't be addressed well. Therefore, an additional campaign is being performed in July 2022 and August 2022 to have thorough assessment on impacts on livelihood (especially on fishers) in the vicinity of the Project area. Additional Focus Group Discussion meetings will also be performed with identified groups such as fishers, women, etc. The social baseline sections and related impacts will be updated following the social survey to be performed in July-August 2022. The new household questionnaire survey is presented in Chapter 16 and the Final ESIA Report will present the outcomes of the additional social site survey. It should be noted that during the stakeholder consultations performed as of July 2022, there are no concerns raised by the local people against the Project. A stand-alone Stakeholder Engagement Plan is already developed together with the Grievance Mechanism in Volume 4.

As for the ecological baseline conditions, this ESIA Report covers the terrestrial flora and fauna surveys performed in July 2021 (summer season) and April 2022 (spring season). The first two surveys revealed that there are no critical and endangered species are observed in and around of the project area. However, in order to cover multiple seasons as recommended in the IFC Guidelines, an additional terrestrial flora and fauna survey is planned to be conducted in September 2022 (autumn season) especially to observe the birds (if any) that are classified as Endangered in literature studies.

This ESIA Report includes a Critical Habitat Assessment that is prepared in line with the summer and spring season surveys. The Final ESIA report will revise this CHA according to outcomes of autumn survey. A Biodiversity Management Plan will also be addressed in the Final ESIA Report, in case required.

Besides, this ESIA Report also includes the results of the aquatic survey performed in July 2021 (summer season). As similar to the terrestrial surveys, an additional aquatic survey will be performed in September 2022 (autumn season). The results of this survey will be included in the Final ESIA Report.

The Final ESIA Report is planned to be submitted in October 2022, which will present the outcomes of the additional surveys described above.

3.9 Scoping Report

Although not legally required according to the national legislation, a Scoping Report had been prepared in July 2021 since the Project Company foresees that an environmental and social impact assessment will be in discussion to have finance from the International Finance Institutions.

The Scoping Report was prepared to determine the content and extent of information on the biophysical and social environment subject to an ESIA. The Scoping Report highlighted the key environmental issues related to the project at an early stage so that they are appropriately addressed

during the successive stages of the studies. The Scoping Report also provided methodologies for the environmental baseline surveys.

3.10 Project Stakeholder Analysis and Consultations

Consultation with stakeholders is an essential part of the environmental & social assessment process. The main objective of the consultation is to establish a dialogue with those stakeholders who may be affected by aspects of the Project or who may have an interest in the outcome of the ESIA process.

3.10.1 Uzbekistan Requirements

The EIA procedure is regulated by Law on Environmental Expertise and the Regulation on State Environmental Expertise (SEE), approved by Decree No.491 of the Cabinet of Ministers on 31 December 2001 and amended in 2005 and 2009. There are two non-mandatory mechanisms for public participation in the EIA assessment procedure which include the public environmental review (PER) and public hearings. The law allows independent expert groups to organize PER but the findings are non-mandatory. However, there are no provisions for public hearings. The EIA assessment procedure Manual provides some procedural guidance by recommending organization of public hearings in the course of the draft EIA preparation. Review of past development Projects in Uzbekistan shows that public consultations in Uzbekistan do not generally involve public consultations and is limited to local, regional, and national authorities as applicable. Such recommendations (which do recommend public hearings during EIA) are described in the Resolution of the Cabinet of Ministries of the Republic of Uzbekistan No. 949.

3.10.2 Lender Requirements

As per AIIB ESP, The AIIB believes that transparency and meaningful consultation are essential for the design and implementation of a Project and works closely with its Clients to achieve these objectives. Meaningful consultation is a process that begins early and is ongoing throughout the Project. It is inclusive, accessible, and timely, and is undertaken in an open manner. It conveys adequate information that is understandable and readily accessible to stakeholders in a culturally appropriate manner and in turn, enables the consideration of stakeholders' views as part of decision-making. Stakeholder engagement is conducted in a manner commensurate with the risks to, and impacts on, those affected by the Project. In the context of a Project in which the Bank determines that there are risks of retaliation against the Project's stakeholders, or of other threats to their safety, it seeks to work with the Client so that the Client avoids or minimizes such risks.

All of the IFC Performance Standards include requirements for an amount of stakeholder consultation/engagement (either in the EIA, or as part of the future ESMS) and therefore the project will require a level of engagement. In particular, IFC Performance Standard 1 on "Social and Environmental Assessment and Management Systems" describes the stakeholder engagement requirements in more depth. It states the following:

"Stakeholder engagement is the basis for building strong, constructive, and responsive relationships that are essential for the successful management of a project's environmental and social impacts. Stakeholder engagement is an on-going process that may involve, in varying degrees, the following elements:

- Stakeholder analysis and planning;
- Disclosure and dissemination of information;

- Consultation and participation;
- Grievance mechanism; and
- On-going reporting to Affected Communities. The nature, frequency, and level of effort of stakeholder engagement may vary considerably and will be commensurate with the project's risks and adverse impacts, and the project's phase of development."

3.10.3 Project Stakeholders

Approach to Stakeholder Identification

During the ESIA studies, a systematic approach has been implemented to identify affected stakeholders. The stakeholders are identified in three different categories; project affected people, other interested parties and disadvantaged/vulnerable groups.

Project affected people are the ones who can be directly affected by the potential impacts whereas interested parties are national and international non-governmental organizations and the interested part of the civil society.

The details of the stakeholders defined for the project are presented in the SEP and the list of the stakeholders is as below:

Stakeholder Group	Definitive Stakeholders	Specific Interest /Relevance/Influence
Project Affected People	<ul style="list-style-type: none"> • Residents of Uchkizil Mahalla (within 5 km radius of the project area) • Residents of Kattaqum Mahalla (within 5 km radius of the project area) • Residents of Bahor Mahalla (within 10 km radius of the project area) • Residents of Dehqonbirlashuv Mahalla (within 10 km radius of the project area) • Residents of Ilgor Mahalla (within 10 km radius of the project area) • Residents of Karvon Mahalla (within 10 km radius of the project area) • Residents of Kayran Mahalla (within 10 km radius of the project area) • Residents of Khalqobod Mahalla (within 10 km radius of the project area) • Residents of Ilgor Mahalla (within 10 km radius of the project area) 	<ul style="list-style-type: none"> - Affected/potentially affected from Project-related E&S risks and impacts that will be managed through the Project ESMS - Management of E&S impacts - Cooperation to maximise benefits and planning for local employment and the supply of goods and services

	<ul style="list-style-type: none"> Residents of Madaniyat Mahalla (within 10 km radius of the project area) Residents of Markaz Mahalla (within 10 km radius of the project area) 	
Other interested parties	<ul style="list-style-type: none"> Termiz Khokimiyat Angor Khokimiyat District Health Department Department of Cultural Heritage of Surkhandarya Region Department of Cultural Heritage of Surkhandarya Region Termiz Archaeological Museum Termiz District Education Department Termiz District Health Department Angor District Health Department Angor District Agriculture Department Angor District Educational Department Angor District Cadastre Department Amu Surkhan Regional Inspection Department Angor District Labour Department Angor District Road Construction and Transportation Angor MonoCentre Official Training Centre (Ministry of Labour) Angor District Youth Department Termiz District Agriculture Department Termiz District Labour Department Termiz District Municipal Department Termiz District Cadastre Department Academic/educational institutions 	<ul style="list-style-type: none"> - Influence on Project-related permitting processes - Coordination of Project activities and processes, and stakeholder engagement activities - Management of environmental and social impacts - Emergency preparedness and coordination - Management of cumulative impacts
Disadvantaged and vulnerable	<p>Women</p> <p>Youth</p> <p>Female headed households</p> <p>Fishermen</p> <p>People with disabilities</p> <p>People with irregular income</p>	<ul style="list-style-type: none"> - Affected/potentially affected from Project-related E&S risks and impacts that will be managed through the Project ESMS - Ensuring that sensitive and disadvantaged Persons / Groups have access to sufficient

		information about the Project, ensuring that these persons / groups benefit equally from the benefits of the Project
Local businesses, suppliers, other industrial projects	Local companies	<ul style="list-style-type: none"> - Positively affected from potential Project benefits/opportunities - Supply of local goods and services related to the project - Coordination of infrastructure services - Management of cumulative impacts
Local media	National and local newspapers, local magazines and TV channels	Project information sharing with stakeholders

According to the Resolution of the Cabinet of Ministers of the Republic of Uzbekistan No. 541 dated 07.09.2020 "On further improvement of the mechanism for assessing environmental impact", objects of I and II categories of environmental impact are subject to the procedure for passing public hearings about environmental impact. In accordance with, the Public Hearing Meeting was conducted in Angor District 17 of August 2021.

Besides, during the ESIA study, qualitative and quantitative techniques were applied for public disclosure as Household Survey, Local Authority Disclosure and Focus Group Discussion. Household survey covered 83 household, which of 57 were in Angor and 26 of them were in Termez.

Local Authority Disclosure were conducted among 8 local authority representatives in Angor and Termez districts from 22 to 29 July, 2021.

First Focus Group Discussion (FGD) was held in Uchqizil with 24 attendances, who were the representative of Khokiyat, district statistic department, district health department, labor and social protection, mahalla on 28 July 2021.

At the same day the 2nd FGD was held in Angor with 37 attendances, who were the representative of Khokiyat, district statistic department, district health department, finance and investment department, labor and social protection, mahalla.

The main concerns raised during the first social site survey were related to the usage of Uchkizil Reservoir which has significant importance to the local people regarding irrigation, and recreational activities. The majority of the respondents highlighted that their school needs well-equipped sports center so that youth could have an opportunity to develop their skills in sports.



Additional stakeholder consultations will be performed during second social site survey. The outcomes of these consultations will be presented in the Final ESIA Report to be submitted in October 2022. It should be noted as of submission of this ESIA Report, second social site surveys are still ongoing.

Previous stakeholder engagement activity log is presented in Table 14.

Table 14 Stakeholder Engagement Activity Log

Consultation Activity	Date	Location	Participants
Public Hearing (under national EIA Legislation)	17 August 2021	Angor	Local people and local authorities (7 women and 5 men)
1 st Consultation Meeting	28 July 2021	Uchkizil	24 attendances, who were the representative of Khokiyat, district statistic department, district health department, labor and social protection, residents of Uchkizil
2 nd Consultation Meeting		Angor	37 attendances, who were the representative of Khokiyat, district statistic department, district health department, finance and investment department, labor and social protection, residents of Uchkizil
Local Authority Survey	22 to 29 July, 2021.	Angor and Termez	8 local authority
Household Survey	July 2021	Angor and Termez	83 household, which of 57 were in Angor and 26 of them were in Termez



Consultation Activity	Date	Location	Participants
Additional Local Authority Survey	27 July -04 August 2022	Angor and Termez	Termiz Khokimiyat, Department of Cultural Heritage of Surkhandarya Region ,Department of Cultural Heritage of Surkhandarya Region,Termiz Archaeological Museum,Uchkizil Mahalla, Termiz District Education Department,Termiz District Health Department,Termiz Khokimiyat,Angor District Health Department,Angor District Agriculture Department,Angor District Educational Department,Angor District Cadastre Department,Amu Surkhan Regional Inspection Department,Angor District Labour Department,Angor District Road Construction and Transportation,Angor MonoCentre Official Training Centre (Ministry of Labour),Angor District Youth Department,Kattaqum Mahalla
Focus Group Discussion	02 August 2022	Angor District Angor Khokimiyat Meeting Room	13 Women who live in Angor's mahalla
Additional Household Surveys	July-August 2022	Angor and Termez	A total of 412 household survey were conducted, the breakdown is as follow: Uchkizil – 33 Kattaqum – 37 Zang Gilambop -15 Namuna-20 Orol -31 Khalqobod-31 Bahor-25 Markaz-20 Zartepa-30



Consultation Activity	Date	Location	Participants
			Dehqonbirlashuv-24 Ilgor-25 Karvon-25 Kayran-30 Madaniyat-21 Qoshtegirmon-25 Tallashqon-20

4. PROJECT ALTERNATIVES

4.1 Do-nothing Scenario

The Uzbekistan 2030 Energy Strategy defines the mid-term and long-term objectives and directions for the development in the power sector between 2020 and 2030. The main objectives include:

- Satisfying the country's electrical power demand in full through domestic generation without dependence on energy imports and thus ensuring energy security;
- Improvement of national economy's energy efficiency with parallel reductions in energy intensity achieved through, inter alia, creation of economic mechanisms to stimulate rational use of electrical power to consumers;
- Increase the energy efficiency of generation, transmission, and distribution of electrical power to satisfy the growing demand;
- Reduction of power equipment wear through consistent renewal, increasing reserves in generation and transmission assets;
- Development and expansion of renewables use and their integration into the unified power system; and
- Development of efficient basic electricity market model.

In order to efficiently fulfill the objectives above and achieve the targeted goals, implementation the strategy calls for the implementation of the following measures:

- Improvement of efficiency and rationale use of electricity at all stages of technological processes based on the use of energy saving technologies and optimization of generating assets;
- Ensuring diversification in power and heat energy sectors through increased share of renewable energy sources and creation of renewable energy investment project mechanism utilizing PPP approaches, enhancement of government policies related to development of renewable energy sources, demonstration of renewable energy projects;
- Development of comfortable, rule of law based, administrative environment for investments and wholesale power sales with a view to attract long term investments first of all foreign direct investments;
- Enhancement of corporate governance, increasing transparency of state-own power enterprises' financial and economic operations;
- Expansion of trans-boundary trade and strengthening of regional cooperation through the reinstatement and modernization of transmission lines connected to neighbouring countries' power systems; and
- Development of market relations through step-by-step liberalizing and reduction of government role, creation of a new market model based on clear separation of rights and responsibilities between actors in this sector at each step of market evolution, starting from Single Buyer and all the way to establishment of competitive wholesale and retail markets.

In regard to the Project, its development is in line with the use of energy efficient technologies to ensure the power sector's overall sustainability. The strategy aims to increase efficiency of the plant during construction of new power plants operating in base-load condition, the use of combined cycle technologies with generator efficiency over 60%.

The government of the Republic of Uzbekistan through the Ministry of Energy aims to modernize and increase the electricity production in the country to foster economic growth and develop public-private partnership in the country's energy sector. The project forms part of the Ministry of Energy's plan to increase and modernize electricity production in the country.

The project also forms part of the Strategy of Action for the Five Priority Development Areas of Uzbekistan (2017 -2021) to introduce new technologies for generating thermal energy as the Project is being implemented as heat recovery in order to generate electricity.

In 2018, Uzbekistan ratified the Paris Agreement and adopted a national commitment to reduce GHG emissions per unit of GDP by 10% of the 2010 level by 2030. In addition, In 2020, the Ministry of Energy published its plans for the Power capacity development in Uzbekistan for the 2020-2030 period in a document called "Concept note for ensuring electricity supply in Uzbekistan in 2020-2030". The document talks in length about Uzbekistan's plans to rebuild its existing power plants, invite private power developers to take part in the power sector development to increase the power production capacity, lays out the plans for reforms, etc. The Concept Note states that "*Construction of a 1300MW TPP utilizing CCGT technology is planned in Kashkadarya or **Surkhandarya** regions to be commissioned in 2025-2026.*"

Taking into consideration of Uzbekistan's national electricity strategy, "Do-Nothing scenario" is considered as not applicable alternative, since it does not align with objectives of the Ministry of Energy. Besides, the project will lead decommissioning of inefficient existing thermal power plants and will contribute to the effective use of natural gas resources that will result in decreasing CO₂/kWh intensity.

4.2 Alternative Design Options

In recent years, significant positive changes have been observed in the legislation of the Republic of Uzbekistan, aimed at both increasing the efficiency of the energy industry enterprises, introducing energy-efficient technologies, and increasing the investment attractiveness of this sector of the economy as a whole.

It should be noted that within the framework of the "Concept for the provision of the Republic of Uzbekistan with electric energy for 2020-2030" it is provided:

- Increase in electricity production from 63.6 billion kWh-up to 120.8 kWh;
- Reducing the consumption of natural gas in the production of electricity from 16.5 billion cubic meters to 12.1 billion cubic meters;
- Reduction of losses during transmission of electricity to 2.35% and losses during distribution - to 6.5% (1.85 times less than in 2019).

The implementation of these plans will ensure the country's energy security, taking into account the forecasts that in 10 years' energy consumption in Uzbekistan will almost double.

At the same time, today the bulk of generating capacities (about 85%) are thermal power plants, in connection with which, by 2030, it is predicted to commission 15.6 GW of new and modernized small

generating capacities of thermal power plants. At the same time, decommissioning of 6.4 GW of physically obsolete equipment of generating capacities at large TPPs is forecasted.

It is noted that plans to reform the electric power industry of Uzbekistan until 2030 have already been voiced earlier in the summer of 2019. It was assumed that the structure of generating capacities by 2030 will look as follows: power units using natural gas will reach 16.3 GW, or 51% of the total capacity (the year 2020 33%), HPPs - 3.8 GW, or almost 12% (the year 2020 - 16%), power units using coal, 2.6 GW, or 8.2% (the year 2020 - 11%).

Decentralization and construction of low-power TPPs, such as the proposed project for the construction of a combined-cycle power plant with a capacity of 1600 MW in the Angora district of the Surkhandarya region will lead to a significant reduction in electrical energy losses during its transportation, as well as a reduction in fuel consumption and, accordingly, emissions of pollutants into the atmospheric air.

When considering the issue of commissioning additional capacities for the production of electrical energy and the construction of a thermal power plant in the Surkhandarya region, it was also assumed to obtain electrical energy using diesel generators working on diesel fuel.

The proposed diesel generator is designed to generate electricity in conditions of unstable or no power supply. A diesel generator also converts mechanical energy from the combustion of diesel fuel into electrical energy.

Analysis of all parameters, including the type of fuel used, fuel consumption per 1 kW / h of about 150 g, efficiency, and, accordingly, the amount of electricity produced showed that, in comparison with diesel generators, combined-cycle plants operating on gas to generate electricity consume 2.5 times less fuel and efficiency will be 60%.

In this regard, it was decided to build a combined cycle power plant - a new generation, with a capacity of 1600 MW in the Angora region to supply power to the border regions (Muzrabad, Termez) districts of the Surkhandarya region, as well as the city of Termez.

Also, an alternative to the decisions made can be a "zero" option, i. E. abandonment of the planned activities and preservation of the existing situation in the region. In this case, there will be no:

- Ensured the accelerated development and increase in the competitiveness of the country's energy sector;
- The active attraction of foreign direct investment in the construction of new generating facilities;
- The growing demand for electricity and heat was satisfied;
- Reduction of specific indicators of fuel consumption in comparison with traditionally used power units;
- Increasing production efficiency.

4.2.1 Cooling Technology

The Cooling methods are a particularly key aspect of alternative analysis. Water availability in Uzbekistan (including the Project area) is highly variable, relatively scarce, and a vital resource to the local agriculture. Furthermore, it is possible that regional water scarcity could increase as a result of climate change, although local climate models also predict an increase in river flow (up to 2050 and for the period of the Project's Power Purchase Agreement) due to additional meltwater from glaciers that (in part) feed these rivers. A range of cooling techniques are available and have been considered

in the design of the Project. These include 'Wet Cooling Towers'; and 'Air-Cooled Condensers'. Schematic illustrations of these techniques are provided below between Figure 24 and Figure 26.

Table 15: Natural gas composition

2-2-1 SGT 9000HL GTCC @ 17°C / 55% RH	Unit	Air-Cooled Condenser	Wet Cooling Tower-1	Wet Cooling Tower-2
Gas Turbine Gross Power	[MW]	1103	1103	1103
Steam Turbine Gross Power	[MW]	533	534	563
Gross Power	[MW]	1636	1637	1666
Aux. Load & Transformer Losses	[MW]	33	34	37
Net Power	[MW]	1603	1603	1629
Net Electrical Efficiency	[%]	62.01	62.02	63.02
Cooling Tower Blowdown & Spray Losses / Drift	[t/h]	-	240.5	241.5
Cooling Tower Water Evaporation	[t/h]	-	962	966
Steam Cycle Makeup				
@ 1% HRSB Blowdown	[t/h]	13.08	13.14	13.76
@ 2% HRSB Blowdown	[t/h]	25.51	25.63	26.22
Cooling System	-	See Figure 24	see Figure 25	see Figure 26

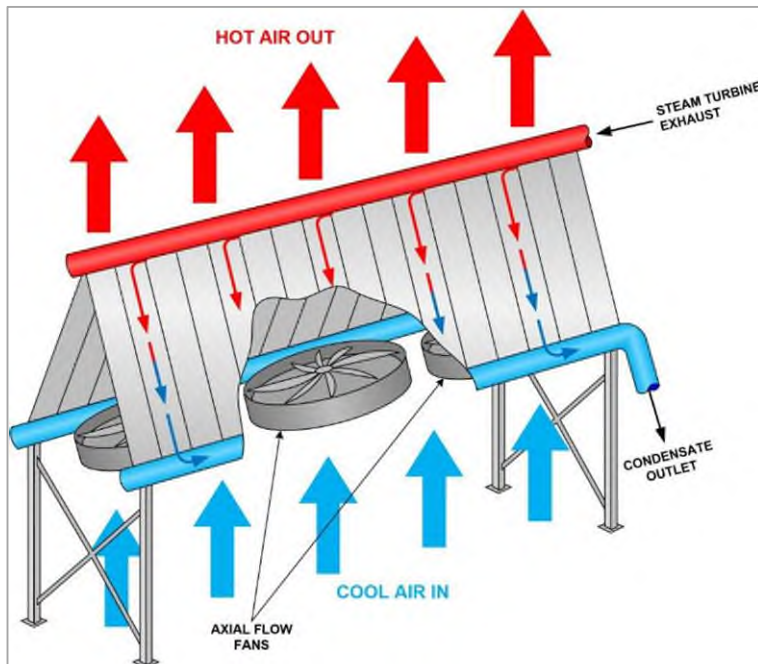


Figure 24: Sample of the Air-Cooled Condenser System [2]

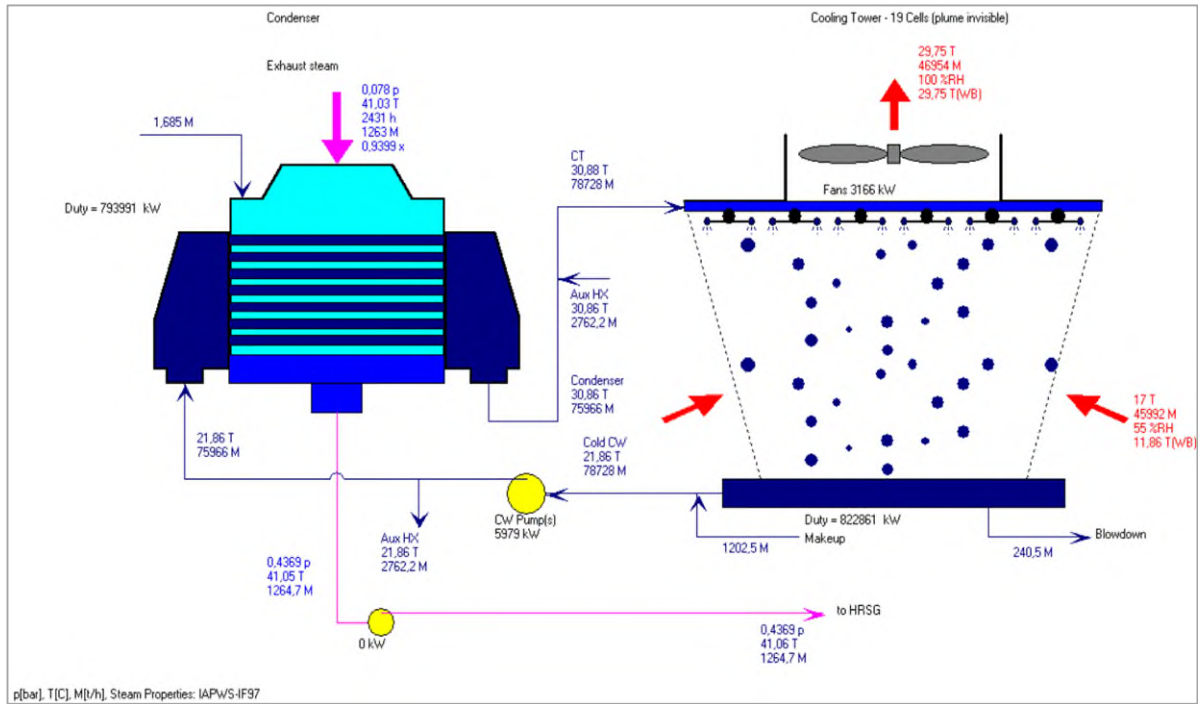


Figure 25: Sample of the Wet Cooling Tower System-1

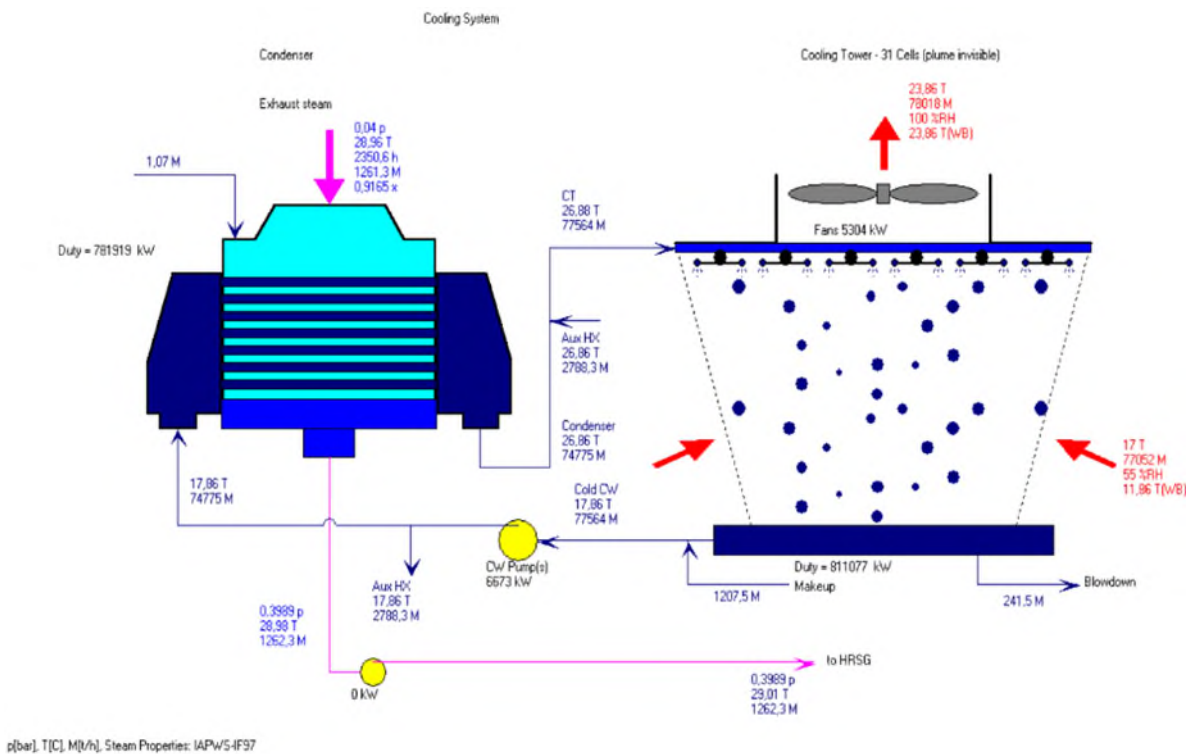


Figure 26: Sample of the Wet Cooling Tower System-2

4.3 Best Available Techniques

The Project Company will meet the requirements described in the EU Best Available Techniques Reference Document prepared for Large Combustion Plants, 2017. The project will use most advanced technologies that are currently available to reduce environmental impacts.

5. REGULATORY FRAMEWORK

All phases of the E&S management of the proposed the Project shall be conducted in compliance with national and international regulations and standards as well as the standards of financial institutions. The legal framework is explained in the following sections.

5.1 National Environmental Policy and Legal Framework

The Republic of Uzbekistan (RUz) is a presidential constitutional republic, whereby the President of Uzbekistan is both head of state and head of government. According to the Constitution which was signed by the President of Uzbekistan and taken by Oliy Majlis (OM) on December 8, 1992 (as amended on 08.02.2021), have the highest legal power.

On the basis of Article 94 of Constitution Law, *"The President of Uzbekistan, shall issue decrees, resolutions and ordinances binding on the entire territory of the Republic on the basis of and for enforcement of the Constitution and laws of the RUz"*.

The Cabinet of Ministers (CM) in accordance with the current legislation issues resolutions and ordinances binding on all bodies, enterprises, institutions, organizations, officials and citizens on the entire territory of the RUz.

Moreover, Article 104 of Constitution Law states, *"The Khokim (Governor of Region) within his vested powers adopt decisions which are binding on all enterprises, institutions, organizations, associations, as well as officials and citizens on the relevant territory."*

The environmental policy of the RUz is aimed at creating favorable conditions for environmental safety and environmental protection of the country, improving the environmental situation, preventing harmful impacts of waste on the environment, improving the quality and standard of living of the population work.

The National environmental legal framework is based on the regulations of the Constitution of Uzbekistan. The Constitution and environmental legislation establish the right of citizens to live in a safe environment. Constitution of the RUz addresses environment protection issues within specific articles are:

- Article 36: "Everyone shall have the right to own property."
- Article 50: "All citizens shall protect the environment";
- Article 53: "The State shall guarantee freedom of economic activity, entrepreneurship and labor with due regard for the priority of consumers' rights, equality and legal protection of all forms of ownership";
- Article 54: "Any property shall not inflict harm to the environment"; and

- Article 55: "Land, subsoil, flora, fauna, and other natural resources are protected by the state and considered as resources of national wealth subject to sustainable use".

In addition, Uzbekistan has enacted several supporting laws and legislation acts for management of environmental, land rights, labor and health and safety requirements, and is a party to several international and regional environmental agreements and conventions. In order to implement the laws efficiently, the majority of them require additional administrative and/or legal instructions for full execution and these are set out in various subordinate regulations, acts and sanitary norms [4]. The most relevant legislation for the Project is described in the following sections.

5.1.1 Environmental Regulator

State administration in the field of ecology, environmental protection, rational use and reproduction of natural resources in accordance with laws and other regulatory legal acts is carried out in the RUz by:

- The Cabinet of Ministers (CM),
- The State Committee on Ecology and Environmental Protection (SCEEP), and
- Government bodies on places.

CM (the Government) is the executive power body of the RUz, ensuring guidance over effective functioning of the economy, social and cultural development, execution of the laws, and other decisions of the Supreme Assembly, as well as decrees and resolutions issued by the President of the RUz.

The RUz are regulated numerous legislative documents, on land, water, forest, subsoil legislation, on the protection and use of atmospheric air, flora and fauna, and other acts of legislation. Relations in the field of environmental protection and rational use of natural resources are carried out by public authorities and regulatory bodies and departments/agencies specifically responsible for nature protection. The SCEEP is the main regulatory governmental body in charge of ecology, environmental protection and rational use of natural resources [4].

The authorized RUz organizations responsible for the nature protection are:

- Cabinet of Ministers;
- State Committee on Ecology and Environmental Protection;
- Ministry of Health;
- Ministry for Emergency Situations;
- Ministry of Labor and Social Welfare;
- State Committee on Industrial Safety;
- Ministry of Internal Affairs;
- Ministry of Agriculture;
- Ministry of Water Resources;
- State Committee on Geology and Mineral Resources;
- Uzbek Hydrometeorological Services (Uzhydromet) and;
- Cadastral Agency under the State Tax Committee.

5.1.2 Key Environmental Laws of Uzbekistan

The key environmental law is the Law "On Nature Protection (No: 754-XII, dated December 09, 1992, as amended on 21.04.2021)". The current Law establishes legal, economic, and organizational fundamentals for the preservation of conditions of natural environment and rational use of natural resources. Its purpose is to ensure balanced relations between man and nature, to protect the environmental system and to guarantee the rights of the population of a clean environment. The influence of economic activity on nature environment is limited by norms and quality standards established for various components of the natural environment to guarantee ecological safety of population, production, and protection of nature resources.

Article 12 of the Law states that "*Residents of the RUz are obliged to use natural resources rationally, treat natural resources with care, and comply with environmental requirements*".

Article 25 of the Law states, "*State Environmental Expertise (SEE) is a mandatory measure for environmental protection; preceded to the decision-making process*" as saying "*the implementation of the project without a positive conclusion of SEE is prohibited*" [4].

Furthermore, the other laws, regulating different areas of management and environmental protection are [4]:

- Law "On Environmental Control", No. 63 dated December 27, 2013, (as amended on September 30, 2020);
- Law "On Ecological Expertise", No. 73-II dated May 25, 2000 (as amended on November 22, 2018);
- Law "On Environmental Audit", No. 678 dated March 15, 2021;
- Law "On Ecological Control", No. 363 dated December 27, 2013 (as amended on August 17, 2021);
- Law "On Ambient Air Protection", No. 353-I dated December 27, 1996 (as amended on April 21, 2021);
- Law "On Protection and Use of Flora (new edition)", No. 409 dated September 21, 2016 (as amended on April 21, 2021);
- Law "On Protection and Use of Fauna (new edition)", No. 408 dated September 19, 2016 (as amended on April 21, 2021);
- Law "On Protected Natural Territories", No. 13 dated January 08, 2018 (as amended on December 28, 2020);
- Law "On Forests (new edition)", No. 475 dated April 16, 2018 (as amended on April 21, 2021);
- Law "On Subsoil (new edition)", No. 444-II dated December 13, 2002 (as amended on April 21, 2021);
- Law "On Waste", No. 362-II dated April 05, 2002 (as amended on April 21, 2021);
- Law "On Water and Water Use", No. 837-XII dated May 06, 1993 (as amended on April 21, 2021);
- Law "On Rational Use of Energy", No. 412-I dated April 25, 1997 (as amended on July 15, 2020);
- Law "On Industrial Safety of Hazardous Production Facilities", No. 57 dated September 28, 2006;
- Law "On the Protection and Use of Cultural Heritage", No. 269-II dated August 30, 2001 (as amended on April 19, 2019).

- Law "On Accession of the RUz to the Cartagena Protocol on Biosafety to the Convention on Biological Diversity", No: 569 dated October 14,2019;
- Law "On Ratification of the Stockholm Convention on Persistent Organic", No.535 dated May 08, 2019; and
- Law "On Ratification of the Paris Agreement", No. 491 dated October 02,2018.

The decrees of the President of the RUz are [4]:

- "On Approval of the Concept on Environmental Protection in the RUz until 2030" No. 5863 dated October 30, 2019 (as amended on March 17, 2021);
- "On Improving the Public Administration System in the Field of Ecology and Environmental Protection" No. 5024 dated April 21, 2017;
- "On Additional Measures to Improve the Public Governance System in the Ecology and Environmental Protection" No. 3956 dated October 03, 2018;
- "On Measures for Cardinal Improvement and Development of the Waste Management System" No. 2916 dated April 21, 2017; and
- "On Approval of the Strategy on Solid Waste Management in the RUz for the Period 2019-2028" No. 4291 dated April 17, 2019.

The resolutions of the Cabinet of Ministers are [4]:

- "On the Improvement of the System of Environmental Monitoring in the RUz" No. 737 dated September 05,2019;
- "On Approval of the Regulations on the Order of Establishment of Water Protection Zones and Sanitary Protection Zones of Water Bodies in the Territory of the RUz" No. 981 dated December 11, 2019;
- "On Approval of the Regulation on the Procedure for Exercising State Environmental Control" No. 216 dated August 05, 2014;
- Resolution No.14, "On Approval of the Regulations on the Procedure for the Development and Coordination of Proposed Environmental Standards", 2014;
- "On Approval of Regulatory Legal Acts in the Field of Environmental Control" No. 286 dated October 08, 2015;
- "On the Further Improvement of the Environmental Impact Assessment Mechanism No. 541 dated September 07, 2020;
- "On Measures to Further Improve the Regulation of imports into the RUz and exports from the RUz of Ozone-depleting Substances and Products Containing Them" No. 17 dated January 09, 2018;
- "On Measures to Organize the Preparation, Publication and Maintenance of the Red Book of the RUz" No. 1034 dated December 19, 2018;
- "On Approval of Regulatory Acts Aimed at Implementing the Provisions of the Law of the RUz on Protected Natural Territories" No. 339 dated May 04, 2018;
- "On Improving the Monitoring System of the Natural Environment in the RUz" No. 737 dated September 05, 2019;
- "On Measures to Further Improve the Economic Mechanisms for The Protection of Nature" No.820 dated October 11, 2018;



- "On the Further Improvement of the Economic mechanisms of Environmental Protection in the Territory of the RUz" No. 202 dated April 12, 2021;
- "On Approval of the Strategy for the Conservation of Biological Diversity in the RUz for the period, 2019–2028" No. 484 dated June 11, 2019;
- "On Measures to Implement the National Sustainable Development Goals and Targets for the Period Until 2030" No. 841 dated October 20, 2018;
- "On Measures for Further Improvement of the Order of Use of Trees and Shrubs Not Included in the State Forest Fund, as well as Issuing Permits in the Field of Their Use", No.43, dated January 17, 2019; and
- "On Additional Measures for Preserving Valuable Varieties of Trees and Shrubs Not Included in the State Forest Fund" No.93, dated February 18, 2020.

The State standards, and sanitary rules and norms are [4]:

- SanPiN No: 0350-17 "Protection of atmospheric air in populated places of the RUz";
- SanPiN No. 0267-09 "On acceptable noise levels in the premises of residential, public buildings and in residential areas";
- SanPiN No. 0293-11 "List of hygiene standards regarding Maximum allowed concentration (MACs) values of air-polluting substances in populated areas in the RUz";
- SanPiN No: 0318-15 "Hygienic anti-epidemic Requirements for the Protection of Water in reservoirs on the Territory of the RUz";
- SanPiN No. 0255-08 "The main criteria for hygienic assessment of the degree of pollution of water and water bodies in terms of danger to public health in Uzbekistan";
- SanPiN No. 0300-11 "Sanitary rules and standards for the organization of collection, inventory, classification, neutralization, storage and disposal of industrial waste in Uzbekistan";
- SanPiN No. 0325-06 "Sanitary norms and rules to ensure acceptable noise levels in the workplace";
- SanPiN No. 0326-16 "Sanitary Standards for general and local vibration at workplace",
- SanPiN No. 0372-20 (new edition) "Temporary sanitary rules and norms for organizing the activities of state bodies and other organizations, as well as business entities during the application of restrictive measures during the COVID-19 pandemic";
- O'zDSt 1057:2004 "Vehicles. Safety requirements for technical conditions" and O'zDSt 1058:2004 "Vehicles. Technical inspection. Method of control";
- O'zDSt 950:2011 "Drinking water. Hygiene requirements and quality control" (replaces O'zDSt 950:2000);
- O'zDSt 951:2011 "Sources of centralized drinking water supply. Hygiene, technical requirements and selection rules" (replaces O'zDSt 951:2000);
- O'zRH 84.3.6, "Instructions on setting limit values for the discharge of pollutants into water bodies and the ground according to technically achievable indicators of wastewater treatment", 2004.

5.1.3 Land Rights, Acquisition and Resettlement Laws

Land expropriation for public needs in Uzbekistan is carried out under the Land Code. The main objectives of the land legislation are to regulate the relations for the purpose of;

- Providing for the benefit of the present and future generations of evidence-based,
- Rational use and protection of lands,
- Reproduction and increase in fertility of soils,
- Preserving and improvements of the environment,
- Creation of conditions for equal development of all forms of managing,
- Protection of the rights of legal entities and physical persons to the parcels of land, and
- Strengthening of legality in this sphere, including by the prevention of corruption offenses.

The national laws and regulations with which the project will be compliance regarding the land rights, acquisition, and resettlement are [4]:

- Constitution of the RUz dated December 08, 1992 (as amended on February 08, 2021);
- Land Code of the RUz, No. 598-I dated April 30, 1998 (as amended on December 23, 2020);
- Civil Code of the RUz, No. 163-I dated December 21, 1995 (as amended on January 22, 2020);
- Law of the RUz "On State Land Cadastre", No. 666-I dated August 28, 1998 (as amended on July 24, 2018);
- Presidential Decree of the RUz "On Additional Measures to Simplify Procedures for the Implementation of Public Property Objects and Rights to Land Plots" No. 5552 dated October 11, 2018.
- Presidential Decree of the RUz "On Measures for Effective Use of Land and Water Resources in Agricultural Industry" No. 5742 dated June 17, 2019;
- Presidential Decree of the RUz "On Measures to Ensure Equality and Transparency in Land Relations, Reliable Protection of Land Rights and Transfer them into a Market Asset" No. 6243 dated June 08, 2021;
- Presidential Decree of the RUz "About Additional Measures to Strengthen the Protection of Private Property and Guarantees of Owners' Rights, to Redual Improvement of the System of Organization of Works to Support Entrepreneurial Initiatives and the Support of Initiatives" No. 5780 dated August 13, 2019;
- Decree of the RUz Cabinet Minister "On Additional Measures to Improve the Procedure for Providing Compensations for the Removal and Provision of Land Plots and Providing a Guarantee of Property Rights of Individuals and Legal Entities" No. 911 dated November 16, 2019; and
- Decree of the RUz Cabinet Minister "On Measures for Further Improvement of Procedures for Providing Vacant Land Plots for Business and Urban Construction" No. 1023 dated December 20, 2019.

5.1.4 Employment and Labor Laws

Article 37 of the Constitution of Uzbekistan mentions that *"each has the right to work, to free choice of work, fair terms of work and protection against unemployment under the law"*. Uzbekistan pursues a purposive policy of creating a legal framework for the protection of human rights and freedoms in accordance with international standards.

As a fully-fledged member of the United Nations Organization, Uzbekistan accedes to international human rights acts thus assuming an obligation to comply with them and apply them in its state and legal practice. The Constitution of the RUz includes all the provisions of the Universal Declaration of Human Rights. RUz has already ratified 17 conventions and 1 protocol of International Labor Organization (ILO) (including 8 fundamental conventions) of which 18 are in force.

The bedrock principle of state policy in the field of occupational safety and health is the priority of the life and health of the worker over the results of production activities as well as coordination of occupational safety and health activities with other areas of economic and social policy, all the principles proclaimed under the Law.

The Labor Code of the RUz of December 21, 1995 (as amended on August 02, 2021) treats labor legislation with due account of the interests of the employees, employers and the state and fair and safe labor conditions and the protection of the labor rights and health of the workers.

The national laws and regulations with which the project will be in compliance regarding labor and working conditions, and occupational health and safety issues are [4]:

- Labor Code of the RUz, 1995;
- Law "On Compulsory Insurance of Third-Party Liability of Employers", No. 210 dated April 16, 2009;
- Law "On Occupational Health and Safety" No. 410 dated September 22, 2016;
- Law "On Compulsory Industrial Accident and Occupational Disease Insurance", No. 174 dated September 10, 2008;
- Law "On Public Pension Provisions" No. 938-XII dated September 03, 1993;
- Decree "On Improving the Procedure for Determining the Size of Wages, Pensions and Other Payments" No.5723 dated May 21, 2019;
- Decree "On Additional Measures to Create Favorable Conditions for Certain Categories of Pensioners Engaged in Labour Activities", No.5291 dated December 28, 2017;
- Resolution "On Measures to Further Strengthen Guarantees for Labour Rights and Support of Women's Entrepreneurship", No.4235 dated March 07, 2019;
- Decree of the Ministry of Employment and Labor and the Ministry of Health of the RUz "On Approval of the List of Hazardous Occupations for Women Not Recommended to be Used to Employ Women", No.48 dated July 22, 2019;
- Resolution "On Measures to Create Favorable Conditions for Labor Activity in the RUz for Qualified Foreign Specialists", No.4008 dated November 07, 2018;
- Resolution "On Additional Measures to Improve the System of External Labor Migration in the RUz", No.3839 dated July 05, 2018; and
- Resolution "On Measures to Improve Cooperation with International and Foreign Financial Institutions", No.3439 dated December 20, 2017.

5.1.5 National Environmental Impact Assessment Process

There are specific requirements as to the content, development procedure and examination of Environment Impact Assessment (EIA) documents. These are governed by the following legislative acts of the RUz [4]:



- Law "On Nature Protection" No. 754-XII dated December 9, 1992 (as amended on November 15 2019).
- Law "On Ecological Expertise" No. 73-II dated May 25, 2000 (as amended on November 22, 2018).
- Regulation "On the further improvement of the environmental impact assessment mechanism", approved by the Decree of the Cabinet of Ministers of the RUz No. 541 dated September 07, 2020. The regulation defines the legal requirements for EIA in Uzbekistan (referred to as OVOS).
- Regulation "On approval of the regulations on the order of design and approval of draft environmental standards", approved by the Decree of the Cabinet of Ministers of the RUz No 14 dated January 21, 2014.

According to the Regulation on SEE approval of the EIA/OVOS process, should be carried out by specialized expert divisions (also referred to as the competent authority) to review the compliance of the planned activities with environmental requirements, and determine the permissibility of the project under examination. The SEE is carried out by one of the following specialized expert divisions of the SCEEP based upon the category of risk:

- The national state unitary enterprise, the Centre of the State Environmental Expertise of the SCEEP, classifies the projects as I and II as per their risk (high and medium risk)"; and
- The state unitary enterprise, the Centre of the State Environmental Examination of the Surkhandarya Region, classifies the projects as III and IV as per their environmental impact (low and local impact).

According to the Decree of the CM No.541 dated September 07, 2020, all types of activities are classified into one of four categories ranging from Category I (High Risk) to Category IV (Local Impact):

- **Category I** is "high risks" of environmental impact (SEE is conducted by the "Centre of State Environmental Expertise" within 20 days, all stages of the EIA are required);
- **Category II** is "medium risks" of environmental impact (SEE is conducted by "Centre of State Environmental Expertise" within 15 days, all stages of the EIA are required);
- **Category III** is "low risk of impact" (SEE is conducted by the regional offices of the "Centre of State Environmental Examination" within 10 days, all stages of the EIA are required); and
- **Category IV** is "minor risk of environmental impact, local impact" SEE is conducted by regional offices of the "Centre of State Environmental Examination" within 5 days, only the first phase of the EIA process needs to be completed (Draft Statement on Environmental Impact).

The SEE Regulation describes the procedure for arranging the SEE and the procedure undertaken by the Centre of the State Environmental Expertise. The three EIA stages and their required deliverables are summarized in below Table 16 as per the regulation [4].

Table 16: Stages of EIA process

Stage of EIA/OVOS Process	Required Deliverables
Stage-I Preliminary Statement of the Environmental Impact (PSEI) ('PZVOS' is the national acronym)	To be conducted at the planning stage of the proposed project prior to development funds being allocated. Public hearing is needed only for this stage. PZVOS is valid until the end of construction. PZVOS will not be valid for the commissioning time
Stage-II Statement of the Environmental Impact (SEI) ('ZVOS' is the national acronym)	To be completed where it was identified by the Center for State Environmental Expertise/Regional Center for State Environmental Expertise at Stage-I that additional investigations or analyses were necessary. The Statement shall be submitted to the Center for State Environmental Expertise/Regional Center for State Environmental Expertise prior to the beginning of construction. <i>Usually this stage is skipped.</i>
Stage-III Statement on Environmental Consequences (SEC) ('ZEP' is the national acronym)	The final stage of the SEE process and is to be performed before the project is commissioned. The report details the modifications to the project design that have been made from the Center for State Environmental Expertise/Regional Center for State Environmental Expertise review at the first two stages of the EIA process. The comments received during the public consultation, the environmental standards applicable to the project and environmental monitoring requirements associated with the project and principal conclusions.

Article 29 of the Law on Environmental Protection states ensuring stakeholder participation is crucial for improving the efficiency of environmental monitoring in the implementation of state and other environmental programs. Uzbekistan, public hearings as part of the EIA is regulated by Appendix 3 of Decree of the Cabinet of Ministers No 541 dated 07.09.2020. According to the Decree all objects divided in four categories and public hearings are mandatory for categories I and II (*almost similar to World Bank A and B categories*). There are no requirements for public hearing or EIA disclosure for Category III and IV projects.

These responsibilities include:

- Public notification (20 days before the public hearings, the customer announces the time and place in the mass media and the Organizer's website in Uzbek and other languages);
- Conducting the consultation (District/city government (Khokimiyat) are the organizers of public hearings and the minimum number of stakeholder participants is 10. For public hearings, a non-technical summary is prepared for disclosure the project);
- Recording the significant findings, conclusions, recommendations, and next steps.

The aim of public hearing is to encourage views of participant (groups or individuals) who may be affected by the Project regarding their environmental concerns. Prior to the scoping meeting, with the intention to inform the public about the investment and gather their opinions and suggestions on the project. In the meeting, the public is informed and consulted and their opinions and suggestions are taken. Any significant issues, established during the public consultation, should be incorporated into the EIA document.

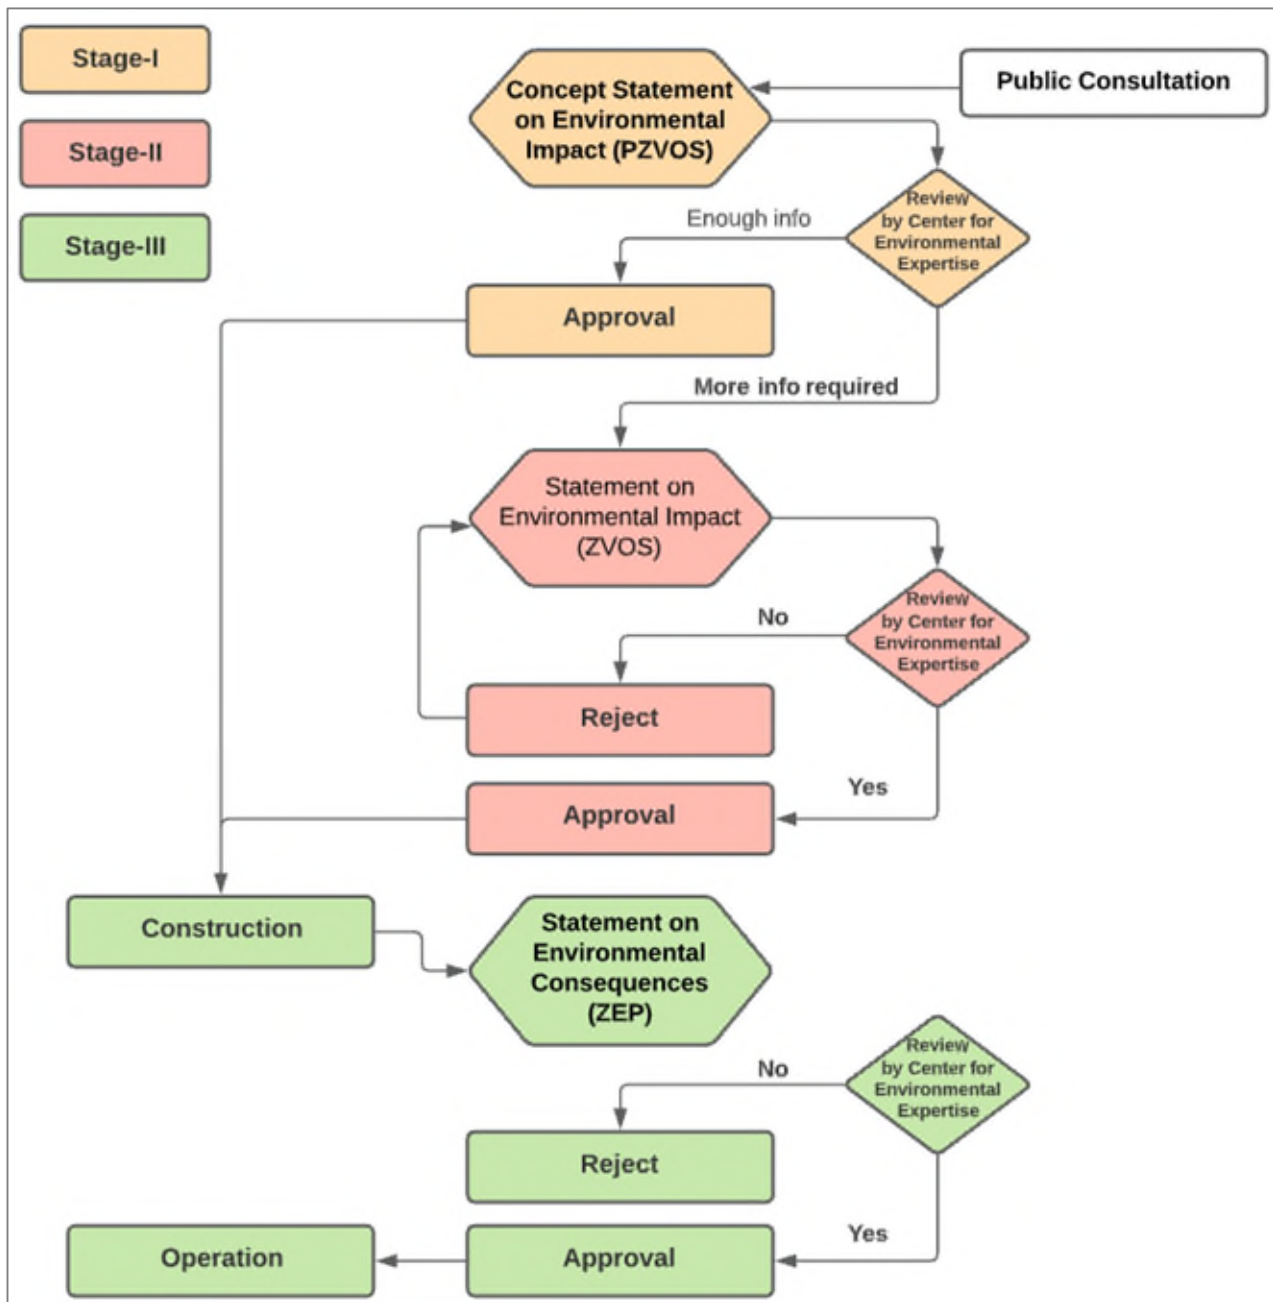


Figure 27: Local EIA Process Flowchart

The conclusion of the SEE is valid for three years from the date of issue. If the project is not implemented within three years from the date of issue of the Conclusion, the EIA report needs to be revised and re-submitted to the Center for environmental expertise for revision and approval. In case of expansion, reconstruction, technical re-equipment or changes in the technological process of existing facilities, affecting the quantitative and qualitative characteristics of emissions, discharges and waste, changes in legislative requirements, as well as by decision of the relevant authorities exercising state control in the field of environmental protection, environmental standards are subject to revised as part of an EIA with a subsequent three-year period. After three years of facility commissioning, it is obligatory to design the ecology normative.

The ecology normative is designed in three directions air (PDV is the national acronym), water (PDS is the national acronym) and wastes (PDO is the national acronym). Ecology normative valid for 5 years. Designing of ecology normative is not in scope of EIA, because decision has made and facility is commissioning.

Ecology normative - the legal limits of permissible negative impact on the environment, environmental standards must be observed by absolutely all economic entities that are included in the list of four categories according to the Decree of the Cabinet of Ministers of the RUz No. 541 dated 07.09.2020 [4].

Three types of normative are designed for the followings:

- **Maximum Permissible Emission:** the mass of pollutants in emissions per unit of time, forming surface concentrations that do not exceed the maximum permissible quotas established for atmospheric air.
- **Maximum Allowable Discharge:** the mass of a substance in wastewater, the maximum allowable for disposal in the established mode at a given point per unit of time in order to ensure water quality standards at the control point.
- **Maximum Permissible Wastes:** the maximum amount of waste allowed for disposal for a certain period in certain place.

5.1.5.1 The Project Environmental Impact Assessment (EIA) Process

The proposed project is categorized as a "Category I" project under the Decree of the Cabinet of Ministers of the RUz No 541 dated 07.09.2020 (high risk, paragraph 32 "Thermal power plants, and other power plants for combustion of the thermal capacity of 300 MW or more") [4].

Consultation activities for the Project have been initiated in accordance with the National EIA Stages. The stages of EIA is given comprehensively in Section 3.1. Decree of the Cabinet of Ministers of the RUz No 541, objects of I and II categories of environmental impact are subject to the procedure for passing public hearings about environmental impact. Considering that the combined cycle power plant with a capacity of 1600 MW belongs to the objects of the I category of impact on the environment, the management of the enterprise under construction together with representatives of Authorities of Angor District, the Inspectorate for Ecology and Environmental Protection, "Kattakum" village community assembly on 17.08.2021 public hearings were organized and held in accordance with the established procedure. During the public hearings, residents of the Kattakum village community assembly did not have any objections to the construction of a combined cycle power plant.

The Public Hearing provided the opportunity for potential stakeholders to be informed about the project and to express their opinions and concerns. As the next phase of the public hearing, The EIA Report has been prepared and submitted to the Centre of SEE and positive decision is granted.

5.2 International Conventions/Protocols

The legal framework valid for the Project also comprises the international conventions/protocols and agreements signed and ratified by the RUz. The relevant international conventions/protocols and agreements with the project are listed in Table 17. In some cases, these have been integrated into national regulations. Moreover, Article 53 of Law "On Nature Protection" requires that *"in cases, when international agreement, concluded by Uzbekistan, states rules other than that contained in the present Law or other legislative act of Uzbekistan on nature protection, the rules of international*

agreement are applied, excluding cases when legislation of Uzbekistan established stricter requirements”.

Table 17: Ratified conventions/protocols by Uzbekistan relevant to the Project

Convention/Protocol Name
Applicable ratified conventions of the Environment / Climate Change
United Nations Framework Convention on Climate Change (ratified by Uzbekistan in 1993)
Kyoto Protocol (ratified by Uzbekistan in 1993)
Paris Agreement (ratified by Uzbekistan in 2017)
United Nations Convention on Biological Diversity (ratified by Uzbekistan in 1995)
Agreement on Cooperation in the Field of Ecology and Environmental Protection (ratified by Uzbekistan in 1992)
Agreement on Cooperation in The Field of Joint Water Resources Management and Conservation of Interstate Sources (ratified by Uzbekistan in 1992)
Agreement on The Conservation of African-Eurasian Migratory Water birds (ratified by Uzbekistan in 2004)
Agreement between the Government of Kazakhstan, the Government of Kyrgyzstan and the Government of Uzbekistan on management of water resources in Central Asia (ratified by Uzbekistan in 1996)
Agreement on Joint Activities in Addressing the Aral Sea and The Zone Around the Sea Crisis, Improving the Environment, And Ensuring the Social and Economic Development of The Aral Sea Region (ratified by Uzbekistan in 1993)
United Nations Convention on Desertification to Combat Desertification (ratified by Uzbekistan in 1995)
Convention on the Prohibition of Military or Any Other Hostile Use of Environmental Modification Techniques (ratified by Uzbekistan in 1993)
Basel Convention on the Control of Transboundary Movements of Hazardous Wastes and Their Disposal (ratified by Uzbekistan in 1996)
Paris Convention Concerning the Protection of the World's Cultural and Natural Heritage (ratified by Uzbekistan in 1993)
Convention for the Safeguarding of the Intangible Cultural Heritage (ratified by Uzbekistan in 2008)
Convention on International Trade in Endangered Species of Wild Fauna and Flora (ratified by Uzbekistan in 1997)
Convention on the Conservation of the Migratory Species of Wild Animals (Bonn Convention) (ratified by Uzbekistan in 1998)
Convention on Wetlands of International Importance Especially as Waterfowl Habitat (ratified by Uzbekistan in 2002)
Convention on Wetlands of International Importance especially the Water Fowl Habitats of Aquatic Birds (RAMSAR Convention) (1975) (ratified by Uzbekistan in 2001)
Convention to Combat Desertification in Those Countries Experiencing Serious Drought And/or Desertification, Particularly in Africa (ratified by Uzbekistan in 1996)
UNECE Convention on The Protection and Use of Transboundary Watercourses and International Lakes (ratified by Uzbekistan in 2007)
Vienna Convention for the Protection of the Ozone Layer (ratified by Uzbekistan in 1993).

Convention/Protocol Name

Montreal Protocol on Substances That Deplete the Ozone Layer (ratified by Uzbekistan in 1993)

Statute of the Interstate Commission for Water Coordination of Central Asia (ratified by Uzbekistan in 1992)

Applicable ratified conventions of the International Labor Organization

C029 - Forced Labor Convention, 1930 (No. 29) (ratified by Uzbekistan in 1992)

C087 - Freedom of Association and Protection of the Right to Organize Convention, 1948 (No. 87) (ratified by Uzbekistan in 2016)

C098 - Right to Organize and Collective Bargaining Convention, 1949 (No. 98) (ratified by Uzbekistan in 1992)

C100 - Equal Remuneration Convention, 1951 (No. 100) (ratified by Uzbekistan in 1992)

C105 - Abolition of Forced Labor Convention, 1957 (No. 105) (ratified by Uzbekistan in 1997)

C111 - Discrimination (Employment and Occupation) Convention, 1958 (No. 111) (ratified by Uzbekistan in 1992)

C138 - Minimum Age Convention, 1973 (No. 138) (ratified by Uzbekistan in 2009)

C182 - Worst Forms of Child Labor Convention, 1999 (No. 182) (ratified by Uzbekistan in 1992)

C081 - Labor Inspection Convention, 1947 (No. 81) (ratified by Uzbekistan in 2020)

C122 - Employment Policy Convention, 1964 (No. 122) (ratified by Uzbekistan in 1992)

C129 - Labor Inspection (Agriculture) Convention, 1969 (No. 129) (ratified by Uzbekistan in 2020)

C144 - Tripartite Consultation (International Labor Standards) Convention, 1976 (No. 144) ratified by Uzbekistan in 2019)

C047 - Forty-Hour Week Convention, 1935 (No. 47) (ratified by Uzbekistan in 1992)

C052 - Holidays with Pay Convention, 1936 (No. 52) (ratified by Uzbekistan in 1992)

C103 - Maternity Protection Convention (Revised), 1952 (No. 103) (ratified by Uzbekistan in 1992)

C135 - Workers' Representatives Convention, 1971 (No. 135) (ratified by Uzbekistan in 1992)

C154 - Collective Bargaining Convention, 1981 (No. 154) (ratified by Uzbekistan in 1997)

Others

Universal Declaration of Human Right (1948), (ratified by Uzbekistan in 1991)

Convention on the Elimination of All Forms of Discrimination against Women (1979), ratified by Uzbekistan in 1995

International Covenant on Civil and Political Rights (1966), (ratified by Uzbekistan in 1995)

Convention on the Elimination of All Forms of Intolerance and of Discrimination Based on Religion or Belief (1981), (ratified by Uzbekistan in 1997)

EU Partnership and Cooperation Agreement (ratified by Uzbekistan in 1996)

5.3 International Environmental Standards

The EIA Report of the proposed Project was prepared as per the applicable national laws, regulations, standards, and guidelines; whereas the ESIA Report has been carried out in accordance with the following requirements as the Company aims to seek international financing for the Project:

- The Equator Principles (EP),
- Asian Infrastructure Investment Bank (AIIB) Environmental and Social Policy,
- International Finance Corporation (IFC) Performance Standards on Environmental and Social Sustainability,
- International protocols and conventions to which our country is a party relating to environmental protection, and
- Applicable National Laws, Regulations, Standards and Guidelines.

In this regard, the most stringent regulation or standards are accepted as project limit or project standard.

5.3.1 Equator Principles

The Equator Principles (EPs) (November 18, 2019) is a framework for determining, assessing, and managing the social and environmental impacts that may arise from financing the projects. The Project will be conducted under the listed EPs, below:

- Principle 1: Review and Categorization;
- Principle 2: Environmental and Social Assessment;
- Principle 3: Applicable Environmental and Social Standards;
- Principle 4: Environmental and Social Management System and Equator Principles Action Plan;
- Principle 5: Stakeholder Engagement;
- Principle 6: Grievance Mechanism;
- Principle 7: Independent Review;
- Principle 8: Covenants;
- Principle 9: Independent Monitoring and Reporting; and
- Principle 10: Reporting and Transparency.

The EPs represent a framework for project financing, which is underpinned by the revised IFC Performance Standards (PSs). EPs establish the minimum environmental & social standards to be adopted by EP Financial Institution, which are from IFC PSs on Environmental and Social Sustainability, the World Bank Group Environmental, Health and Safety Guidelines and/or the relevant host country laws, regulations and permits that pertain to environmental and social issues.

5.3.2 AIIB Environmental and Social Policy

The Asian Infrastructure Investment Bank's (AIIB) Environmental and Social Policy (ESP) supports the Bank's clients in achieving environmentally and socially sustainable development outcomes. It does so by integrating the management of environmental and social risks and impacts into decision-making on, and preparation and implementation of, AIIB-financed projects.

The ESP includes an introductory overview, an aspirational Vision Statement, a mandatory Environmental and Social Policy (ESP), accompanied by three mandatory Environmental and Social Standards (ESSs) and an Environmental and Social Exclusion List. The three ESSs comprise:

- ESS 1: Environmental and Social Assessment and Management;
- ESS 2: Land Acquisition and Involuntary Resettlement; and
- ESS 3: Indigenous Peoples.

ESP was approved in February 2016 and amended in February 2019. Revisions to the ESF were approved by AIIB's Board of Directors in May 2021.

Since there are no known communities thought to be living in the Project AoI that meets the criteria of indigenous peoples as characterized in ESS 3, the ESS 2 and ESS 3 are considered not applicable for the Project.

5.3.3 IFC Standards

IFC is a member of the World Bank Group and is the largest global development institution focused exclusively on the private sector in developing countries. The IFC Performance Standards (PSs) are an international benchmark for identifying and managing environmental and social risk and has been adopted by many organizations as a key component of their environmental and social risk management.

The Project will be implemented the requirements of the IFC as set out in the following standards and guidelines:

- IFC Environmental and Social Sustainability Policy (2012);
- IFC E&S Performance Standards (PSs) 2012 and supporting Guidance Notes (GN) (as relevant);
 - PS-1: Assessment and Management of Environmental and Social Risks and Impacts;
 - PS-2: Labor and Working Conditions;
 - PS-3: Resource Efficiency and Pollution Prevention;
 - PS-4: Community Health, Safety, and Security;
 - PS-5: Land Acquisition and Involuntary Resettlement;
 - PS-6: Biodiversity Conservation and Sustainable Management of Living Natural Resources;
 - PS-7: Indigenous Peoples
 - PS-8: Cultural Heritage.

However, the PS-7 and PS-8 are considered not applicable for the Project. There are no known communities thought to be living in the project area of influence that meets the criteria of Indigenous Peoples as characterized in IFC's PS 7.

Site visit observations and discussions have not highlighted the presence of critical cultural heritage as characterized in IFC's PS-8. Moreover, The Ministry of Culture of the RUZ has an official letter stating that there are no archaeological or cultural sites near or within the proposed Project Site. A chance finds procedure may be required for the construction phase to address potentially unidentified items of cultural significance during the construction works.

In addition to the PSs, the following guidelines and good international industry practice (GIIP) are relaxant for the Project:

- World Bank Group (WBG) Environment, Health and Safety (EHS) Guidelines; including
 - WBG General EHS Guidelines (April 30, 2007) which cover four areas of GIIP related to: Environmental Occupational Health & Safety; Community Health & Safety; Construction; and, Decommissioning,
 - WBG EHS Guidelines Thermal Power Plants (2007 / draft 2017); and
 - WBG EHS Guidelines Electric Power Transmission and Distribution (April 2007).

The EHS Guidelines are technical reference documents with general and industry-specific examples of Good International Industry Practice (GIIP) and are referred to in the World Bank's Environmental and Social Framework and in IFC's Performance Standards. The EHS Guidelines contain the performance levels and measures that are normally acceptable to the World Bank Group, and that are generally considered to be achievable in new facilities at reasonable costs by existing technology. The World Bank Group requires borrowers/clients to apply the relevant levels or measures of the EHS Guidelines. When host country regulations differ from the levels and measures presented in the EHS Guidelines, projects will be required to achieve whichever is more stringent. If less stringent levels or measures than those provided in these EHS Guidelines are appropriate, in view of specific project circumstances, a full and detailed justification for any proposed alternatives is needed as part of the site-specific environmental assessment.

5.3.4 Other Relevant Standards, Guidelines and Good Practices

The Project will implement the requirements of the EU Directives and Standards, including:

- Best available techniques (BAT) conclusions for large combustion plant (LCP) of 31 July 2017 were published in the Official Journal on 17 August 2017 (2017/1442/EU),
- Use of Security Forces: Assessing and Managing Risks and Impacts (February 2017),
- Worker's Accommodation: Processes and Standards (Guidance Note by IFC and EBRD, 2009),
- Scottish Natural Heritage Environmental Impact Assessment Handbook, 2014,
- Guidelines for Landscape and Visual Impact Assessment 3rd Edition, 2013,
- EIA Directive 2014/52/EU (amending Directive 2011/92/EU and 97/11/EC),
- Birds Directive 2009/147/EC
- Habitats Directive 92/43/EEC,
- Water Framework Directive 2000/60/EC,
- Dutch Intervention Values 2013 (Soil Remediation Circular Jul, 2013).
- Directive 2008/50/EC of the European Parliament and of the Council of 21 May 2008 on Ambient Air Quality and Cleaner Air for Europe and National Regulation;
- EU BAT Air Emission Limits (AELs), July 31, 2017,
- ASTM D 1586/ D1586M-18: Standard Test Method for Standard Penetration Test (SPT) and Split-Barrel Sampling of Soils,
- Basel Convention on the Control of Transboundary Movements of Hazardous Wastes and Their Disposal.
- OECD Recommendation of the Council on Common Approaches for Officially Supported Export Credits and Environmental and Social Due Diligence
- Joint MDB Assessment Framework for Paris Alignment for Direct Investment Operations



All phases of the environmental and social management of the proposed project shall be conducted in compliance with national and international regulations and standards as well as the standards of financial institutions. The legal framework is explained in the following sections.

6. AIR EMISSIONS AND AMBIENT AIR QUALITY

6.1 Standards and Regulatory Requirements

6.1.1 National Standards

The relevant legislation related with air emissions and ambient air quality in Uzbekistan are given below:

- Law "On Ambient Air Protection", No. 353-I dated December 27,1996 (as amended on April 21,2021);
- Resolution of Cabinet Ministers "On approval of the Regulations on the Order of design and approval of draft environmental standards", No 14 dated January 21, 2014.

Law "On Ambient Air Protection" covers the right of citizens to clean air and their obligations to take care of the atmosphere, state management in the field of air protection (responsibilities of SCEEP and the Ministry of Health), standards on air quality, maximum permissible emissions of pollutants from stationary sources, industrial air consumption, standards for emissions from mobile sources (vehicles and other equipment), quality of fuels, production and use of chemicals, protection of the ozone layer, spatial planning for enterprise construction and of waste disposal facilities, responsibilities of enterprises (in terms of monitoring and techniques to reduce emissions) and levies for emissions to the air and damage caused. According to the Law, new activities in industrial areas or areas with dense traffic require a SEE/EIA and a health assessment.

The Ministry of Health of RUz develops air quality standards (sanitary norms) to protect human health and oversees the compliance with hygienic norms and standards associated with air quality. The standards related to air emissions and air quality are given below:

- SanPiN No. 0293-11 "List of hygiene standards regarding Maximum Permissible Concentration (MPCs) values of air-polluting substances in populated areas in the RUz",
- SanPiN No. 0350-17 "Protection of Atmospheric Air in Populated Places of the RUz".

The national air quality standards are defined as maximum allowable concentrations (MPC). These MPC values are set for 485 pollutants (SanPiN No. 0293-11). The values are set for short-term maxima (20 minutes), for daily means, for monthly means and for annual means.

The applicable National Ambient Air Quality Standards (MPCs) are provided in Table 18.

Table 18: National Ambient Air Quality Standards (MPCs)

Pollutant Name	Averaging Period	Maximum Permissible Concentration (MPC) ¹ (mg/m ³)
Carbon monoxide(CO)	One Time Maximum (20-30 min.)	5.0
	Daily	4.0
	Monthly	3.5
	Annually	3.0
Nitrogen oxide(NO)	One Time Maximum (20-30 min.)	0.6
	Daily	0.25
	Monthly	0.12
	Annually	0.12
Nitrogen dioxide(NO₂)	One Time Maximum (20-30 min.)	0.085
	Daily	0.06
	Monthly	0.05
	Annually	0.05
Sulfur dioxide (SO₂)	One Time Maximum (20-30 min.)	0.5
	Daily	0.2
	Monthly	0.1
	Annually	0.1
Dust	One Time Maximum (20-30 min.)	0.15-0.5
	Daily	0.1-0.35
	Monthly	0.08-0.020
	Annually	0.05-0.015

Article 6.2 of the SanPin No.0350-17 requires the establishment of a sanitary protection zone (SPZ, buffer zone) around any new thermal power plants. This is defined as an exclusion zone around an emission point (e.g. stack) for the protection of sensitive receptors. For the proposed Project, this zone will have a radius of 500 m (see Figure 28).

As per provisions of the SanPin No.0350-17:

¹ SanPiN RUz No. 0293-11 "The list of maximum permissible concentration (MPC) of pollutants in the ambient air of populated areas on the territory of the Republic of Uzbekistan", Table 1.



- Article 2.16: The SPZ or any part of it may not be regarded as a reserve territory of the enterprise and used for expansion of the industrial site
- Article 2.17: It is prohibited to locate within the boundaries of the sanitary protection zone and on the territory of the industrial site:
 - food industry facilities as well as facilities for the production of tableware, containers, equipment etc. for the food industry, warehouses of finished products, beverage and water production facilities for drinking water purposes,
 - complexes of waterworks;
 - wholesale warehouses of food raw materials and food products;
 - residential buildings, kindergartens, other educational institutions;
 - collective or individual dacha and garden plots;
 - sports facilities, parks, health care and recreation facilities for general use
- Article 2.20: It is permitted to locate in the SPZ:
 - enterprises, their separate buildings and structures with production facilities of a lower class of harmfulness;
 - fire industry, bathhouses, laundries, garages, car and motorcycle parking areas, warehouses (excluding public and specialized food warehouses), buildings of offices, design offices, educational buildings, stores, public catering facilities, clinics, research laboratories and other facilities, related to servicing of this and adjacent enterprises;
 - non-residential premises for on-duty emergency personnel and security guards of enterprises, buildings for shift workers, storage facilities for public and individual transport, local and transit communications, power lines, power substations, oil and gas pipelines, artesian wells for technical water supply, water cooling facilities, facilities for technical water preparation, sewage pumping stations, water recycling facilities, industrial sites, plant nurseries for landscaping and sanitary protection of enterprises.

There are no residential area or recreational facility in the sanitary protection zone of the Project.



Figure 28: Project Area Buffer Zones

6.1.2 Lender Requirements

The IFI's applicable ambient air quality and air emissions standards are given below:

- IFC General EHS Guidelines: Environmental Air Emissions and Ambient Air Quality, April 30, 2007;
- IFC EHS Guidelines for Thermal Power Plants May 31, 2017;
- Directive 2008/50/EC of the European Parliament and of the Council of 21 May 2008 on Ambient Air Quality and Cleaner Air for Europe and National Regulation;
- EU BAT Air Emission Limits (AELs), July 31, 2017.

The international ambient air quality standards together with the national standards are summarized in Table 19. The values presented in blue refer to the stringent values that are applicable to the Project.

Table 19: Ambient Air Quality Standards

Pollutant Name	Averaging Period	National Ambient Air Quality Standards MPC (mg/m ³)	IFC/WB EHS Guideline Ambient Air Quality (mg/m ³ (2007))	EU Environmental Standard (mg/m ³)
Carbon monoxide (CO)	One Time Maximum (20-30 min.)	5.0	-	-
	Daily	4.0	-	-
	Monthly	3.5	-	-
	Annually	3.0	-	-
Nitrogen oxide(NO)	One Time Maximum (20-30 min.)	0.6	-	-
	Daily	0.25	-	-
	Monthly	0.12	-	-
	Annually	0.12	-	-
Nitrogen dioxide(NO₂)	One Time Maximum (20-30 min.)	0.085	-	-
	1 hour	-	0.2	0.2
	Daily	0.06	-	-
	Monthly	0.05	-	-
	Annually	0.05	0.04	0.04

Pollutant Name	Averaging Period	National Ambient Air Quality Standards MPC (mg/m ³)	IFC/WB EHS Guideline Ambient Air Quality (mg/m ³ (2007))	EU Environmental Standard (mg/m ³)
Sulfur dioxide (SO₂)	10 minute	-	0.5 (limit value)	-
	One Time Maximum (20-30 min.)	0.5		
	1 hour	-	-	0.35
			0.125 (Interim target-1)	0.125
	Daily	0.2	0.05 (Interim target-2) 0.02 (limit value)	
	Monthly	0.1	-	-
	Annually	0.1	-	0.02
Dust	One Time Maximum (20-30 min.)	0.15-0.5		
			0.15 (Interim target-1)	0.05
	Daily	0.1-0.35	0.1 (Interim target-2) 0.75 (Interim target-3)	
			0.05 (limit value)	
	Monthly	0.08-0.020	-	-
			0.07 (Interim target-1)	0.04
	Annually	0.05-0.015	0.05 (Interim target-2) 0.03 (Interim target-3) 0.02 (limit value)	

IFC EHS Guidelines, Environmental Air Emissions, and Ambient Air Quality approach are "Emissions do not result in pollutant concentrations that reach or exceed relevant ambient quality guidelines and standards by applying national legislated standards, or in their absence, the current WHO Air Quality



Guidelines (Table 1.1.1.) or other internationally recognized sources". The IFC guideline values and EU Environmental Standards given in Table 20 are shown for indicative purposes. According to lenders' requirements, the more stringent standards are applicable for this Project.

However, Russia and other Commonwealth of Independent States countries have reconsidered this standard and harmonized this standard with the European Union and World Health Organization standards (i.e., 0.2 mg/m³ or 200 µg.m³). Similar work in Uzbekistan is still ongoing.

Moreover, Uzbekistan legislation does not set stack emission limits. Therefore, IFC will intend to limit the emissions as per the "IFC EHS Guideline: Thermal Power Plants". The guideline standards applicable for the Project during the operation phase are summarized in Table 20.

Table 20: Nitrogen Oxides (NO_x) and Carbon Monoxide (CO) Air Emission Limits for Combustion Turbine

Pollutant	IFC Thermal Power Guidelines (Table 6B) (mg/Nm ³) ²		
	Combustion Plant/Natural Gas	Non-degraded air-shed ³ [18] (mg/Nm ³)	Degraded air shed (mg/Nm ³)
NO_x	51 (25 ppm)	51 (25 ppm)	51 (25 ppm)

6.2 Observation and Baseline Conditions

Field measurements of meteorological parameters were carried out and atmospheric air Measurement were measured at 3 (three) observation points (A-01, A-02, A-03). Table 21 shows the coordinates and location of sampling points for atmospheric air while Figure 29 shows the locations where measurements Measurement were conducted.

Baseline air quality measurement stations are selected in accordance with the dominant wind direction and the possible receptors. Dominant wind direction is blowing from southwest direction. Since there is no receptor within 5 km radius, no air quality monitoring point was determined at this direction. Second dominant wind direction is blowing from north east and north-northeast direction. Point 1 and Point 3 are represents nearest residential receptors at the downwind directions. In addition, Point 2 is selected to represent nearest settlement, which is Kattakum Village.

² The Environmental Assessment (EA) may need to justify more stringent or less stringent guideline values due to environmental, community health, technical and economic considerations, whilst not exceeding nationally legislated limits. In all cases, the EA will be demonstrate that ambient impacts from emissions comply with air quality limit guidelines as set out in Section 1.1 of the General EHS Guidelines.

³ Under definitions provided by IFC EHS guidelines for thermal power plant, an air-shed will be considered as degraded if relevant ambient air quality standards (as defined in the General EHS Guidelines) are exceeded; DA/NDA to be determined for each pollutant.

Table 21: Atmospheric Air Measurement Station Coordinates

Monitoring Stations	Station Location	Coordinates (deg/min/sec)	Description of the Monitoring Station	Distance to the border of the Project Site
A-01	Garden, next to the village, 300 m from the cell tower.	N = 37°20'58,29" E = 67°11'36,42"	This station is located at south of the Uchkizil Reservoir. There are agricultural fields and residential areas nearby. Located at downwind direction	5500 m
A-02	SSG Kattakum	N = 37°22'53,43" E = 67°13'38,52"	This station is located west part of Kattakum Village. There are agricultural fields, residential areas, and a main road nearby. Nearest residential area	1850 m
A-03	Former sanatorium, 15-20 m from the lake.	N = 37°20'42,20" E = 67°13'22,06"	This station is located at southwest of the Uchkizil Reservoir. There are dense residential areas nearby. Located at downwind direction	3850 m



Figure 29: Map showing the Location of Atmospheric Air Measurement Stations

Measurements were conducted by an accredited laboratory which is Yuksak Musaffo Tabiat" Llc Company in accordance with the established state standards as specified by the corresponding regulatory, methodological and instructive documents.

The factors analyzed to determine the state of atmospheric air included measurements of meteorological parameters: which are air temperature, wind speed, wind direction and atmospheric pressure at observation points. Atmospheric air measurements and meteorological measurements were carried out simultaneously.

Meteorological observations were carried out using meteorological equipment in accordance with GOST 17.2.3.01-86 "Nature protection. Atmosphere. Air quality control rules for settlements" and GOST 31296.2-2006 "Noise. Description, measurement and assessment of noise on the ground. Part 2. Determination of sound pressure levels". To measure the ambient temperature and wind speed, a modern digital instrument, Testo 425, which measures the data of meteorological parameters automatically, (see Figure 30) was used. Air pressure was measured using an aneroid barometer (see Figure 31) and wind direction was determined by using a compass.



Figure 30: Digital Instrument Testo 425



Figure 31: Measurements of Atmospheric Pressure Using Aneroid Barometer

Air quality measurements were carried out in accordance with GOST 17.2.3.01-86 "Nature protection. Atmosphere Air quality control rules for settlements". Measurement of atmospheric air for determining nitrogen dioxide, carbon monoxide, sulfur dioxide content were conducted by using an ECOLAB gas analyzer (modification A) and suspended particles (dust) measurement in the atmospheric air were carried out on a DustTrak DRX dust analyzer (see Figure 32).



Figure 32: DustTrak DRX dust analyzer

Table 22 provides a list baseline air quality measurement parameters and the methods of their analysis.

The level of atmospheric air pollution was assessed in accordance with SanPiN No: 0293-11 which was developed and approved by the Ministry of Health of the RUz

Table 22: List of measurement parameters in atmospheric air and methods of their determination

Defined Ingredient	Measurement Method
Meteorological parameters: air temperature, pressure, wind direction and speed	GOST 17.2.3.01-86 "Nature protection. Atmosphere. Air quality control rules for settlements"
Carbon oxide	Working procedure for testing with the use of automatic gas analyzers EKOLAB for monitoring atmospheric air. MIP 03897485.001: 2019.
Sulphur dioxide	Working procedure for testing with the use of automatic gas analyzers EKOLAB for monitoring atmospheric air. MIP 03897485.001: 2019.
Nitrogen dioxide, nitrogen oxide	Working procedure for testing with the use of automatic gas analyzers EKOLAB for monitoring atmospheric air. MIP 03897485.001: 2019.
Dust	Test procedure for mass concentration of aerosol particles of various origins, as well as total dust content using a portable aerosol analyzer "Dust Trak DRX 8534".

6.2.1 Local Meteorological Conditions

Surkhandarya is the region of the southernmost administrative-territorial unit of Uzbekistan. The climate in the area of the proposed construction of the thermal power plant is sharply continental: dry with long frost-free periods (250-270 days). The high average annual air temperature and its sharp daily fluctuations, hot dry summers, insignificant amount of atmospheric precipitation and high evaporation determine the desert like character of the region's climatic conditions. Average monthly air temperatures range from 0.5-7.7 (December-January) to 25.5-28.2 (July-August). The air temperature varies considerably over the year, from 16°C in winter to 40-42°C in the summer months. Sub-zero winter temperatures were mostly observed in the period before 1977, after which they have not been recorded to date.

Since 1994, there has been a general tendency towards an increase in average annual air temperatures from 13.0 to 14.5°C. In general, the distribution of average annual temperatures corresponds to the identified periods in terms of the water content of the year. The amount of annual precipitation varies from 185.8 mm to 781 mm, with the norm of the total average annual precipitation being 441.94 mm. The greatest amount of precipitation in the year occurs in the winter-autumn months, from December to May. However, in some years this period becomes somewhat extended and may span the months of October to June. For a significant part of the year, air humidity does not exceed 40%, with a monthly average of 44-58%.

Termez meteorological station is the closest meteorological station to the project site, which is nearly 12 km and altitude and terrain around of this station is similar with the Project site. The following meteorological evaluations are conducted in accordance with the long term data obtained from Termez station.

The monthly average temperature, maximum temperature, minimum temperature observed at Termez Meteorological Station between 2002 and 2021 is given in Table 23 and Figure 33. As can be seen from the table and figure, temperature is increasing towards the summer and decreasing towards

winter. Maximum air temperature is observed between 2002 and 2021 as 45.8 °C at June 2005 and minimum temperature is observed as -21.7 in February 2014.

Table 23: Monthly average temperature, maximum temperature, minimum temperature observed at Termez Meteorological Station (2002-2021) (°C)

Month	Average Temp.	Maximum Average Temp.	Minimum Average Temp.	Max Recorded Temp. and date	Min Recorded Temp. and date
1	4.6	10.8	-0.1	22.9 / 28.01.2014	-19.7 / 09.01.2008
2	7.2	13.8	2.2	30.1 / 25.02.2016	-21.7 / 04.02.2014
3	13.6	20.9	7.7	37.3 / 31.03.2018	-4.5 / 09.03.2013
4	19.4	27.2	12.4	38.7 / 27.04.2006	0.3 / 09.04.2020
5	25.6	33.7	17.2	41.9 / 29.05.2017	5.6 / 03.05.2003
6	29.7	38.2	20.2	45.7 / 22.06.2005	13.3 / 05.06.2009
7	32.1	40.6	23.3	45.2 / 06.07.2021	18.3 / 05.07.2020
8	28.7	37.7	19.3	45.6 / 06.08.2019	10.8 / 28.08.2005
9	23.7	33.2	14.4	39.9 / 07.09.2004	6.1 / 30.09.2007
10	17.1	26	9.3	37.5 / 05.10.2013	-0.2 / 29.10.2020
11	10.2	17.4	4.7	33.5 / 01.11.2017	-10.2 / 27.11.2016
12	5.1	11.5	0.4	24.6 / 02.12.2021	-18.4 / 05.12.2002

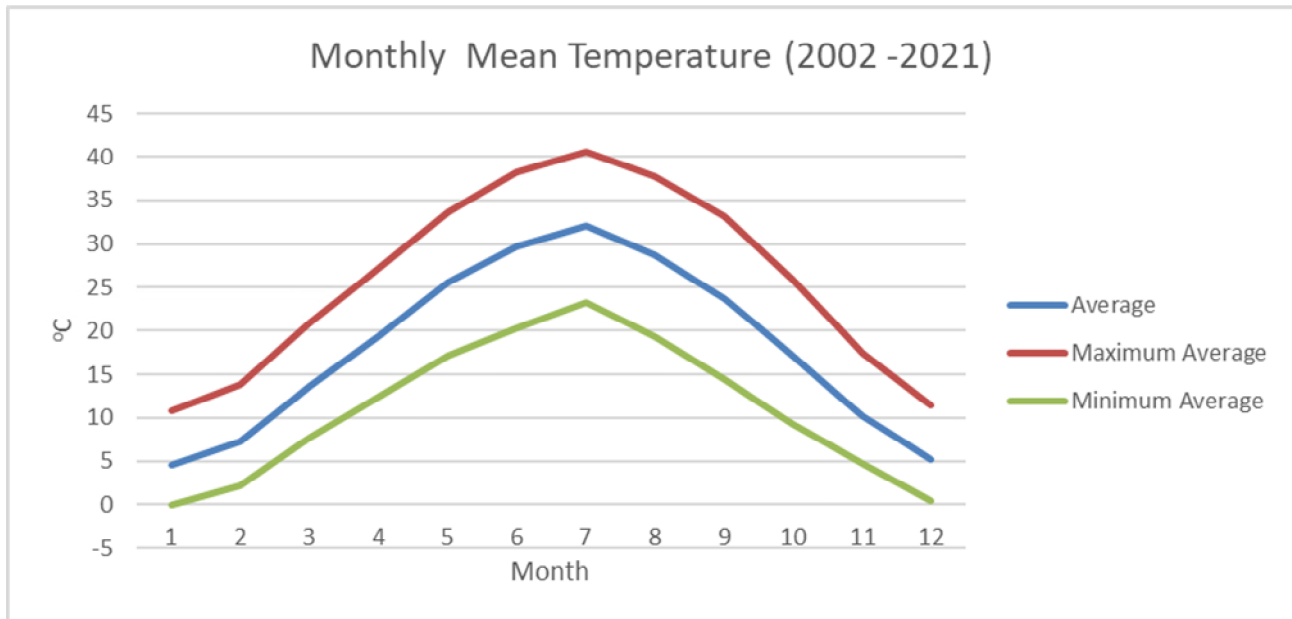


Figure 33: Monthly average temperature, maximum temperature, minimum temperature observed at Termez Meteorological Station (2002-2021) (°C)

Additionally, annual temperature trends between 2002 and 2022 is investigated and given in Table 24 and Figure 34. Average mean temperature is similar through 2002 and 2021. It can be said that, no increase trend is observed during last 20 years.

Table 24: Annual average, minimum, maximum temperature observed at Termez Meteorological Station (°C) (2002 - 2021)

Year	Average Temp	Max Temp.	Min Temp
2002	18.0	44.1	-18.4
2003	17.5	46.0	-8.9
2004	18.5	43.0	-4.0
2005	17.9	45.7	-4.7
2006	18.2	43.2	-10.5
2007	17.9	45.5	-6.9
2008	17.5	44.6	-19.7
2009	17.9	43.4	-3.1
2010	18.4	44.8	-9.5
2011	18.0	44.4	-9.1



2012	17.2	43.9	-16.8
2013	18.4	44.3	-10.4
2014	17.3	44.3	-21.7
2015	18.1	44.6	-5.3
2016	18.7	45.8	-10.8
2017	18.2	44.3	-7.3
2018	18.4	45.2	-11.4
2019	18.6	45.6	-2.2
2020	17.3	44.2	-7.6
2021	18.8	45.2	-8.3


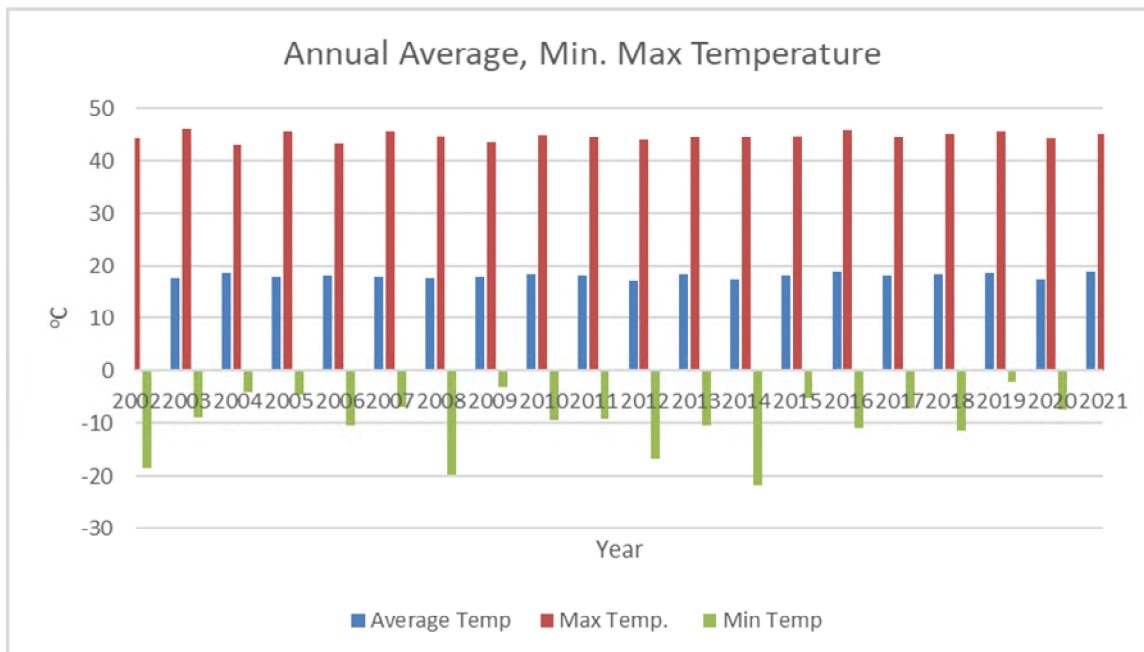


Figure 34: Annual average, minimum, maximum temperature observed at Termez Meteorological Station (°C) (2002 - 2021)


The dominant wind direction of the Termez Meteorological Station is blowing from WSW and NNE through the year. On the other hand, wind pattern changes through the year. Wind blows mainly from




NNE and NE between January to June and between July and September wind blows mianly from WSW and SW direction (see Figure 35).

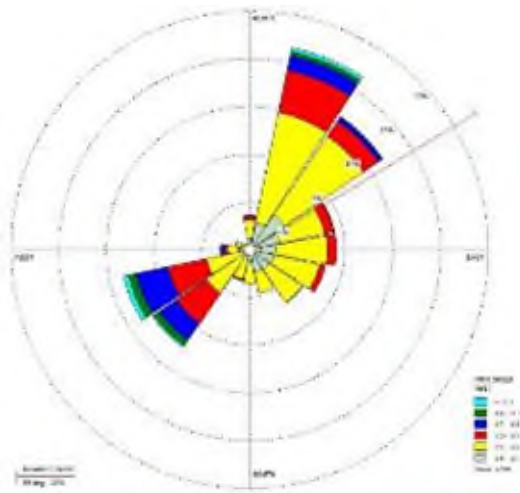


January – March 2018

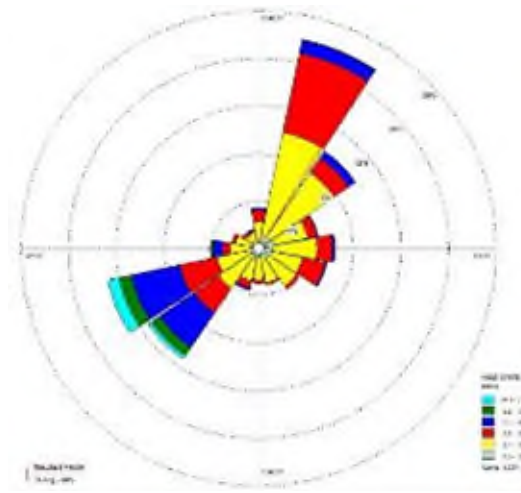


April- June 2018

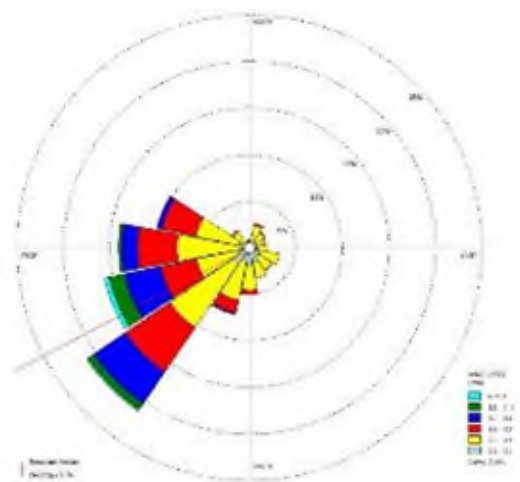


July- September 2018

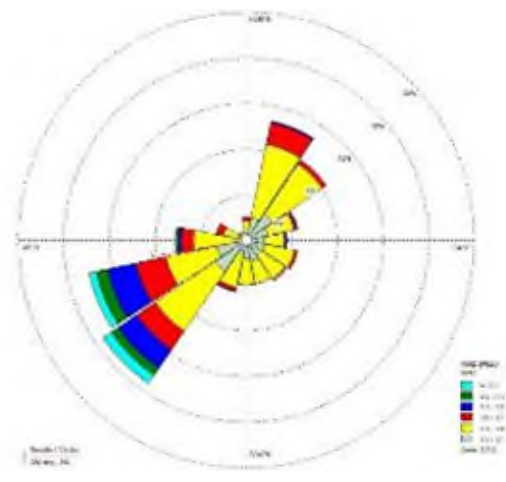


October – December 2018

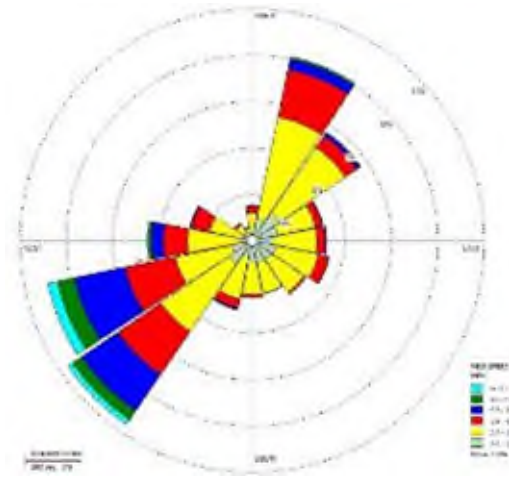


January - December 2018

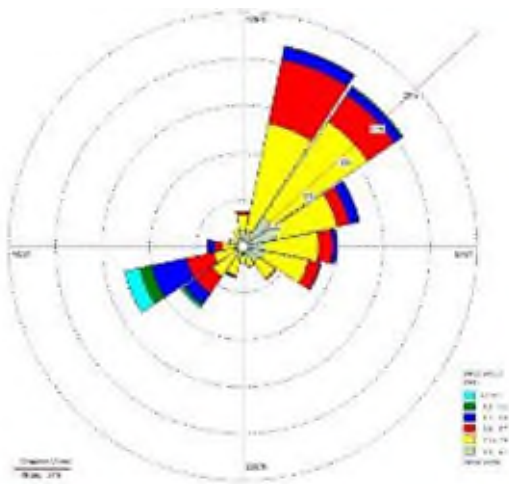


January - March 2019

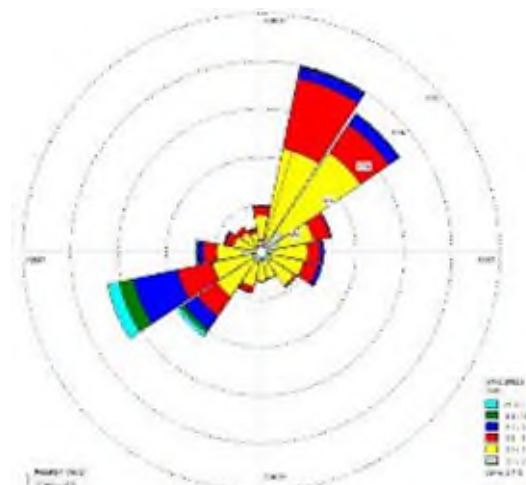


April- June 2019

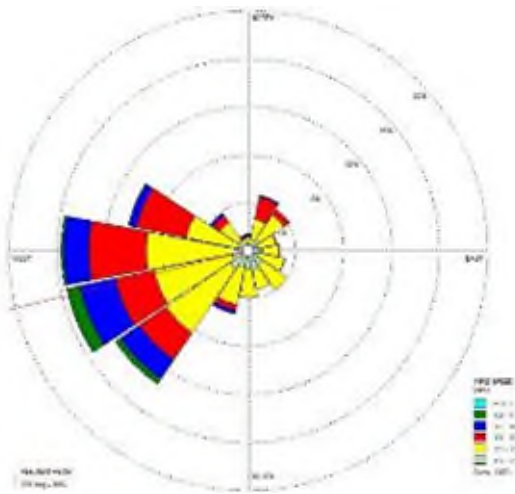


July- September 2019

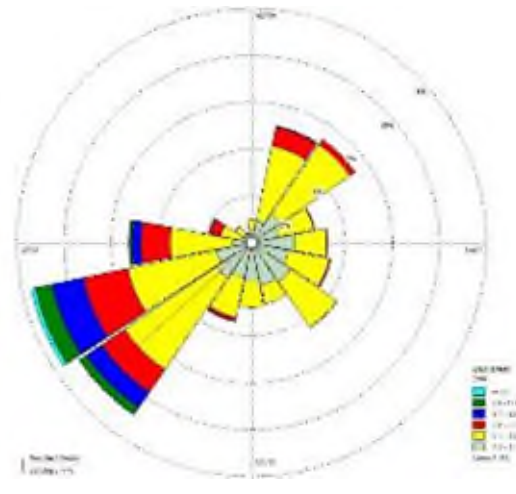


October - December 2019

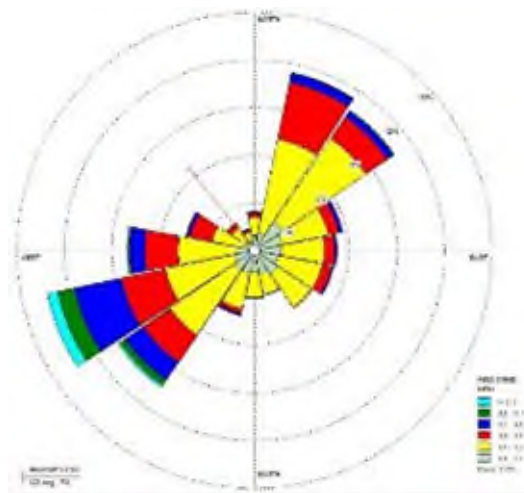


January - December 2019

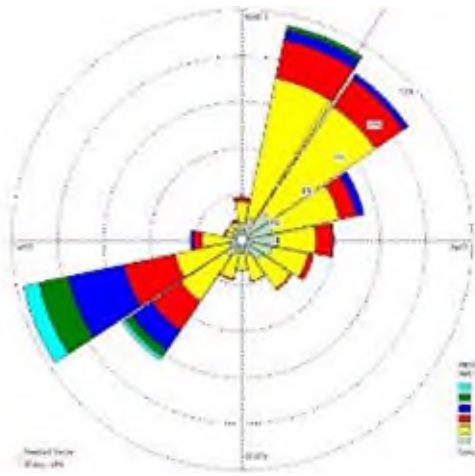


January – March 2020

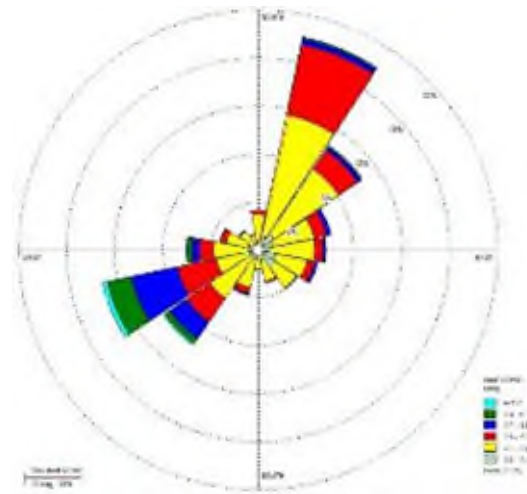


April- June 2020

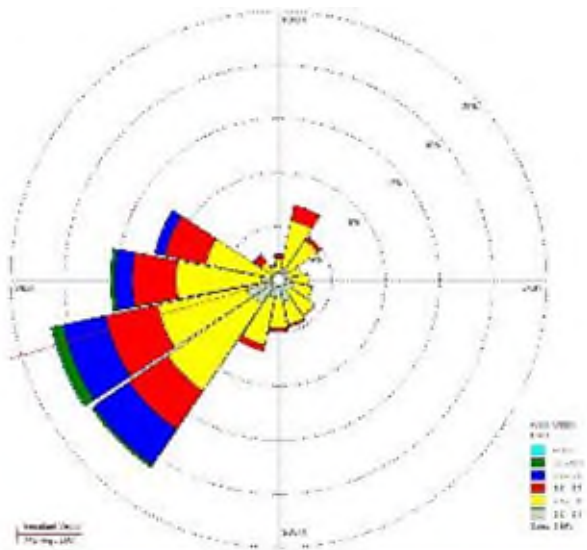


July- September 2020

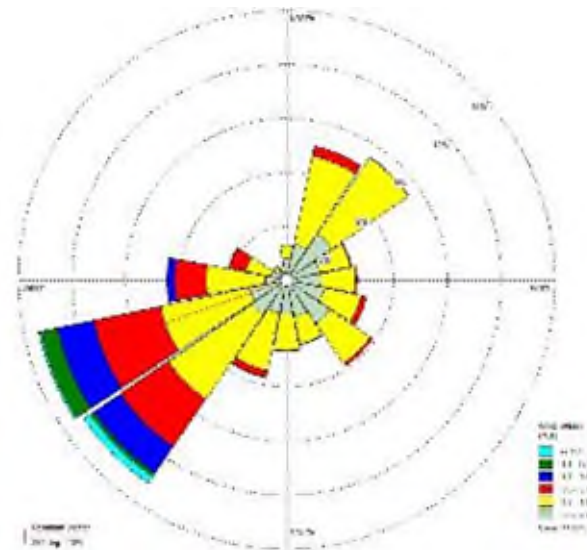

October – December 2020

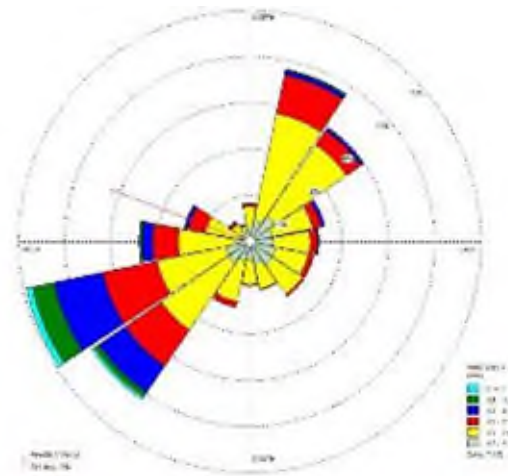

January - December 2020

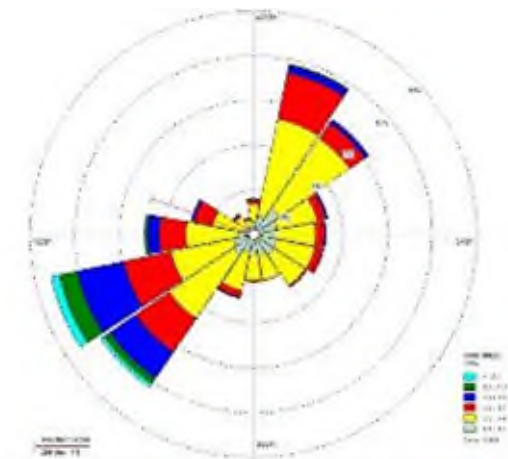

January 2018- December 2020

Figure 35: Quarterly and Annual Wind Rose Diagrams of Termez Station (2018-2020 – blowing from)

In accordance with the precipitation data gathered at Termez Meteorological station, approximately 160 mm precipitation is observed through the year (see Table 25). The rain events are observed between December and May. The most precipitation is observed in 2006 between 2002 and 2021.

As can be seen from the Table 25, 2008 year is the most snow event is observed at Termez Station between 2002 and 2021. Snow events are observed between December and February months.

Table 25: Annual precipitation and snow depth observed at Termez Meteorological Station (°C) (2002 - 2021)

Year	Precipitation (mm)	Snow depth (cm)
2002	156.4	29.0
2003	147.3	0.0
2004	139.4	12.0
2005	110.9	0.0
2006	229.7	38.0
2007	136.9	5.0
2008	83.0	240.0
2009	188.4	1.0
2010	154.9	0.0
2011	220.3	13.0
2012	177.5	14.0
2013	119.1	11.0
2014	164.6	130.0
2015	204.9	4.0
2016	173.5	74.0
2017	211.4	14.0
2018	112.6	5.0
2019	178.6	0.0
2020	183.4	14.0
2021	117.2	1.0

6.2.2 Local Influences on Air Quality

Dust and engine emissions created by construction activities (i.e. earthworks, demolition and operation of machinery) can influence the local ambient air quality.

The release of vehicle exhaust emissions into the atmosphere due to the highway around the project area may have an impact on the local ambient air quality.

6.2.3 Existing Ambient Air Quality Data

Baseline data on atmospheric air pollution in the territory of the Project was obtained from the results of air quality measurement from the 3 (three) observation station for 7 days period in July 2021.

Simultaneously: meteorological measurements were also carries out to determine air temperature, atmospheric pressure, wind speed direction. The measurements are presented in Table 26.

Table 26: Meteorological measurement results

No	Number of monitoring point	Date	Meteorological parameters			
			Temperature , (°C)	Pressure,(mmHg)	Wind speed, (m/s)(min-max)	Wind direction
Monitoring point A-01						
1.	Morning	10.07.2021	36.7	726	1.90 – 4.46	SE
2.	Day		40.8	726	1.01 – 3.00	SE
3.	Evening		35.7	725	2.30 – 3.40	NE
4.	Morning	11.07.2021	27.0	727	1.60 – 2.10	NE
5.	Day		39.2	727	3.60 – 5.20	SE
6.	Evening		42.0	725	3.70 – 4.90	SE
7.	Morning	12.07.2021	31.0	726	1.50 – 3.80	E
8.	Day		37.3	726	4.20 – 5.70	E
9.	Evening		39.0	723	1.35 – 5.80	SE
10.	Morning	13.07.2021	28.2	725	1.70 – 2.80	NE
11.	Day		38.4	725	4.50 – 5.71	SE
12.	Evening		38.6	723	1.00 – 1.15	NE
13.	Morning	14.04.2021	27.6	725	1.90 – 2.70	NE
14.	Day		40.0	724	2.10 – 6.90	NE
15.	Evening		38.1	723	1.20 – 4.16	E
16.	Morning	15.04.2021	29.0	725	0.60 – 2.10	NE
17.	Day		39.1	725	0.16 – 2.67	NE
18.	Evening		35.8	724	1.30 – 3.50	SE
19.	Morning	16.04.2021	27.0	728	2.60 – 5.50	E
20.	Day		36.1	725	2.33 – 9.11	E
21.	Evening		35.8	724	1.30 – 6.81	SE
Monitoring point A-02						
1.	Morning	10.07.2021	36.0	728	0.52 – 2.81	SE
2.	Day		41.7	726	2.01 – 3.81	SE
3.	Evening		37.2	723	0.70 – 1.70	NE
4.	Morning	11.07.2021	29.5	727	1.50 – 2.20	NE

No	Number of monitoring point	Date	Meteorological parameters			
			Temperature, (°C)	Pressure,(mmHg)	Wind speed, (m/s)(min-max)	Wind direction
5.	Day		43.0	727	1.50 – 2.50	NE
6.	Evening		38.4	724	1.80 – 3.20	SE
7.	Morning	12.07.2021	32.0	726	0.25 – 2.15	E
8.	Day		38.0	725	1.30 – 4.30	No dominant wind direction
9.	Evening		38.0	722	1.60 – 2.60	E
10.	Morning	13.07.2021	29.1	724	1.60 – 2.90	N
11.	Day		39.0	724	1.80 – 4.20	E
12.	Evening		37.1	722	0.01 – 0.51	-
13.	Morning	14.04.2021	29.0	725	1.90 – 2.60	SE
14.	Day		42.0	724	0.14 – 1.13	E
15.	Evening		36.9	722	0.23 – 4.25	E
16.	Morning	15.04.2021	31.0	725	0.70 – 2.08	NE
17.	Day		41.0	725	0.12 – 2.17	NE
18.	Evening		36.8	724	0.12 – 2.53	SE
19.	Morning	16.04.2021	28.0	727	2.40 – 3.60	NE
20.	Day		35.5	725	0.88 – 2.55	SE
21.	Evening		35.0	724	0.12 – 7.00	SE
Monitoring point A-03						
1.	Morning	10.07.2021	33.0	726	2.71 – 4.26	SE
2.	Day		41.0	726	0.70 – 4.10	SE
3.	Evening		37.4	725	0.90 – 1.20	NE
4.	Morning	11.07.2021	21.4	722	1.90 – 3.35	SE
5.	Day		38.8	722	1.30 – 2.90	NE
6.	Evening		36.8	724	1.20 – 1.60	SE
7.	Morning	12.07.2021	29.0	726	0.10 – 0.60	NE
8.	Day		39.0	726	1.06 – 5.12	NE
9.	Evening		40.0	723	1.35 – 2.40	SE
10.	Morning	13.07.2021	27.0	724	1.80 – 4.20	E
11.	Day		35.2	725	0.10 – 2.88	E
12.	Evening		40.0	723	1.90 – 3.20	SE
13.	Morning	14.04.2021	26.0	724	0.70 – 0.90	SE

No	Number of monitoring point	Date	Meteorological parameters			
			Temperature, (°C)	Pressure,(mmHg)	Wind speed, (m/s)(min-max)	Wind direction
14.	Day		41.1	724	0.24 – 1.75	NE
15.	Evening		40.6	722	0.51 – 2.81	E
16.	Morning	15.04.2021	30.8	725	0.03 – 0.90	-
17.	Day		39.0	725	0.83 – 2.01	NE
18.	Evening		36.0	724	1.90 – 4.0	SE
19.	Morning	16.04.2021	26.0	727	2.90 – 4.50	NE
20.	Day		36.0	725	2.70 – 8.10	E
21.	Evening		36.1	724	1.90 – 6.00	SE
-	Calm air		Windy weather with a speed of 1 knot or less			

The results of observations of the main meteorological parameters during the field work showed that the winds of the southeastern and northeastern directions prevailed on the territory of the surveyed area at this time. The wind speed in the study area varies from 0.01 m/s (calm) to 6.90 m/s. In field studies, the minimum value of atmospheric pressure was 722 mm Hg, and the maximum atmospheric pressure is 728 mmHg the distribution of air temperature values at observation points ranged from 21.4oC to 43.0°C.

The meteorological measurement results are in line with the long term data obtained in the Surkhandarya region for the summer period.

Together with this sulfur dioxide, nitrogen dioxide, nitrogen oxide, carbon monoxide and dust measurements were carried out.

The assessment of baseline atmospheric air pollution was carried out by comparing the measurement results with the corresponding maximum permissible concentrations of the estimated parameters (sulfur dioxide, nitrogen dioxide, nitrogen oxide, carbon monoxide, air dust content (dust)) in accordance with SanPiN No: 0293-11 (see Table 27).

Table 27: Air Quality Measurement Results

No	Pollutants						
	Carbon monoxide (mg/m ³)	Nitrogen dioxide,(mg /m ³)	Nitrogen oxide,(m g/m ³)	Sulphur dioxide,(mg/m ³)	Dust,(mg /m ³)		
MPC limit value (one-time) (mg/m ³)	5.0 (mg/m ³)	0.085 (mg/m ³)	0.6 (mg/m ³)	0.5 (mg/m ³)	0.5 (mg/m ³)		
Sampling point A-01							
1.	10.07.2021	Morning	0.53	<BDL	<BDL	<BDL	0.310
2.		Day	<BDL*	<BDL	<BDL	<BDL	0.067
3.		Evening	<BDL	<BDL	<BDL	0.185	0.069
4.	11.07.2021	Morning	<BDL	<BDL	<BDL	<BDL	0.201
5.		Day	<BDL	<BDL	<BDL	<BDL	0.076
6.		Evening	<BDL	<BDL	<BDL	0.479	0.017
7.	12.07.2021	Morning	<BDL	<BDL	<BDL	<BDL	0.151
8.		Day	<BDL	<BDL	<BDL	0.079	0.079
9.		Evening	<BDL	<BDL	<BDL	0.406	0.085
10.	13.07.2021	Morning	<BDL	<BDL	<BDL	<BDL	0.110
11.		Day	<BDL	<BDL	<BDL	<BDL	0.049
12.		Evening	<BDL	<BDL	<BDL	0.389	0.079
13.	14.07.2021	Morning	<BDL	<BDL	<BDL	<BDL3	0.067
14.		Day	<BDL	<BDL	<BDL	<BDL	<BDL
15.		Evening	<BDL	<BDL	<BDL	0.384	0.022
16.	15.07.2021	Morning	<BDL	<BDL	<BDL	0.317	0.048
17.		Day	<BDL	<BDL	<BDL	0.040	0.056
18.		Evening	<BDL	<BDL	<BDL	0.867	0.026
19.	16.07.2021	Morning	<BDL	<BDL	<BDL	0.327	0.085
20.		Day	<BDL	<BDL	<BDL	<BDL	0.234
21.		Evening	<BDL	<BDL	<BDL	<BDL	0.037
Sampling point A-02							
1.	10.07.2021	Morning	1.36	<BDL	<BDL	<BDL	0.519
2.		Day	<BDL	<BDL	<BDL	0.401	0.306
3.		Evening	<BDL	<BDL	<BDL	0.318	0.240

No	Pollutants						
		Carbon monoxide (mg/m ³)	Nitrogen dioxide,(mg /m ³)	Nitrogen oxide,(m g/m ³)	Sulphur dioxide,(mg/m ³)	Dust,(mg /m ³)	
MPC limit value (one-time) (mg/m ³)		5.0 (mg/m ³)	0.085 (mg/m ³)	0.6 (mg/m ³)	0.5 (mg/m ³)	0.5 (mg/m ³)	
4.	11.07.2021	Morning	<BDL	<BDL	<BDL	<BDL	0.276
5.		Day	<BDL	<BDL	<BDL	<BDL	0.072
6.		Evening	<BDL	<BDL	<BDL	0.113	0.110
7.	12.07.2021	Morning	<BDL	<BDL	<BDL	<BDL	0.123
8.		Day	<BDL	<BDL	<BDL	<BDL	0.039
9.		Evening	<BDL	<BDL	<BDL	0.257	0.122
10.	13.07.2021	Morning	<BDL	0.388	0.204	<BDL	0.108
11.		Day	<BDL	<BDL	<BDL	0.180	0.069
12.		Evening	<BDL	<BDL	<BDL	0.129	0.714
13.	14.07.2021	Morning	<BDL	<BDL	<BDL	<BDL	0.068
14.		Day	<BDL	<BDL	<BDL	<BDL	0.045
15.		Evening	<BDL	<BDL	<BDL	0.077	0.139
16.	15.07.2021	Morning	<BDL	<BDL	<BDL	<BDL	0.044
17.		Day	<BDL	<BDL	<BDL	0.207	0.031
18.		Evening	<BDL	<BDL	<BDL	0.898	0.019
19.	16.07.2021	Morning	<BDL	<BDL	<BDL	<BDL	0.201
20.		Day	<BDL	<BDL	<BDL	<BDL	0.391
21.		Evening	<BDL	<BDL	<BDL	<BDL	0.121
Sampling point A-03							
1.	10.07.2021	Morning	<BDL	<BDL	<BDL	<BDL	0.530
2.		Day	<BDL	<BDL	<BDL	<BDL	0.610
3.		Evening	<BDL	<BDL	<BDL	0.27	0.082
4.	11.07.2021	Morning	<BDL	<BDL	<BDL	<BDL	0.103
5.		Day	<BDL	<BDL	<BDL	<BDL	0.050
6.		Evening	<BDL	<BDL	<BDL	0.216	0.055
7.	12.07.2021	Morning	<BDL	<BDL	<BDL	<BDL	0.142
8.		Day	<BDL	<BDL	<BDL	<BDL	0.081
9.		Evening	<BDL	<BDL	<BDL	<BDL	0.054

No	Pollutants						
	Carbon monoxide (mg/m ³)	Nitrogen dioxide,(mg /m ³)	Nitrogen oxide,(m g/m ³)	Sulphur dioxide,(mg/m ³)	Dust,(mg /m ³)	MPC limit value (one-time) (mg/m ³)	
	5.0 (mg/m ³)	0.085 (mg/m ³)	0.6 (mg/m ³)	0.5 (mg/m ³)	0.5 (mg/m ³)		
10.	13.07.2021	Morning	<BDL	<BDL	<BDL	<BDL	0.083
11.		Day	<BDL	<BDL	<BDL	0.092	0.066
12.		Evening	<BDL	<BDL	<BDL	1.290	0.036
13.	14.07.2021	Morning	<BDL	<BDL	<BDL	0.512	0.098
14.		Day	<BDL	<BDL	<BDL	0.234	0.020
15.		Evening	<BDL	<BDL	<BDL	0.710	0.015
16.	15.07.2021	Morning	<BDL	<BDL	<BDL	0.337	0.076
17.		Day	<BDL	<BDL	<BDL	0.308	0.015
18.		Evening	<BDL	<BDL	<BDL	0.443	0.019
19.	16.07.2021	Morning	<BDL	<BDL	<BDL	0.885	0.151
20.		Day	<BDL	<BDL	<BDL	<BDL	0.508
21.		Evening	<BDL	<BDL	<BDL	<BDL	0.015

*

BDL= Below Detection Limit

The results of the field studies of the state of atmospheric air carried out in July 2021 on the territory of the Project shows that:

- The carbon monoxide concentration in the atmospheric air was below the level of the established standard maximum permissible concentration at all observation points
- The nitrogen oxide and nitrogen dioxide measurement results are generally below the MPC except for a one-time excess of MPC by 4.6 times at Monitoring Point 2 on July 13 in the morning. The monitoring point 2 is near agricultural fields and a main road. This one time excess could be considered as local temporary antropogenic effect, such as tractor, dense car movement etc.
- Sulfur dioxide measurement result shows that there is an excess of MPC was recorded at all observation points. Monitoring Point 1 and Moitoring Point 2 SO₂ measured as 0.867 mg/m³ (1.7 times of MPC) and 0.898 mg/m³ (1.8 times of MPC), respectively. At the Monitoring Point 3 on July 13-14 (night) and 16 July (morning) excess of MPC was recorded from 0.710 mg/m³ (1.4 times of MPC) - 1,290 mg/m³ (2.6 MAC) at the time. All three monitoring points are near the residential areas, stoves and barbecues are being used for the cooking. It can be said that these exceedances are local temporary increases due to human activities. Since the Project will use natural gas as fuel, the Project will not effect the air quality in terms of SO₂.
- Dust concentrations are observed (see Table 27), generally significantly lower than the established MPC standards, with the exceptions of outlier one-time excesses of 1.4 times on

the evening of July 13th at Monitoring Point 2 and 1.2 times in the afternoon of July 10th at Monitoring Point 3. Since the area around the monitoring points contains sand and limited amount of vegetation cover, dust concentrations can be increased via wind.

As per the ambient air quality monitoring data collected from the area dust, SO₂ and NO₂ concentrations are below the national limits with the exception of some local and temporary exceedances.

The nearest long term air quality monitoring station that is operated by the state is located nearly 130 km to the Project site. Therefore, the data collected in this station is not considered to be used in this ESIA Report. However, supplementary air quality measurements with passive diffusion tubes for 1 month is started within July 2022. Measurement results will be included in the Final ESIA report. The assessment regarding the airshed will be reevaluated in the Final ESIA Report by taking into account of additional site surveys.

6.3 Sensitive Receptors

Sensitive receptors were determined in the scoping process given in Table 28 and Figure 17 and background air quality measurements were performed at three points which are shown in Figure 29. The table below shows the receptors around the project area regarding the impacts on air quality.

Table 28: Air Quality Receptors of the Project

Receptor	Receptor Type	Distance From Project Border (m)	Sensitivity	Justification
A-01	Residential area Garden, next to the village, 300 m from the cell tower.	5500 m SW	Medium	Permanent residents in residential areas, would be vulnerable to changes in ambient air quality,
A-02	Residential area Kattakum	1850 m W	Medium	Permanent residents in residential areas, would be vulnerable to changes in ambient air quality,
A-03	Residential area Former sanatorium, 15-20 m from the lake.	3850 m SSW	Medium	Permanent residents in residential areas, would be vulnerable to changes in ambient air quality,
IR-1	Industrial Receptor	250 m N	Low	Waste processing facility near the project area
HR-1	Human Receptor	1350 m W	Medium	Permanent residential area
HR-2	Human Receptor	1850 m S	Medium	Permanent residential area
HR-3	Human Receptor	4100 m SW	Medium	Permanent residential area

Receptor	Receptor Type	Distance From Project Border (m)	Sensitivity	Justification
AR-1	Agricultural Receptor	980 m NW	Medium	Agricultural area near Project area
AR-2	Agricultural Receptor	4810 m SW	Medium	Agricultural area near Project area
AR-3	Agricultural Receptor	3060 m SSW	Medium	Agricultural area near Project area

6.4 Potential Impacts, Mitigation, Management & Residual Impact

6.4.1 Construction Phase

During construction phase, local ambient air quality may potentially be affected by increased dust, particularly during the site preparation stage (site clearance and earthworks etc.) and by the exhaust gas of construction vehicles, equipment and temporary power generators. The typical air emissions resulting from these activities include nitrogen oxides (NO_x), sulphur dioxides (SO₂), carbon monoxide (CO), carbon dioxide (CO₂), volatile organic compounds (VOC), particulates and benzene, toluene, ethylbenzene and xylene (BTEX).

- Sources of air emissions during construction phase are;
- Excavations and earthworks (dust),
- Vehicle movements on unpaved, or compacted roads and surfaces (dust);
- Particulate matter dispersion from uncovered truckloads;
- Vehicle and construction equipment emissions (e.g. NO_x, SO_x and CO, CO₂, VOCs, particulates and BTEX) and particulates from vehicles, generators and other mechanical equipment;
- Stored VOCs and other volatile hazardous materials (VOCs) and;
- Odour from temporary wastewater facilities, or containment

6.4.1.1 Dust

The main sources of dust and particulate matter emissions during construction phase will be:

- Excavations and earthworks, such as cutting, filling and levelling;
- Vehicle movements on unpaved, or compacted surfaces; and
- Particulate matter dispersion from uncovered truckloads.

Dust Emissions from Site Preparation

Excavations and earthworks cause dust which typically comprises large diameter particles, settle rapidly and close to the source.

According to the screening guidance of the UK's Institute of Air Quality Management (IAQM) for construction dust, detailed assessment relating to dust generation is required where there is a 'human

receptor' within 350m of the boundary of the site[95]. In the case of this Project and with respect to the screening criteria above, although there is no any settlement within the sanitary buffer zone (500m around the project area), there is a waste processing facility 250 m away from Project's north border. In addition to this, the closest residential receptors to the project site is about 1 km m away from the west border of project site. There is no expected impacts relating to dust emissions on the settlements. However, the existing facility (waste processing facility) can be affected. In addition to this, the magnitude of dust impacts from construction works will depend on the wind speed and wind direction at the project site. As shown in Figure 36, dominant wind direction is from the southeast for the year 2018, 2019 and 2020 and as a result, the potential of emissions impact to the facility can be considered as negligible.

In addition to vehicle movements on unpaved surfaces, dust generation from truck movements and particulate dispersion from truckloads would only occur where mitigation measures are not effectively implemented at the site, or by contractors bringing materials to the site.

Uncontained and/or un-sheeted trucks may be subject to losses of material where the containment is not effective (e.g. spills), or where wind or other air turbulence may disturb the contents and result in dispersion of materials. Such impacts have the potential to degrade local air quality in the immediate area of such movements.

In accordance with the UK's IAQM Guidance on the Assessment of Dust from Demolition and Construction, detailed assessment of vehicle movements should only be required where 'human' receptors are located within 50m of the route used by construction vehicles on public roads, up to 500m from the project site entrance [95]

In the instance of this Project, there are residential and commercial receptors within 50m of the route to be used by construction vehicles and as a result there is potential for impacts the receptors within 50m of the routes to be used by construction vehicles include residential and commercial receptors and there is potential for impacts relating to dust generation or particulate emissions as a result of increase vehicle movement on these routes.

6.4.1.2 Gaseous Emissions

The operation of Project related vehicles and fuel consuming construction equipment will be the only sources of gaseous emissions during construction phase. List of construction machinery, which will be used during land preparation and construction phases of the project, are given in Table 9.

The quantity of gaseous emissions from this equipment will depend on the number of vehicles/equipment deployed on site, hours of operation and efficiency. The exhaust emissions due to construction machinery are negligible. In addition to this, details of the overall GHG emissions during construction phase are provided in Section 14.

Table 29: List of Vehicles and Construction Equipment During Construction Phase

Vehicles & Equipment Name	Quantity	Fuel
750t Crawling Crane	1	Diesel
150t Crawling Crane	1	Diesel
Hydraulic Lifting Device and Lifting Frame	1	Electrical
250t Crawling Crane	1	Diesel
50t Crawling Crane	1	Diesel

Vehicles & Equipment Name	Quantity	Fuel
50t Truck Crane	1	Diesel
Gantry Crane	2	Electrical
Truck	3	Diesel
Forklift	2	Diesel
Electric Welding Machine	301	Electrical
Diesel Generator	1	Diesel
Tower Crane	2	Electrical
Vehicle Crane	2	Diesel
Wheel Loader	1	Diesel
Backhoe Excavator	7	Diesel
Crawler Bulldozer	1	Diesel
Road Roller	2	Diesel
Dump Truck	10	Diesel
Platform Lorry	1	Diesel
Batch Plant	2	Electrical
Concrete Pump Truck	3	Electrical
Concrete Delivery Truck	6	Electrical
Piling Machine	4	Diesel

6.4.1.3 Emission of Volatile Organic Compounds (VOCs)

Small quantity of fuels, paints, solvents and other volatile substances are likely to be required during the construction phase, which will be stored in secure areas within the construction area. If not adequately contained, such substances have the potential to result in the dispersion of volatile emissions to the immediate air shed. Given that the storage of such volatile substances will be in small quantities, any potential impacts will be temporary and limited to the immediate surrounding area, likely to be within the Project site or in close proximity to the construction boundaries.

6.4.1.4 Odours

On site sanitation and toilet facilities (including septic tanks) will be provided for construction staff. There is the potential for release of odour to the immediate surrounding areas from inappropriate containment and coverage associated with wastewater holding/septic tanks. Any such impacts are likely to be temporary and limited to the Project site or in close proximity to the construction site boundaries.

6.4.1.5 Assessment of Impacts and Mitigation Measures

By using impact assessment significance criteria approach, key potential impacts and countermeasures on air quality for the construction phase are presented in Table 30. In addition to mitigation measures, following studies are recommended;



- Provide the information such as construction site utilization plan, excavation schedule, amount of material to be excavated and used for backfilling, machinery list and types, amount of fuel to be used, etc.
- Develop a Traffic Management Plan to establish speed limits.
- Conduct air quality monitoring in line with the plan.
- Prepare an Authority Approval Manual and obtain permits for batching plant(s).
- Conduct periodic site audits and report including findings.

Table 30: Impacts Significance of the Air Quality during – Construction Phase

Potential Impacts	Receptor	Sensitivity of Receptor	Magnitude of Impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
Dust emissions– Generated as a result of site preparatory works and movement of vehicles on unpaved surfaces	Residential Areas	Medium	Medium	Moderate	Any land grading, excavations and moving of uncovered waste/materials will not be carried out during strong wind movements Where sand and other dusty materials are transported to the site, trucks will not be overloaded and will be appropriately covered/sheeted to avoid loses. Vehicle speed on all site roads and along the access road into the site will be restricted to 20 km/h. Speed limits will be established in the Traffic Management Plan will be adhered to.	Minor
	Workers at the Site	High	Medium	Major	Wetting down of any unpaved site roads in order to reduce dust generation. Full PPE kit will be provided to the workers including dust masks. No burning of wastes will be allowed onsite.	Moderate
	Industrial Facilities	Low	High	Moderate	Dusty material stockpiles (i.e. any fine powders and sand) dust generating activities will be to be located away from the site boundaries and be contained to avoid dust dispersion during storage or use. Cement and other fine powders will be sealed after use or put in banded containers. Concrete batching plant(s) will be located away from sensitive receptors.	Minor
Gaseous emissions – From vehicle exhaust	Residential Areas & Workers at the Site	Medium	Medium	Moderate	Unnecessary usage of vehicles, plant and equipment will be minimized - No unnecessary idling. Exhaust fumes and particulates emitted from trucks and vehicles will be minimized by ensuring the use of good condition vehicles (e.g. compliant to vehicle emission requirements). Lorries and truck engines will be turned off while waiting on site to minimize gaseous emissions. Internal roads inside the project site will be compacted as it reduces vehicular power consumption. Construction roads in the site will be designated and made clear to the drivers with signage for directions and speed limits placed all along the roads.	Minor
Emissions of VOCs and other hazardous volatiles	Residential Areas & Workers at the Site	Medium	Medium	Moderate	Hazardous materials stored in sealed containers and used on site with potential gas emissions will be located in well-ventilated, but secure low-risk areas, away from major transport routes and away from the site boundary (where possible). Fires and material burning will not be allowed on the Project site. Chemical storage areas will be purpose built and well maintained. A data log of all chemicals with MSDSs will be provided at the storage facility within easy access.	Minor



Potential Impacts	Receptor	Sensitivity of Receptor	Magnitude of Impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
Odour from Onsite	Residential Areas & Workers at the Site	Medium	Medium	Moderate	<p>Adequate and sufficient sanitary facilities for site workers will be provided.</p> <p>Effective cleaning and maintenance of toilets to be undertaken to avoid odour dispersion and cleaning records/inspection sheets displayed in the toilets.</p> <p>All septic tanks will be sealed and fully functioning.</p> <p>Septic tanks will be operated and maintained according to manufacturer recommendations.</p> <p>Sanitary waste will be removed from site by licensed contractors and disposed in waste treatment facilities approved by the local government.</p>	Minor

6.4.2 Operational Phase

Activities associated with the operational phase of the Project will result in the emissions of gaseous pollutants from the operation of the CCGT power blocks. These emissions will occur under combined cycle operating modes using natural gas fuel only. Impacts from the CCGT are likely to be associated with emissions from the two main stacks associated with the HRSG.

The key pollutants arising from natural gas combustion and emitted via the stacks will be oxides of nitrogen (NO and NO₂) and carbon monoxide (CO). The use of natural gas is generally accepted as being preferred over fuel oils or other solid fuels and there will be no (or negligible) emissions content of SO₂ and no particulates [13].

6.4.2.1 Air Dispersion Modelling

By means of modeling studies, how the pollutants to be discharged from the stack of the planned plant into the atmosphere under the current meteorological conditions and the possible ground level concentration values of the pollutants are investigated.

AERMOD software is used within the scope of Air Quality Dispersion Modeling. This model is a typical Gaussian dispersion model and is used to calculate the distribution of various pollutants such as gas or dust in three dimensions. It is possible to model the pollutant distribution of area, point, linear or volumetric sources within the scope of the model. The model, which was developed to replace ISC in 2000, has been proposed by USEPA (US Environmental Protection Agency) since 9 November 2005.

AERMOD is used for the modeling of atmospheric dispersion for air pollutants originating from a fixed plant in areas up to 50 kilometers, in simple or complex terrain.

A detailed air quality dispersion modelling assessment has been undertaken to determine impacts associated with the proposed Project. Dispersion modelling has been carried out using the United States (US) Environmental Protection Agency (EPA) Breeze AERMOD (version 10.0.0.15 and US EPA version 21112) dispersion model, three years of meteorological data from Termez (2018, 2019 and 2020) and terrain data for the local area.

The key pollutants considered in this assessment are: oxides of nitrogen (NO₂ and NO) and carbon monoxide (CO) are the key pollutants emitted from combustion of natural gas that may potentially lead to exceedances of any relevant standards. Predicted concentrations are compared with the most stringent applicable standards and guidelines incorporated into Uzbekistan law and also the European Union (EU) standards, the International Finance Corporation (IFC) guidelines and the World Health Organisation (WHO) Guidelines.

In the scope of modelling studies, worst case approach was implemented. In this case, it is assumed that, the power plant will be operated at full load throughout the year. Technical details of the modelling inputs and amount of pollutants are given below (see Table 31).

Table 31: Modelling Study Inputs

Fuel Type	-	Natural gas	Natural gas
Unit	-	Unit-1	Unit-2
Number of Stack	Piece	1	1
Inner Diameter of Stack	m	8.24	8.24
Stack Height	m	65	65
Flue Gas Volumetric Flow	m ³ /h	5,363,604	5,363,604
Flue Gas Outlet Temperature	°C	120	120
Flue Gas Output Speed	m/s	27.94	27.94
Pollutant Concentrations	NO ₂ mg/Nm ³	52.60	52.60
	NO mg/Nm ³	8.55	8.55
	CO mg/Nm ³	218.07	218.07
Pollutant Mass Flows Per Stack	NO ₂ g/s	78.37	78.37
	NO g/s	12.74	12.74
	CO g/s	324.9	324.9
Total Pollutant Mass Flows to be Originated from the Plant	NO ₂ g/s	156.74	
	NO g/s	25.48	
	CO g/s	649.80	

Baseline Data

As discussed in Section 6.2.3 , ambient air quality monitoring was undertaken for the Project through active sampler for seven days at three observation points (see Table 27). The results of the baseline measurement study are,

- The carbon monoxide concentration in the atmospheric air was below the level of the established standard maximum permissible concentration at all observation points.
- The nitrogen oxide and nitrogen dioxide measurement results are generally below the MPC except for a one-time excess of MPC by 4.6 times at Monitoring Point 2 on July 13 in the morning.

Meteorological Data

The Termez meteorological station is used for the air dispersion modeling studies. The station is the closest meteorological station to the project site, which is nearly 12 km and altitude and terrain around of this station is similar with the Project site. Therefore, this station is selected as representative station for this Project. The modelling has been carried out by using three years (2018, 2019 and 2020) of hourly sequential meteorological data (temperature, pressure, cloudiness, and wind speed and direction) in order to take account of inter-annual variability and reduce the effect of any atypical conditions. Data from meteorological station at Termez has been used for the assessment. Wind rose for each of these years are presented in the figures below. For all years, dominant wind direction is blowing from the southwest. Apart from this, upper atmospheric data was also used during the modelling study.

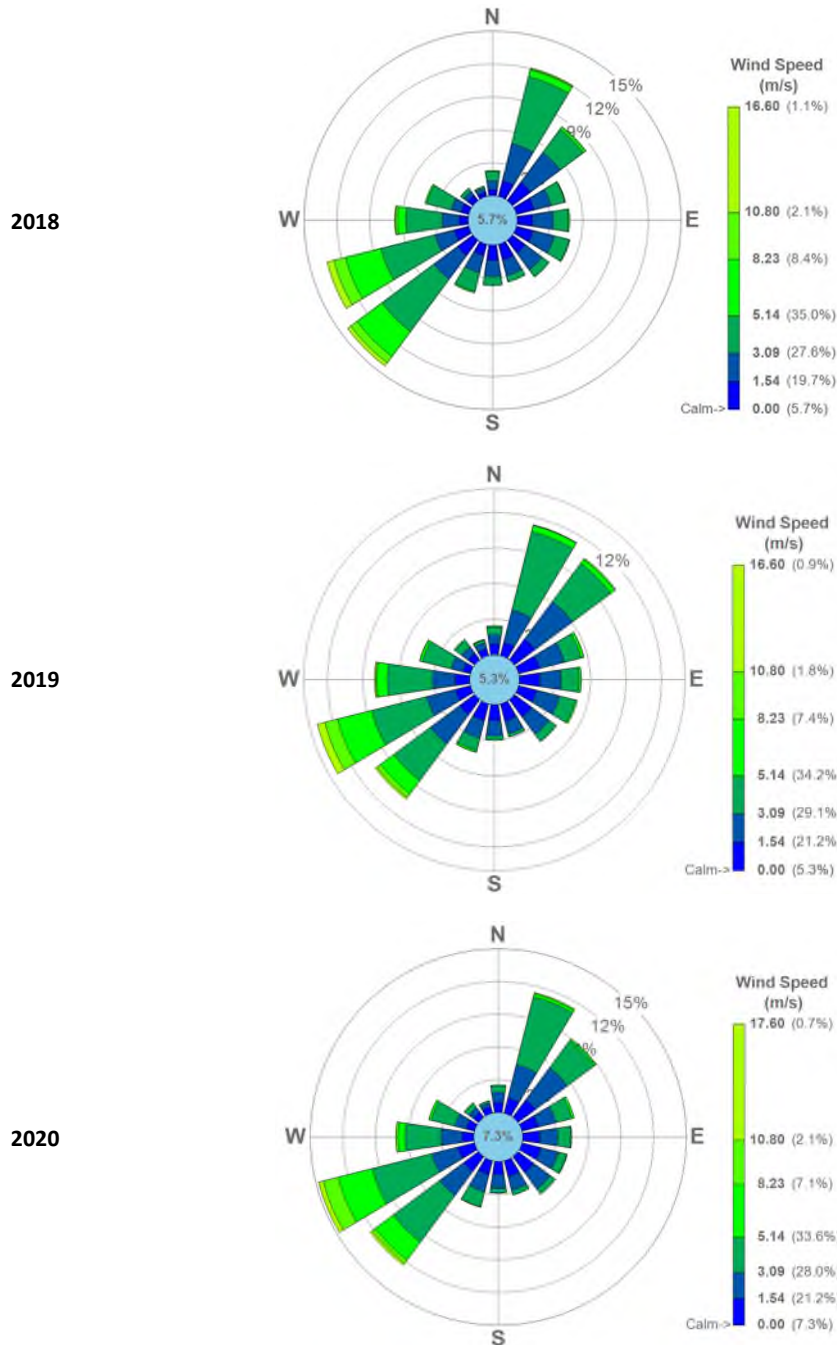


Figure 36: Wind Roses for the Years 2018, 2019 and 2020

Surface Roughness and Terrain

During surface roughness determination, the definitions and values that is determined in AERMET User Guide is used. The area is divided into sectors and each sector is defined by its characteristics. For

the sections fall into Uchkizil Reservoir is defined as "Water (fresh and sea)" and the rest is defined as "Desert Shrubland".

The digital elevation data is used for terrain data.

Receptors

For the AERMOD model, a working area must be defined and allocated to the receiving environment elements. For this purpose, ground-level pollutant concentrations have been predicted at both the receptor locations above and over a coarse grid of size 12km by 12km Cartesian grid of 250m resolution. In other words, the plant impact area is defined as a square with an edge of 12,000 meters, and receiving points are placed at 250 m intervals by the Cartesian grid method. For this study, the central area of the Cartesian grid area, defined as the receiving environment, was determined as the midpoint of the facility.

In addition to this, three discreet receptor points, which were used as air quality measurement point, were added to the modelling study.

As a result, total receptor point number is 2,404 and in air quality modelling study, all of receptor points are evaluated. Satellite view of cartesian grid and discreet receptors with Project area and Area of Influence (R=5km) given in Figure 37.

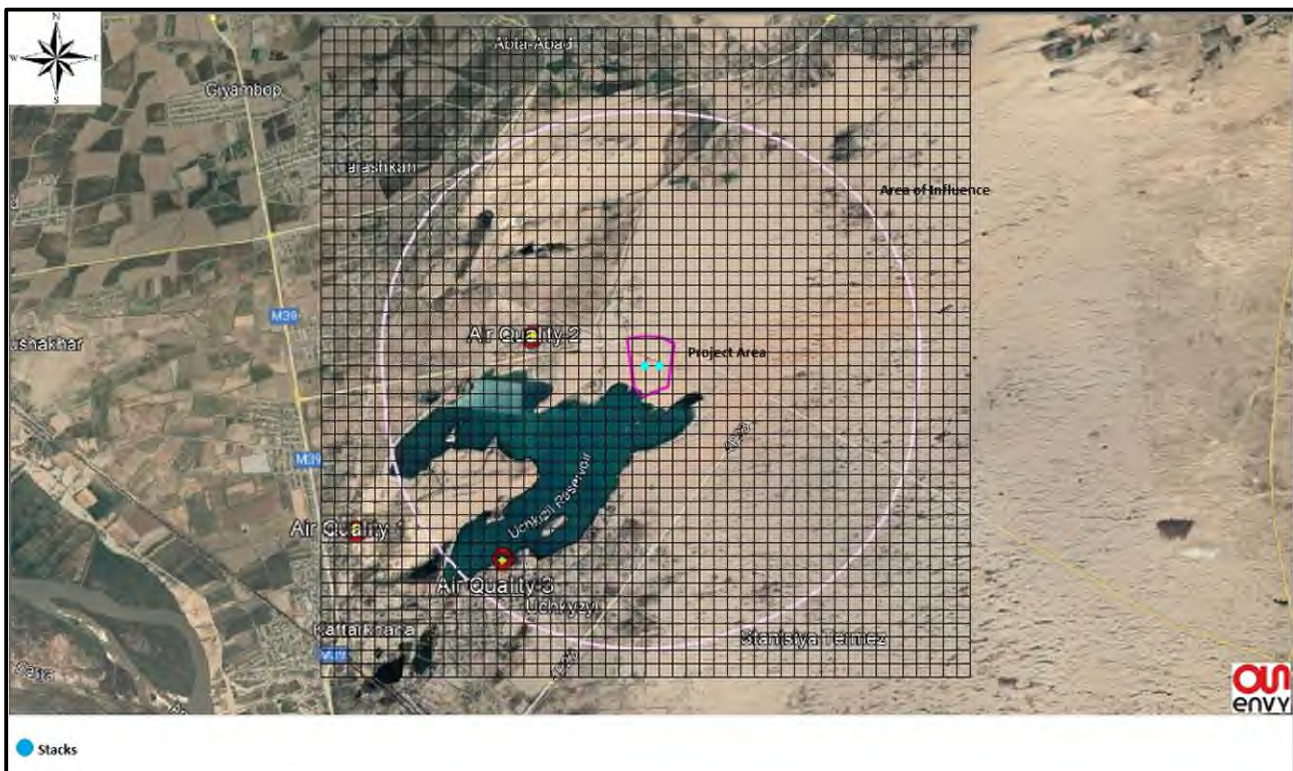


Figure 37: Air Quality Receptor Points

6.4.2.2 Modelling Results

In the scope of modelling studies, worst case approach was implemented. In this case, it is assumed that, the power plant will be operated at full load throughout the year. In addition to this, to determine the burden of air quality in the region, to compare this burden with the limit values given in the regulations and to create a cumulative impact assessment to provide solutions that can provide these limit values. Within the scope of the study, the pollutant ground level concentration obtained from the existing air quality measurements was taken as the present pollution load of the region and this result was collected with the results obtained from the modeling study and cumulative impact assessment was made. For the Project, background measurements were implemented at the site for three days. In this respect, the highest measurement result is evaluated as one-time maximum value and average of all time measurement result is evaluated as daily value.

The results of the modeling study and total pollution values on NO, NO₂, and CO parameters that will occur during the operation phase are given below, separately.

NO₂ Modelling Results

The highest ground level concentrations and coordinates determined by the modelling study for NO₂ pollutant during operation phase, background measurement results, the total pollution value which equals to the total of modelling result and background measurement value and the limits specified in the national and international legislations are given in Table 32 and ground level concentration distributions are presented between Figure 38 and Figure 41.

Table 32: Highest Ground Level Concentrations of NO₂ via Modelling and Limit Values

Parameter	Period	Modelling Results of the Project			Background	Total	National	IFC/WB EHS	EU Environmental
		Highest Ground Level	Coordinates where Highest Ground		Measurement	Pollution	Ambient Air	Guideline	Standard
		Concentration (mg/m ³)	X	Y	Result (mg/m ³)	Value (mg/m ³)	Quality Standards MPC (mg/m ³)	Fundamental principles (mg/m ³ (2007))	(mg/m ³)
NO₂	One Time Max (20-30 min)*	0.051	343905.4	4137187	0.39	0.44	0.085	-	-
	Hourly	0.051	343905.4	4137187	-	0.051	-	0.2	0.2
	Daily	0.014	346405.4	4138437	-	0.014	0.06	-	-
	Monthly	0.006	345905.4	4138187	-	0.006	0.05	-	-
	Annual	0.002	346155.4	4138437	-	0.002	0.05	0.04	0.04

*Since the AerMod program gives hourly values as the smallest time period, hourly modeling results are given for the One Time Maximum evaluation.

According to modelling results, for all periods highest level concentration values are under both National Ambient Air Quality Standards, IFC/WB EHS Guideline Fundamental Principles and EU Environmental Standards.

According to the total pollution values evaluation, hourly, daily, monthly and annual total pollution values are under both National Ambient Air Quality Standards, IFC/WB EHS Guideline Fundamental Principles and EU Environmental Standards. For one-time maximum time basis, the highest modelling result is 0.051 mg/m³, background measurement result is 0.39 mg/m³ and the total pollution value is 0.44 mg/m³ and it is higher than the limit value of National Ambient Air Quality Standards, (MPC 0.085 mg/m³). The contribution of the Project to the air quality pollution is 11.6%. As stated in Section 6.2.3. "Existing Ambient Air Quality Data", the content of nitrogen dioxide in the atmospheric air of the surveyed territory did not reveal cases of exceeding the maximum permissible concentration (MPC) of this substance in the air, except for a one-time excess of its values at observation point No. 2 by 4.6 times on July 13 in the morning.

Ground Level Concentrations at Air Quality Measurement Points

During the determination of baseline conditions at and near the project site, air quality measurements were conducted at 3 air quality measurement points. Detailed information about the baseline air quality is given in Section 6.2.3. In order to determine the impact of the NO₂ emissions at these air quality measurement points, modelling studies also were conducted and modelling study results, background measurement values and total pollution values at that three air quality measurement points are summarized in Table 33.

According to modelling results, for all periods highest level concentration values at all measurement points are under both National Ambient Air Quality Standards, IFC/WB EHS Guideline Fundamental Principles and EU Environmental Standards.

According to the total pollution values evaluation, hourly, daily, monthly and annual total pollution values for all measurement points also are under both National Ambient Air Quality Standards, IFC/WB EHS Guideline Fundamental Principles and EU Environmental Standards.

For one-time maximum time basis, at AQ-1 and AQ-3 measurement points total pollution values are under both National Ambient Air Quality Standards, IFC/WB EHS Guideline Fundamental Principles and EU Environmental Standards. In addition to this, for one-time maximum time basis, at AQ-2 measurement point, the highest modelling result is 0.043 mg/m³, background measurement result is 0.39 mg/m³ and the total pollution value is 0.43 mg/m³ and it is higher than the limit value of National Ambient Air Quality Standards, MPC which is 0.085 mg/m³. The contribution of the Project is 10%. As stated in Section 6.2.3. "Existing Ambient Air Quality Data", the content of nitrogen dioxide in the atmospheric air of the surveyed territory did not reveal cases of exceeding the maximum permissible concentration (MPC) of this substance in the air, except for a one-time excess of its values at observation point No. 2 by 4.6 times on July 13 in the morning.

Table 33: Modelling Results, Background Measurements and Total Pollution Values at Measurements Points

Point	Period	Modelling Results of the Project			Background Measurement Result (mg/m ³)	Total Pollution Value (mg/m ³)	National Ambient Air Quality Standards MPC (mg/m ³)	IFC/WB EHS Guideline Fundamental principles (mg/m ³ (2007))	EU Environmental Standard (mg/m ³)
		Highest Ground Level Concentration (mg/m ³)	Coordinates						
			X	Y					
AQ-1	One Time Max (20-30 min)*	0.029			0	0.029	0.085	-	-
	Hourly	0.029			-	0.029	-	0.2	0.2
	Daily	0.003	339777.7	4135189	0	0.003	0.06	-	-
	Monthly	0.0009			-	0.0009	0.05	-	-
	Annual	0.0004			-	0.0004	0.05	0.04	0.04
AQ-2	One Time Max (20-30 min)*	0.043			0.39	0.43	0.085	-	-
	Hourly	0.043			-	0.043	-	0.2	0.2
	Daily	0.004	343059	4138735	-	0.024	0.06	-	-
	Monthly	0.0011			-	0.0011	0.05	-	-
	Annual	0.0006			-	0.0006	0.05	0.04	0.04
AQ-3	One Time Max (20-30 min)*	0.042			0	0.042	0.085	-	-
	Hourly	0.042			-	0.042	-	0.2	0.2
	Daily	0.005	342508.7	4134598	0	0.005	0.06	-	-
	Monthly	0.0012			-	0.0012	0.05	-	-
	Annual	0.0006			-	0.0006	0.05	0.04	0.04

*Since the AerMod program gives hourly values as the smallest time period, hourly modeling results are given for the One Time Maximum evaluation.

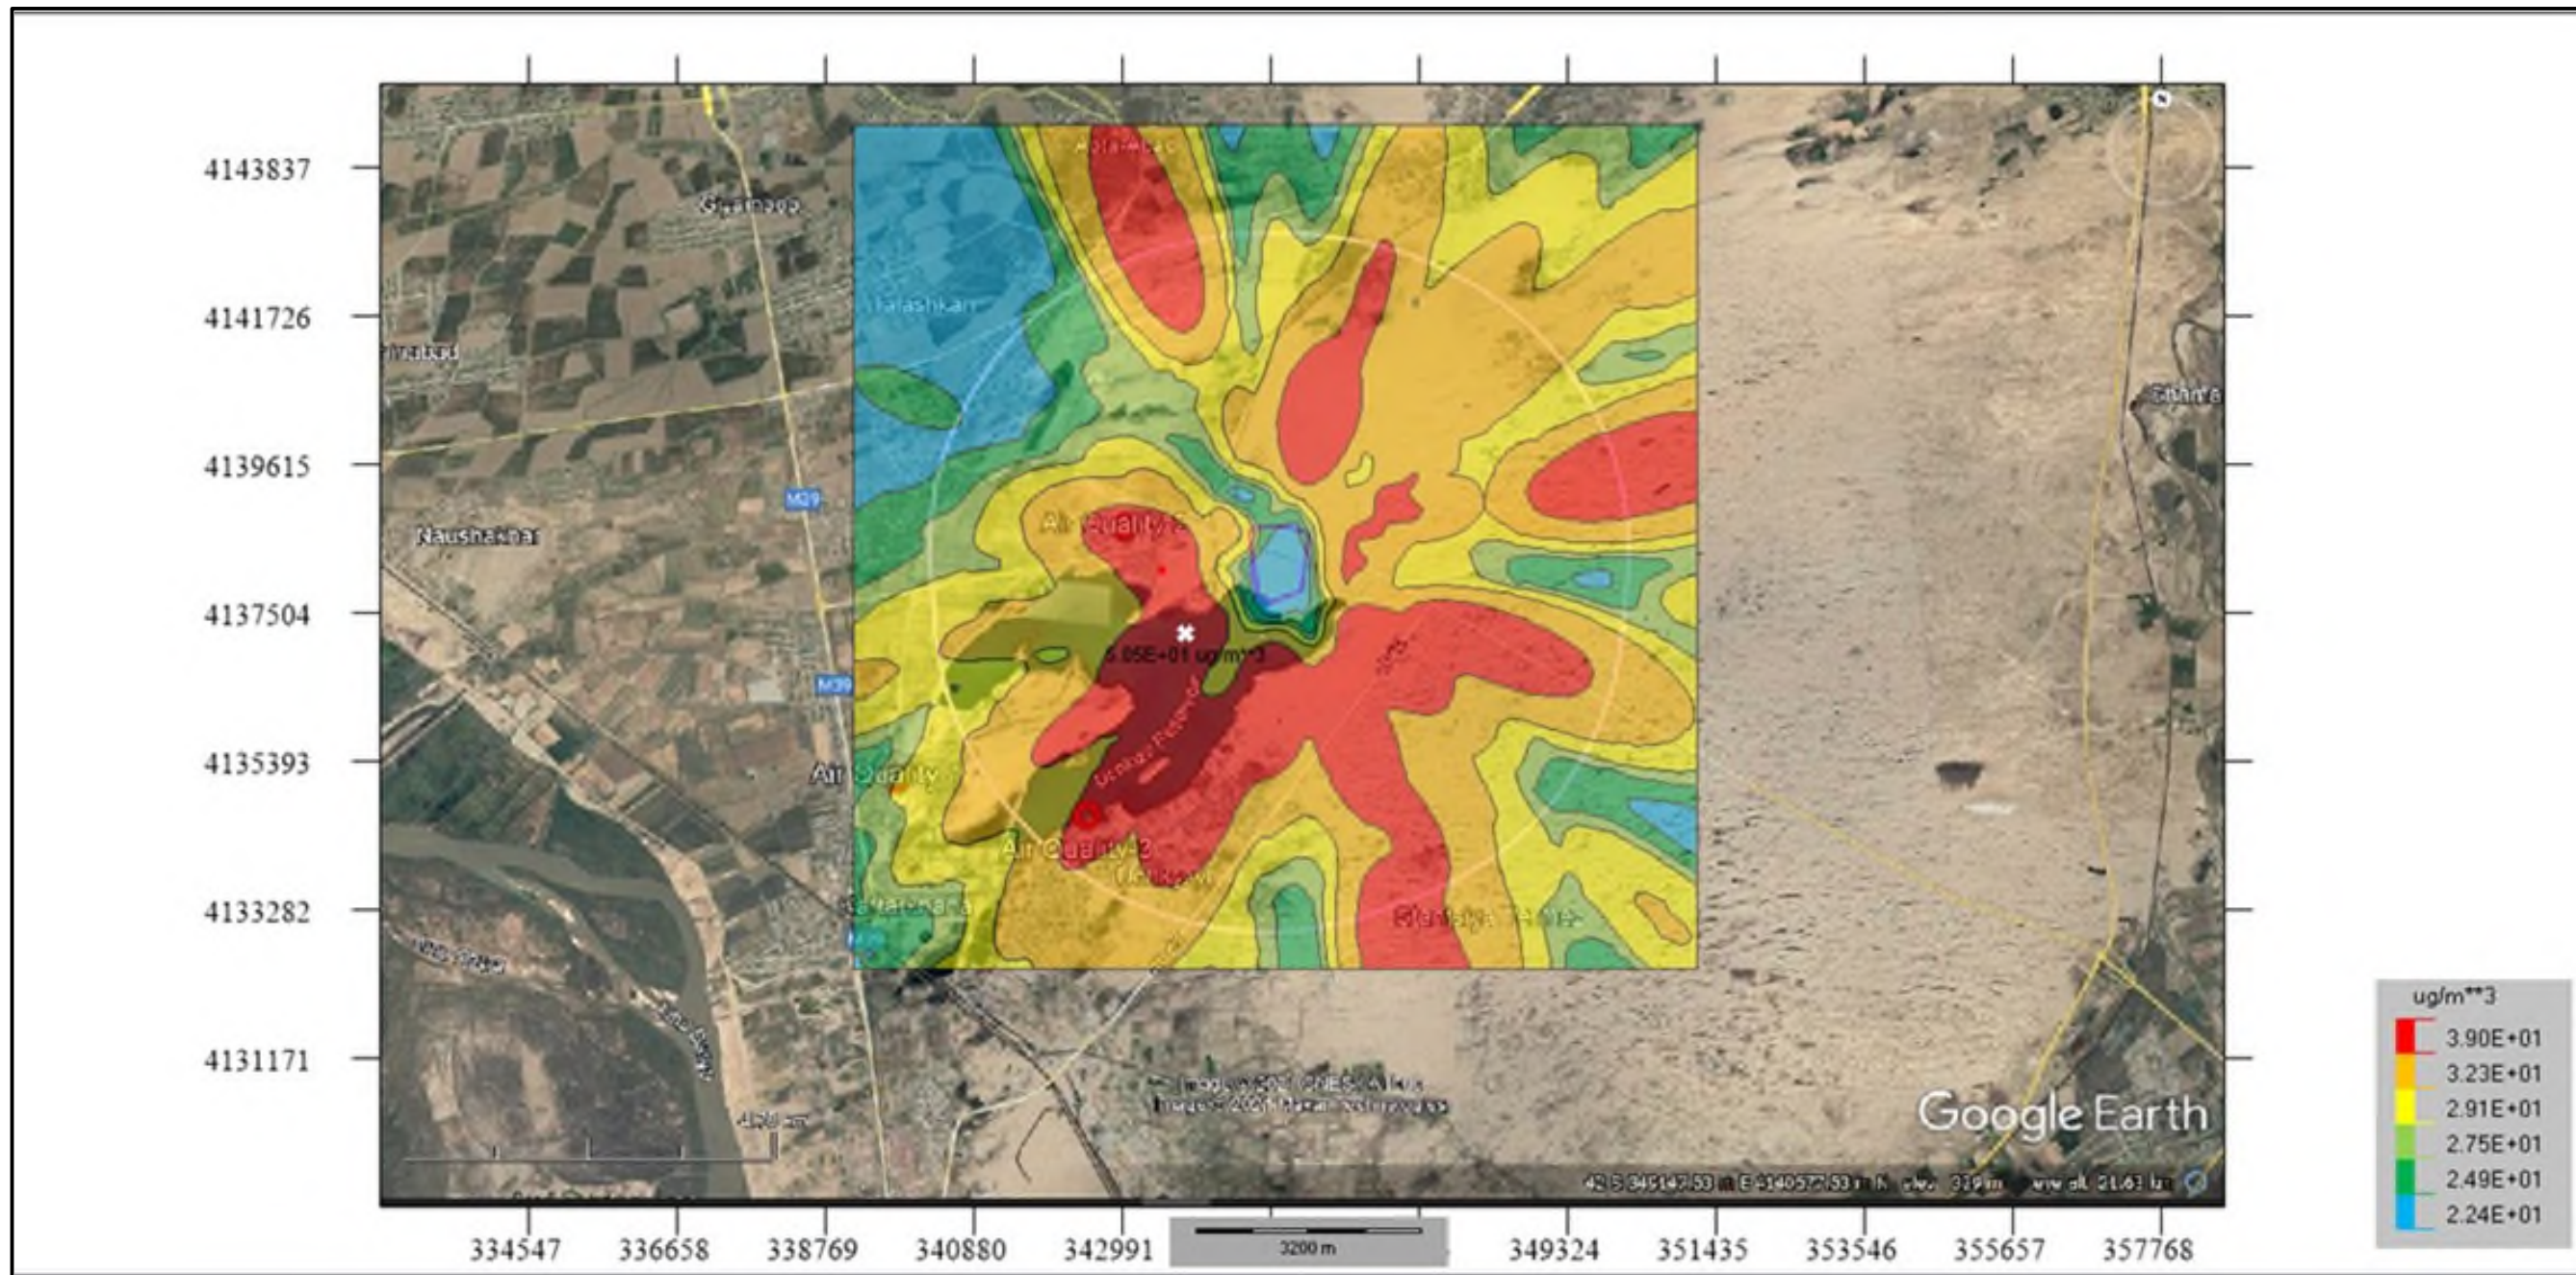


Figure 38: Maximum Hourly NO2 Distribution

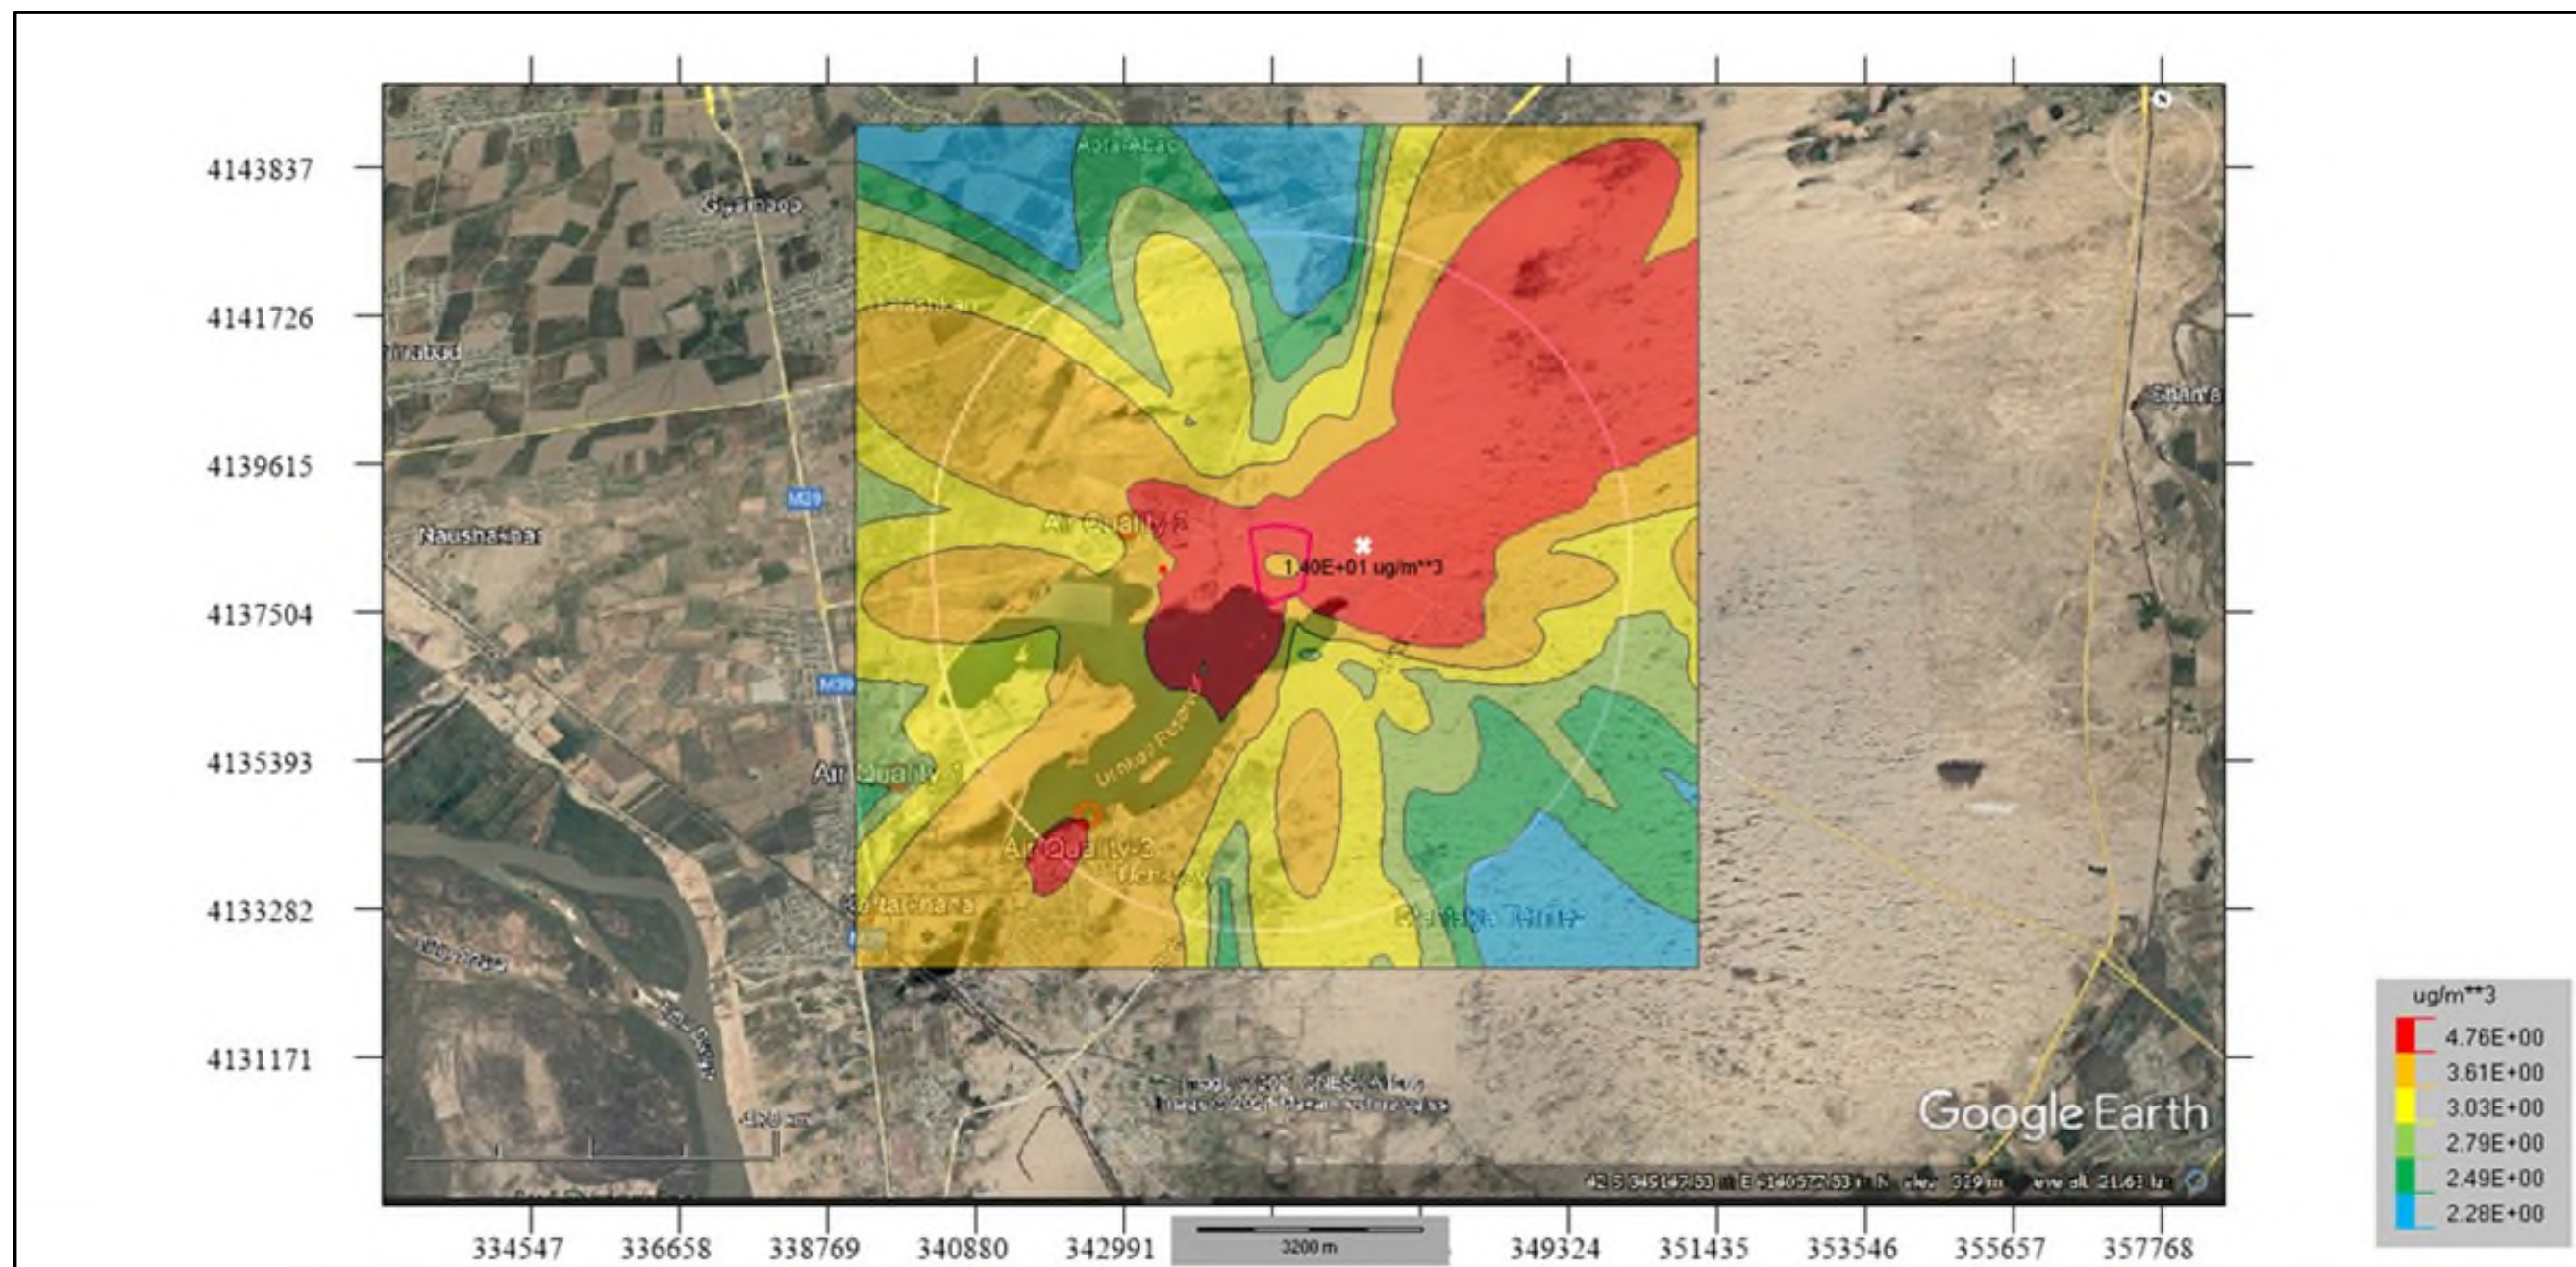


Figure 39: Maximum Daily NO₂ Distribution

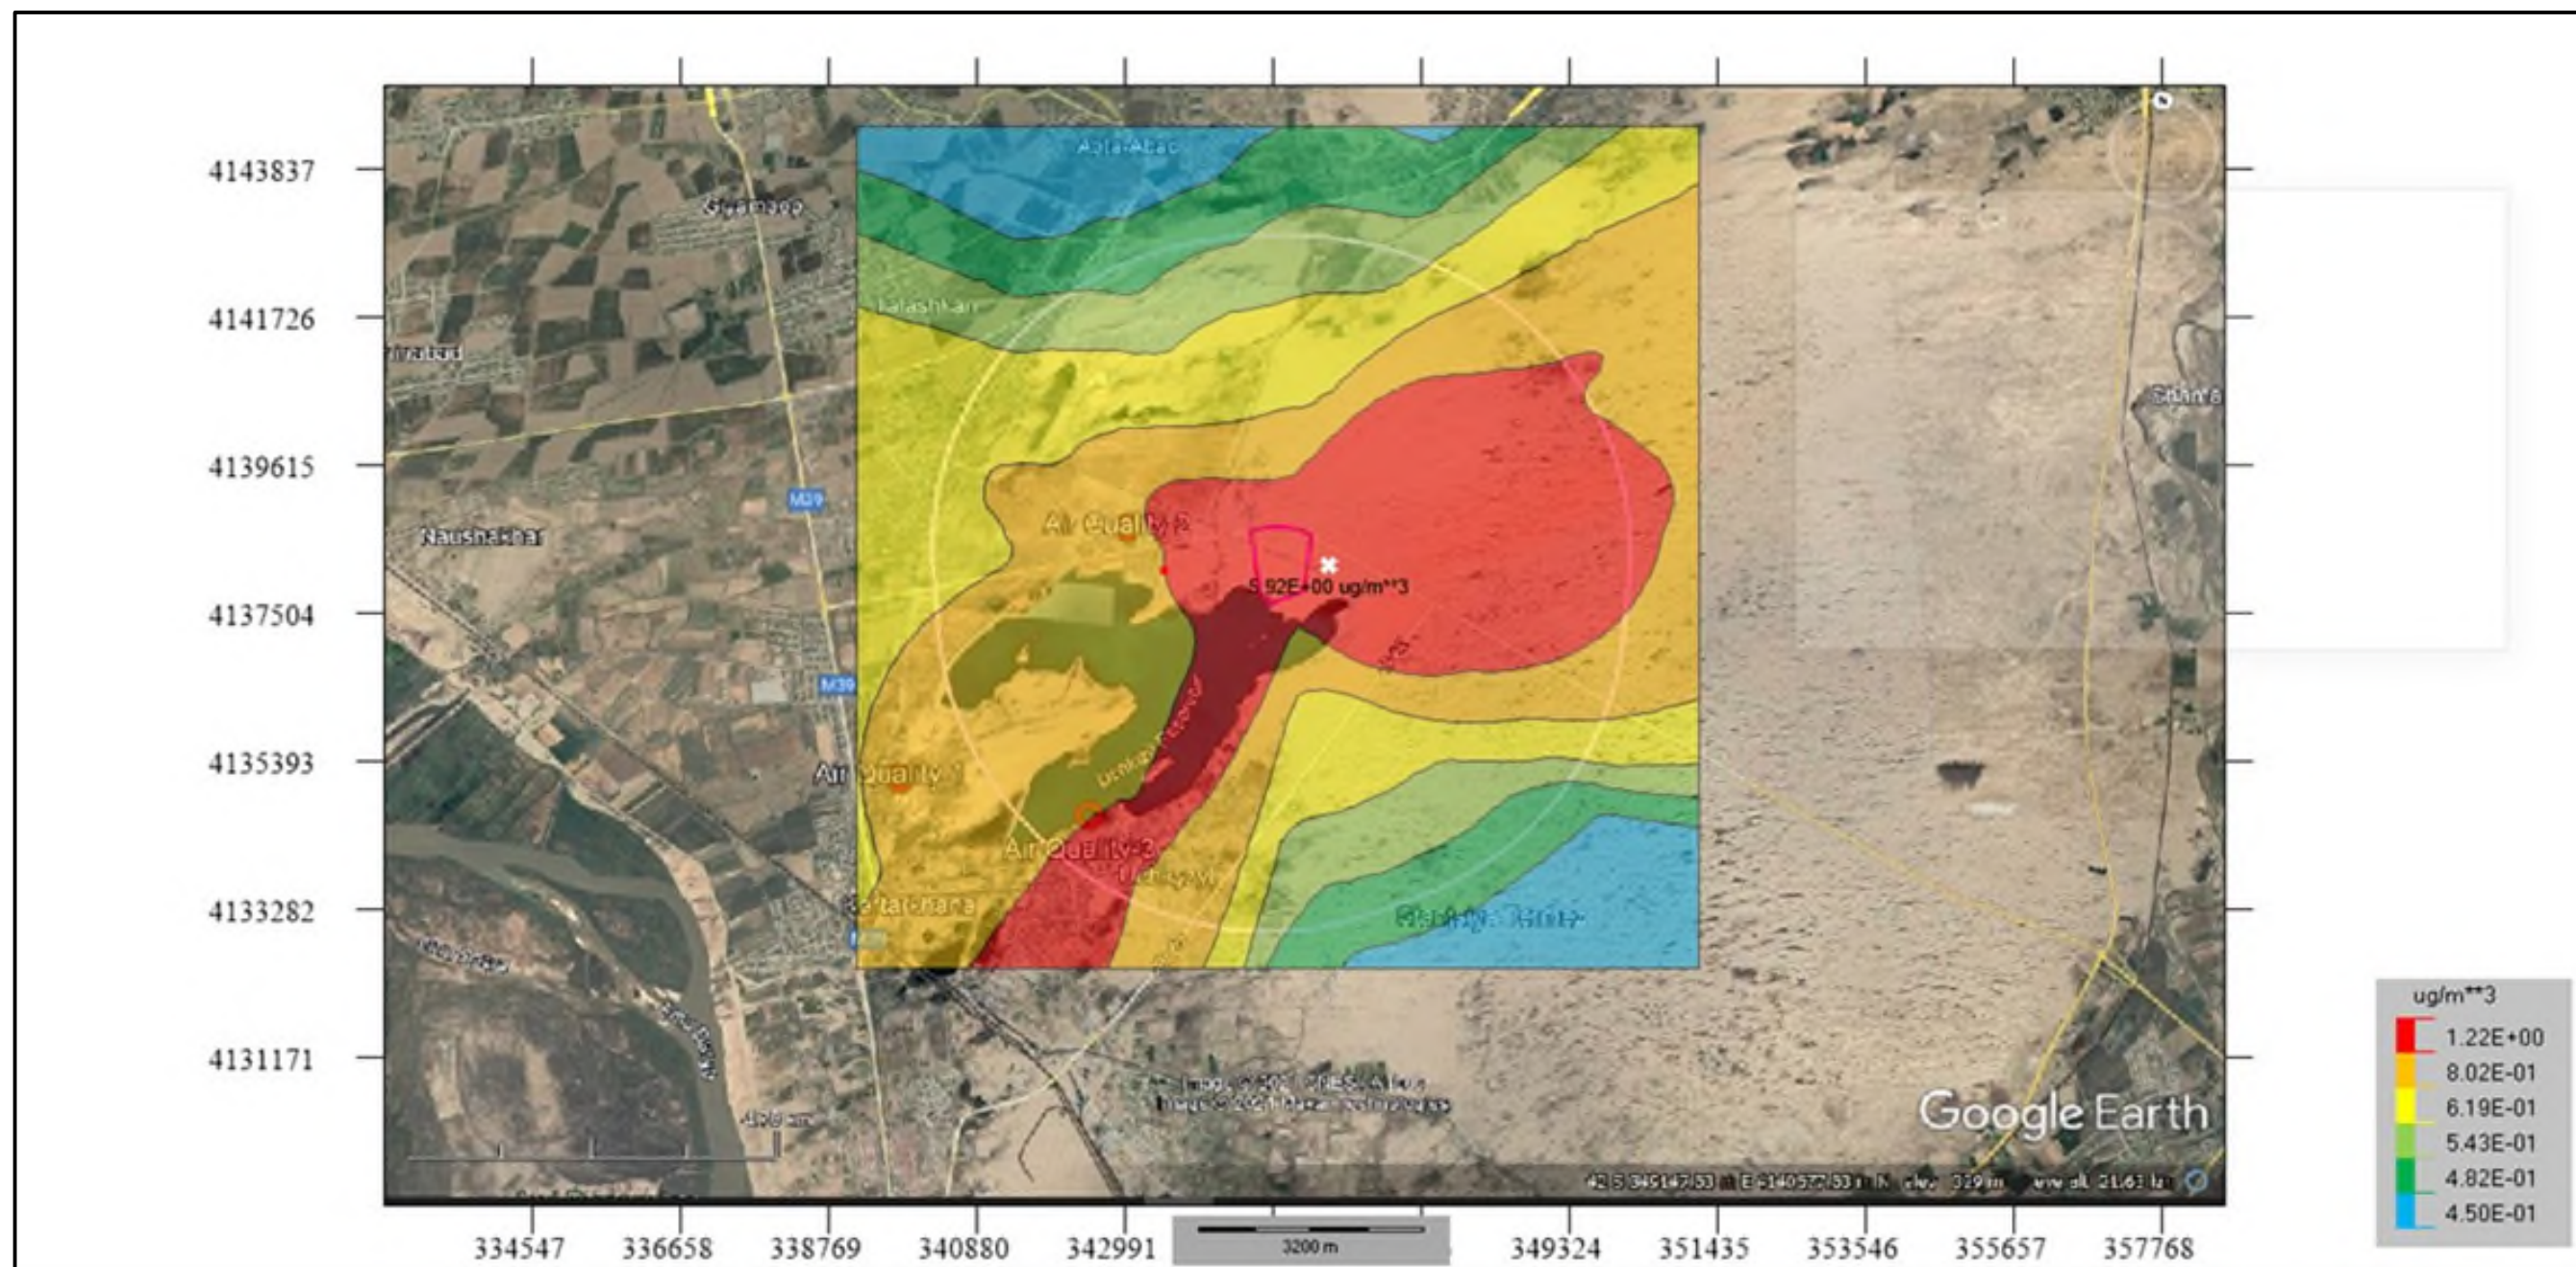


Figure 40: Maximum Monthly NO₂ Distribution

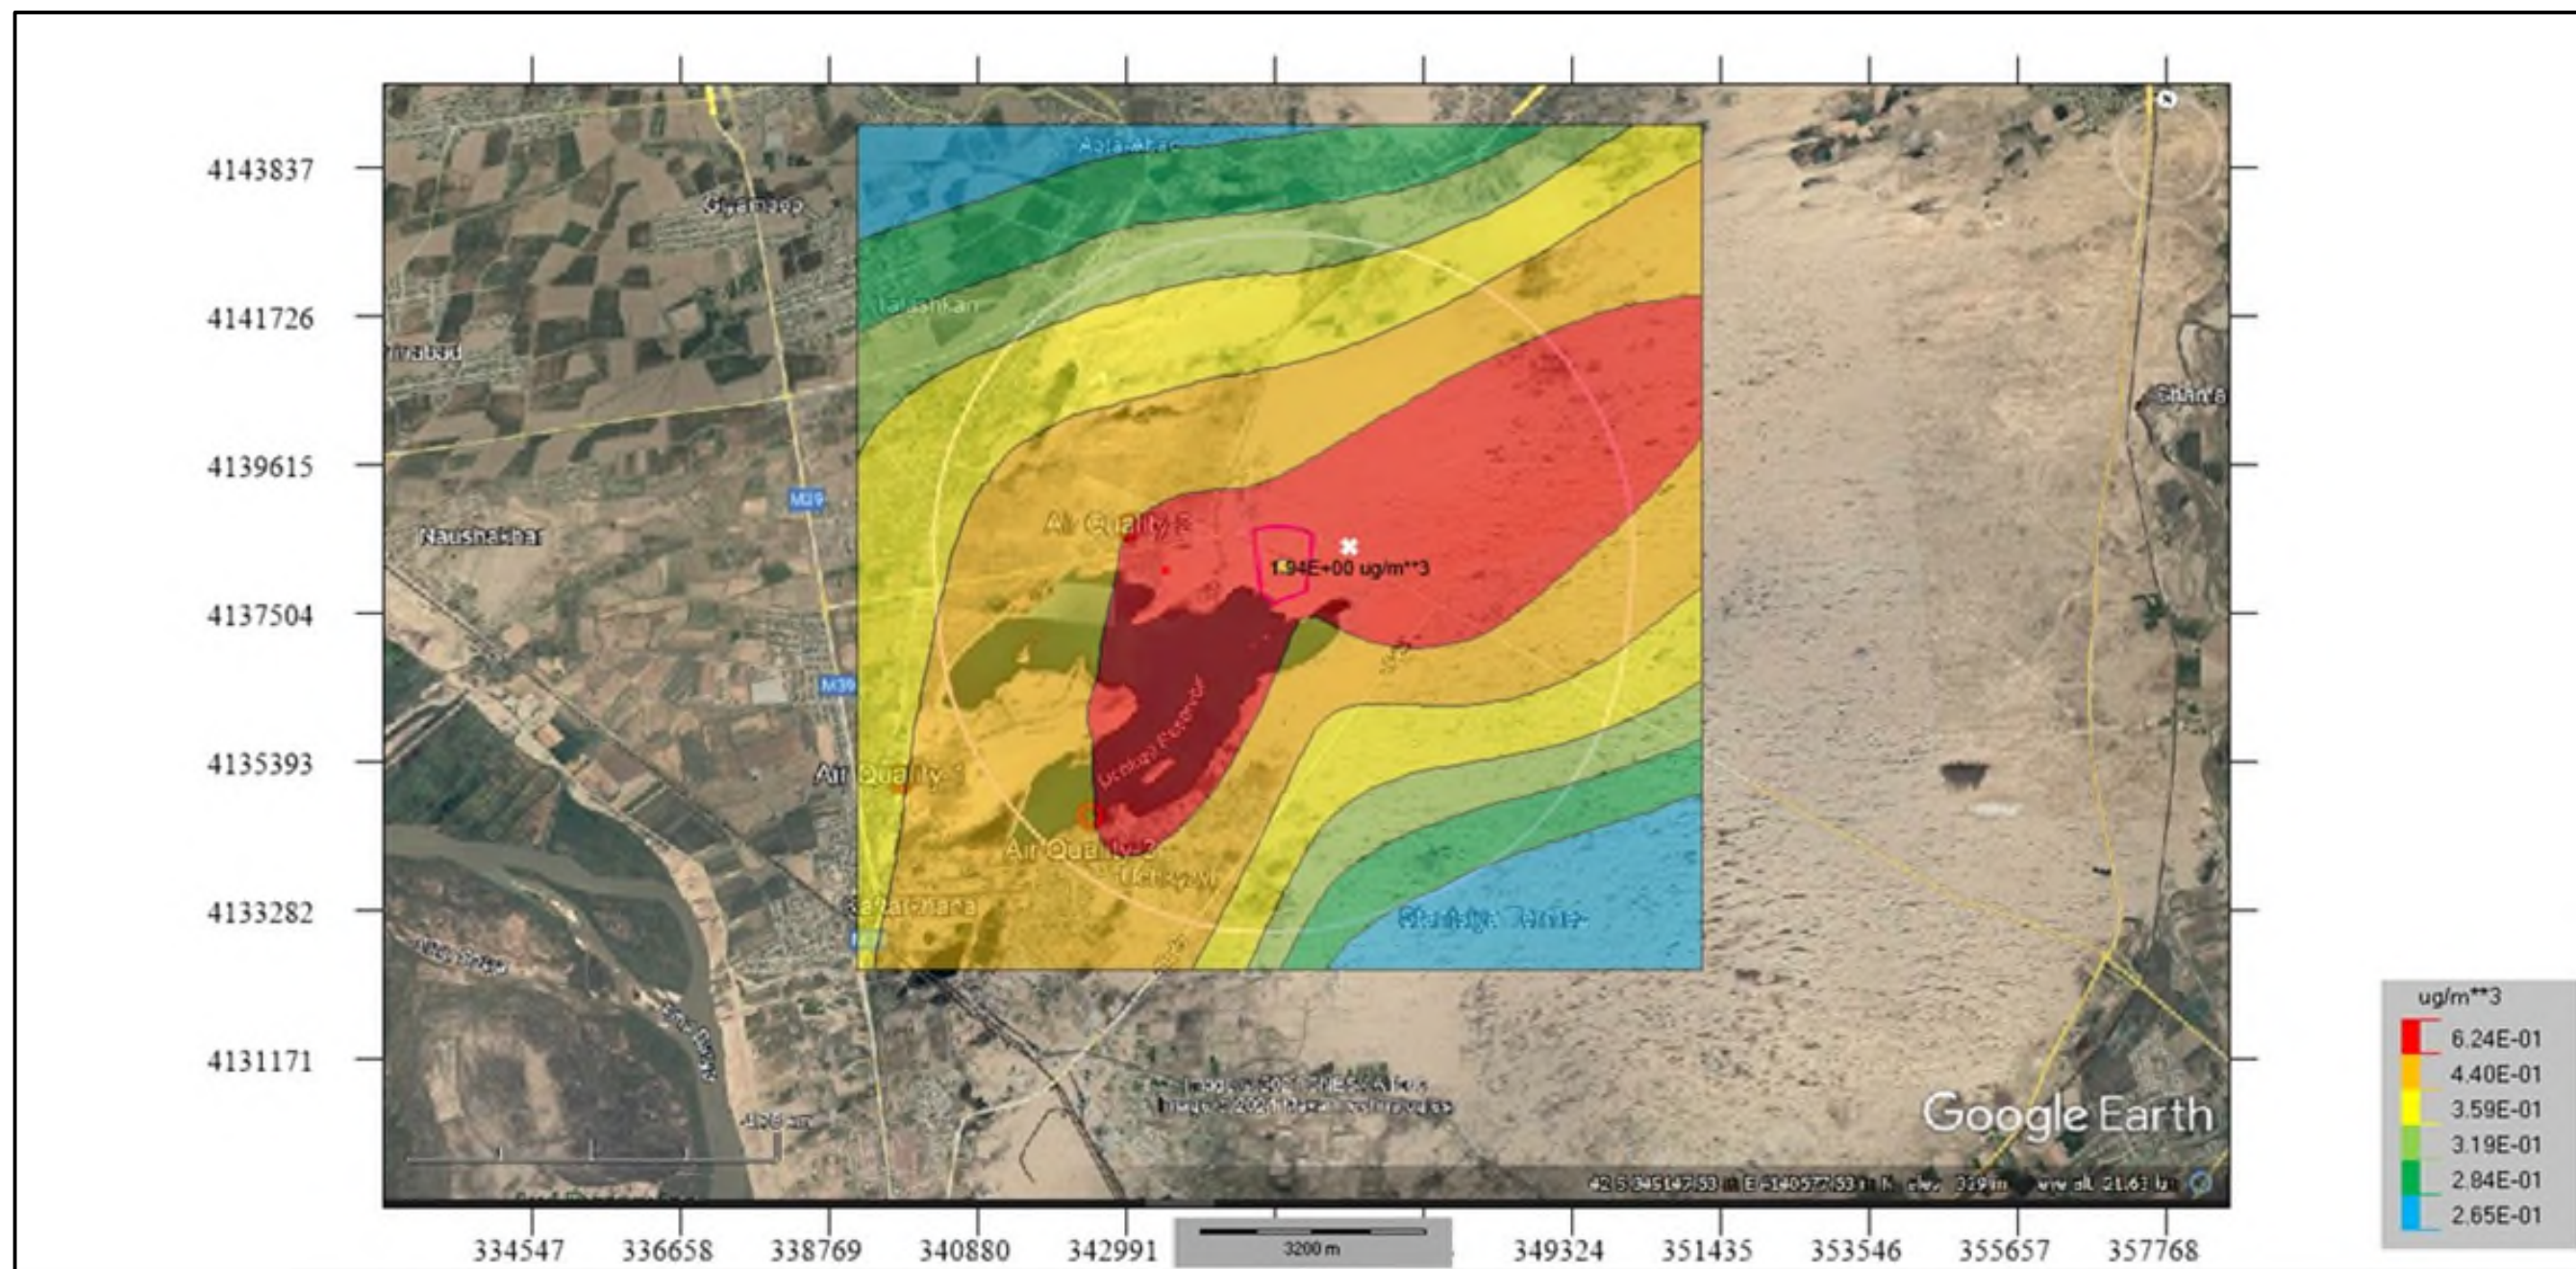


Figure 41: Maximum Annual NO2 Distribution



Draft Environmental and Social Impact Assessment Report /25/07/2022

ASE-UZA-571-REP-ESA-0001-03

EN/INT/Rev : 4

NO Modelling Results

The highest ground level concentrations and coordinates determined by the modelling study for NO pollutant during operation phase, background measurement results, the total pollution value which equals to the total of modelling result and background measurement value and the limits specified in the national and international legislations are given in Table 34 and ground level concentration distributions are presented between Figure 42 and Figure 45.

Table 34: Highest Ground Level Concentrations of NO via Modelling and Limit Values

Parameter	Period	Modelling Results of the Project			Background	Total	National Ambient Air Quality Standards MPC (mg/m ³)	IFC/WB EHS Guideline Fundamental principles (mg/m ³ (2007))	EU Environmental Standard (mg/m ³)
		Highest Ground Level Concentration	Coordinates where Highest Ground Level Concentrations Observed		Measurement Result	Pollution Value			
		(mg/m ³)	X	Y	(mg/m ³)	(mg/m ³)			
NO	One Time Max (20-30 min)*	0.008	343905.4	4137187	0.20	0.208	0.6	-	-
	Daily	0.0022	346405.4	4138437	0.009	0.011	0.25	-	-
	Monthly	0.0009	345905.4	4138187	-	0.0009	0.12	-	-
	Annual	0.0003	346155.4	4138437	-	0.0003	0.12	-	-

*Since the AerMod program gives hourly values as the smallest time period, hourly modeling results are given for the One Time Maximum evaluation.

According to modelling results, for all periods highest level concentration values are under both National Ambient Air Quality Standards, IFC/WB EHS Guideline Fundamental Principles and EU Environmental Standards.

According to the total pollution values evaluation, one-time maximum value, daily, monthly and annual total pollution values are under both National Ambient Air Quality Standards, IFC/WB EHS Guideline Fundamental Principles and EU Environmental Standards.

Ground Level Concentrations at Air Quality Measurement Points

During the determination of baseline conditions at and near the project site, air quality measurements were conducted at 3 air quality measurement points. Detailed information about the baseline air quality is given in Section 6.2.3. In order to determine the impact of the NO emissions at these air quality measurement points, modelling studies also were conducted and modelling study results, background measurement values and total pollution values at that three air quality measurement points are summarized in Table 35.

According to modelling results, for all periods highest level concentration values at all measurement points are under both National Ambient Air Quality Standards, IFC/WB EHS Guideline Fundamental Principles and EU Environmental Standards.

According to the total pollution values evaluation, one-time maximum value, daily, monthly and annual total pollution values for all measurement points also are under both National Ambient Air Quality Standards, IFC/WB EHS Guideline Fundamental Principles and EU Environmental Standards.

Table 35: Modelling Results, Background Measurements and Total Pollution Values at Measurements Points

Modelling Results of the Project									
Point	Period	Highest Ground Level Concentration (mg/m ³)	Coordinates		Background Measurement Result (mg/m ³)	Total Pollution Value (mg/m ³)	National Ambient Air Quality Standards MPC (mg/m ³)	IFC/WB EHS Guideline Fundamental principles (mg/m ³ (2007))	EU Environmental Standard (mg/m ³)
			X	Y					
AQ-1	One Time Max (20-30 min)*	0.005	339777.7	4135189	0	0.005	0.6	-	-
	Daily	0.0005			0	0.0005	0.25	-	-
	Monthly	0.0009			-	0.0009	0.12	-	-
	Annual	0.00007			-	0.00007	0.12	-	-
AQ-2	One Time Max (20-30 min)*	0.007	343059	4138735	0.204	0.211	0.6	-	-
	Daily	0.0006			-	0.024	0.25	-	-
	Monthly	0.0002			-	0.0011	0.12	-	-
	Annual	0.0001			-	0.0006	0.12	-	-
AQ-3	One Time Max (20-30 min)*	0.007	342508.7	4134598	0	0.007	0.6	-	-
	Daily	0.0008			0	0.0008	0.25	-	-
	Monthly	0.0002			-	0.0002	0.12	-	-
	Annual	0.0001			-	0.0001	0.12	-	-

*Since the AerMod program gives hourly values as the smallest time period, hourly modeling results are given for the One Time Maximum evaluation.

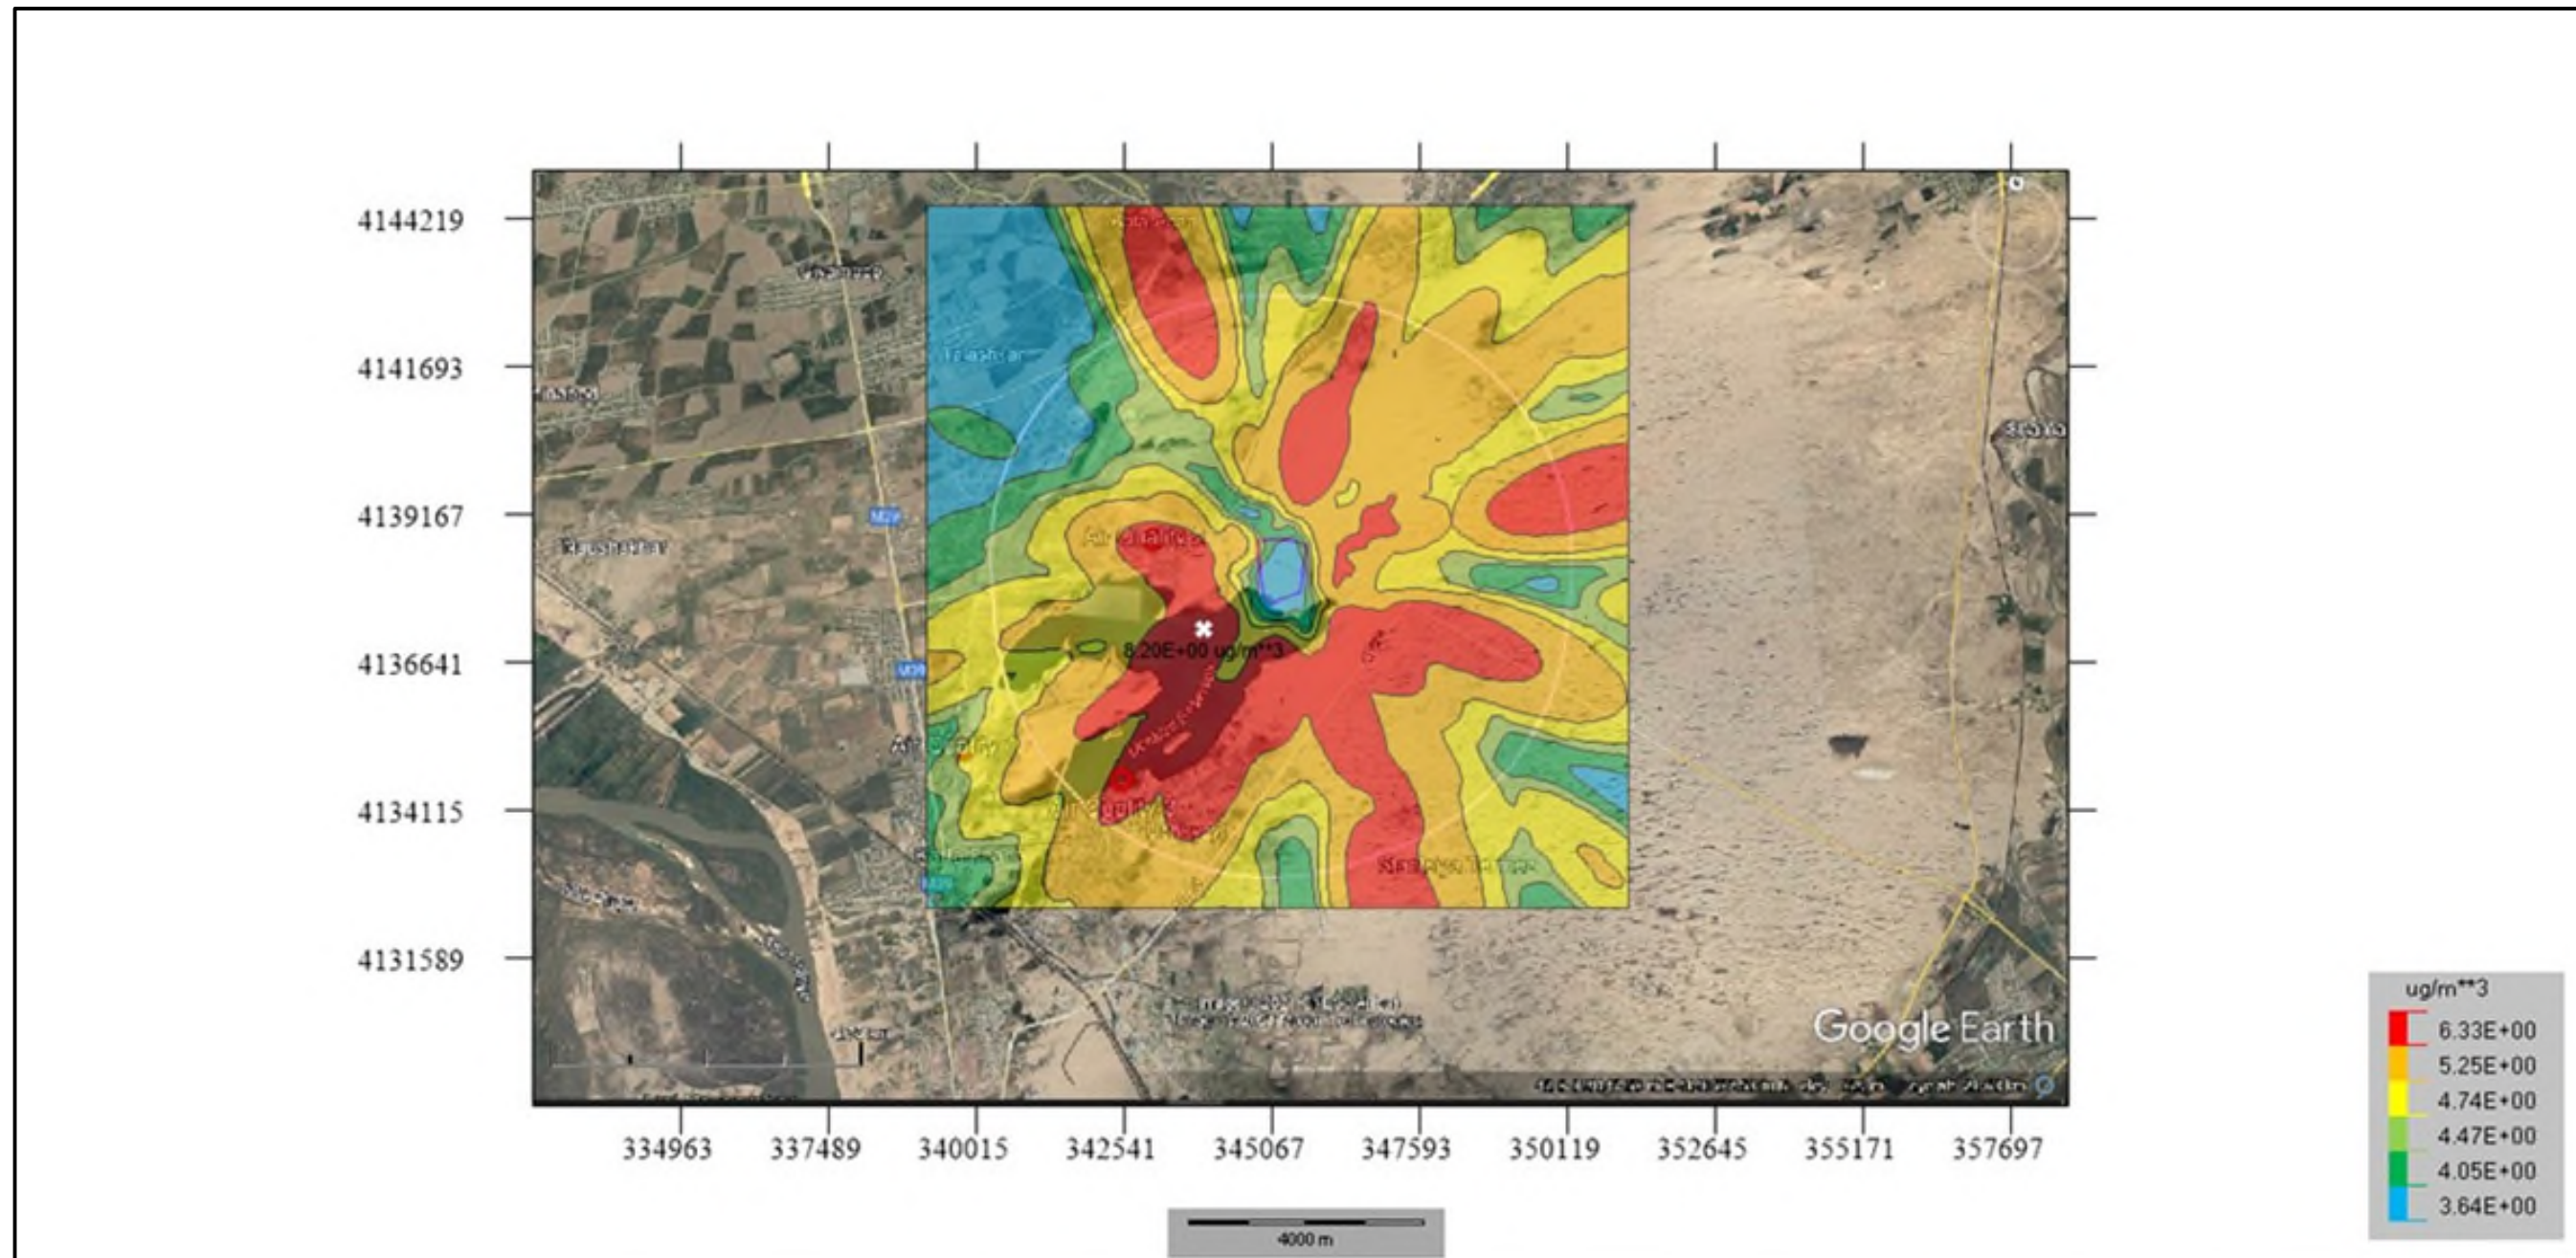


Figure 42: Maximum Hourly NO Distribution

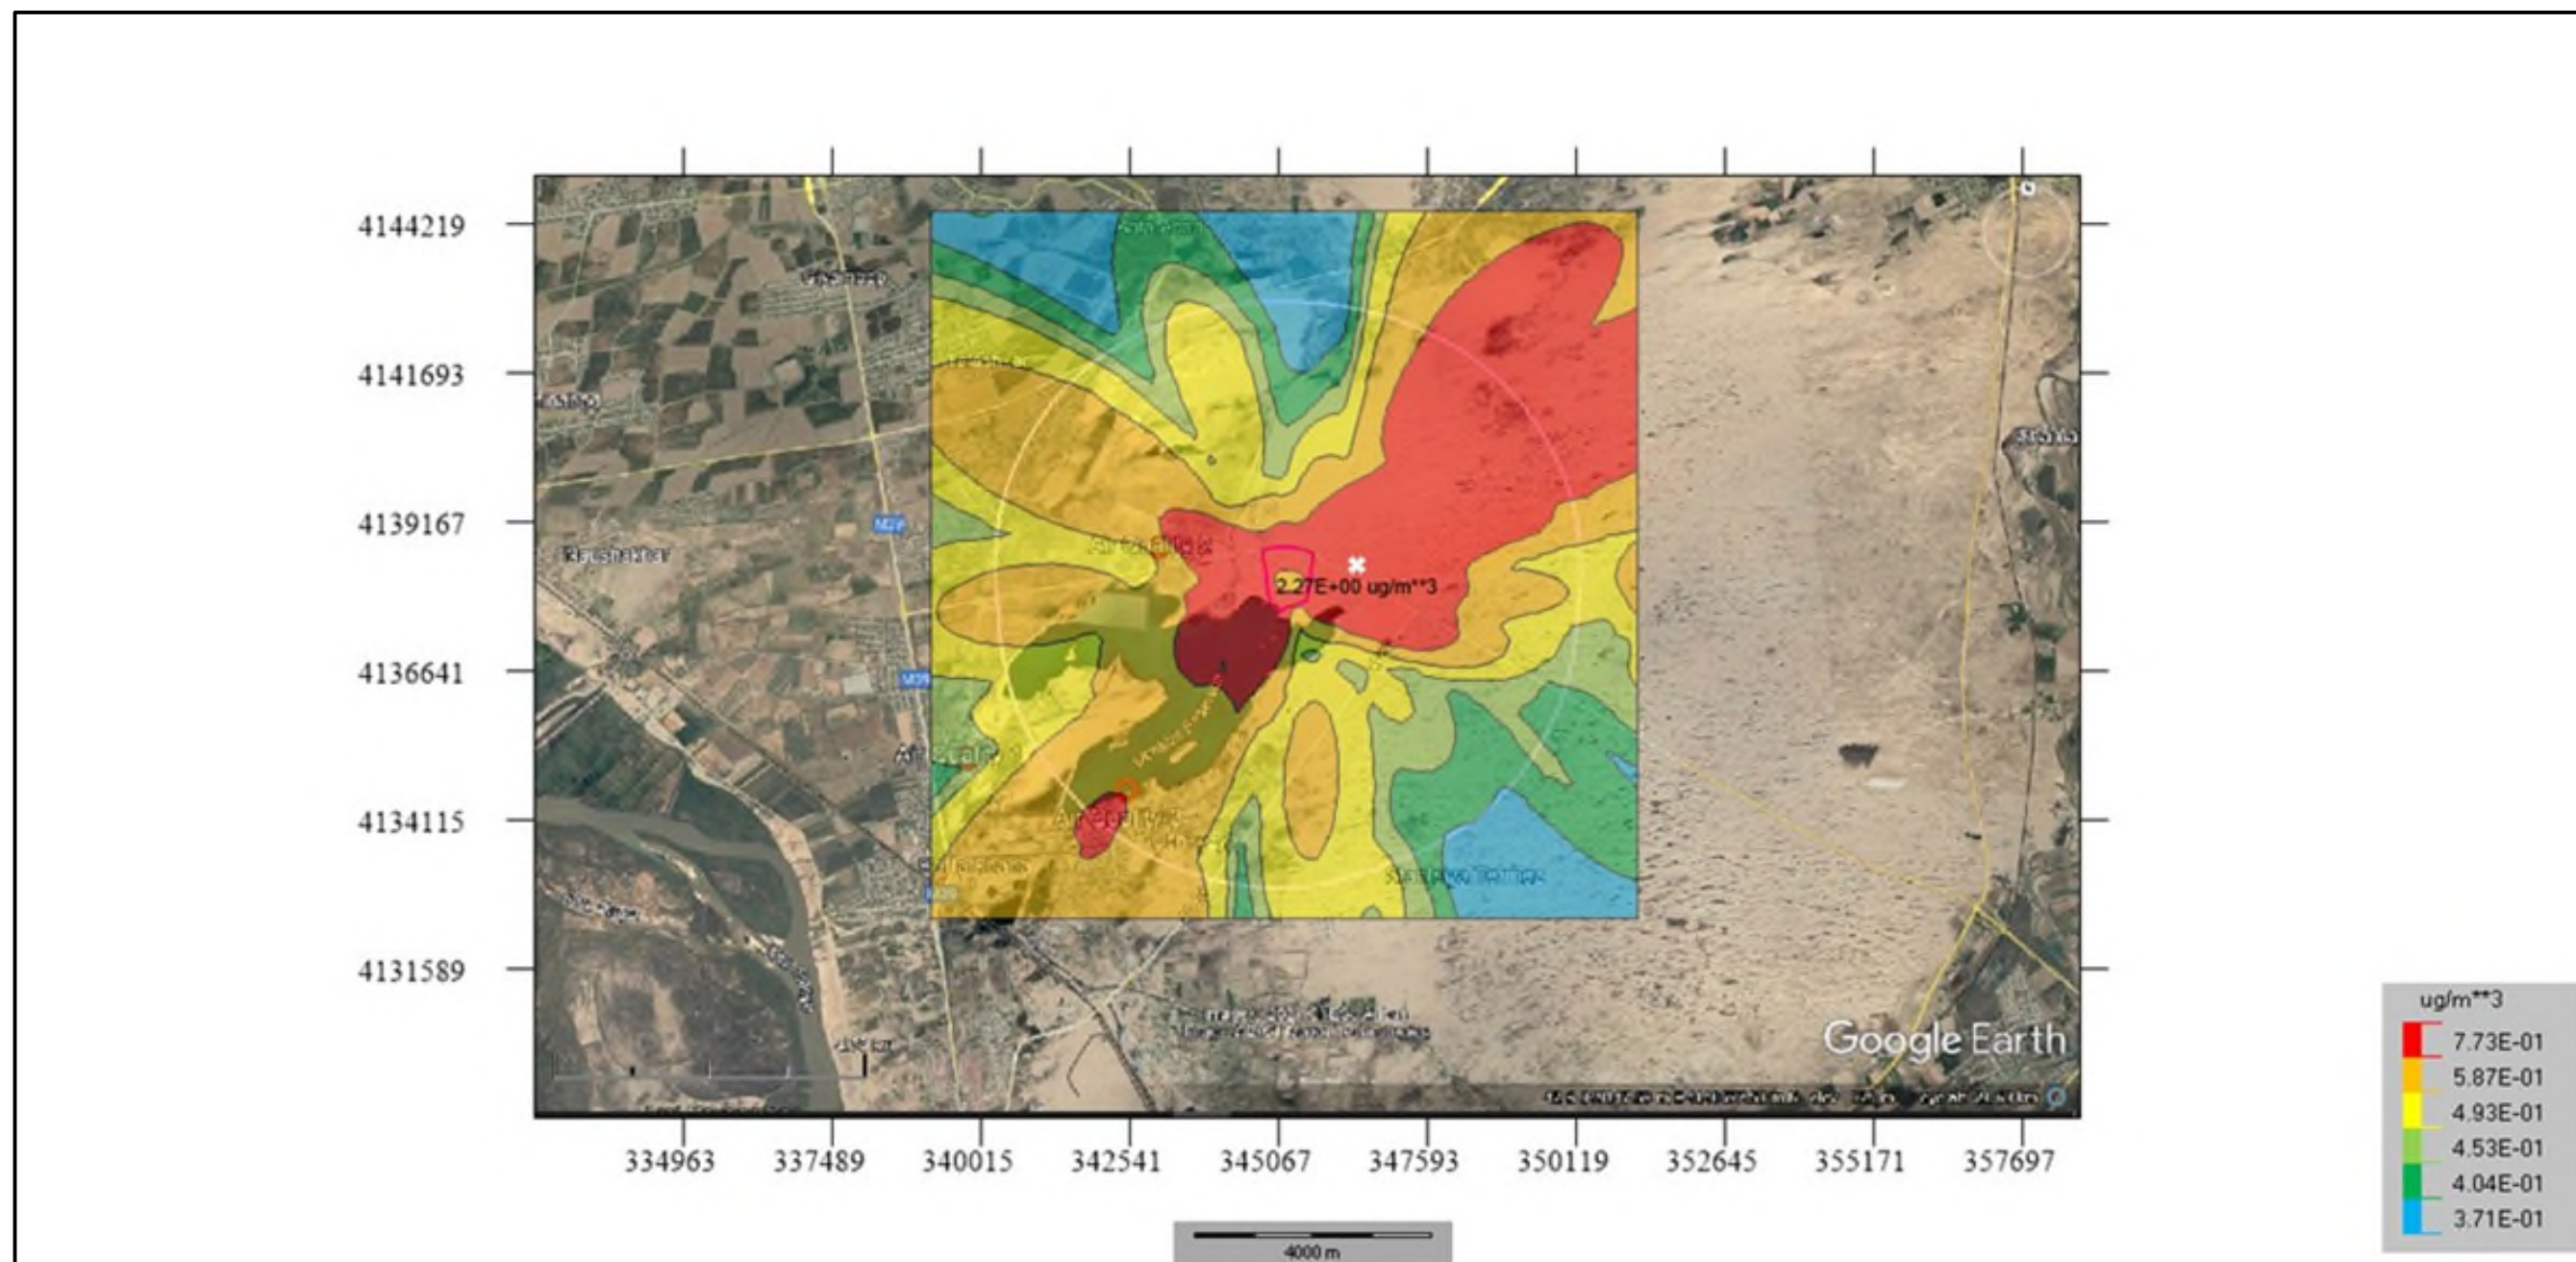


Figure 43: Maximum Daily NO Distribution

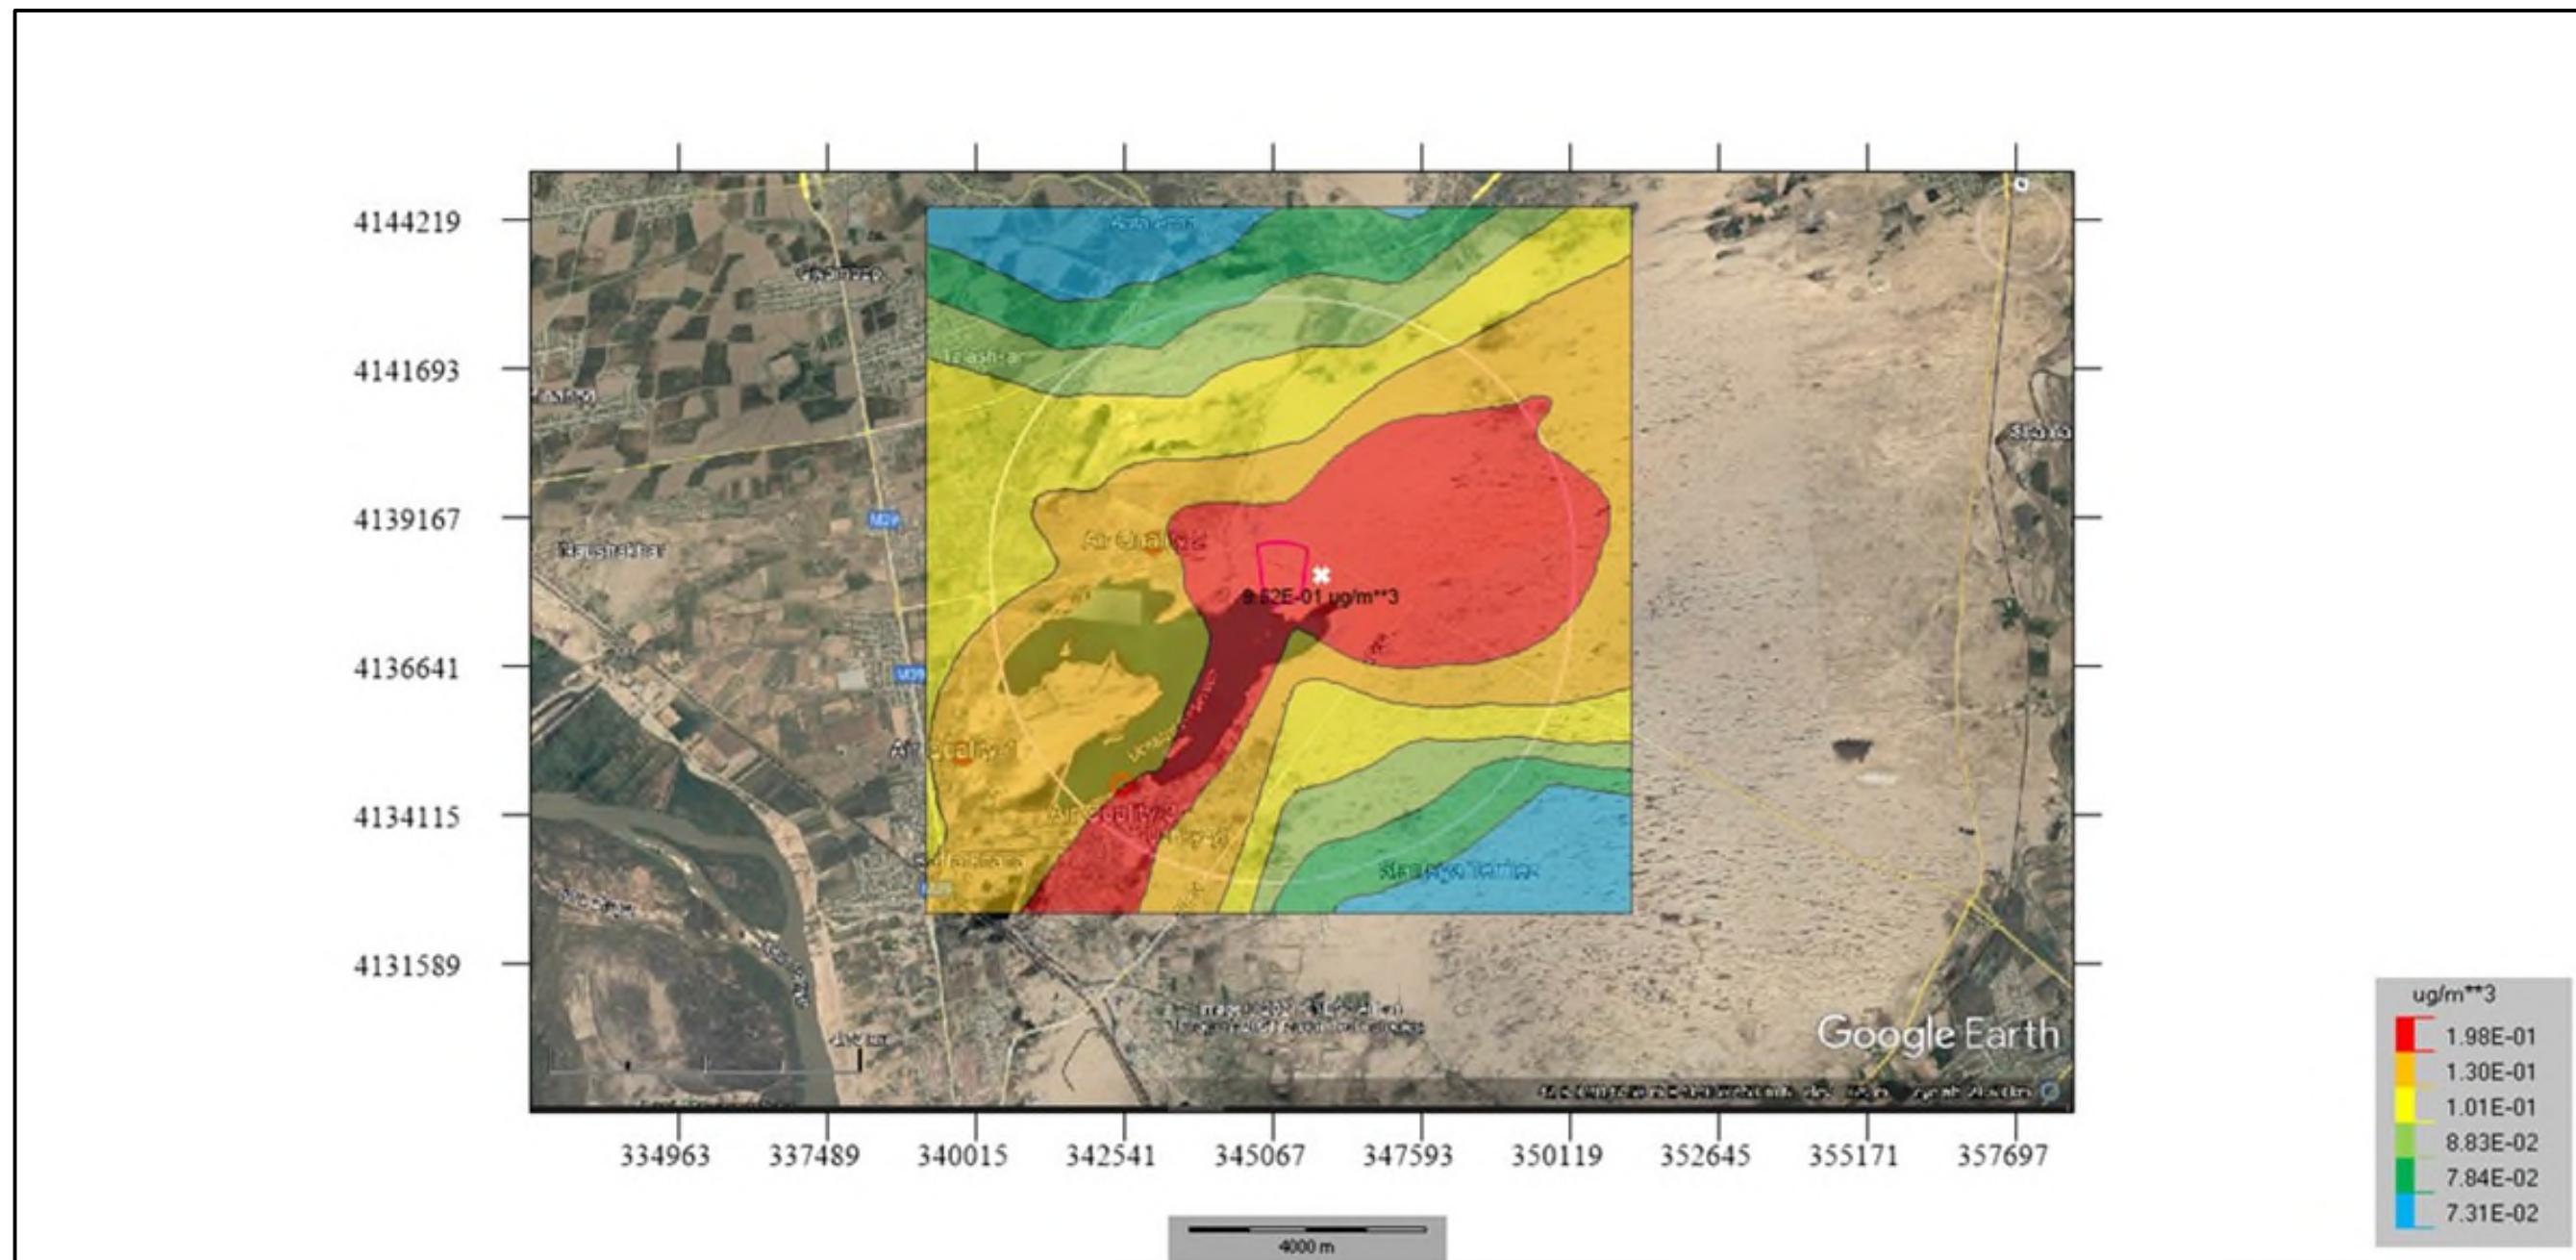


Figure 44: Maximum Monthly NO Distribution

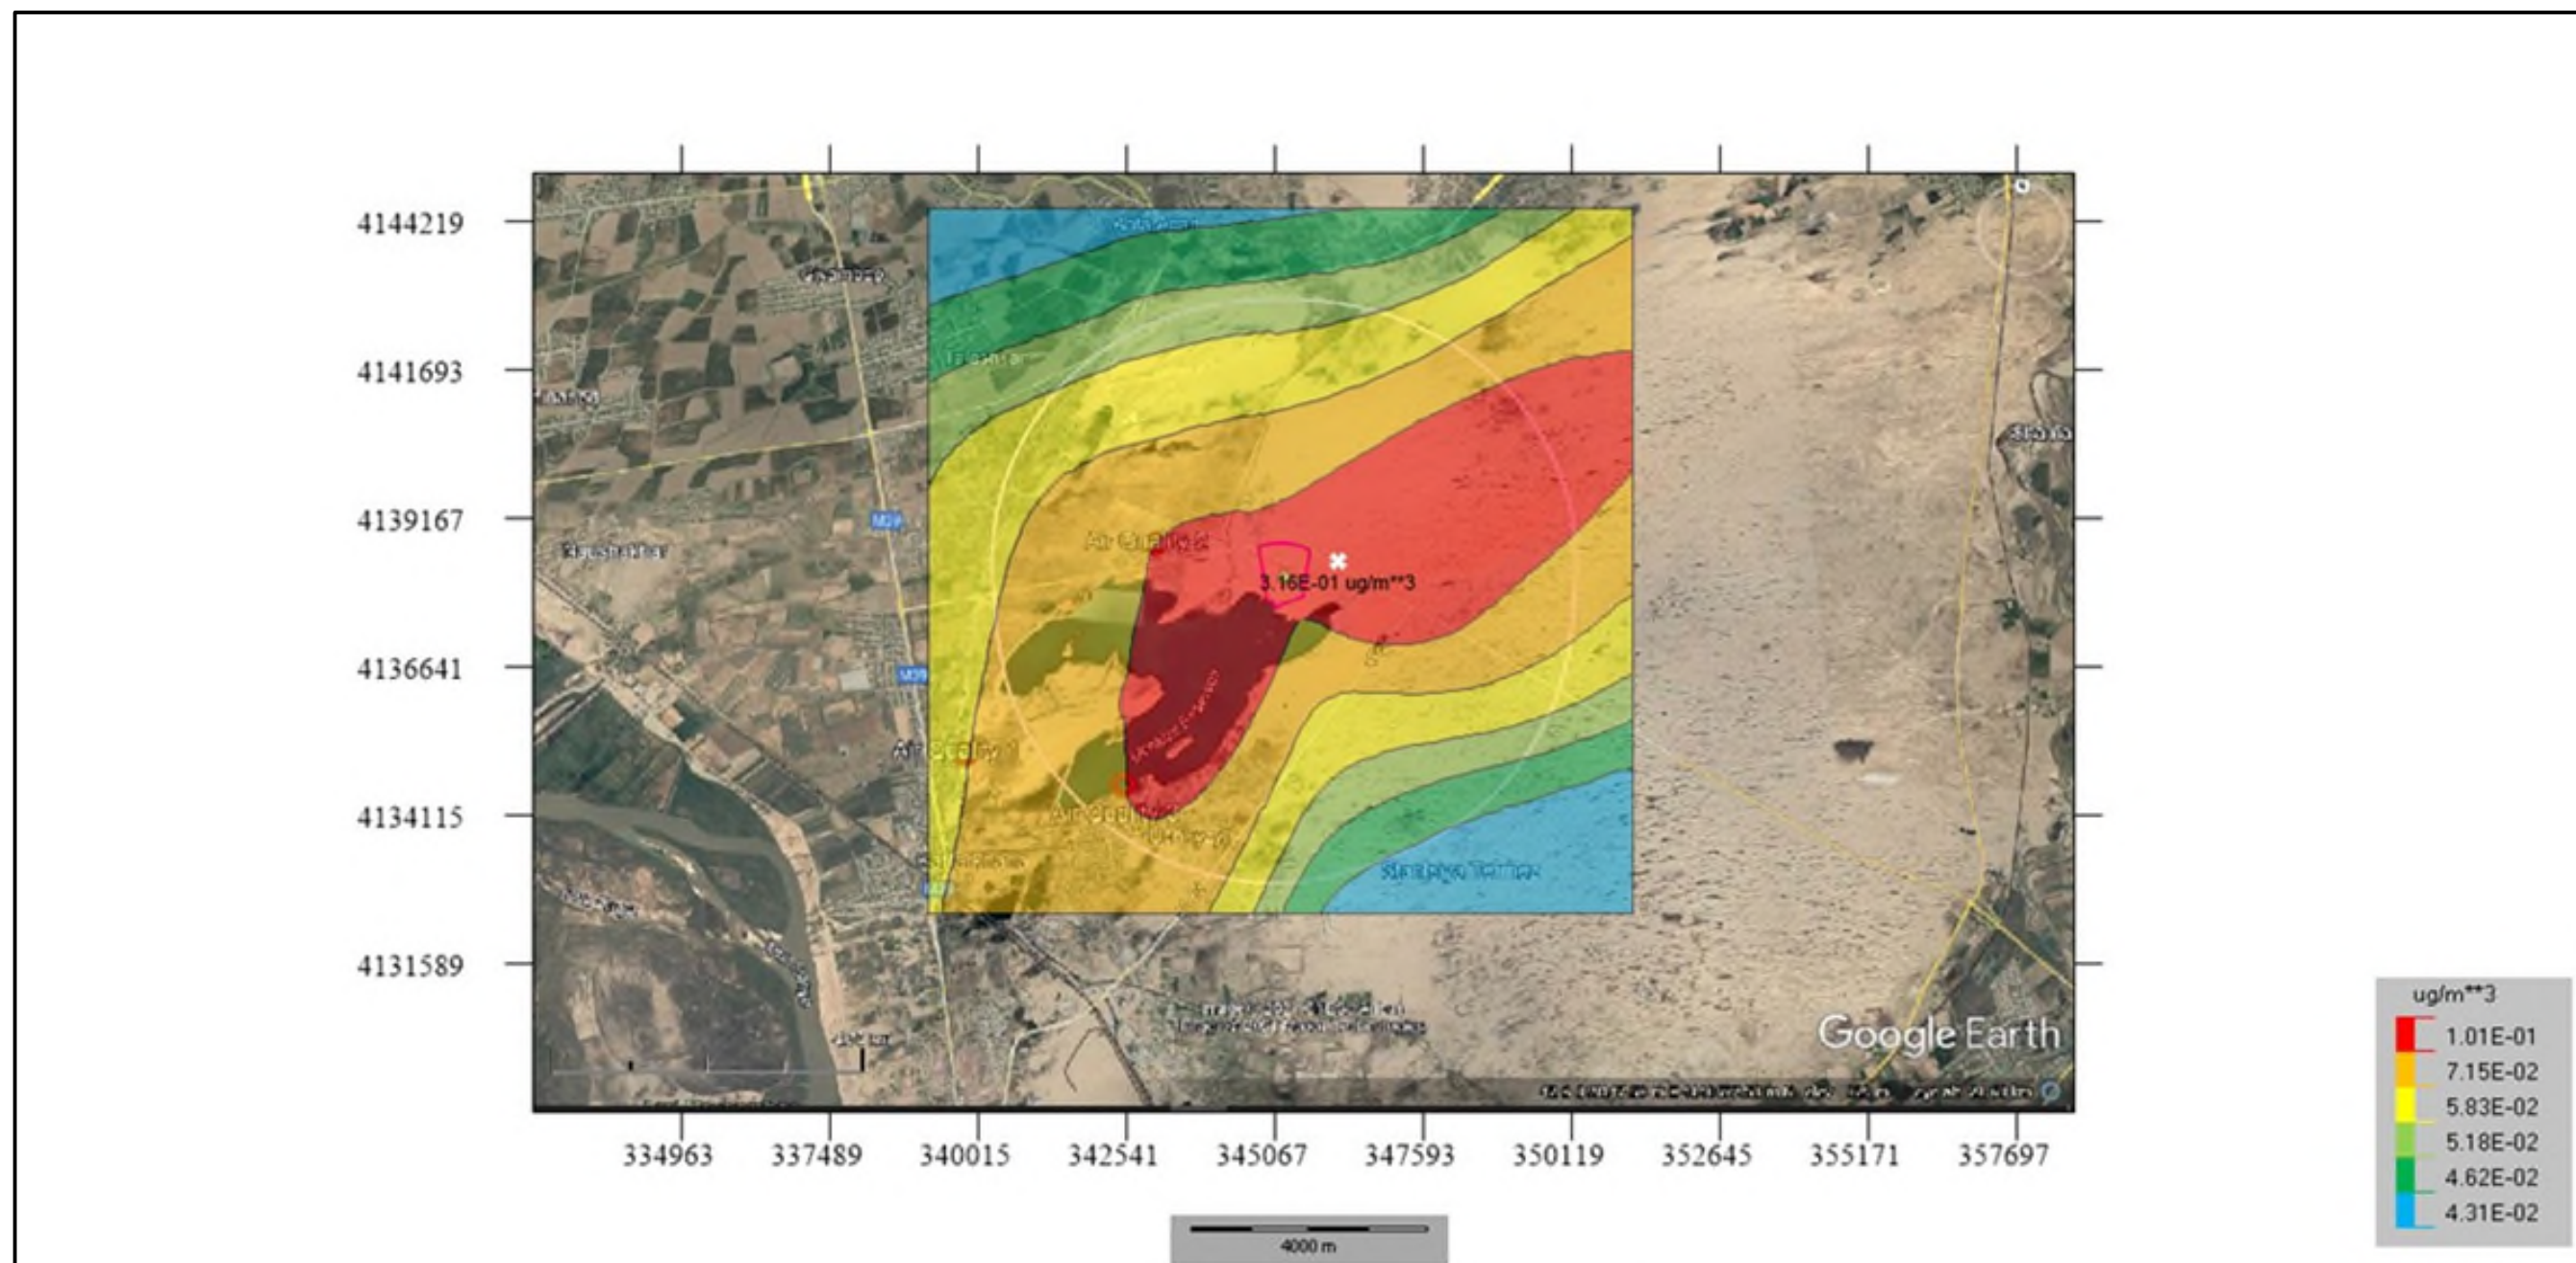


Figure 45: Maximum Annual NO Distribution



Draft Environmental and Social Impact Assessment Report /25/07/2022

ASE-UZA-571-REP-ESA-0001-03

EN/INT/Rev : 4

CO Modelling Results

The highest ground level concentrations and coordinates determined by the modelling study for CO pollutant during operation phase, background measurement results, the total pollution value which equals to the total of modelling result and background measurement value and the limits specified in the national and international legislations are given in Table 36 and ground level concentration distributions are presented between Figure 46 and Figure 49.

Table 36: Highest Ground Level Concentrations of CO via Modelling and Limit Values

Parameter	Period	Modelling Results of the Project			Background Measurement Result (mg/m ³)	Total Pollution Value (mg/m ³)	National Ambient Air Quality Standards MPC (mg/m ³)	IFC/WB EHS Guideline Fundamental principles (mg/m ³ (2007))	EU Environmental Standard (mg/m ³)
		Highest Ground Level Concentration (mg/m ³)	Coordinates where Highest Ground Level Concentrations Observed						
			X	Y					
CO	One Time Max (20-30 min)*	0.21	343905.4	4137187	1.36	1.57	5.0	-	-
	Daily	0.06	346405.4	4138437	0.05	0.11	4.0	-	-
	Monthly	0.02	345905.4	4138187	-	0.02	3.5	-	-
	Annual	0.008	346155.4	4138437	-	0.008	3.0	-	-

*Since the AerMod program gives hourly values as the smallest time period, hourly modeling results are given for the One Time Maximum evaluation.

According to modelling results, for all periods highest level concentration values are under both National Ambient Air Quality Standards, IFC/WB EHS Guideline Fundamental Principles and EU Environmental Standards.

According to the total pollution values evaluation, one-time maximum value, daily, monthly and annual total pollution values are under both National Ambient Air Quality Standards, IFC/WB EHS Guideline Fundamental Principles and EU Environmental Standards.

Ground Level Concentrations at Air Quality Measurement Points

During the determination of baseline conditions at and near the project site, air quality measurements were conducted at 3 air quality measurement points. Detailed information about the baseline air quality is given in Section 6.2.3. In order to determine the impact of the CO emissions at these air quality measurement points, modelling studies also were conducted and modelling study results, background measurement values and total pollution values at that three air quality measurement points are summarized in Table 37.

According to modelling results, for all periods highest level concentration values at all measurement points are under both National Ambient Air Quality Standards, IFC/WB EHS Guideline Fundamental Principles and EU Environmental Standards.

According to the total pollution values evaluation, one-time maximum value, daily, monthly and annual total pollution values for all measurement points also are under both National Ambient Air Quality Standards, IFC/WB EHS Guideline Fundamental Principles and EU Environmental Standards.

Table 37: Modelling Results, Background Measurements and Total Pollution Values at Measurements Points

Modelling Results of the Project									
Point	Period	Highest Ground Level Concentration (mg/m ³)	Coordinates		Background Measurement Result (mg/m ³)	Total Pollution Value (mg/m ³)	National Ambient Air Quality Standards MPC (mg/m ³)	IFC/WB EHS Guideline Fundamental principles (mg/m ³ (2007))	EU Environmental Standard (mg/m ³)
			X	Y					
AQ-1	One Time Max (20-30 min)*	0.12	339777.7	4135189	0.53	0.65	5.0	-	-
	Daily	0.012			0.03	0.042	4.0	-	-
	Monthly	0.004			-	0.004	3.5	-	-
	Annual	0.002			-	0.002	3.0	-	-
AQ-2	One Time Max (20-30 min)*	0.18	343059	4138735	1.36	1.54	5.0	-	-
	Daily	0.016			0.06	0.076	4.0	-	-
	Monthly	0.005			-	0.005	3.5	-	-
	Annual	0.003			-	0.003	3.0	-	-
AQ-3	One Time Max (20-30 min)*	0.18	342508.7	4134598	0	0.18	5.0	-	-
	Daily	0.020			0	0.020	4.0	-	-
	Monthly	0.005			-	0.005	3.5	-	-
	Annual	0.003			-	0.003	3.0	-	-

*Since the AerMod program gives hourly values as the smallest time period, hourly modeling results are given for the One Time Maximum evaluation.

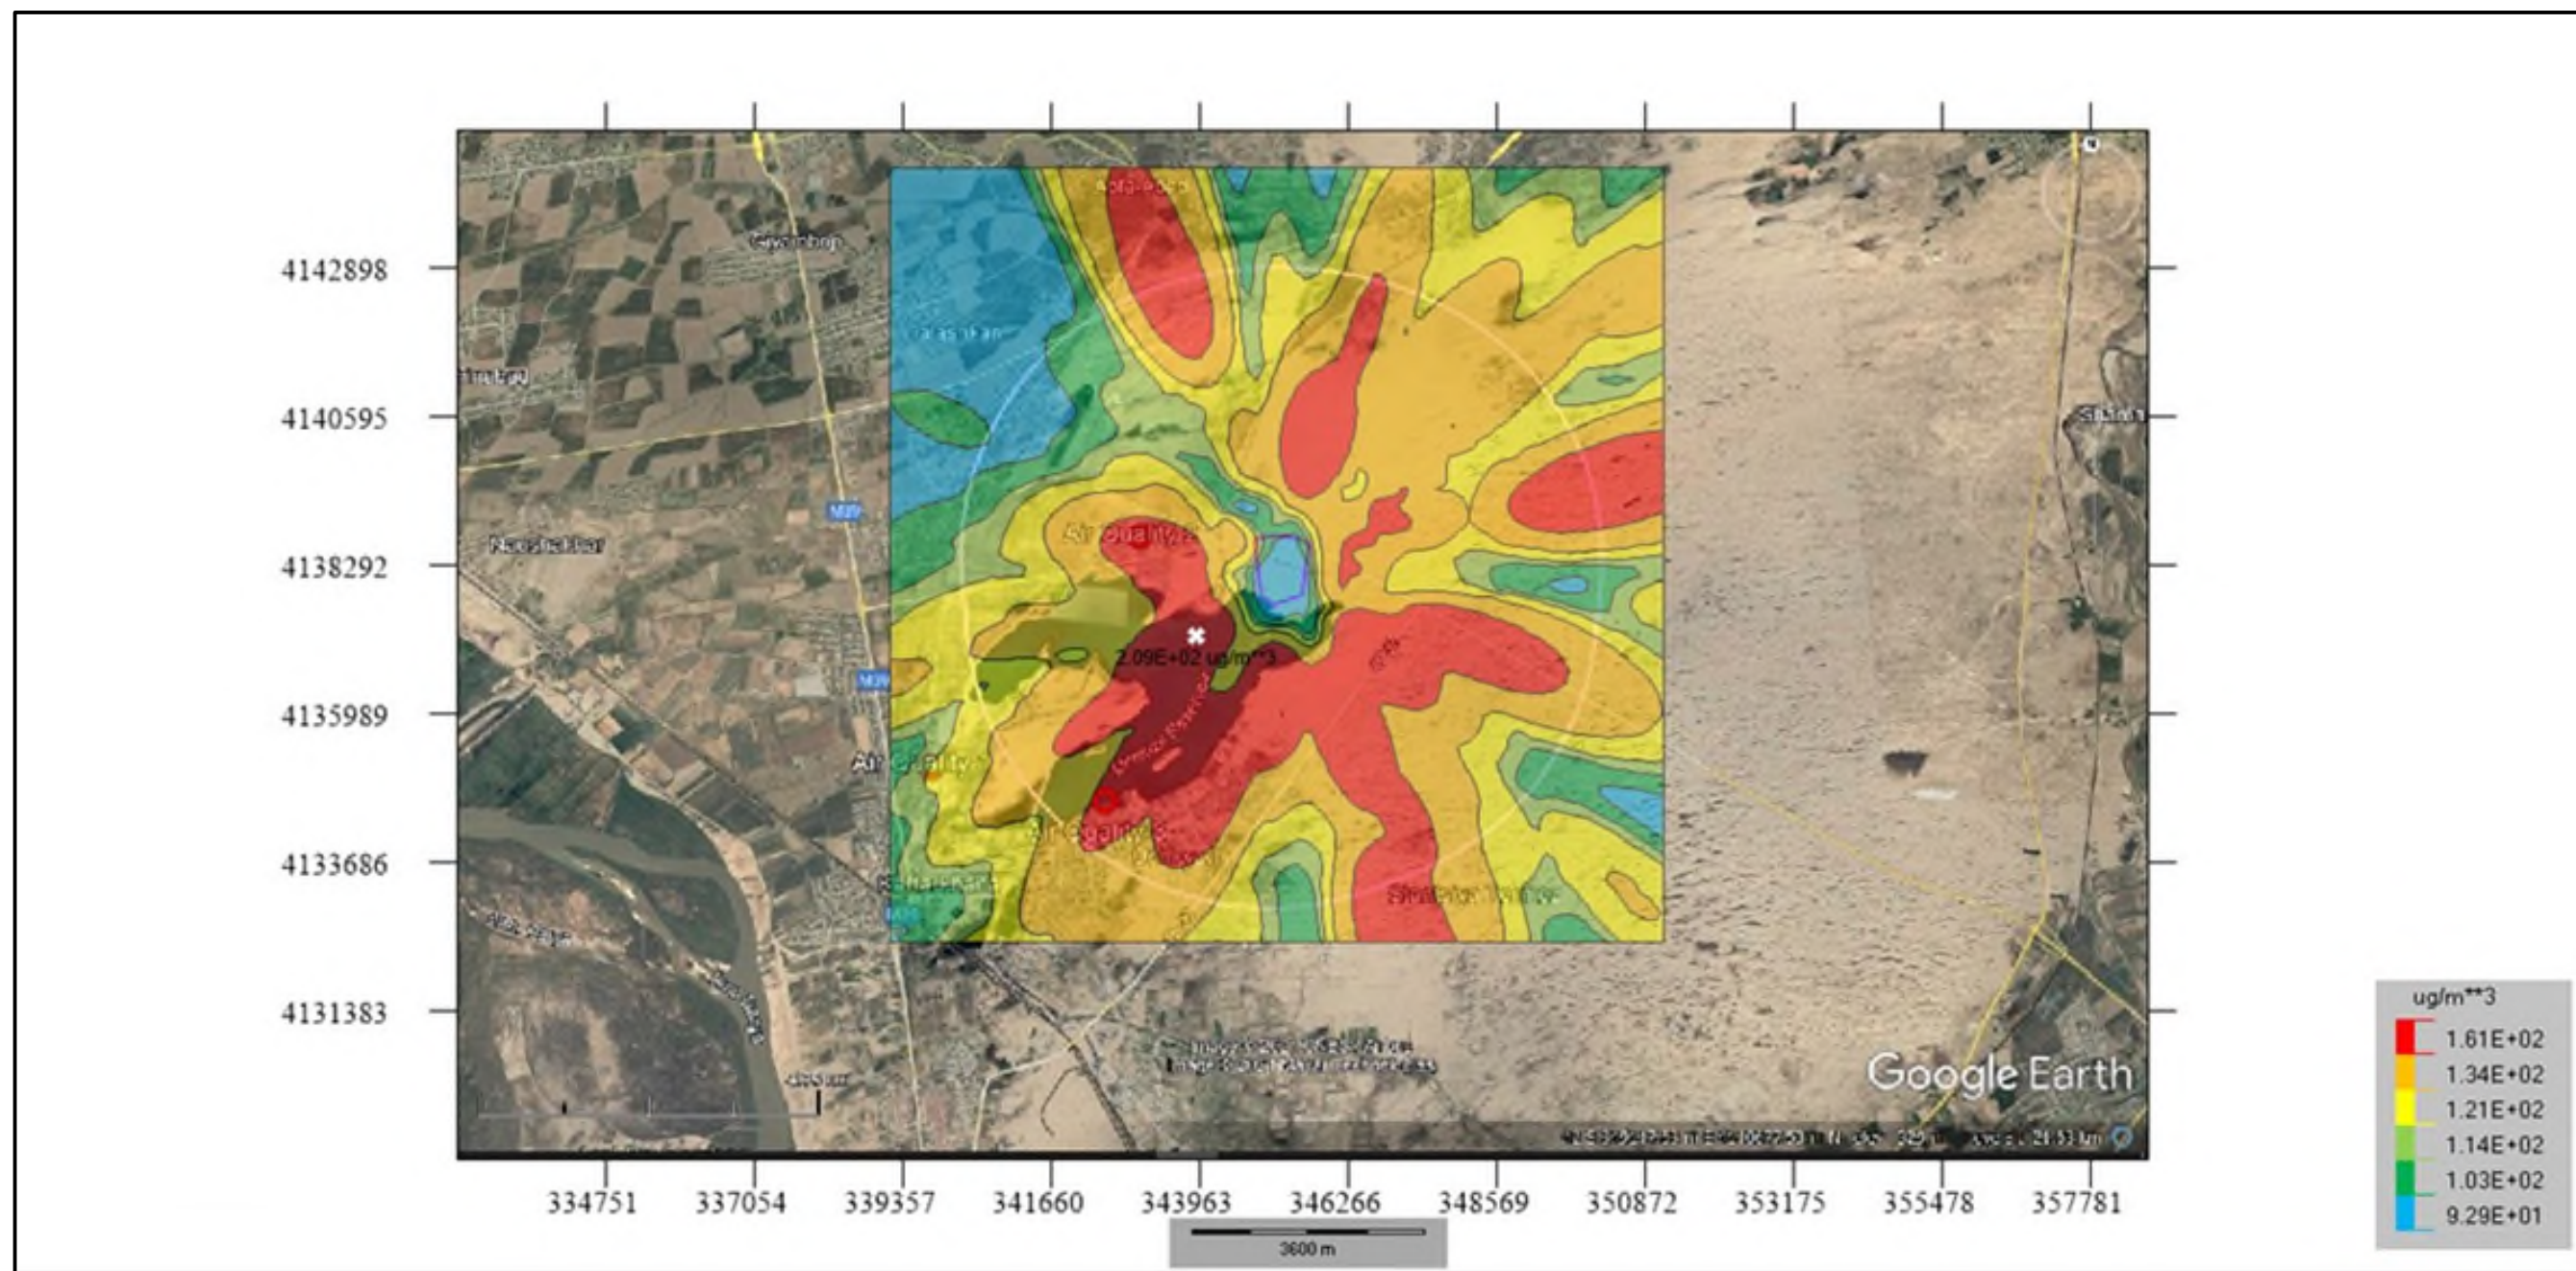


Figure 46: Maximum Hourly CO Distribution

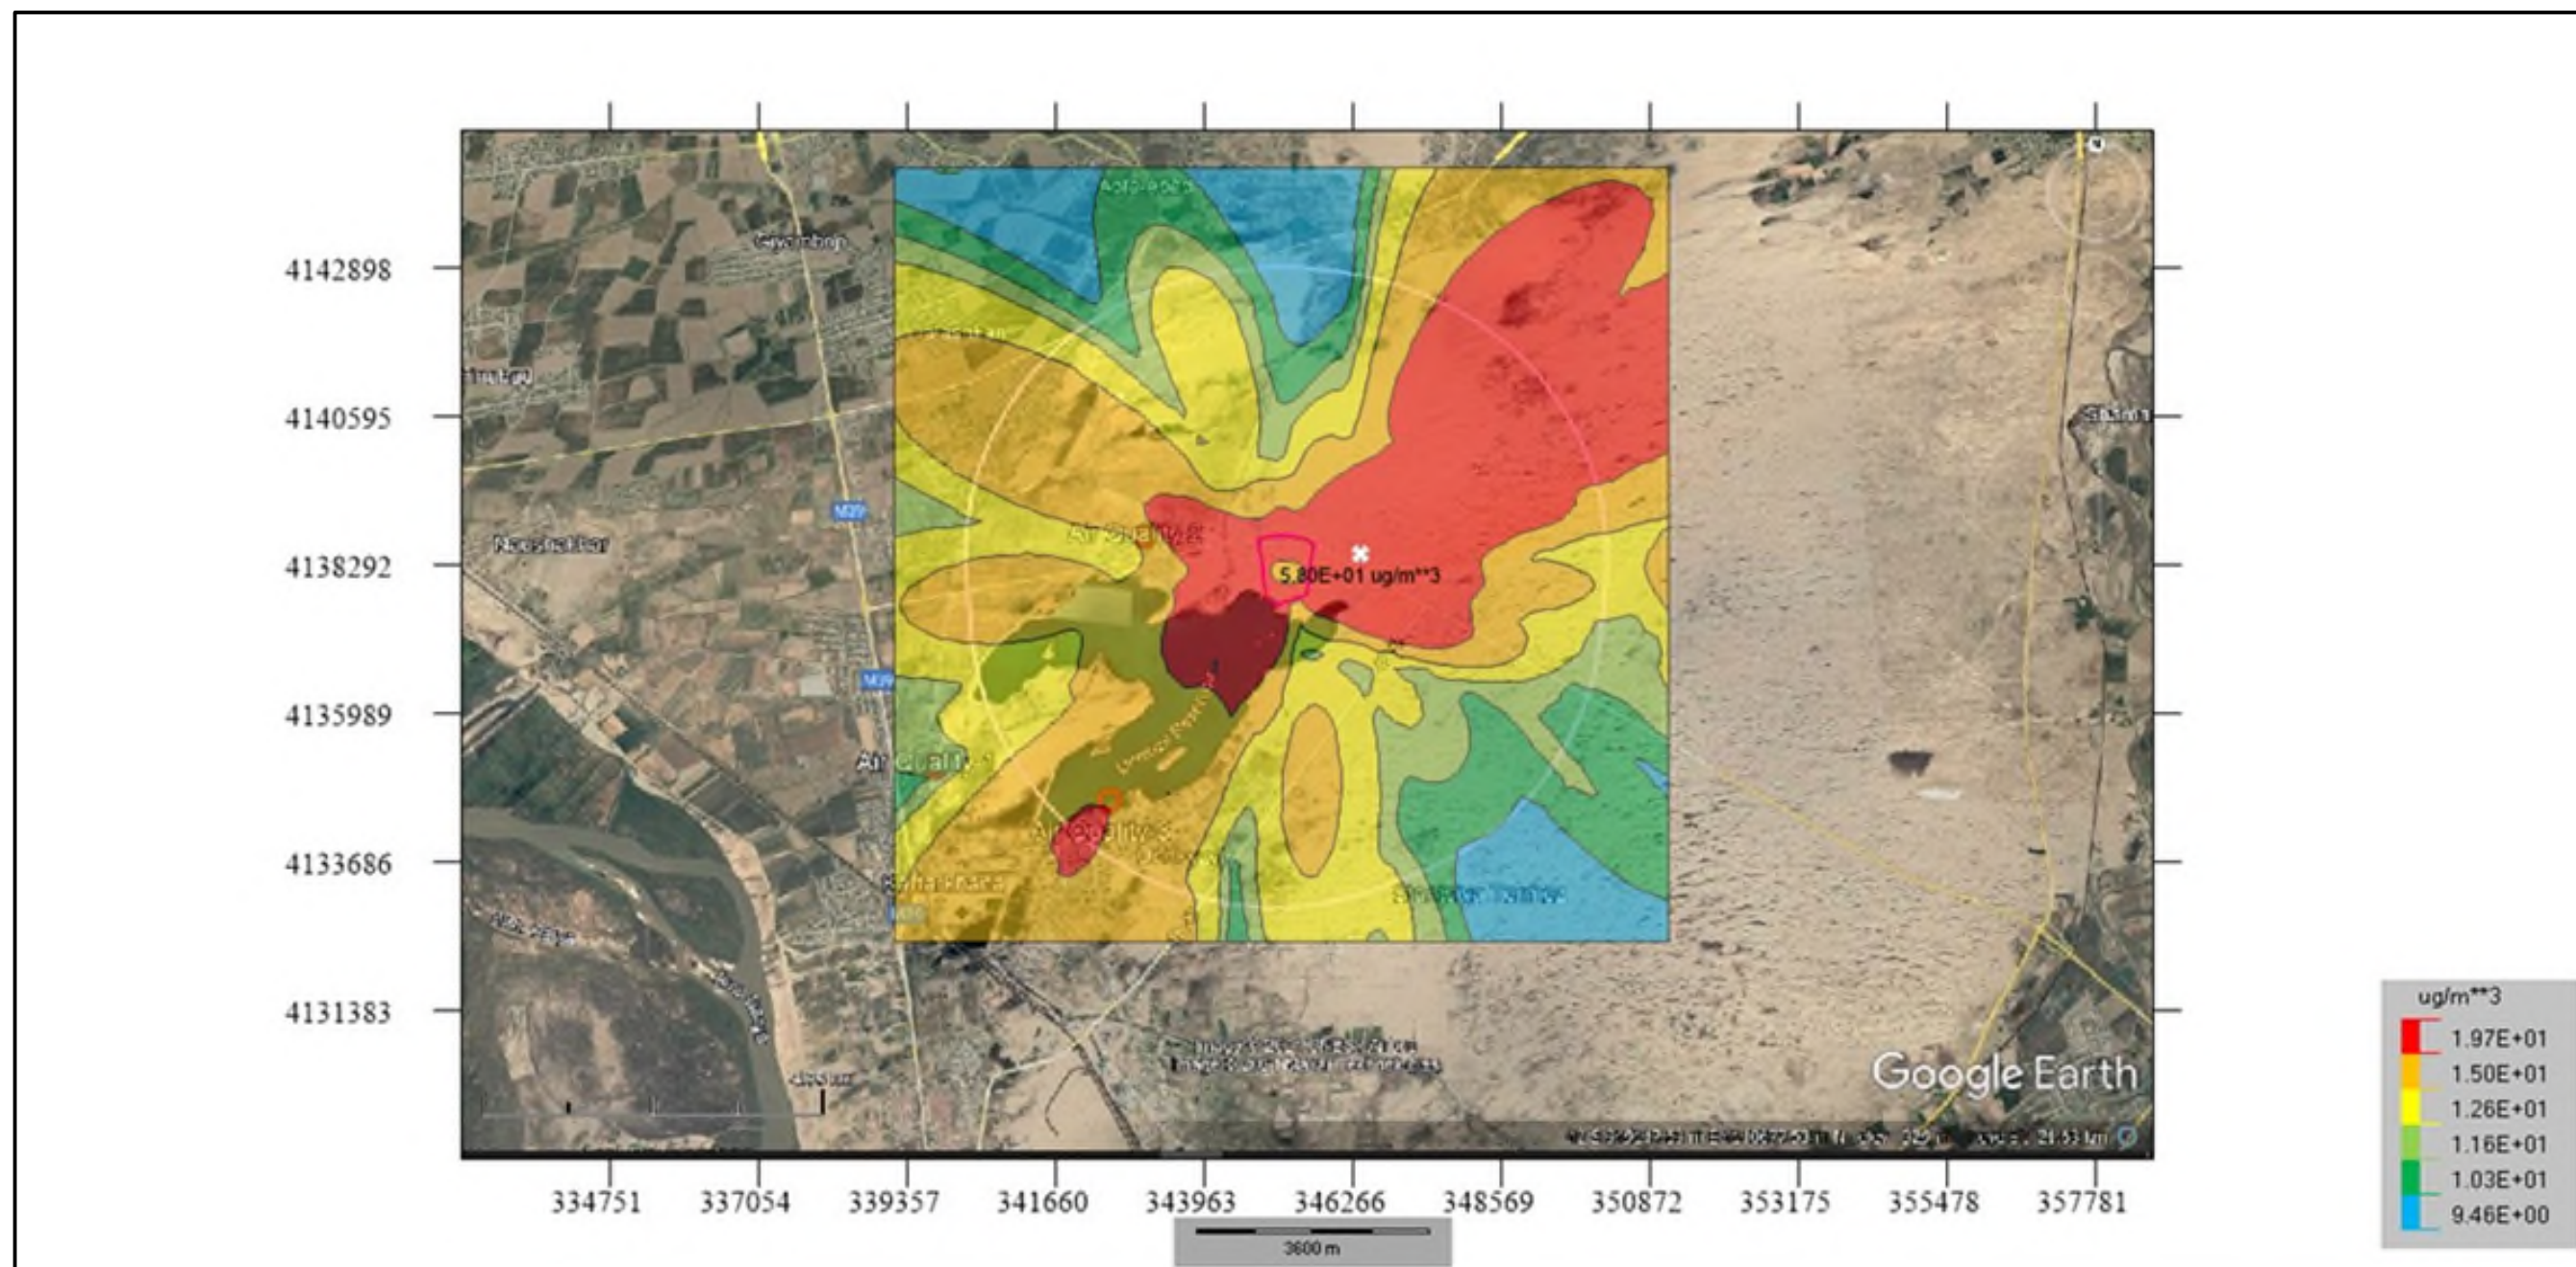


Figure 47: Maximum Daily CO Distribution

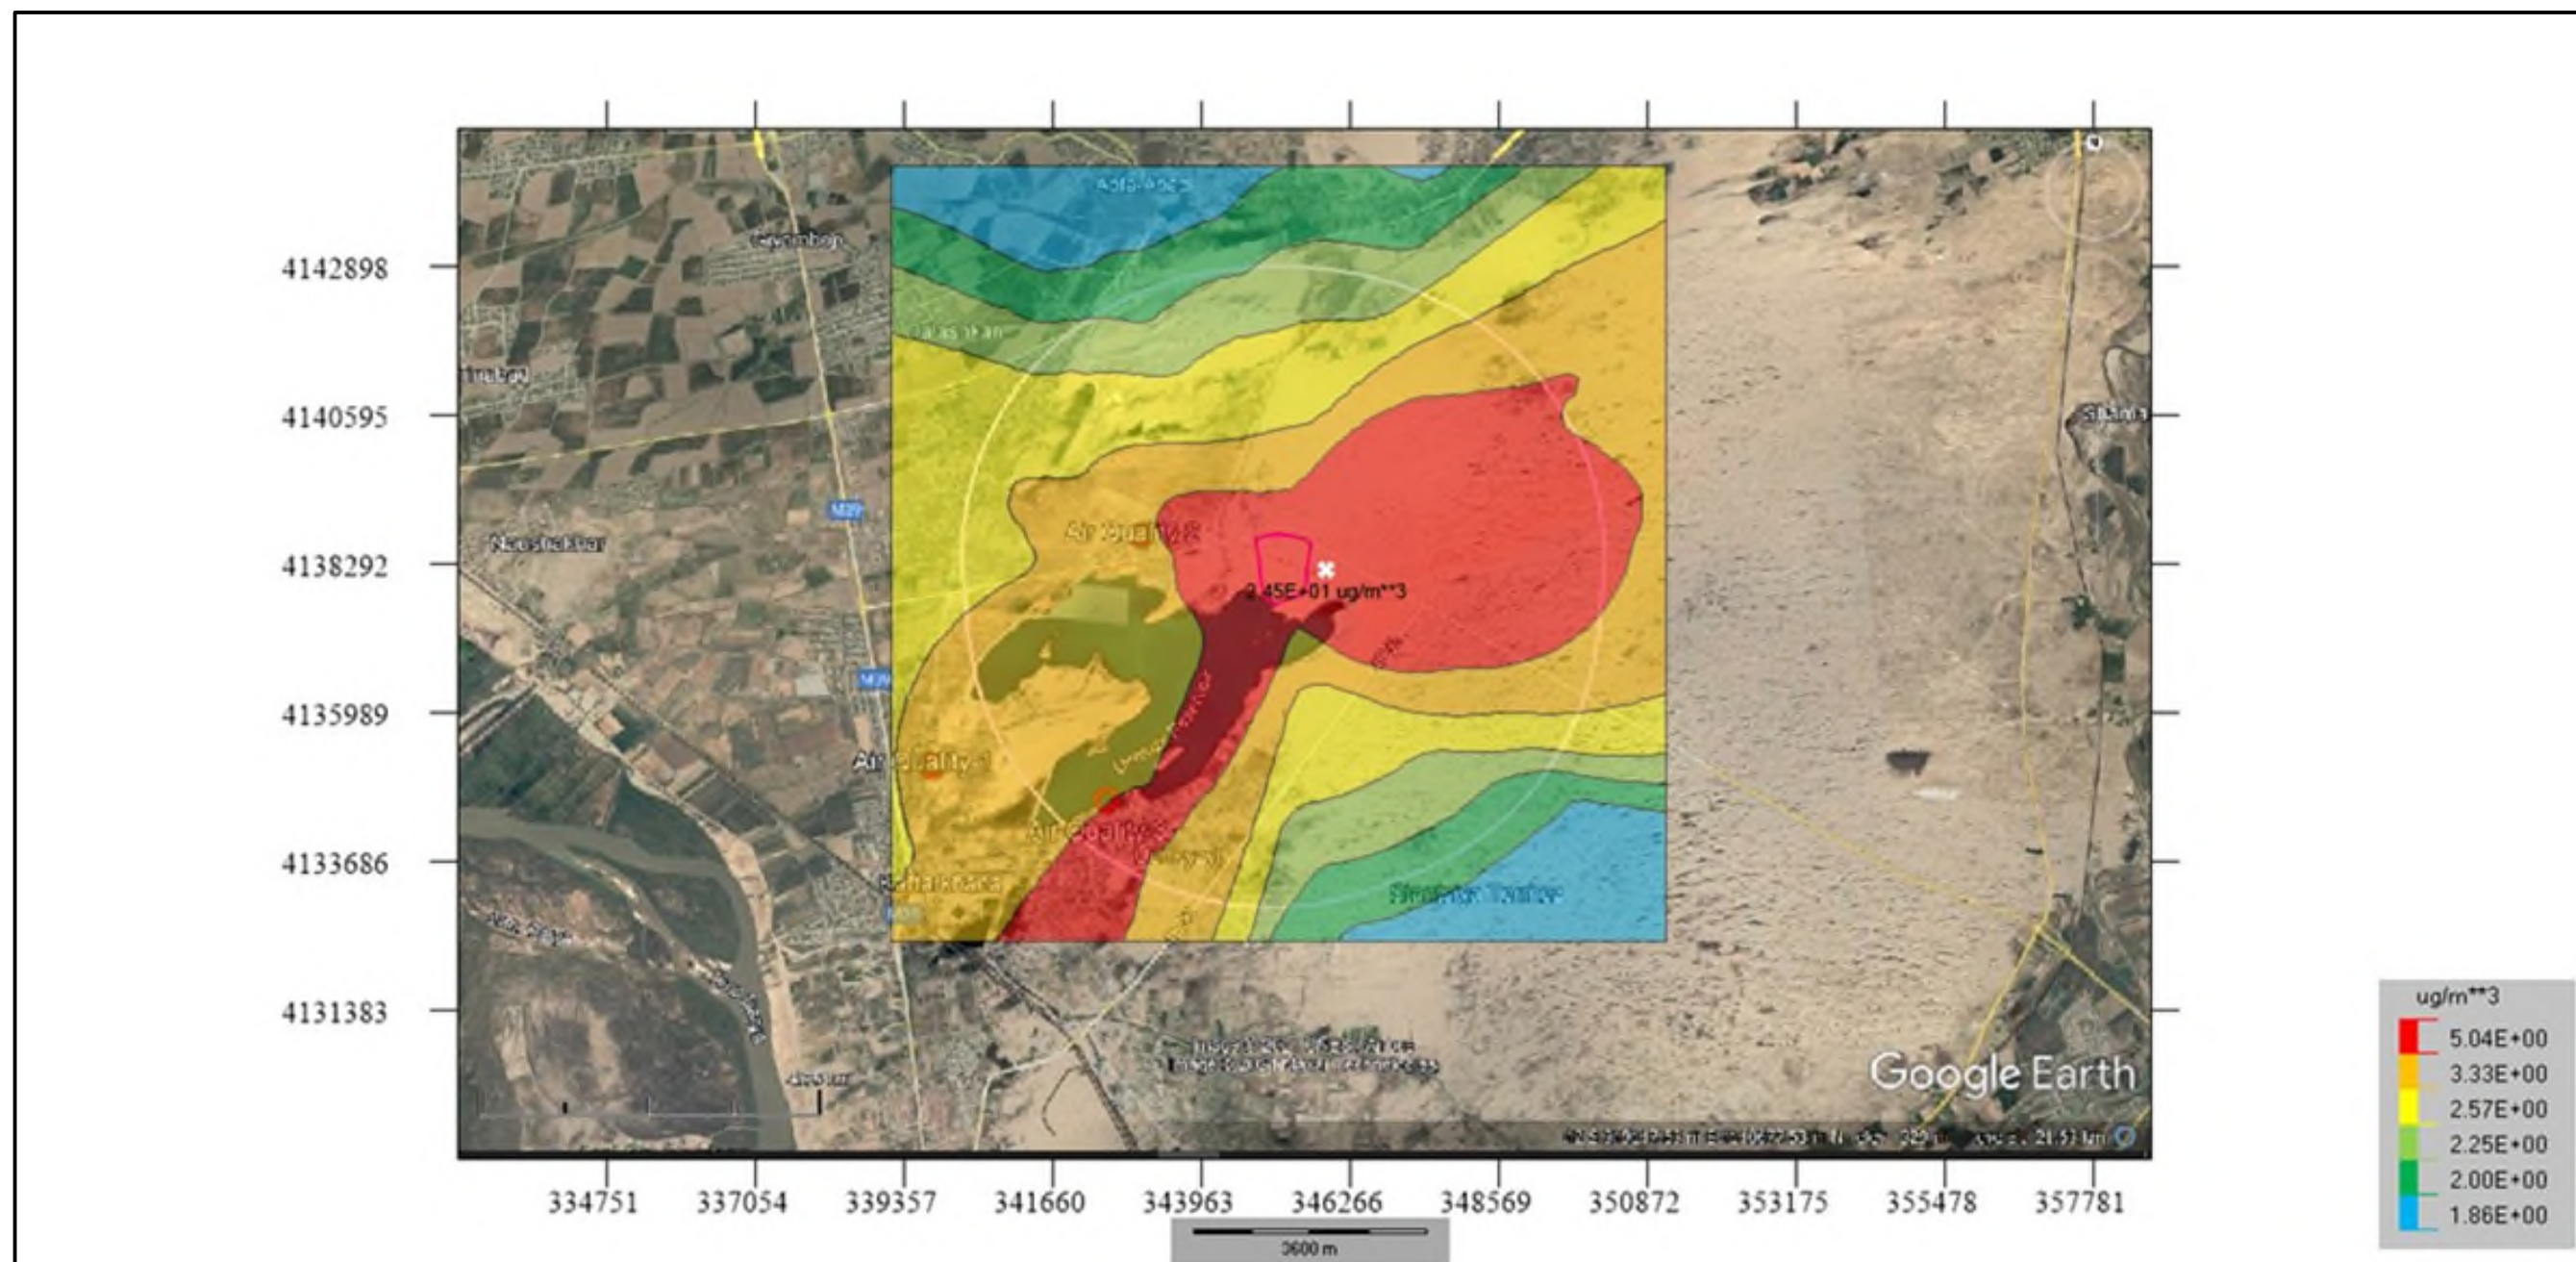


Figure 48: Maximum Monthly CO Distribution

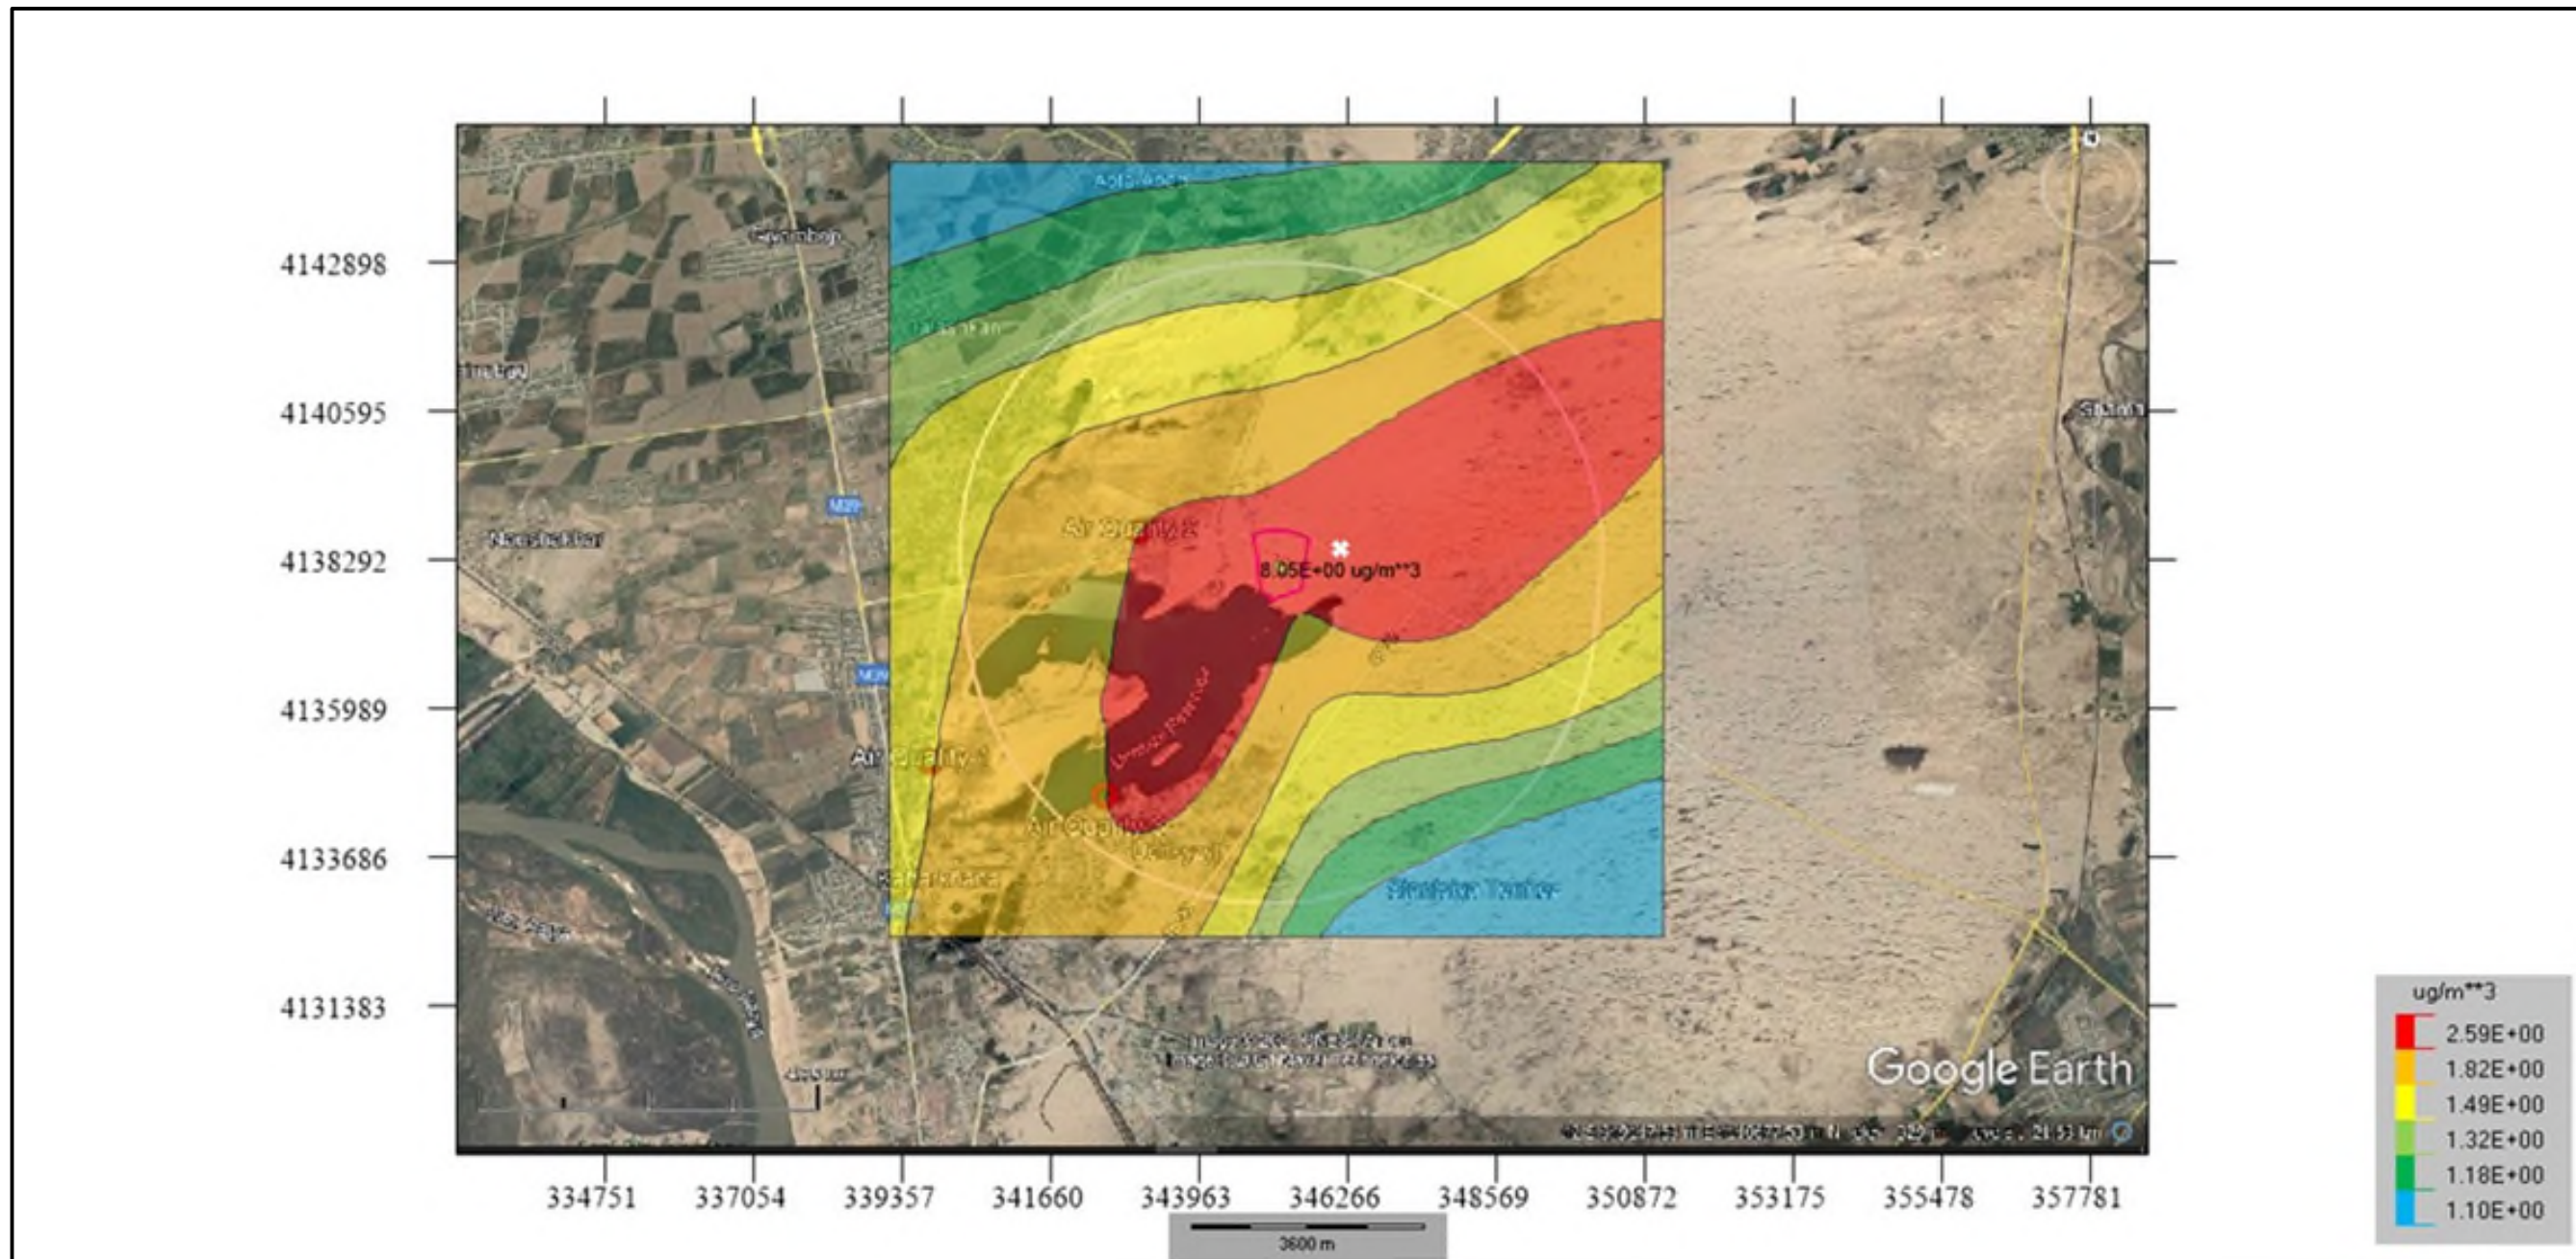


Figure 49: Maximum Annual CO Distribution

6.4.2.3 New Modelling Study

The air dispersion modelling presented in Section 6.4.2.1 is run based on the emission values calculated by the natural gas consumption of the proposed plant as in line with the local EIA study. The previous modelling study was conducted for NO and NO₂, separately. As seen in Table 31, NO (52.60 mg/Nm³) and NO₂ (8.55 mg/Nm³) emission values are used in the air dispersion as an input value.

However, the Project commits that stack emissions as NO_x will comply with the emission values (51 mg /Nm³) given in Table 6.b of IFC Thermal Power Guidelines. Therefore, the maximum NO_x concentration emitted from the stack will be considered as 51 mg/Nm³ in the new air quality dispersion model. The new model will consider all nitrogen emissions as NO_x and will provide the ground level concentrations for NO₂.

As described in Section 6.4.2.2, ground level concentrations are well below the regulatory limits in the air dispersion model given in this ESIA Report. Since the new air dispersion modelling study will be run by using lower emission values, the results are expected to be lower than the previous study. Therefore, it is anticipated that, new modelling study will be conducted to have clear picture about dispersion of the emissions and will not change the assessment of the potential impacts.

During the new air dispersion modelling study, the following parameters and conditions will be applied.

Table 38: Modelling Study Inputs for new modelling study

Parameter	Unit	Characteristics	IFC Thermal Power Guidelines		
Fuel Type	-	Natural gas	Natural gas		
Unit	-	Unit-1	Unit-2		
Number of Stack	Piece	1	1		
Inner Diameter of Stack	m	8.24	8.24		
Stack Height	m	65	65		
Flue Gas Volumetric Flow	m ³ /h	5,363,604	5,363,604		
Flue Gas Outlet Temperature	°C	120	120		
Flue Gas Output Speed	m/s	27.94	27.94		
Pollutant Concentrations	NO _x	mg/Nm ³	50	50	51
	CO	mg/Nm ³	218.07	218.07	-
Pollutant Mass Flows Per Stack	NO _x	g/s	74.5	74.5	
	CO	g/s	324.9	324.9	

Additionally, following items will also be applied during the new air dispersion modelling:

- Modelling results of NO₂ parameter will be obtained from the in-built chemistry available module within AERMOD software by modelling NO_x to calculate NO₂ concentrations.
- Modelling results will be discussed in the context of the 25% rule as suggested by IFC General EHS Guidelines- Air Emissions and Ambient Air Quality.
- Where one-time maximum (20-30 min) limit values are used during assessment, the peak-to-mean approach will be used to convert hourly modelling results to 30 minutes interval results in order to compare with national limits.
- Total pollution value will be calculated by using measurement results at the monitoring station and modelling results at the same location. By this way, total pollution value will reflect close to real situation.
- In the presentation of the modelling results the distances and directions of points where the highest ground level concentrations are observed will be given.

Baseline Data

In addition to the 7-days monitoring results presented in Section 6.2.3, the results of the additional passive diffusion tube samplings will also be taken into consideration.

Meteorological Data

Meteorological data and surface roughness and terrain will be kept as they were used in the existing air dispersion model.

Receptors

For the AERMOD model, a working area must be defined and allocated to the receiving environment elements. For this purpose, ground-level pollutant concentrations have been predicted at both the receptor locations above and over a coarse grid of size 12km by 12km Cartesian grid of 50m resolution. In other words, the plant impact area is defined as a square with an edge of 12,000 meters, and receiving points are placed at 50 m intervals by the Cartesian grid method. For this study, the central area of the Cartesian grid area, defined as the receiving environment, was determined as the midpoint of the facility.

In addition to this, discreet receptor points, which were defined as sensitive receptors in Section 6.3, were added to the modelling study.

6.4.2.4 Operational Vehicle Emissions

The facility is likely to result in the small additional number of vehicles and delivery/removal vehicles along the local roads. Emissions from these vehicles will likely result in a negligible impact and as such detailed assessment has not been conducted.

6.4.2.5 Assessment of Impacts and Mitigation Measures

Activities associated with the operational phase of the Project will result in the emissions of gaseous pollutants from the operation of the power blocks. The key pollutants arising from natural gas combustion and emitted via the stacks will be oxides of nitrogen (NO and NO₂) and carbon monoxide (CO). The use of natural gas is generally accepted as being preferred over fuel oils or other solid fuels



and there will be no (or negligible) emissions content of sulfur dioxide (SO₂) and no particulates. By using impact assessment significance criteria approach, key potential impacts and countermeasures on air quality for the operation phase are presented in Table 39.

Table 39: Impacts Significance of the Air Quality during – Operation Phase

Potential Impacts	Receptor	Sensitivity of Receptors	Magnitude of Impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
Stack Emissions	Residential Areas	Medium	High	Major	<p>During commissioning, the stack emissions will be tested for NO, NO₂, CO to ensure that the control systems are operating correctly and that emission values comply with applicable standards and guidelines.</p> <p>During operation there will be continuous emission monitoring system (CEMS) of stack emissions of NO, NO₂ and CO to ensure compliant conditions are maintained through appropriate process controls.</p>	Minor
	Industrial Facilities	Low	High	Moderate	<p>Regular scheduled maintenance activities will be undertaken to ensure that equipment is operating in its most effective manner, to reduce emissions.</p> <p>In operation phase, ambient air quality measurement should be conducted.</p>	Minor
Gaseous emissions – From vehicle exhaust	Residential Areas & Workers at the Site	Medium	Medium	Moderate	<p>Unnecessary usage of vehicles, plant and equipment will be minimized - No unnecessary idling.</p> <p>Exhaust fumes and particulates emitted from trucks and vehicles will be minimized by ensuring the use of good condition vehicles (e.g. compliant to vehicle emission requirements).</p> <p>Vehicle engines will be turned off while waiting on site to minimize gaseous emissions.</p> <p>Appropriate quality of fuel used – Fuel to International standards to be sourced through a licensed company.</p> <p>Emissions from vehicles should be free from significant black smoke - remedial measures shall be taken if this is observed.</p> <p>Ensure emissions comply with Maximum allowable limits for air pollutants emitted by mobile vehicles established by law.</p> <p>Implement a regular maintenance program of vehicles, and keep documentary evidence.</p>	Minor

6.5 Cumulative Impacts

The purpose of a cumulative impact assessment is to determine how the potential impacts of a proposed development might combine cumulatively, with the potential impacts of other projects or human activities as well as natural stressors such as droughts or extreme climatic events. Summary of Cumulative Impacts of Air Emissions & Ambient Air is presented in Table 40.

Table 40: Summary of Cumulative Impacts of Air Emissions & Ambient Air

Environmental & Social Aspects	Construction	Operation
Air Emissions & Ambient Air		
Cumulative Impacts	<p>There is no known Project which will be in the construction phase at the same time period as the Surkhandarya Project.</p> <p>No cumulative impact will occur if the construction periods do not overlap.</p> <p>If the construction periods coincide, cumulative impact on air quality with respect to dust generation and gaseous emissions from construction activities at the Project is anticipated. However, with the implementation of management and mitigation measures, the cumulative impacts are expected to be Minor.</p>	<p>There is no known project which is planned within the Project Impact Area.</p> <p>Therefore, no cumulative impact assessment is of concern for the time being.</p>

6.6 Monitoring

Air quality monitoring should be undertaken by the EPC Contractor/s and the Project owner during both the construction, commissioning, and operational phases of the Project respectively (see Table 41).

Table 41: Monitoring Requirements of Air Quality

Source	Parameters	Duration	Frequency	Location
Construction Phase				
Dust Generation & Dispersion	Dust	Dust measurements	Quarterly	Access Road to the Project site, Construction site and laydown areas, Dispersion to external receptors from point of generation.
Emissions from Engines	Emissions from Vehicles	Ambient Air Quality monitoring of SO ₂ , NO ₂ , CO and dust	In every six months	Baseline Air Quality Monitoring Stations
Emissions from Engines	Emissions from Vehicles	Visual assessment of emissions to be undertaken on a daily basis while vehicles & equipment are in use and annual inspection of vehicles. This will include an inspection during the initial acceptance criteria of such vehicles to site.	Daily- visual Annual-inspection	All vehicles and engines
Sanitary Facilities & Hazardous Material Storage	Odour & VOCs	Daily olfactory observations – as part of maintenance and inspection checks Daily inspection of hazardous materials storage areas for any leaks or emission of VOCs	Daily	All sanitary facilities available within the laydown areas, subcontractor camps and work fields.
Commissioning & Operation				
Emissions from Stacks	NOX (NO and NO ₂) and CO	Continuous Emissions Monitoring System (CEMS). Manual testing if the CEMS is not calibrated at the start of the commissioning stage.	Continuos	Stacks
Emissions from Stacks	NOX (NO and NO ₂)	Ambient Air Quality monitoring of NO and NO ₂ ,	Monthly – during commissioning phase Quarterly-during operation	Baseline Air Quality Monitoring Stations
Emissions from Vehicles	Vehicles Emissions	Regular maintenance & servicing of project vehicles and planned annual inspection.	Annual-Inspection	All road and non-road vehicles and engines

7. NOISE LEVEL

7.1 Standards and Regulatory Requirements

7.1.1 National Standards

Noise, vibration, and electromagnetic fields are regulated through sanitary norms and standards in Uzbekistan which are given below:

- SanPiN No. 0267-09 "Sanitary norms and rules to ensure acceptable noise levels inside residential and public buildings and in residential areas";
- SanPiN No. 0325-16 "Sanitary norms and rules to ensure acceptable noise levels in the workplace";
- SanPiN No. 0326-16 "Sanitary Standards for general and local vibration at workplace".

Noise standards established by SanPiN No. 0267-09 set the rules for ensuring residential/public areas in Uzbekistan. This standard indicates a table of noise levels for a variety of internal and external applications. The most significant permissible noise levels for the Project are summarized in Table 42.

Regarding this standard, assessment of the sound level at the determining point is performed for the day and night period of the selected day and takes into account the maximum intensity of the sound level during the half-hour period.

Additionally, noise standards established by SanPiN No. 0325-16 set the rules for ensuring the health of workers in the workplace in Uzbekistan. This standard indicates a table of noise levels for various types of work. The most significant permissible noise level at workplaces for the Project is summarized in Table 42.

Table 42: National Noise Levels for Residential / Commercial Areas

Purpose of premises or territories	Sound pressure Level dB(A) of inconstant noise (SanPiN No. 0267-09 : Sanitary norms and rules to ensure acceptable noise levels inside residential and public buildings and in residential areas. (Table 1))	
	Daytime (07:00 to 23:00)	Night-time (23:00 to 07:00)
Territories adjacent to residential buildings, clinics, outpatient clinic, dispensaries, rest homes, boarding houses, nursing homes, childcare facilities, schools and other educational institutions, libraries	55	45
Living room of apartments, holiday homes,	40	30

Table 43: National Noise Levels for Workplace

Type of work, Workplace	Sound pressure Level dB(A) of inconstant noise (SanPiN No. 0325-16: Sanitary standards for permissible noise levels in the workplace (Table 2))	
	Daytime (07:00 to 23:00)	Night-time (23:00 to 07:00)
Performance of all types of work at permanent workplaces in industrial premises and at enterprises operated since March 12, 1985.	80	

7.1.2 Lender Requirements

The IFI's applicable noise standards for the Project are given below:

- IFC General EHS Guidelines: Environmental, Noise Management, April 30, 2007;
- IFC General EHS Guidelines: Occupational Health and Safety, Noise, April 30, 2007;

The Project is required to comply with the strictest of the noise limit values defined in guideline noise levels set out in the IFC/WBG General EHS Guidelines and national standards, as presented in Table 44 and Table 45.

IFC/WBG General EHS Guidelines recommend that noise levels presented in Table 44 should not result in a maximum increase in background levels of 3 dB at the nearest receptor location off-site and that noise levels at the boundary of an industrial property should not exceed 70 dB(A).

According to noise limits for various working environments in IFC/WBG General EHS Guidelines, no employee should be exposed to a noise level greater than 85 dB(A) for a duration of more than 8 hours per day without hearing protection (see Table 45). Although hearing protection is preferred for any period of noise exposure in excess of 85 dB(A), an equivalent level of protection can be obtained, but less easily managed, by limiting the duration of noise exposure. For every 3 dB(A) increase in sound levels, the 'allowed' exposure period or duration should be reduced by 50 percent.

Table 44: Summary of the IFC/WBG General EHS Guidelines, Noise Level Guidelines with National Standards

Type	National Noise Level Standard (SanPiN No. 0267-09) (30 min LAeq (dB(A)))		IFC/WBG General EHS Guidelines (2007), Table 1.7.1. (One-hour LAeq (dB(A)))	
	Daytime (07:00 to 23:00)	Night-time (23:00 to 07:00)	Daytime (07:00 to 22:00)	Night-time (22:00 – 07:00)
Residential, institutional, educational	55	45	55	45
Industry, commercial			70	70

As can be seen from the Table 44, IFC/WBG General EHS Guidelines establish night time noise levels between 22:00 and 07:00. Since, this approach covers 1 hour more night time than National Noise Level Standards, IFC/WBG General EHS Guidelines is used during determination of day-time and night-time noise levels.

Table 45: IFC/WBG General EHS Guidelines, Occupational Health and Safety, Noise Limits for Various Working Environments with National Standards

Type	Sound pressure Level dB(A) of inconstant noise (SanPiN No. 0325-16: Sanitary standards for permissible noise levels in the workplace (Table 2))	IFC/WBG General EHS Guidelines (2007), Table 2.3.1.	
		One-hour LAeq (dB(A)) Equivalent level LAeq,8h	Maximum LAm _{ax,fast}
Performance of all types of work at permanent workplaces in industrial premises and at enterprises operated since March 12, 1985.	80 dB(A)		
Heavy Industry (no demand for oral communication)		85	110
Light industry (decreasing demand for oral communication)		50-65	110

The national standards (SanPiN No. 0267-09 and SanPiN No. 0325-16) are fundamentally aligned with IFC/WBG General EHS Guidelines standards (see Table 44 and Table 45).

Moreover, the Project commits that the following room average sound pressure levels will not be exceeded inside the Plant in rooms which are provided for or which require the constant presence of staff:

- Main control room and offices 50 dB(A),
- Local control rooms 70 dB(A),
- Areas of computers 75 dB(A),
- Workshop and stores 85 dB(A).

The contribution of noise caused by the inventory in these rooms, e.g., workshop machines, as well as that caused by the staff is not taken into consideration.

Under consideration of an unabsorbing inner lining, the following room averaged sound pressure levels will be expected during normal operation: (excluding offices and recreation rooms):

- Turbine building 90 dB(A),
- Circulating water pump area 95 dB(A),
- Building for water treatment plant 90 dB(A).

Additionally, IFC/WBG General EHS Guidelines indicate that "Limits for vibration and action values, (i.e. the level of exposure at which remediation should be initiated) are provided by the American Conference of Governmental Industrial Hygienists. Exposure levels should be checked on the basis of daily exposure time and data provided by equipment manufacturers."

7.2 Observation and Baseline Conditions

The noise level in the environment was measured at four observation points to determine the baseline noise conditions in the project area between 10-14, July 2021. Table 46 shows the coordinates of the points of measurement of the noise level. The locations of the noise measurement points are presented in Figure 50.

Noise level measurement locations were selected to determine baseline noise levels at the possible nearest receptors near the Project Area. Point 1 is the nearest possible noise receptor, which is a waste processing facility. Point 2, Point 3, and Point 4 are the nearest residential areas to the project site, which can be affected by the project activities. These measurement points are selected to determine baseline noise levels because the workers at the waste processing facility are exposed to noise and residents living in the residential areas that are likely to be affected by the increased noise levels.

Table 46: Coordinates of points of measurement of noise levels and measurements of meteorological parameters

No.	Number of monitoring point	Coordinates, deg/min/sec	Distance to border of the Project Area (m)	Measurement Period	Measured Parameters and their frequencies
1.	Point 1	N= 37°22'38.1" E= 67°15'06.1"	250	10-13 July 2021	Meteorological parameters (48 measurements) Noise (35 measurements) weekdays and weekends Daytime and at night time of day Hourly, 1 time for 15 minutes.
2.	Point 2	N= 37°22'48.9" E= 67°13'48.4"	990	10-13 July 2021	Meteorological parameters (48 measurements) Noise (36 measurements) weekdays and weekends Daytime and at night time of day Hourly, 1 time for 15 minutes.
3.	Point 3	N= 37°21'31.8" E= 67°14'47.7"	1,690	11-14 July 2021	Meteorological parameters (48 measurements) Noise (27 measurements) weekdays and weekends Daytime and at night time of day Hourly, 1 time for 15 minutes.
4	Point 4	N= 37°21'45.3" E= 67° 12'55.8"	2,980		Meteorological parameters (48 measurements) Noise (27 measurements) weekdays and weekends Daytime and at night time of day Hourly, 1 time for 15 minutes.



Figure 50: Location of Sampling Points for Noise

Measurement of the noise level was carried out in accordance with GOST 31296.1-2005 "Noise. Description, measurement and assessment of noise on the ground. Part 1. Basic quantities and assessment procedures ", as well as GOST 31296.2-2006" Noise. Description, measurement and assessment of noise on the ground. Part 2. Determination of sound pressure levels". In accordance with this standard, noise measurements can be carried out when the wind speed is less than 5 m/s for the measurement period. Therefore, during measurements, noise levels could not be measured for certain hours when the wind speed in more than 5 m/s.

Measurement of weighted equivalent continuous noise level, maximum sound pressure level over time, measurements of minimum and maximum weighted sound pressure level with fast time weighting and measurement of sound pressure level in octave bands with geometric mean frequencies

(31.5; 63; 125; 250; 500 ; 1000; 2000; 4000; 8000 Hz) at the observation points was carried out using a special device - a sound level meter of the 1st and 3rd accuracy classes (sound level meter ShUM-1M30 and sound level meter VShV-003-M-2). Figure 51 shows noise level measurements and measurements of meteorological parameters at observation points during the period of monitoring the baseline noise levels.



Measurements of the noise level at the observation points



Sound level meter SHUM-1M30



Sound level meter VShV-003-M-2



Measurement of noise at point No. 1 (day)



Measurement of noise at Point Number 1 (night)



Measurement of noise at Point Number 2 (day)



Measurement of noise at Point Number 2 (night)



Measurement of noise at Point Number 3 (day)



Measurement of noise at Point Number 3 (night)



Measurement of noise at Point Number 4 (day).



Measurement of noise at Point Number 4 (night)

Figure 51: Noise measurements Photographs

To measure noise, various principles of operation of sound analyzers were used as follows:

- Measurement of an electrical signal coming from a condenser microphone and proportional to the sound pressure of acoustic noise;
- Conversion of sound vibrations into electric voltage by a microphone;

The list of methods used during measurement of noise and meteorological parameters are given in Table 47 Measurements of the noise level and meteorological parameters and description and assessment of the characteristics of noise levels at measurement points were selected in accordance with the accredited Sampling Acts.

Table 47: List of noise level measurement methods

Defined parameters	Measurement technique
Meteorological parameters: air temperature, pressure, wind direction and speed	GOST 17.2.3.01-86 "Nature protection. Atmosphere. Air quality control rules for settlements". GOST 31296.2-2006 "Noise. Description, measurement and assessment of noise on the ground. Part 2. Determination of sound pressure levels".

Simultaneously with the measurements of the noise level at the observation points: meteorological parameters were also measured which are air temperature, atmospheric pressure, wind speed and direction.

Laboratory assessment of the performed measurements to determine:

- Weighted equivalent continuous noise level;
- Minimum and maximum weighted sound pressure level with fast time weighing;
- The maximum sound pressure level over the measurement time;
- Sound pressure in octave bands with geometric mean frequencies.

In total, 130 measurements of the noise level and 192 measurements of meteorological parameters were carried out during the period of field research.

Based on the results of noise measurements and observations of the main meteorological parameters in the area of the project, carried out in July 2021, the following can be noted:

The results of observations of the main meteorological parameters during fieldwork at point 1 showed:

Measured values of temperatures by dates:

- July 10-11 - 25.3 °C - 45.4 °C;
- July 12-13 - 25.0 °C - 43.3 °C;

Measured values of atmospheric pressure by dates:

- July 10-11 - 722 - 727 mm Hg;
- July 12-13 - 722 - 724 mm Hg;

The winds from southeast and northeast directions prevailed.

Observation Point Number 1 is located in an open area (steppe), 1500 m from the road. A constant source of noise of natural origin (wind, insects), sometimes dogs barking can be heard from a distant village.

The A-weighted equivalent continuous noise level was in the range of 31.6 - 57.0 dB, the maximum sound pressure level was at 42.9 - 64.1 dB during the observations.

The results of observations of the main meteorological parameters during the fieldwork at point 2 showed:



Measured values of temperatures by dates:

- July 10-11 - 25.4 °C - 45.2 °C;
- July 12-13 - 25.2 °C - 42.0 °C;

Measured values of atmospheric pressure by dates:

- July 10-11 - 723 - 726 mm Hg;
- July 12-13 - 722 - 726 mm Hg;

The winds from southeast and northeast directions prevailed.

Observation Point Number 2 is located near the village, along a small road and near the storage of agricultural products. The main source of noise is trucks, but their traffic on the road is rare, the flow of cars is extremely insignificant.

The A-weighted equivalent continuous noise level was in the range of 30.1 - 56.4 dB, the maximum sound pressure level was 35.8 - 72.0 dB during the observations.

The results of observations of the main meteorological parameters during the fieldwork at point 3 showed:

Measured values of temperatures by dates:

- July 11-12 - 21.0 °C - 37.5 °C;
- July 13-14 - 22.0 °C - 38.1 °C;

Measured values of atmospheric pressure by dates:

- July 11-12 - 724 - 727 mm Hg;
- July 13-14 - 722 - 724 mm Hg;

The winds from southeast and east directions prevailed.

Observation Point Number 3 is located on the bank of the lake; the terrain has a highly rugged relief with a height difference of up to five meters. The main sources of natural noise are animals (wind, birds) and sometimes people swimming in the lake.

A weighted equivalent continuous noise level was in the range of 31.7 - 49.5 dB, the maximum sound pressure level was at the level of 37.5 - 59.8 dB during the observations.

The results of observations of the main meteorological parameters during field work at point 4 showed:

Measured values of temperatures by dates:

- July 11-12 - 26.1 °C - 43.1 °C;
- July 13-14 - 23.7 °C - 42.0 °C;

Measured values of atmospheric pressure by dates:

- July 11-12 - 724 - 726 mm Hg;
- July 13-14 - 723 - 724 mm Hg;

The winds from the northeast and east directions prevailed.

Observation Point Number 4 is located in the area near the lake (former sanatorium), with separate abandoned buildings. The main sources of noise are wind and birds.

A-weighted equivalent continuous noise level was in the range of 31.2 - 50.6 dB, the maximum sound pressure level was at 38.0 - 57.9 dB during the observations.

Detailed noise monitoring results are presented in the Appendix H and calculated day-time and night-time noise levels at measurement points are given in Table 48. The average of the noise levels recorded between 7 am and 10 pm as the daytime noise level, and the average of the noise levels recorded between 10 pm and 7 am as the night noise level were calculated.

Table 48: Noise Measurement Levels Summary

Receptor	Distance to the Project Area (m)	Background Noise Measurements (dBA)	
		Daytime (07:00 to 22:00)	Night-time (22:00 to 07:00)
Waste Processing Facility Measurement Point-1	250	44.07	38.72
Settlement Measurement Point-2	990	42.14	36.41
Settlement Measurement Point-3	1,690	41.47	38.23
Settlement Measurement Point-4	2,980	41.96	40.92

In addition to given noise measurements, supplementary noise level measurements are planned to be conducted in July 2022. These measurements will be conducted for 2 days and the time interval for each measurement will be 2 hours during morning, day and night time at each location. Measurements will be conducted in accordance with TS ISO 1996 1 and 2 standards. The measurement results will be presented in the Final ESIA report.

7.2.1 Sensitive Receptors

In the scope of the Projects, sensitive receptors were determined in sopping process and background noise measurements were implemented at that points. Background noise measurement points are shown in Figure 33. The table below show these receptors in representative clusters and have been identified based on the nearest receptors to the Project site in each cluster group.

Table 49: Potential Noise Receptors of the Project

Receptor	Receptor Type	Distance From Project Border (m)	Sensitivity	Justification
Point - 1	Waste Processing Facility	250	Medium	Workers at the site are exposed to noise.
Point - 2	Residential	990	Medium	Residents living in these residential areas will be particularly vulnerable to increase in ambient noise levels.
Point - 3	Residential	1,690	Low	Residents living in these residential areas can be particularly vulnerable to increase in ambient noise levels. It is far away from Project site.
Point - 4	Residential	2,980	Low	Residents living in these residential areas can be particularly vulnerable to increase in ambient noise levels. It is far away from Project site.

7.3 Potential Impacts, Mitigation, Management & Residual Impact

7.3.1 Construction Phase

The construction phase of the Project is planned to be conducted only during the day-time. However, if it is required to work during evening and night times, the necessary permits should be received from the authority. The permit will identify the type of construction activities that are allowed to be performed during night-time.

There will be no blasting during construction activities; therefore, vibration effect will not be of concern on the environment and human health. Nevertheless, there will be vibration due to heavy machinery. Vibrations resulted from the machines or buildings including machinery emerge from the dynamic force from the moving parts of the machines. Different parts of the machines generally make different frequency and vibration. Vibrations cause mechanical weathering in time. Generally, most important factor of a machine malfunction is vibration. Therefore, necessary maintenance shall be performed for the construction machines and equipment.

The main noise sources during construction phase are the heavy machineries. Heavy machinery planned to use during construction phase provided by Project owner and noise data for the anticipated plant/equipment to be used at the site has been obtained from 'British Standards: Code of practice for noise and vibration on construction and open sites [11] and are listed in Table 50.

Construction activities in relation to noise and vibration are likely to include:

- Site Preparation
- Civil Works
- Construction and mechanical Installation;

- Internal Road Paving/Compacting; and
- Works at associated facilities; and
- Movement of vehicles (on and off-site)

Table 50: Construction Machine & Equipment Types, Quantities and Expected Sound Levels

Vehicles & Equipment Name	Quantity	Sound Power Level (dB)
Site Preparation and Earth and Civil Works		
Wheel Loader	1	76
Backhoe Excavator	7	78
Crawler Bulldozer	1	88
Road Roller	2	79
Dump Truck	10	79
Diesel Generator	1	74
Truck	3	66
Forklift	2	77
Building and Foundation Works		
Platform Lorry	1	80
Concrete Pump Truck	3	79
Concrete Delivery Truck	6	80
Piling Machine	4	89
Diesel Generator	1	74
Truck	1	66
Forklift	2	77
Mechanical and Installation Works		
750t, 250t and 150t Crawling Crane	3	75
Hydraulic Lifting Device and Lifting Frame	1	67
50t Crawling Crane	1	71
50t Truck Crane	1	67
Gantry Crane	2	75
Electric Welding Machine	301	73
Tower and Vehicle Crane	2	76
Vehicle Crane	2	71
Diesel Generator	1	74
Truck	1	66
Forklift	2	77

The accumulation of noise from the above activities can introduce potential impacts for nearby receptors at different construction phases as discussed below. It is assumed that all construction machines will work at the same time and same location (worst case)

Total Sound Power Level (L_w) can be calculated via following formula:

$$L_w = 10 * \log \sum_{i=1}^n 10^{L_{wi}/10}$$

L_{wi} = Sound Power Level of Each Construction Machine (dB)

L_w = Total Sound Power Level (dB)

Site Preparation and Earth and Civil Works

The sound power level of each noise source was calculated by distributing it to 4-octave bands (see Table 51). Total sound power level, 500 Hz, 1000 Hz, 2000 Hz and 4000 Hz octave band sound power level calculations are used in the following formula. In the calculations, it is assumed that the total sound power levels are equally distributed on 4-octave bands.

$$L_w(i) = 10 * \log (10 (L_w / 10) / 4)$$

L_w = Sound power level of the source (dB)

Table 51: Distribution of Noise Sources Sound Power Levels in Octave Bands in Site Preparation and Earth and Civil Works

Noise Sources	Total	Sound Power Level (dB)			
		500 Hz	1000 Hz	2000 Hz	4000 Hz
Wheel Loader	76	70	70	70	70
Backhoe Excavator	78	72	72	72	72
Crawler Bulldozer	88	82	82	82	82
Road Roller	79	73	73	73	73
Dump Truck	79	73	73	73	73
Diesel Generator	74	68	68	68	68
Truck	66	60	60	60	60
Forklift	77	71	71	71	71

Sound pressure levels of each sources based on 4-octave bands are given in Table 52.

Table 52: Sound Pressure Levels of Noise Sources in Site Preparation and Earth and Civil Works

Noise Source	Distance (m)	Sound Pressure Level (dB)			
		500 Hz	1000 Hz	2000 Hz	4000 Hz
Wheel Loader	50	25.01	25.01	25.01	25.01
	100	18.99	18.99	18.99	18.99
	250	11.03	11.03	11.03	11.03
	500	5.01	5.01	5.01	5.01
	1000	-1.01	-1.01	-1.01	-1.01
	2000	-7.03	-7.03	-7.03	-7.03
	4000	-13.05	-13.05	-13.05	-13.05
Backhoe Excavator	50	27.01	27.01	27.01	27.01
	100	20.99	20.99	20.99	20.99
	250	13.03	13.03	13.03	13.03
	500	7.01	7.01	7.01	7.01
	1000	0.99	0.99	0.99	0.99
	2000	-5.03	-5.03	-5.03	-5.03
	4000	-11.05	-11.05	-11.05	-11.05
Crawler Bulldozer	50	37.01	37.01	37.01	37.01
	100	30.99	30.99	30.99	30.99
	250	23.03	23.03	23.03	23.03
	500	17.01	17.01	17.01	17.01
	1000	10.99	10.99	10.99	10.99
	2000	4.97	4.97	4.97	4.97
	4000	-1.05	-1.05	-1.05	-1.05
Road Roller	50	28.01	28.01	28.01	28.01
	100	21.99	21.99	21.99	21.99
	250	14.03	14.03	14.03	14.03
	500	8.01	8.01	8.01	8.01
	1000	1.99	1.99	1.99	1.99
	2000	-4.03	-4.03	-4.03	-4.03
	4000	-10.05	-10.05	-10.05	-10.05

Noise Source	Distance (m)	Sound Pressure Level (dB)			
		500 Hz	1000 Hz	2000 Hz	4000 Hz
Dump Truck	50	28.01	28.01	28.01	28.01
	100	21.99	21.99	21.99	21.99
	250	14.03	14.03	14.03	14.03
	500	8.01	8.01	8.01	8.01
	1000	1.99	1.99	1.99	1.99
	2000	-4.03	-4.03	-4.03	-4.03
	4000	-10.05	-10.05	-10.05	-10.05
Diesel Generator	50	23.01	23.01	23.01	23.01
	100	16.99	16.99	16.99	16.99
	250	9.03	9.03	9.03	9.03
	500	3.01	3.01	3.01	3.01
	1000	-3.01	-3.01	-3.01	-3.01
	2000	-9.03	-9.03	-9.03	-9.03
	4000	-15.05	-15.05	-15.05	-15.05
Truck	50	15.01	15.01	15.01	15.01
	100	8.99	8.99	8.99	8.99
	250	1.03	1.03	1.03	1.03
	500	-4.99	-4.99	-4.99	-4.99
	1000	-11.01	-11.01	-11.01	-11.01
	2000	-17.03	-17.03	-17.03	-17.03
	4000	-23.05	-23.05	-23.05	-23.05
Forklift	50	26.01	26.01	26.01	26.01
	100	19.99	19.99	19.99	19.99
	250	12.03	12.03	12.03	12.03
	500	6.01	6.01	6.01	6.01
	1000	-0.01	-0.01	-0.01	-0.01
	2000	-6.03	-6.03	-6.03	-6.03
	4000	-12.05	-12.05	-12.05	-12.05

As a result of the calculation with the correction factors, the sound levels of the 4-octave bands of each noise source were calculated (see Table 53).

Table 53: Sound Pressure Levels of Corrected Noise Sources in Site Preparation and Earth and Civil Works

Noise Source	Distance (m)	Sound Power Level (dB)			
		500 Hz	1000 Hz	2000 Hz	4000 Hz
Wheel Loader	50	21.81	25.01	26.21	26.01
	100	15.79	18.99	20.19	19.99
	250	7.83	11.03	12.23	12.03
	500	1.81	5.01	6.21	6.01
	1000	-4.21	-1.01	0.19	-0.01
	2000	-10.23	-7.03	-5.83	-6.03
	4000	-16.25	-13.05	-11.85	-12.05
Backhoe Excavator	50	23.81	27.01	28.21	28.01
	100	17.79	20.99	22.19	21.99
	250	9.83	13.03	14.23	14.03
	500	3.81	7.01	8.21	8.01
	1000	-2.21	0.99	2.19	1.99
	2000	-8.23	-5.03	-3.83	-4.03
	4000	-14.25	-11.05	-9.85	-10.05
Crawler Bulldozer	50	33.81	37.01	38.21	38.01
	100	27.79	30.99	32.19	31.99
	250	19.83	23.03	24.23	24.03
	500	13.81	17.01	18.21	18.01
	1000	7.79	10.99	12.19	11.99
	2000	1.77	4.97	6.17	5.97
	4000	-4.25	-1.05	0.15	-0.05
Road Roller	50	24.81	28.01	29.21	29.01
	100	18.79	21.99	23.19	22.99
	250	10.83	14.03	15.23	15.03
	500	4.81	8.01	9.21	9.01
	1000	-1.21	1.99	3.19	2.99
	2000	-7.23	-4.03	-2.83	-3.03
	4000	-13.25	-10.05	-8.85	-9.05
Dump Truck	50	24.81	28.01	29.21	29.01
	100	18.79	21.99	23.19	22.99
	250	10.83	14.03	15.23	15.03

Noise Source	Distance (m)	Sound Power Level (dB)			
		500 Hz	1000 Hz	2000 Hz	4000 Hz
	500	4.81	8.01	9.21	9.01
	1000	-1.21	1.99	3.19	2.99
	2000	-7.23	-4.03	-2.83	-3.03
	4000	-13.25	-10.05	-8.85	-9.05
Diesel Generator	50	19.81	23.01	24.21	24.01
	100	13.79	16.99	18.19	17.99
	250	5.83	9.03	10.23	10.03
	500	-0.19	3.01	4.21	4.01
	1000	-6.21	-3.01	-1.81	-2.01
	2000	-12.23	-9.03	-7.83	-8.03
	4000	-18.25	-15.05	-13.85	-14.05
Truck	50	11.81	15.01	16.21	16.01
	100	5.79	8.99	10.19	9.99
	250	-2.17	1.03	2.23	2.03
	500	-8.19	-4.99	-3.79	-3.99
	1000	-14.21	-11.01	-9.81	-10.01
	2000	-20.23	-17.03	-15.83	-16.03
	4000	-26.25	-23.05	-21.85	-22.05
Forklift	50	22.81	26.01	27.21	27.01
	100	16.79	19.99	21.19	20.99
	250	8.83	12.03	13.23	13.03
	500	2.81	6.01	7.21	7.01
	1000	-3.21	-0.01	1.19	0.99
	2000	-9.23	-6.03	-4.83	-5.03
	4000	-15.25	-12.05	-10.85	-11.05

Atmospheric absorption values at specific distances for each frequency were calculated using the following formula and calculated values are given in Table 54.

$$\text{Waste (Atmospheric Swallow)} = 7.4 * 10^{-8} (f^2 * r / H) \text{ dB}$$

f = frequency of noise source / center frequency of frequency band (Hz)

r = Distance from source (m)

H = Relative humidity of air (%) (According to the data recorded in Termez Meteorological Station for the years 2018, 2019 and 2020, 47% is taken.)

Table 54: Atmospheric Absorption Values Calculated Based on Distance

Frequency (Hz)	Distance (m)	Atmospheric Swallow
500	50	0.020
500	100	0.039
500	250	0.098
500	500	0.197
500	1000	0.394
500	2000	0.787
500	4000	1.574
1000	50	0.079
1000	100	0.157
1000	250	0.394
1000	500	0.787
1000	1000	1.574
1000	2000	3.149
1000	4000	6.298
2000	50	0.315
2000	100	0.630
2000	250	1.574
2000	500	3.149
2000	1000	6.298
2000	2000	12.596
2000	4000	25.191
4000	50	1.260
4000	100	2.519
4000	250	6.298
4000	500	12.596
4000	1000	25.191
4000	2000	50.383
4000	4000	100.766

After deducting the atmospheric absorption values, the net sound levels of the 4-octave bands of each noise source were calculated using the formula $LP = L_{Port} - A_{atm}$ (see Table 55).

Table 55: Clear Sound Levels of Noise Source Based on Distance in Site Preparation and Earth and Civil Works

Noise Source	Distance (m)	Sound Level (dBA)				Total Sound Level (dBA)
		500 Hz	1000 Hz	2000 Hz	4000 Hz	
Wheel Loader	50	21.79	24.93	25.90	24.75	30.605
	100	15.75	18.83	19.56	17.47	24.153
	250	7.73	10.64	10.66	5.73	15.170
	500	1.61	4.22	3.06	0.00	8.523
	1000	0.00	0.00	0.00	0.00	6.021
	2000	0.00	0.00	0.00	0.00	6.021
	4000	0.00	0.00	0.00	0.00	6.021
Backhoe Excavator	50	23.79	26.93	27.90	26.75	32.605
	100	17.75	20.83	21.56	19.47	26.153
	250	9.73	12.64	12.66	7.73	17.170
	500	3.61	6.22	5.06	0.00	10.292
	1000	0.00	0.00	0.00	0.00	6.021
	2000	0.00	0.00	0.00	0.00	6.021
	4000	0.00	0.00	0.00	0.00	6.021
Crawler Bulldozer	50	33.79	36.93	37.90	36.75	42.605
	100	27.75	30.83	31.56	29.47	36.153
	250	19.73	22.64	22.66	17.73	27.170
	500	13.61	16.22	15.06	5.41	20.019
	1000	7.40	9.42	5.89	0.00	12.813
	2000	0.98	1.82	0.00	0.00	6.789
	4000	0.00	0.00	0.00	0.00	6.021
Road Roller	50	24.79	27.93	28.90	27.75	33.605
	100	18.75	21.83	22.56	20.47	27.153
	250	10.73	13.64	13.66	8.73	18.170

Noise Source	Distance (m)	Sound Level (dBA)				Total Sound Level (dBA)
		500 Hz	1000 Hz	2000 Hz	4000 Hz	
	500	4.61	7.22	6.06	-3.59	11.019
	1000	-1.60	0.42	-3.11	-22.20	3.591
	2000	-8.02	-7.18	-15.43	0.00	1.392
	4000	-14.83	-16.35	-34.04	0.00	0.239
Dump Truck	50	24.79	27.93	28.90	27.75	33.605
	100	18.75	21.83	22.56	20.47	27.153
	250	10.73	13.64	13.66	8.73	18.170
	500	4.61	7.22	6.06	-3.59	11.019
	1000	-1.60	0.42	-3.11	-22.20	3.591
	2000	-8.02	-7.18	-15.43	0.00	1.392
	4000	-14.83	-16.35	0.00	0.00	3.130
Diesel Generator	50	19.79	22.93	24.21	22.75	28.714
	100	13.75	16.83	18.19	15.47	22.383
	250	5.73	8.64	10.23	3.73	13.794
	500	-0.39	2.22	4.21	-8.59	7.290
	1000	-6.60	-4.58	-1.81	-27.20	0.890
	2000	-13.02	-12.18	-7.83	0.00	1.056
	4000	-19.83	-21.35	-13.85	0.00	0.249
Truck	50	11.79	14.93	15.90	14.75	20.605
	100	5.75	8.83	9.56	7.47	14.153
	250	-2.27	0.64	0.66	-4.27	5.170
	500	-8.39	-5.78	-6.94	-16.59	-1.981
	1000	-14.60	-12.58	-16.11	-35.20	-9.409
	2000	-21.02	-20.18	-28.43	0.00	0.081
	4000	-27.83	-29.35	-47.04	0.00	0.012
Forklift	50	22.79	25.93	26.90	25.75	31.605

Noise Source	Distance (m)	Sound Level (dBA)				Total Sound Level (dBA)
		500 Hz	1000 Hz	2000 Hz	4000 Hz	
	100	16.75	19.83	20.56	18.47	25.153
	250	8.73	11.64	11.66	6.73	16.170
	500	2.61	5.22	4.06	-5.59	9.019
	1000	-3.60	-1.58	-5.11	-24.20	1.591
	2000	-10.02	-9.18	-17.43	0.00	0.929
	4000	-16.83	-18.35	-36.04	0.00	0.152

The total sound level during the construction phase is calculated using the following formula.

LT = Total sound level (dBA)

$$LT = 10 \log \sum 10^{L_i / 10}$$

Equivalent noise levels, assuming that all machines in the field preparation works simultaneously, are given below (see Table 56).

Table 56: Clear Sound Levels of Noise Sources Depending on Distance in Site Preparation and Earth and Civil Works

Distance (m)	L(day,evening,night) (dBA)
50	48.12
100	41.67
250	32.71
500	25.64
1000	19.31
2000	17.83
4000	17.12

Building and Foundation Works

The sound power level of each noise source was calculated by distributing it to 4-octave bands (see Table 57). Total sound power level, 500 Hz, 1000 Hz, 2000 Hz and 4000 Hz octave band sound power level calculations are used in the following formula. In the calculations, it is assumed that the total sound power levels are equally distributed on 4-octave bands.

$$L_w(i) = 10 * \log(10 (L_w / 10) / 4)$$

L_w = Sound power level of the source (dB)

Table 57: Distribution of Noise Sources Sound Power Levels in Octave Bands in Building and Foundation Works

Noise Sources	Total	Sound Power Level (dB)			
		500 Hz	1000 Hz	2000 Hz	4000 Hz
Platform Lorry	80	74	74	74	74
Concrete Pump Truck	79	73	73	73	73
Concrete Delivery Truck	80	74	74	74	74
Piling Machine	89	83	83	83	83
Diesel Generator	74	68	68	68	68
Truck	66	60	60	60	60
Forklift	77	71	71	71	71

Sound pressure levels of each sources based on 4-octave bands are given in Table 58.

Table 58: Sound Pressure Levels of Noise Sources in Building and Foundation Works

Noise Source	Distance (m)	Sound Pressure Level (dB)			
		500 Hz	1000 Hz	2000 Hz	4000 Hz
Platform Lorry	50	29.01	29.01	29.01	29.01
	100	22.99	22.99	22.99	22.99
	250	15.03	15.03	15.03	15.03
	500	9.01	9.01	9.01	9.01
	1000	2.99	2.99	2.99	2.99
	2000	-3.03	-3.03	-3.03	-3.03
	4000	-9.05	-9.05	-9.05	-9.05
Concrete Pump Truck	50	28.01	28.01	28.01	28.01
	100	21.99	21.99	21.99	21.99
	250	14.03	14.03	14.03	14.03
	500	8.01	8.01	8.01	8.01
	1000	1.99	1.99	1.99	1.99
	2000	-4.03	-4.03	-4.03	-4.03
	4000	-10.05	-10.05	-10.05	-10.05
Concrete Delivery Truck	50	29.01	29.01	29.01	29.01

Noise Source	Distance (m)	Sound Pressure Level (dB)			
		500 Hz	1000 Hz	2000 Hz	4000 Hz
	100	22.99	22.99	22.99	22.99
	250	15.03	15.03	15.03	15.03
	500	9.01	9.01	9.01	9.01
	1000	2.99	2.99	2.99	2.99
	2000	-3.03	-3.03	-3.03	-3.03
	4000	-9.05	-9.05	-9.05	-9.05
	50	38.01	38.01	38.01	38.01
Piling Machine	100	31.99	31.99	31.99	31.99
	250	24.03	24.03	24.03	24.03
	500	18.01	18.01	18.01	18.01
	1000	11.99	11.99	11.99	11.99
	2000	5.97	5.97	5.97	5.97
	4000	-0.05	-0.05	-0.05	-0.05
	50	23.01	23.01	23.01	23.01
Diesel Generator	100	16.99	16.99	16.99	16.99
	250	9.03	9.03	9.03	9.03
	500	3.01	3.01	3.01	3.01
	1000	-3.01	-3.01	-3.01	-3.01
	2000	-9.03	-9.03	-9.03	-9.03
	4000	-15.05	-15.05	-15.05	-15.05
	50	15.01	15.01	15.01	15.01
Truck	100	8.99	8.99	8.99	8.99
	250	1.03	1.03	1.03	1.03
	500	-4.99	-4.99	-4.99	-4.99
	1000	-11.01	-11.01	-11.01	-11.01
	2000	-17.03	-17.03	-17.03	-17.03
	4000	-23.05	-23.05	-23.05	-23.05
	50	26.01	26.01	26.01	26.01
Forklift	100	19.99	19.99	19.99	19.99
	250	12.03	12.03	12.03	12.03
	500	6.01	6.01	6.01	6.01
	1000	-0.01	-0.01	-0.01	-0.01
	2000	-6.03	-6.03	-6.03	-6.03
	4000	-12.05	-12.05	-12.05	-12.05

As a result of the calculation with the correction factors, the sound levels of the 4-octave bands of each noise source were calculated (see Table 59).

Table 59: Sound Pressure Levels of Corrected Noise Sources in Building and Foundation Works

Noise Source	Distance (m)	Sound Power Level (dB)			
		500 Hz	1000 Hz	2000 Hz	4000 Hz
Platform Lorry	50	25.81	29.01	30.21	30.01
	100	19.79	22.99	24.19	23.99
	250	11.83	15.03	16.23	16.03
	500	5.81	9.01	10.21	10.01
	1000	-0.21	2.99	4.19	3.99
	2000	-6.23	-3.03	-1.83	-2.03
	4000	-12.25	-9.05	-7.85	-8.05
Concrete Pump Truck	50	24.81	28.01	29.21	29.01
	100	18.79	21.99	23.19	22.99
	250	10.83	14.03	15.23	15.03
	500	4.81	8.01	9.21	9.01
	1000	-1.21	1.99	3.19	2.99
	2000	-7.23	-4.03	-2.83	-3.03
	4000	-13.25	-10.05	-8.85	-9.05
Concrete Delivery Truck	50	25.81	29.01	30.21	30.01
	100	19.79	22.99	24.19	23.99
	250	11.83	15.03	16.23	16.03
	500	5.81	9.01	10.21	10.01
	1000	-0.21	2.99	4.19	3.99
	2000	-6.23	-3.03	-1.83	-2.03
	4000	-12.25	-9.05	-7.85	-8.05
Piling Machine	50	34.81	38.01	39.21	39.01
	100	28.79	31.99	33.19	32.99
	250	20.83	24.03	25.23	25.03
	500	14.81	18.01	19.21	19.01
	1000	8.79	11.99	13.19	12.99
	2000	2.77	5.97	7.17	6.97
	4000	-3.25	-0.05	1.15	0.95
Diesel Generator	50	19.81	23.01	24.21	24.01
	100	13.79	16.99	18.19	17.99

Noise Source	Distance (m)	Sound Power Level (dB)			
		500 Hz	1000 Hz	2000 Hz	4000 Hz
	250	5.83	9.03	10.23	10.03
	500	-0.19	3.01	4.21	4.01
	1000	-6.21	-3.01	-1.81	-2.01
	2000	-12.23	-9.03	-7.83	-8.03
	4000	-18.25	-15.05	-13.85	-14.05
	50	11.81	15.01	16.21	16.01
	100	5.79	8.99	10.19	9.99
Truck	250	-2.17	1.03	2.23	2.03
	500	-8.19	-4.99	-3.79	-3.99
	1000	-14.21	-11.01	-9.81	-10.01
	2000	-20.23	-17.03	-15.83	-16.03
	4000	-26.25	-23.05	-21.85	-22.05
	50	22.81	26.01	27.21	27.01
	100	16.79	19.99	21.19	20.99
	250	8.83	12.03	13.23	13.03
Forklift	500	2.81	6.01	7.21	7.01
	1000	-3.21	-0.01	1.19	0.99
	2000	-9.23	-6.03	-4.83	-5.03
	4000	-15.25	-12.05	-10.85	-11.05

Atmospheric absorption values at specific distances for each frequency were calculated using the following formula and calculated values are given in Table 60.

$$\text{Waste (Atmospheric Swallow)} = 7.4 * 10^{-8} (f^2 * r / H) \text{ dB}$$

f = frequency of noise source / center frequency of frequency band (Hz)

r = Distance from source (m)

H = Relative humidity of air (%) (According to the data recorded in Termez Meteorological Station for the years 2018, 2019 and 2020, 47% is taken.)

Table 60: Atmospheric Absorption Values Calculated Based on Distance

Frequency (Hz)	Distance (m)	Atmospheric Swallow
500	50	0.020
500	100	0.039
500	250	0.098
500	500	0.197
500	1000	0.394
500	2000	0.787
500	4000	1.574
1000	50	0.079
1000	100	0.157
1000	250	0.394
1000	500	0.787
1000	1000	1.574
1000	2000	3.149
1000	4000	6.298
2000	50	0.315
2000	100	0.630
2000	250	1.574
2000	500	3.149
2000	1000	6.298
2000	2000	12.596
2000	4000	25.191
4000	50	1.260
4000	100	2.519
4000	250	6.298
4000	500	12.596
4000	1000	25.191
4000	2000	50.383
4000	4000	100.766

After deducting the atmospheric absorption values, the net sound levels of the 4-octave bands of each noise source were calculated using the formula $LP = L_{Port} - A_{atm}$ (see Table 61).

Table 61: Clear Sound Levels of Noise Source Based on Distance in Building and Foundation Works

Noise Source	Distance (m)	Sound Level (dBA)				Total Sound Level (dBA)
		500 Hz	1000 Hz	2000 Hz	4000 Hz	
Platform Lorry	50	25.79	28.93	29.90	28.75	34.605
	100	19.75	22.83	23.56	21.47	28.153
	250	11.73	14.64	14.66	9.73	19.170
	500	5.61	8.22	7.06	0.00	12.140
	1000	0.00	1.42	0.00	0.00	6.420
	2000	0.00	0.00	0.00	0.00	6.021
	4000	0.00	0.00	0.00	0.00	6.021
Concrete Pump Truck	50	24.79	27.93	28.90	27.75	33.605
	100	18.75	21.83	22.56	20.47	27.153
	250	10.73	13.64	13.66	8.73	18.170
	500	4.61	7.22	6.06	0.00	11.208
	1000	0.00	0.42	0.00	0.00	6.128
	2000	0.00	0.00	0.00	0.00	6.021
	4000	0.00	0.00	0.00	0.00	6.021
Concrete Delivery Truck	50	25.79	28.93	29.90	28.75	34.605
	100	19.75	22.83	23.56	21.47	28.153
	250	11.73	14.64	14.66	9.73	19.170
	500	5.61	8.22	7.06	0.00	12.140
	1000	0.00	1.42	0.00	0.00	6.420
	2000	0.00	0.00	0.00	0.00	6.021
	4000	0.00	0.00	0.00	0.00	6.021
Piling Machine	50	34.79	37.93	38.90	37.75	43.605
	100	28.75	31.83	32.56	30.47	37.153
	250	20.73	23.64	23.66	18.73	28.170
	500	14.61	17.22	16.06	6.41	21.019
	1000	8.40	10.42	6.89	-12.20	13.591
	2000	1.98	2.82	-5.43	0.00	6.793
	4000	-4.83	-6.35	-24.04	0.00	1.945
Diesel Generator	50	19.79	22.93	23.90	22.75	28.605
	100	13.75	16.83	17.56	15.47	22.153
	250	5.73	8.64	8.66	3.73	13.170
	500	-0.39	2.22	1.06	-8.59	6.019
	1000	-6.60	-4.58	-8.11	-27.20	-1.409

Noise Source	Distance (m)	Sound Level (dBA)				Total Sound Level (dBA)
		500 Hz	1000 Hz	2000 Hz	4000 Hz	
Truck	2000	-13.02	-12.18	-20.43	0.00	0.490
	4000	-19.83	-21.35	0.00	0.00	3.049
	50	11.79	14.93	16.21	14.75	20.714
	100	5.75	8.83	10.19	7.47	14.383
	250	-2.27	0.64	2.23	-4.27	5.794
	500	-8.39	-5.78	-3.79	-16.59	-0.710
	1000	-14.60	-12.58	-9.81	-35.20	-7.110
	2000	-21.02	-20.18	-15.83	0.00	0.185
	4000	-27.83	-29.35	-21.85	0.00	0.040
	Forklift	50	22.79	25.93	26.90	25.75
100		16.75	19.83	20.56	18.47	25.153
250		8.73	11.64	11.66	6.73	16.170
500		2.61	5.22	4.06	-5.59	9.019
1000		-3.60	-1.58	-5.11	-24.20	1.591
2000		-10.02	-9.18	-17.43	0.00	0.929
4000		-16.83	-18.35	-36.04	0.00	0.152

The total sound level during the construction phase is calculated using the following formula.

LT = Total sound level (dBA)

$$LT = 10 \log \sum 10^{L_i / 10}$$

Equivalent noise levels, assuming that all machines in building and foundation works simultaneously, are given below (see Table 62).

Table 62: Clear Sound Levels of Noise Sources Depending on Distance in Building and Foundation Works

Distance (m)	L(day,evening,night,) (dBA)
50	50.84
100	44.39
250	35.40
500	28.28
1000	21.37
2000	18.03
4000	17.10

Mechanical and Installation Works

The sound power level of each noise source was calculated by distributing it to 4-octave bands (see Table 63). Total sound power level, 500 Hz, 1000 Hz, 2000 Hz and 4000 Hz octave band sound power level calculations are used in the following formula. In the calculations, it is assumed that the total sound power levels are equally distributed on 4-octave bands.

$$L_w(i) = 10 * \log(10(L_w / 10) / 4)$$

L_w = Sound power level of the source (dB)

Table 63: Distribution of Noise Sources Sound Power Levels in Octave Bands in Mechanical and Installation Works

Noise Sources	Total	Sound Power Level (dB)			
		500 Hz	1000 Hz	2000 Hz	4000 Hz
750t, 250t and 150t Crawling Crane	75	69	69	69	69
Hydraulic Lifting Device and Lifting Frame	67	61	61	61	61
50t Crawling Crane	71	65	65	65	65
50t Truck Crane	67	61	61	61	61
Gantry Crane	75	69	69	69	69
Electric Welding Machine	73	67	67	67	67
Tower and Vehicle Crane	76	70	70	70	70
Vehicle Crane	71	65	65	65	65
Diesel Generator	74	68	68	68	68
Truck	66	60	60	60	60
Forklift	77	71	71	71	71

Sound pressure levels of each sources based on 4-octave bands are given in Table 64.

Table 64: Sound Pressure Levels of Noise Sources in Mechanical and Installation Works

Noise Source	Distance (m)	Sound Pressure Level (dB)			
		500 Hz	1000 Hz	2000 Hz	4000 Hz
750t, 250t and 150t Crawling Crane	50	24.01	24.01	24.01	24.01
	100	17.99	17.99	17.99	17.99
	250	10.03	10.03	10.03	10.03
	500	4.01	4.01	4.01	4.01
	1000	-2.01	-2.01	-2.01	-2.01
	2000	-8.03	-8.03	-8.03	-8.03
	4000	-14.05	-14.05	-14.05	-14.05
Hydraulic Lifting Device and Lifting Frame	50	16.01	16.01	16.01	16.01
	100	9.99	9.99	9.99	9.99
	250	2.03	2.03	2.03	2.03
	500	-3.99	-3.99	-3.99	-3.99

Noise Source	Distance (m)	Sound Pressure Level (dB)			
		500 Hz	1000 Hz	2000 Hz	4000 Hz
	1000	-10.01	-10.01	-10.01	-10.01
	2000	-16.03	-16.03	-16.03	-16.03
	4000	-22.05	-22.05	-22.05	-22.05
50t Crawling Crane	50	20.01	20.01	20.01	20.01
	100	13.99	13.99	13.99	13.99
	250	6.03	6.03	6.03	6.03
	500	0.01	0.01	0.01	0.01
	1000	-6.01	-6.01	-6.01	-6.01
	2000	-12.03	-12.03	-12.03	-12.03
	4000	-18.05	-18.05	-18.05	-18.05
	4000	-18.05	-18.05	-18.05	-18.05
50t Truck Crane	50	16.01	16.01	16.01	16.01
	100	9.99	9.99	9.99	9.99
	250	2.03	2.03	2.03	2.03
	500	-3.99	-3.99	-3.99	-3.99
	1000	-10.01	-10.01	-10.01	-10.01
	2000	-16.03	-16.03	-16.03	-16.03
	4000	-22.05	-22.05	-22.05	-22.05
Gantry Crane	50	24.01	24.01	24.01	24.01
	100	17.99	17.99	17.99	17.99
	250	10.03	10.03	10.03	10.03
	500	4.01	4.01	4.01	4.01
	1000	-2.01	-2.01	-2.01	-2.01
	2000	-8.03	-8.03	-8.03	-8.03
	4000	-14.05	-14.05	-14.05	-14.05
Electric Welding Machine	50	22.01	22.01	22.01	22.01
	100	15.99	15.99	15.99	15.99
	250	8.03	8.03	8.03	8.03
	500	2.01	2.01	2.01	2.01
	1000	-4.01	-4.01	-4.01	-4.01
	2000	-10.03	-10.03	-10.03	-10.03
	4000	-16.05	-16.05	-16.05	-16.05
Tower and Vehicle Crane	50	25.01	25.01	25.01	25.01
	100	18.99	18.99	18.99	18.99
	250	11.03	11.03	11.03	11.03
	500	5.01	5.01	5.01	5.01
	1000	-1.01	-1.01	-1.01	-1.01
	2000	-7.03	-7.03	-7.03	-7.03
	4000	-13.05	-13.05	-13.05	-13.05
Vehicle Crane	50	20.01	20.01	20.01	20.01
	100	13.99	13.99	13.99	13.99
	250	6.03	6.03	6.03	6.03
	500	0.01	0.01	0.01	0.01

Noise Source	Distance (m)	Sound Pressure Level (dB)			
		500 Hz	1000 Hz	2000 Hz	4000 Hz
Diesel Generator	1000	-6.01	-6.01	-6.01	-6.01
	2000	-12.03	-12.03	-12.03	-12.03
	4000	-18.05	-18.05	-18.05	-18.05
	50	23.01	23.01	23.01	23.01
	100	16.99	16.99	16.99	16.99
	250	9.03	9.03	9.03	9.03
	500	3.01	3.01	3.01	3.01
	1000	-3.01	-3.01	-3.01	-3.01
	2000	-9.03	-9.03	-9.03	-9.03
	4000	-15.05	-15.05	-15.05	-15.05
Truck	50	15.01	15.01	15.01	15.01
	100	8.99	8.99	8.99	8.99
	250	1.03	1.03	1.03	1.03
	500	-4.99	-4.99	-4.99	-4.99
	1000	-11.01	-11.01	-11.01	-11.01
	2000	-17.03	-17.03	-17.03	-17.03
	4000	-23.05	-23.05	-23.05	-23.05
Forklift	50	26.01	26.01	26.01	26.01
	100	19.99	19.99	19.99	19.99
	250	12.03	12.03	12.03	12.03
	500	6.01	6.01	6.01	6.01
	1000	-0.01	-0.01	-0.01	-0.01
	2000	-6.03	-6.03	-6.03	-6.03
	4000	-12.05	-12.05	-12.05	-12.05

As a result of the calculation with the correction factors, the sound levels of the 4-octave bands of each noise source were calculated (see Table 65).

Table 65: Sound Pressure Levels of Corrected Noise Sources in Mechanical and Installation Works

Noise Source	Distance (m)	Sound Power Level (dB)			
		500 Hz	1000 Hz	2000 Hz	4000 Hz
750t, 250t and 150t Crawling Crane	50	20.81	24.01	25.21	25.01
	100	14.79	17.99	19.19	18.99
	250	6.83	10.03	11.23	11.03
	500	0.81	4.01	5.21	5.01
	1000	-5.21	-2.01	-0.81	-1.01
	2000	-11.23	-8.03	-6.83	-7.03

Noise Source	Distance (m)	Sound Power Level (dB)			
		500 Hz	1000 Hz	2000 Hz	4000 Hz
Hydraulic Lifting Device and Lifting Frame	4000	-17.25	-14.05	-12.85	-13.05
	50	12.81	16.01	17.21	17.01
	100	6.79	9.99	11.19	10.99
	250	-1.17	2.03	3.23	3.03
	500	-7.19	-3.99	-2.79	-2.99
	1000	-13.21	-10.01	-8.81	-9.01
	2000	-19.23	-16.03	-14.83	-15.03
	4000	-25.25	-22.05	-20.85	-21.05
50t Crawling Crane	50	16.81	20.01	21.21	21.01
	100	10.79	13.99	15.19	14.99
	250	2.83	6.03	7.23	7.03
	500	-3.19	0.01	1.21	1.01
	1000	-9.21	-6.01	-4.81	-5.01
	2000	-15.23	-12.03	-10.83	-11.03
	4000	-21.25	-18.05	-16.85	-17.05
50t Truck Crane	50	12.81	16.01	17.21	17.01
	100	6.79	9.99	11.19	10.99
	250	-1.17	2.03	3.23	3.03
	500	-7.19	-3.99	-2.79	-2.99
	1000	-13.21	-10.01	-8.81	-9.01
	2000	-19.23	-16.03	-14.83	-15.03
	4000	-25.25	-22.05	-20.85	-21.05
Gantry Crane	50	20.81	24.01	25.21	25.01
	100	14.79	17.99	19.19	18.99
	250	6.83	10.03	11.23	11.03
	500	0.81	4.01	5.21	5.01
	1000	-5.21	-2.01	-0.81	-1.01
	2000	-11.23	-8.03	-6.83	-7.03
	4000	-17.25	-14.05	-12.85	-13.05

Noise Source	Distance (m)	Sound Power Level (dB)			
		500 Hz	1000 Hz	2000 Hz	4000 Hz
Electric Welding Machine	50	18.81	22.01	23.21	23.01
	100	12.79	15.99	17.19	16.99
	250	4.83	8.03	9.23	9.03
	500	-1.19	2.01	3.21	3.01
	1000	-7.21	-4.01	-2.81	-3.01
	2000	-13.23	-10.03	-8.83	-9.03
	4000	-19.25	-16.05	-14.85	-15.05
	Tower and Vehicle Crane	50	21.81	25.01	26.21
100		15.79	18.99	20.19	19.99
250		7.83	11.03	12.23	12.03
500		1.81	5.01	6.21	6.01
1000		-4.21	-1.01	0.19	-0.01
2000		-10.23	-7.03	-5.83	-6.03
4000		-16.25	-13.05	-11.85	-12.05
Vehicle Crane		50	16.81	20.01	21.21
	100	10.79	13.99	15.19	14.99
	250	2.83	6.03	7.23	7.03
	500	-3.19	0.01	1.21	1.01
	1000	-9.21	-6.01	-4.81	-5.01
	2000	-15.23	-12.03	-10.83	-11.03
	4000	-21.25	-18.05	-16.85	-17.05
	Diesel Generator	50	19.81	23.01	24.21
100		13.79	16.99	18.19	17.99
250		5.83	9.03	10.23	10.03
500		-0.19	3.01	4.21	4.01
1000		-6.21	-3.01	-1.81	-2.01
2000		-12.23	-9.03	-7.83	-8.03
4000		-18.25	-15.05	-13.85	-14.05

Noise Source	Distance (m)	Sound Power Level (dB)			
		500 Hz	1000 Hz	2000 Hz	4000 Hz
Truck	50	11.81	15.01	16.21	16.01
	100	5.79	8.99	10.19	9.99
	250	-2.17	1.03	2.23	2.03
	500	-8.19	-4.99	-3.79	-3.99
	1000	-14.21	-11.01	-9.81	-10.01
	2000	-20.23	-17.03	-15.83	-16.03
	4000	-26.25	-23.05	-21.85	-22.05
Forklift	50	22.81	26.01	27.21	27.01
	100	16.79	19.99	21.19	20.99
	250	8.83	12.03	13.23	13.03
	500	2.81	6.01	7.21	7.01
	1000	-3.21	-0.01	1.19	0.99
	2000	-9.23	-6.03	-4.83	-5.03
	4000	-15.25	-12.05	-10.85	-11.05

Atmospheric absorption values at specific distances for each frequency were calculated using the following formula and calculated values are given in Table 66.

$$\text{Waste (Atmospheric Swallow)} = 7.4 * 10^{-8} (f^2 * r / H) \text{ dB}$$

f = frequency of noise source / center frequency of frequency band (Hz)

r = Distance from source (m)

H = Relative humidity of air (%) (According to the data recorded in Temez Meteorological Station for the years 2018, 2019 and 2020, 47% is taken.)

Table 66: Atmospheric Absorption Values Calculated Based on Distance

Frequency (Hz)	Distance (m)	Atmospheric Swallow
500	50	0.020
500	100	0.039
500	250	0.098
500	500	0.197
500	1000	0.394
500	2000	0.787

Frequency (Hz)	Distance (m)	Atmospheric Swallow
500	4000	1.574
1000	50	0.079
1000	100	0.157
1000	250	0.394
1000	500	0.787
1000	1000	1.574
1000	2000	3.149
1000	4000	6.298
2000	50	0.315
2000	100	0.630
2000	250	1.574
2000	500	3.149
2000	1000	6.298
2000	2000	12.596
2000	4000	25.191
4000	50	1.260
4000	100	2.519
4000	250	6.298
4000	500	12.596
4000	1000	25.191
4000	2000	50.383
4000	4000	100.766

After deducting the atmospheric absorption values, the net sound levels of the 4-octave bands of each noise source were calculated using the formula $LP = L_{Port} - A_{atm}$ (see Table 67).

Table 67: Clear Sound Levels of Noise Source Based on Distance in Mechanical and Installation Works

Noise Source	Distance (m)	Sound Level (dBA)				Total Sound Level (dBA)
		500 Hz	1000 Hz	2000 Hz	4000 Hz	
750t, 250t and 150t Crawling Crane	50	20.79	23.93	24.90	23.75	29.605
	100	14.75	17.83	18.56	16.47	23.153
	250	6.73	9.64	9.66	4.73	14.170
	500	0.61	3.22	2.06	0.00	7.679
	1000	0.00	0.00	0.00	0.00	6.021
	2000	0.00	0.00	0.00	0.00	6.021
	4000	0.00	0.00	0.00	0.00	6.021
Hydraulic Lifting Device and Lifting Frame	50	12.79	15.93	16.90	15.75	21.605
	100	6.75	9.83	10.56	8.47	15.153
	250	0.00	1.64	1.66	0.00	6.922
	500	0.00	0.00	0.00	0.00	6.021
	1000	0.00	0.00	0.00	0.00	6.021
	2000	0.00	0.00	0.00	0.00	6.021
	4000	0.00	0.00	0.00	0.00	6.021
50t Crawling Crane	50	16.79	19.93	20.90	19.75	25.605
	100	10.75	13.83	14.56	12.47	19.153
	250	2.73	5.64	5.66	0.73	10.170
	500	0.00	0.00	0.00	0.00	6.021
	1000	0.00	0.00	0.00	0.00	6.021
	2000	0.00	0.00	0.00	0.00	6.021
	4000	0.00	0.00	0.00	0.00	6.021
50t Truck Crane	50	12.79	15.93	16.90	15.75	21.605
	100	6.75	9.83	10.56	8.47	15.153
	250	-1.27	1.64	1.66	-3.27	6.170
	500	-7.39	-4.78	-5.94	-15.59	-0.981
	1000	-13.60	-11.58	-15.11	-34.20	-8.409
	2000	-20.02	-19.18	-27.43	0.00	0.102
	4000	-26.83	-28.35	-46.04	0.00	0.015

Noise Source	Distance (m)	Sound Level (dBA)				Total Sound Level (dBA)
		500 Hz	1000 Hz	2000 Hz	4000 Hz	
Gantry Crane	50	20.79	23.93	24.90	23.75	29.605
	100	14.75	17.83	18.56	16.47	23.153
	250	6.73	9.64	9.66	4.73	14.170
	500	0.61	3.22	2.06	-7.59	7.019
	1000	-5.60	-3.58	-7.11	-26.20	-0.409
	2000	-12.02	-11.18	-19.43	0.00	0.609
	4000	-18.83	-20.35	0.00	0.00	3.059
Electric Welding Machine	50	18.79	21.93	23.21	21.75	27.714
	100	12.75	15.83	17.19	14.47	21.383
	250	4.73	7.64	9.23	2.73	12.794
	500	-1.39	1.22	3.21	-9.59	6.290
	1000	-7.60	-5.58	-2.81	-28.20	-0.110
	2000	-14.02	-13.18	-8.83	0.00	0.859
	4000	-20.83	-22.35	-14.85	0.00	0.199
Tower and Vehicle Crane	50	21.79	24.93	25.90	24.75	30.605
	100	15.75	18.83	19.56	17.47	24.153
	250	7.73	10.64	10.66	5.73	15.170
	500	1.61	4.22	3.06	-6.59	8.019
	1000	-4.60	-2.58	-6.11	-25.20	0.591
	2000	-11.02	-10.18	-18.43	0.00	0.753
	4000	-17.83	-19.35	-37.04	0.00	0.121
Vehicle Crane	50	16.79	19.93	20.90	19.75	25.605
	100	10.75	13.83	14.56	12.47	19.153
	250	2.73	5.64	5.66	0.73	10.170
	500	-3.39	-0.78	-1.94	-11.59	3.019
	1000	-9.60	-7.58	-11.11	-30.20	-4.409
	2000	-16.02	-15.18	-23.43	0.00	0.253
	4000	-22.83	-24.35	-42.04	0.00	0.039

Noise Source	Distance (m)	Sound Level (dBA)				Total Sound Level (dBA)
		500 Hz	1000 Hz	2000 Hz	4000 Hz	
Diesel Generator	50	19.79	22.93	23.90	22.75	0.000
	100	13.75	16.83	17.56	15.47	0.000
	250	5.73	8.64	8.66	3.73	0.000
	500	-0.39	2.22	1.06	-8.59	0.000
	1000	-6.60	-4.58	-8.11	-27.20	0.000
	2000	-13.02	-12.18	-20.43	0.00	0.000
	4000	-19.83	-21.35	0.00	0.00	0.000
Truck	50	11.79	14.99	16.19	15.99	-0.02
	100	5.75	8.95	10.15	9.95	-0.04
	250	-2.27	0.93	2.13	1.93	-0.10
	500	-8.39	-5.19	-3.99	-4.19	-0.20
	1000	-14.60	-11.40	-10.20	-10.40	-0.39
	2000	-21.02	-17.82	-16.62	-16.82	-0.79
	4000	-27.83	-24.63	-23.43	-23.63	-1.57
Forklift	50	22.79	25.99	27.19	26.99	-0.02
	100	16.75	19.95	21.15	20.95	-0.04
	250	8.73	11.93	13.13	12.93	-0.10
	500	2.61	5.81	7.01	6.81	-0.20
	1000	-3.60	-0.40	0.80	0.60	-0.39
	2000	-10.02	-6.82	-5.62	-5.82	-0.79
	4000	-16.83	-13.63	-12.43	-12.63	-1.57

The total sound level during the construction phase is calculated using the following formula.

LT = Total sound level (dBA)

$$LT = 10 \log \sum 10^{Li / 10}$$

Equivalent noise levels, assuming that all machines in mechanical and installation works simultaneously, are given below (see Table 68).



Table 68: Clear Sound Levels of Noise Sources Depending on Distance in Mechanical and Installation Works

Distance (m)	L(day,evening,night,) (dBA)
50	55.48
100	49.03
250	40.05
500	32.92
1000	25.72
2000	25.60
4000	25.34

Table 69: Summary of Noise Levels Caused from Activities in Construction Phase, Background Noise Measurements and National and International Limits

Receptor	Distance to border of the Project Area (m)	Background Noise Measurements (dBA)		Noise Caused By Construction Activities (dBA)			Noise Levels at Receptors		National Noise Level Standard (SanPIN No. 0267-09) (30 min LAeq (dB(A)))		IFC/WBG General EHS Guidelines (2007), Table 1.7.1. (One-hour LAeq (dB(A)))	
		Daytime (07:00 to 22:00)	Night-time (22:00 to 07:00)	Site Preparation and Earth and Civil Works	Building and Foundation Works	Mechanical and Installation Works	Daytime (07:00 to 22:00)	Night-time (22:00 to 07:00)	Daytime (07:00 to 23:00)	Night-time (23:00 to 07:00)	Daytime (07:00 to 22:00)	Night-time (22:00 to 07:00)
Waste Processing Facility Measurement Point-1	250	44.07	38.72	32.71	35.40	40.05	45.5	42.4				
Settlement Measurement Point-2	990	42.14	36.41	19.30	21.36	25.71	42.2	36.8	55	45	55	45
Settlement Measurement Point-3	1,690	41.47	38.23	18.84	19.71	25.63	41.6	38.5				
Settlement Measurement Point-4	2,980	41.96	40.92	17.56	17.83	25.49	42.1	41.0				

As seen from Table 69, noise levels during construction phase of the project is under the limit values specified for the day and night time in both national and international limits.

In addition to this, it is stated in IFC's EHS Guidelines that noise levels should not exceed the levels presented in Table 69, or result in a maximum increase in background levels of 3 dB at the nearest receptor location off-site. The baseline noise level measurement results and the noise level calculations are given in Table 69 and there is no any increase in background levels of 3 dB.

Vehicular Noise

The addition of temporary construction vehicles on local roads and within the site will likely result in temporary increases in traffic which will consequently result in an increase to noise levels at off-site receptors within close proximity to the Project boundary and close to the site access road and along key routes. Impacts due to vehicular noise will vary due to the phasing of works and the timing of vehicular movements, which affect both vehicles flow and the percentage of heavy vehicles.

The flow of vehicles in the local area is not constant, but the main road to the north of the Project site has a very low but continuous flow. The construction phase will result in the presence of larger vehicles and other more specialized equipment. As a major Project in the local area requiring hundreds of construction staff, associated equipment and deliveries, there will be a noticeable increase in vehicles at the site and along key access routes. This will influence noise levels and impacts to receptors in the adjacent corridors along these roads, in addition to existing impacts from existing vehicle flows. It is noted that such impacts will be limited to the construction phase only and may be more prevalent during certain period so construction, which require more vehicle trips.

Internal site roads will generate a new noise source from the movement of construction vehicles. Such noises will be predominantly experienced by the Project construction workers and workers of in nearby facility. It is noted that much of this movement of vehicles has been captured by the predictions for construction equipment as above.

Vibration

There will be no blasting during construction activities; therefore, vibration effect will not be of concern on the environment and human health. Nevertheless, there will be vibration due to heavy machinery. Vibrations resulted from the machines or buildings including machinery emerge from the dynamic force from the moving parts of the machines. Different parts of the machines generally make different frequency and vibration. Vibrations cause mechanical weathering in time. Generally, most important factor of a machine malfunction is vibration. Therefore, necessary maintenance shall be performed for the construction machines and equipment.

Noise Impacts to Site Workers

Site workers will be exposed to varying levels of noise depending on their specific roles and activities being conducted. This may relate to exposure to noise in areas that are considered 'high' (e.g. above occupational health and safety guidelines), Without mitigation, noise impacts to the workforce could results in health impacts, for example hearing damage.

Noise Impacts at Accommodation Facilities Located On Site

Some of the EPC construction workers will live in accommodation facilities located at the Project site. This will potentially expose the workers to construction phase noise levels especially in the event that workers are required to work in shifts (day and night). Currently, the exact location of the accommodation facilities has not been determined, so if the impacts are higher than regulatory limit



values, the EPC Contractor will be required to implement appropriate mitigation and management measures.

7.3.1.1 Assessment of Impacts and Mitigation Measures

By using impact assessment significance criteria approach, key potential impacts and countermeasures on air quality for the construction phase are presented in Table 71.

Table 70: Impacts Significance of the Noise and Vibration during – Construction Phase

Potential Impacts	Receptor	Sensitivity of the Receptor	Magnitude of Impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
Construction Site Noise – Noise generated from general construction activities	Waste Processing Facility	Medium	Medium	Moderate	<p>Consideration of noise fences for non-mobile equipment such as generators or at boundaries for key receptors that may have higher assessed impacts.</p> <p>The EPC Contractor will, at all times, carry out all work in such a manner as to keep any disturbance from noise to a minimum (by phasing noisy works).</p> <p>Acoustic covers on machine engines will be remain closed at all times as applicable.</p> <p>Where practical, electrically powered machines will be preferred to mechanically powered alternatives.</p> <p>All mechanically powered plant, diesel engine vehicles and compression equipment will be fitted with noise control equipment (exhaust silencers, mufflers) as available from the manufacturer.</p>	Minor
	Residential Areas	Medium	Medium	Moderate	<p>Where possible, the highest noise emitting activities will be undertaken in a central site area, or within an enclosed structure.</p> <p>Where practical, additional noise barriers/attenuation should be employed to ensure that the maximum noise level at 1m distance outside of the plant fence when all equipment is running do not exceed 70dB(A) and maximum noise level at 1m from open air installations do not exceed 85dB(A).</p> <p>Items of plant on site operating intermittently will be shut down in the intervening periods between use.</p> <p>Night time construction works will be avoided as much as practicable to prevent noise impact at the sub contractor camp. Where unavoidable, night work permits (if applicable) will be obtained from the relevant authorities.</p> <p>The impacted receptors will have access to a grievance mechanism in accordance with the Project SEP in order to make any complaints regarding noise during the construction phase.</p>	Minor

Potential Impacts	Receptor	Sensitivity of the Receptor	Magnitude of Impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
Vehicular Noise- Noise from movement of Vehicles	Waste Processing Facility & Residential Areas	Medium	Medium	Moderate	<p>Delivery vehicles will be prohibited from waiting outside the site with their engines running (consideration of driver waiting room with heating/AC).</p> <p>Ensure any applicable permits are in place for deliveries to the site and for any works performed outside normal working hours.</p> <p>Review vendor specifications and accept site plant & vehicles, in particular heavy vehicles, based on noise generation (as far as practical).</p> <p>The movement of heavy vehicles during the night will be avoided wherever practical.</p> <p>Where available in country, audible reversing alarms with broadband noise (white noise) should be preferred over tone alarms (beeping), to limit external disturbance to communities.</p> <p>Where construction vehicles will be operating in close proximity to the accommodation camps, the need for trucks to reverse will be minimized as far as practicable. This is so as to reduce the frequency at which disturbing but necessary reverse warnings sirens will be used.</p> <p>Speed limits established in the Traffic Management Plan will be adhered to.</p>	Minor
Construction vibration impacts (including vehicle vibration)	Waste Processing Facility & Residential Areas	Medium	Medium	Moderate	<p>The Contractors will, at all times, carry out all works in such a manner to keep any disturbance from vibration to a minimum.</p> <p>Wherever practical, all vibratory generating equipment and activities shall be sited away from the Project boundary.</p> <p>Vibrating equipment/machinery will be switched off when not in use.</p>	Minor

Potential Impacts	Receptor	Sensitivity of the Receptor	Magnitude of Impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
Impacts to Construction Workers & Accommodation Areas Located at the Project site	Site Workers	High	Medium	Major	<p>Where noise levels exceed 80dB(A) noise protection devices will be provided to personnel on-site and the area marked as a high-noise zone where ear protection is mandatory. Note: 80dB(A) is aligned with Uzbekistan noise standards.</p> <p>Operators of vibrating hand-held machinery (if any) will be provided with appropriate PPE (e.g. protective gloves and ear muffs/plugs) and be given suitable breaks from using such equipment to reduce the impacts of vibration.</p> <p>Workers potentially exposed to high noise and vibration shall be provided with appropriate PPE with respect to the occupational H&S risk assessment conducted for that activity.</p> <p>Workers potentially exposed to high noise and vibration shall be trained to identify situation when PPE is required to be worn and how to effectively utilise the PPE.</p> <p>These mitigation measures shall be incorporated to the applicable occupational H&S plan being developed by the EPC Contractor and implemented on-site.</p> <p>The Occupational H&S Plan shall include measures to reduce the risk of potential sleep disturbance to workers (who may work both day and night shifts). Where practical the benchmark for noise in the sleeping areas shall be taken against the WHO Guidelines for Community Noise (2011) of 30dB (LAeq,8h).</p> <p>Worker accommodation facilities should be located further away from the construction areas and facilities such as canteens and laundry rooms positioned in a way that creates a buffer zone between the sleeping areas and construction areas.</p> <p>Where applicable, the worker accommodation facilities at the Project site should be constructed with walls and windows that reduce noise (such as double-glazed windows, noise cancelling shutters or blinds, etc.).</p> <p>If necessary, solid walls (rather than wire fences) may be required to fence the accommodation area.</p> <p>Where noisy activities are located in close proximity to the EPC accommodation facilities, stockpiling of materials could be considered between the source of noise and the camp so as to provide acoustic screening.</p>	Moderate

7.3.2 Operational Phase

In scope of the project, 2 Gas Turbines + 2 Heat Recovery Steam Generators + 1 Steam turbines will be operated. Under consideration of an unabsorbing inner lining, the following room averaged sound pressure levels will be expected during normal operation: (excluding offices and recreation rooms):

- Turbine building 90 dB(A),
- Circulating water pump area 95 dB(A),
- Building for water treatment plant 90 dB(A).

Additionally, IFC/WBG General EHS Guidelines indicate that "Limits for vibration and action values, (i.e. the level of exposure at which remediation should be initiated) are provided by the American Conference of Governmental Industrial Hygienists. Exposure levels should be checked on the basis of daily exposure time and data provided by equipment manufacturers."

Moreover, the Project commits that the following room average sound pressure levels will not be exceeded inside the Plant in rooms which are provided for or which require the constant presence of staff:

- Main control room and offices 50 dB(A),
- Local control rooms 70 dB(A),
- Areas of computers 75 dB(A),
- Workshop and stores 85 dB(A).

The contribution of noise caused by the inventory in these rooms, e.g., workshop machines, as well as that caused by the staff is not taken into consideration.

The sound power level of each noise source was calculated by distributing it to 4-octave bands (see Table 71). Total sound power level, 500 Hz, 1000 Hz, 2000 Hz and 4000 Hz octave band sound power level calculations are used in the following formula. In the calculations, it is assumed that the total sound power levels are equally distributed on 4-octave bands.

$$L_w(i) = 10 * \log(10(L_w / 10) / 4)$$

L_w = Sound power level of the source (dB)

Table 71: Distribution of Noise Sources Sound Power Levels in Octave Bands in Operation Phase

Noise Sources	Total	Sound Power Level (dB)			
		500 Hz	1000 Hz	2000 Hz	4000 Hz
Turbine Building	90	84	84	84	84
Circulating Water Pump Area	95	89	89	89	89
Building for Treatment Plants	90	84	84	84	84

Sound pressure levels of each sources based on 4-octave bands are given in Table 72.

Table 72: Sound Pressure Levels of Noise Sources in Operation Phase

Noise Source	Distance (m)	Sound Pressure Level (dB)			
		500 Hz	1000 Hz	2000 Hz	4000 Hz
Turbine Building	50	39.01	39.01	39.01	39.01
	100	32.99	32.99	32.99	32.99
	250	25.03	25.03	25.03	25.03
	500	19.01	19.01	19.01	19.01
	1000	12.99	12.99	12.99	12.99
	2000	6.97	6.97	6.97	6.97
	4000	0.95	0.95	0.95	0.95
Circulating Water Pump Area	50	44.01	44.01	44.01	44.01
	100	37.99	37.99	37.99	37.99
	250	30.03	30.03	30.03	30.03
	500	24.01	24.01	24.01	24.01
	1000	17.99	17.99	17.99	17.99
	2000	11.97	11.97	11.97	11.97
	4000	5.95	5.95	5.95	5.95
Building for Treatment Plants	50	39.01	39.01	39.01	39.01
	100	32.99	32.99	32.99	32.99
	250	25.03	25.03	25.03	25.03
	500	19.01	19.01	19.01	19.01
	1000	12.99	12.99	12.99	12.99
	2000	6.97	6.97	6.97	6.97
	4000	0.95	0.95	0.95	0.95

As a result of the calculation with the correction factors, the sound levels of the 4-octave bands of each noise source were calculated (see Table 73).

Table 73: Sound Pressure Levels of Corrected Noise Sources in Operation Phase

Noise Source	Distance (m)	Sound Power Level (dB)			
		500 Hz	1000 Hz	2000 Hz	4000 Hz
Turbine Building	50	35.81	39.01	40.21	40.01
	100	29.79	32.99	34.19	33.99
	250	21.83	25.03	26.23	26.03
	500	15.81	19.01	20.21	20.01
	1000	9.79	12.99	14.19	13.99
	2000	3.77	6.97	8.17	7.97
	4000	-2.25	0.95	2.15	1.95
Circulating Water Pump Area	50	40.81	44.01	45.21	45.01
	100	34.79	37.99	39.19	38.99
	250	26.83	30.03	31.23	31.03
	500	20.81	24.01	25.21	25.01
	1000	14.79	17.99	19.19	18.99
	2000	8.77	11.97	13.17	12.97
	4000	2.75	5.95	7.15	6.95
Building for Treatment Plants	50	35.81	39.01	40.21	40.01
	100	29.79	32.99	34.19	33.99
	250	21.83	25.03	26.23	26.03
	500	15.81	19.01	20.21	20.01
	1000	9.79	12.99	14.19	13.99
	2000	3.77	6.97	8.17	7.97
	4000	-2.25	0.95	2.15	1.95

Atmospheric absorption values at specific distances for each frequency were calculated using the following formula and calculated values are given in Table 74.

Waste (Atmospheric Swallow) = $7.4 * 10^{-8} (f^2 * r / H)$ dB

f = frequency of noise source / center frequency of frequency band (Hz)

r = Distance from source (m)

H = Relative humidity of air (%) (According to the data recorded in Termez Meteorological Station for the years 2018, 2019 and 2020, 47% is taken.)

Table 74: Atmospheric Absorption Values Calculated Based on Distance

Frequency (Hz)	Distance (m)	Atmospheric Swallow
500	50	0.020
500	100	0.039
500	250	0.098
500	500	0.197
500	1000	0.394
500	2000	0.787
500	4000	1.574
1000	50	0.079
1000	100	0.157
1000	250	0.394
1000	500	0.787
1000	1000	1.574
1000	2000	3.149
1000	4000	6.298
2000	50	0.315
2000	100	0.630
2000	250	1.574
2000	500	3.149
2000	1000	6.298
2000	2000	12.596
2000	4000	25.191
4000	50	1.260
4000	100	2.519
4000	250	6.298
4000	500	12.596
4000	1000	25.191
4000	2000	50.383
4000	4000	100.766

After deducting the atmospheric absorption values, the net sound levels of the 4-octave bands of each noise source were calculated using the formula $LP = L_{Port} - A_{atm}$ (see Table 75).

Table 75: Clear Sound Levels of Noise Source Based on Distance in Operation Phase

Noise Source	Distance (m)	Sound Level (dBA)				Total Sound Level (dBA)
		500 Hz	1000 Hz	2000 Hz	4000 Hz	
Turbine Building	50	35.79	38.93	39.90	38.75	44.605
	100	29.75	32.83	33.56	31.47	38.153
	250	21.73	24.64	24.66	19.73	29.170
	500	15.61	18.22	17.06	7.41	22.019
	1000	9.40	11.42	7.89	0.00	14.729
	2000	2.98	3.82	0.00	0.00	8.060
	4000	0.00	0.00	0.00	0.00	6.021
Circulating Water Pump Area	50	40.79	43.93	44.90	43.75	49.605
	100	34.75	37.83	38.56	36.47	43.153
	250	26.73	29.64	29.66	24.73	34.170
	500	20.61	23.22	22.06	12.41	27.019
	1000	14.40	16.42	12.89	0.00	19.627
	2000	7.98	8.82	0.57	0.00	12.053
	4000	1.17	0.00	0.00	0.00	6.345
Building for Treatment Plants	50	35.79	38.93	39.90	38.75	44.605
	100	29.75	32.83	33.56	31.47	38.153
	250	21.73	24.64	24.66	19.73	29.170
	500	15.61	18.22	17.06	7.41	22.019
	1000	9.40	11.42	7.89	0.00	14.729
	2000	2.98	3.82	0.00	0.00	8.060
	4000	0.00	0.00	0.00	0.00	6.021

The total sound level during the construction phase is calculated using the following formula.

LT = Total sound level (dBA)

$$LT = 10 \log \sum 10^{Li / 10}$$

Equivalent noise levels, assuming that all machines in operation phase are given below (see Table 76).



Table 76: Clear Sound Levels of Noise Sources Depending on Distance in Operation Phase

Distance (m)	L(day,evening,night,) (dBA)
50	51.73
100	45.28
250	36.30
500	29.15
1000	21.80
2000	14.60
4000	10.90

For the operation phase, summary of background noise levels at the measurement points, noise level caused from construction activities and national and international standards are given in Table 77.

Table 77: Summary of Noise Levels Caused from Operation Phase, Background Noise Measurements and National and International Limits

Receptor	Distance to border of the Project Area (m) (m)	Background Noise Measurements (dBA)		Noise Caused By Operation Activities (dBA)	Noise Levels at Receptors		National Noise Level Standard (SanPIN No. 0267-09) (30 min LAeq (dB(A)))		IFC/WBG General EHS Guidelines (2007), Table 1.7.1. (One-hour LAeq (dB(A)))	
		Daytime (07:00 to 23:00)	Night-time (23:00 to 07:00)		Daytime (07:00 to 23:00)	Night-time (23:00 to 07:00)	Daytime (07:00 to 23:00)		Night-time (23:00 to 07:00)	
							Daytime (07:00 to 22:00)	Night-time (22:00 to 07:00)	Daytime (07:00 to 22:00)	Night-time (22:00 to 07:00)
Waste Processing Facility Measurement Point-1	250	44.07	38.72	36.30	44.7					
Settlement Measurement Point-2	990	42.14	36.41	21.79	43.2	55	45	55	45	
Settlement Measurement Point-3	1,690	41.47	38.23	18.32	41.5					
Settlement Measurement Point-4	2,980	41.96	40.92	12.47	42.0					
At the border of the Project Site	-	-	-	45.28	-				70	70

As seen in Table 77, noise levels during operation phase of the project are under the limit values specified for the day and night time in both national and international limits. Therefore, no additional noise level reduction mitigations (such as establishment of noise barriers, etc.) are foreseen for the operation phase. Besides, as can be seen from the project layout (see Figure 10) the project components are not adjacent to the main road and any other receptors.

In addition to this, it is stated in IFC's EHS Guidelines that noise levels should not exceed the levels presented in Table 77, or result in a maximum increase in background levels of 3 dB at the nearest receptor location off-site. The baseline noise level measurement results and the noise level calculations are given in Table 77 and there is no any increase in background levels of 3 dB.

Vibration

Vibration associated with the operation of the CCGT plant is anticipated to be minimal. Minimal vibrations associated with the standard operation of the plant or machinery dissipate rapidly as they spread due to losses of energy radiating 360 degrees from the source and are only anticipated to have a negligible impact at Waste Processing Facility receptor.

Noise Impacts to Site Workers

Site workers will be exposed to varying levels of noise depending on their specific roles and activities being conducted. This may relate to exposure to noise in areas that are considered 'high' (e.g. above occupational health and safety guidelines), Without mitigation, noise impacts to the workforce could result in health impacts, for example hearing damage.

7.3.2.1 Assessment of Impacts and Mitigation Measures

By using impact assessment significance criteria approach, key potential impacts and countermeasures on noise levels for the operation phase are presented in Table 78.

Table 78: Impacts Significance of the Noise and Vibration during – Operation Phase

Potential Impacts	Receptor	Sensitivity of the Receptor	Magnitude of Impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
Operational Noise – Noise from CCGT, control rooms, machine rooms, etc.	Waste Processing Facility & Residential Areas	Medium	Medium	Moderate	Cooling fans could be installed with inlet and exhaust mufflers.	Minor
Impacts to Workers	Site Workers	High	Medium	Major	<p>The design of the project will include selection of state-of-art technologies to have low noise level equipment to prioritise the reduction of noise at the source. Where noise levels exceed 80dB(A), additional mitigation measures will be taken to reduce noise at source. Additionally, noise protection devices will be provided to personnel on-site and the area marked as a high-noise zone where ear protection is mandatory. Note: 80dB(A) is aligned with Uzbekistan noise standards.</p> <p>Operators of vibrating hand-held machinery (if any) will be provided with appropriate PPE (e.g. protective gloves and ear muffs/plugs) and be given suitable breaks from using such equipment to reduce the impacts of vibration.</p> <p>Workers potentially exposed to high noise and vibration shall be provided with appropriate PPE with respect to the occupational H&S risk assessment conducted for that activity.</p> <p>Workers potentially exposed to high noise and vibration shall be trained to identify situation when PPE is required to be worn and how to effectively utilize the PPE.</p> <p>These mitigation measures shall be incorporated to the applicable occupational H&S plan being developed by the EPC Contractor and implemented on-site.</p>	Minor

7.4 Cumulative Impacts

The purpose of a cumulative impact assessment is to determine how the potential impacts of a proposed development might combine cumulatively, with the potential impacts of other projects or human activities as well as natural stressors such as droughts or extreme climatic events. Summary of Cumulative Impacts of Noise & Vibration is presented in Table 79.

Table 79: Summary of Cumulative Impacts of Noise & Vibration

Environmental & Social Aspects	Construction	Operation
Noise & Vibration		
Cumulative Impacts	<p>No cumulative impact is expected if construction periods do not coincide.</p> <p>If construction period coincide, cumulative impact will occur at receptors within the area of influence which is defined as 10 km in this ESIA.</p> <p>Receptors within the area of influence may be temporarily impacted by the cumulative impact from the increase in ambient noise due to operation of construction machinery and equipment.</p>	<p>The cumulative Project and ambient noise levels do not increase the existing noise levels by more than 3dB(A), which aligns with the WBG EHS Guidelines where existing baseline is in excess of the applicable standard.</p>

7.5 Monitoring

The EPC Contractor and the Project owner will need to undertake noise monitoring on a periodic basis during both the construction, commissioning and operational phases of the project respectively. The minimum expected requirements for the noise monitoring are outlined in Table 80.

Table 80: Monitoring Requirements of Noise

Source	Parameters	Duration	Location
Construction and Commissioning Phase			
Day Time Noise	Leq (A)	Monthly and if there is complaint for 10-15 minutes periods at each location	Nearest residential area and at the origin of the complaint.
Night Time Noise	Leq (A)		
Operation Phase			
Day & night noise	Leq (A)	Quarterly and if there is complaint for 10-15- minute periods at each location	Nearest residential area and at the origin of the complaint..

In the event of a recorded exceedance during noise monitoring a process to investigate and take appropriate corrective actions will be outlined in the overarching 'Environmental Monitoring Plan'.

Occupational Health and Safety Monitoring

Where noise or hearing related grievances are received from the workforce, these shall be further investigated and as applicable hearing tests to applicable workers will be necessary.

8. WATER RESOURCES AND WATER ENVIRONMENT

8.1 Standards and Regulatory Requirements

8.1.1 National Regulations

The relevant legislation on the water resources and water environment in Uzbekistan is given below:

- Law "On Water and Water Use", No. 837-XII dated May 06, 1993 (as amended on April 21, 2021);
- Resolution of the Cabinet of Ministers of the RUz" On Approval of the Regulation on Water Protection Zones Sanitary Protection Zones of Water Bodies in The Territory of the RUz" No. 981 dated December 11, 2019.

Main objectives of the Law "On Water and Water Use", are to ensure the rational use of water for the needs of the population and economic sectors, protect water from pollution, contamination and depletion, prevent and eliminate the harmful effects of water, improve the condition of water bodies, as well as protect the rights and legitimate interests of enterprises, institutions, organizations, farms, dekhkan farms and citizens in the field of water relations.

Resolution of the Cabinet of Ministers of the RUz No.981, determines the procedure for establishing water protection zones and sanitary protection zones for water bodies on the territory of the RUz, as well as the regime for carrying out economic activities in these zones to prevent pollution, clogging, and depletion of water resources, effective use of water bodies and rational management of water resources.

In related with the project, the regulation sets a water protection zone around water canals and lake for the protection of the water bodies from industrial activities or construction works. It is understood that a water protection zone of 150 m is applicable for the Uchkizil Reservoir according to the article 18 based on a water volume in the lake of ≈ 0.2 billion m^3 (see Figure 28).

For drinking, domestic water supply, as well as for other needs of the population, water bodies are provided, the water quality of which meets the established sanitary and hygienic requirements and state standards. Ambient water quality is regulated through sanitary norm and standard in Uzbekistan which are given below:

- SanPiN RUz No. 0318-15 "Hygienic and anti-epidemic requirements for the protection of water in reservoirs on the territory of the RUz."
- SanPiN RUz No. 0173-04 "Sanitary and hygienic requirements for the protection of groundwater from pollution in the specific conditions of Uzbekistan."
- SanPiN No. 0255-08 "The main criteria for hygienic assessment of the degree of pollution of water and water bodies in terms of danger to public health in Uzbekistan."
- SanPiN No. 0202-06 "The procedure for issuing permits for special water use, development and approval of projects of maximum Permissible discharges (MPD) of substances entering with wastewater into water bodies and on the terrain."
- List of Maximum permissible concentration (MPC) of pollutants in water by categories of watercourse use.

- State standard O'z DSt 951:2011 "Sources of centralized household water supply. Hygienic, technical requirements and classification code"
- State standard O'z DSt 950:2011 "Drinking water. Hygienic requirements and quality control"

Subject to the purpose of use, watercourses could be categorized as for domestic use (could be used as a source for drinking water after treatment), cultural&service and fishery, communal use in Uzbekistan. Uzbekistan general effluent standards into the water bodies are classified by type of use and presented in Table 81.

Table 81: General Water Standards

Indicators	Purpose of water use			
	Domestic use	Cultural and service	Highest and first category	Second category
Suspended solids	Compared with the natural conditions the content of suspended solids at wastewater discharge shall not be increased by more than			
	0.25 mg/dm ³	0.75 mg/dm ³	0.25 mg/dm ³	0.75 mg/dm ³
	For reservoirs and watercourses containing at low water above 30 mg/dm ³ suspended solids, there may be an increase to 5%. Suspensions with fallout rate of more than 0.4 mm/s for watercourses and more than 0.2 mm/s for discharge lake are prohibited			
Floating matter	There shall not be a film of oil products and concentrations of other contaminants on the water surface			
Color	Shall not be detected in the column of height		There shall be no foreign colour	
	20 sm	10 sm		
Smell and test	Intensity of more than 1 point is not permitted		Water must not give extraneous odours and flavours to fish meat	
Temperature	Temperature of water at the discharge point must not exceed 3°C in comparing with average monthly temperature of the hottest month		Temperature of water at the discharge point must not exceed 5°C in comparing average monthly temperature of the hottest month. Increasing of temperature more than 28 °C in summer and till 8°C in winter is not allowed	
Hydrogen exponent (pH)	Shall not beyond 6.5 8.5 pH		Shall not beyond 6.5 8.5 pH	

Indicators	Purpose of water use			
	Domestic use	Cultural and service	Highest and first category	Second category
Mineralization	Shall not exceed by dry residue 1000 mg/dm ³ , including chlorides - 350mg/dm ³ and sulphates - 500 mg/dm ³		Rated according to water bodies intoxications	
Dissolved oxygen	No less than 4 mg/dm ³ in any period of the year in a sample taken by 12 a.m. on the same day		In winter shall be no less than 6 mg/dm ³ No less than 6 mg/dm ³ in any period of the year in a sample taken by 12 a.m. on the same day	
BOD	At 20°C must not exceed 3.0 mg/dm ³	6.0 mg/dm ³	At 20 ° C shall not exceed 3.0 mg/dm ³ if in winter the dissolved oxygen content in the water of the first* category fishing water bodies fell to 6.0 mg/dm ³ , and in the second** – to 4 mg/dm ³ , then discharge in them is only permitted to wastewater that does not change the BOD	
COD	Shall not exceed 15.0 mg/dm ³	30.0 mg/dm ³	-	-
Causative agent (of a disease)	Not allowed			
Chemicals (pollutants)**	Shall not be contained in concentrations exceeding the MAC			

* The first category includes water bodies, where valuable fish species highly sensitive to oxygen are kept and reproduced in.

** The second group includes water bodies used for other aquatic economy needs.

The List of MPC of pollutants in water by categories of watercourse use (see Table 82) is a document of Centre for Specialized Analytical Control in the Field of Environmental Protection. This list establishes the national water quality standards depends on the purpose of the usage water body. Since Uchkizil Reservoir has aquatic life in it, it is accepted as fishery reservoir according to the regulation.

Table 82: Maximum permissible concentration (MPC) of pollutants in water by categories of watercourse use, mg / l

Parameter	Category of the watercourse			
	Fishery	Cultural and household	Potable	Irrigation
COD	15	40	30	40
BOD20, mgO / l	3	3-6	3-7	10
pH	6.5-8.5	6.5-8.5	6.5-8.5	6.5-8.5
Suspended particles	15	30	30	50
Mineralization, including:	1000	1000	1000-1500	1000
Sulfates (SO4)	100	500	400-500	-
Chlorides	300	350	400-500	-
Ammonium nitrogen (NH4)	0.5	2.0	0.5	1.5
Nitrite nitrogen (NO2)	0.02	0.5	3	0.5
Nitrite nitrogen (NO3)	9.1	25	45	25
Nitrite	0.08	3.3	3	-
Nitrates	40	45	45	-
Phosphates (PO43)	0.3	1	3.5	1
Ether-soluble	0.05	0.8	0.8	0.8
Petroleum products	0.05	0.3	0.1	0.3
SPAV	0.1	0.5	0.5	0.5
Phenol	0.001	0.001	0.001-0.1	0.001
Fluorine (F)	0.05	1.5	0.7	1
Arsenic (As)	0.05	0.05	0.05	0.1
Iron (Fe)	0.05	0.5	0.3-3	5
Chromium (Cr6)	0.001	0.1	0.05	0.1
Copper (Cu)	0.001	1	1	1
Zinc (Zn)	0.01	1	3	5
Cyanide	0.05	0.1	-	-
Lead (Pb)	0.03	0.1	0.03	0.2
Nickel (Ni)	0.01	0.1	0.1	-
Cadmium (Cd)	0.005	0.01	-	-
Cobalt (Co)	0.1	1	-	-
Molybdenum (Mo)	0.0012	0.5	0.25	-

Parameter	Category of the watercourse			
	Fishery	Cultural and household	Potable	Irrigation
Strontium (Sr2)	-	2	7	-
Saline (Se)	0.001	-	0.01	-
Rodanids	0.1	-	-	-
Mercury (Hg)	-	0.005	0.0005	-
Coloration	20 cm.	-	10 cm.	-
Smells	The water should not acquire odors with an intensity of more than 2 points, detected by:			
	directly or with subsequent chlorination	-	directly	-
Floating impurities	Films of oil products, oils, fats and the accumulation of other impurities should not be found on the surface of the water			
Temperature	Summer water temperature as a result of wastewater discharge should not be exceeded by more than 3°C, compared to the average monthly water temperature of the hottest month of the year over the past 10 years			

According to SanPİN No. 0202-06, "The norms of maximum permissible discharges of harmful substances are established for each source of pollution, based on the conditions of inadmissibility of exceeding the maximum permissible concentrations of harmful substances in water bodies and its intended use. These limits are established and approved by the State Committee Ecology and Environmental Protection.

In all cases, the MPC will consider the existing background natural water quality for the body of water into which effluents will be discharged and the water quality objectives for the classification applied to the waterbody, which is Uchkizil Reservoir for this Project.

In no case will the MPC be set below the current background natural water quality value (in the case of polluted water bodies) or lower than the MPC set for category of water to be discharged into (for non-polluted water courses).

Moreover, in terms of compliance with the requirements of the resolution of the Cabinet of Ministers of the RUz, the enterprise will ensure the implementation of appropriate measures to ensure the protection of waters from pollution, clogging and depletion, as well as improve the state and regime of water use in Uchkizil Reservoir. In particular, in the water protection zone with a width of at least 150 meters from industrial buildings and structures to the water edge of Lake Uchkizil, tree and shrub plantations will be planted with the exception of any economic and other activities.

In the water protection zone, it is prohibited:

- the use and burial of any types of poisonous chemical agents used to combat plant pests and diseases, weeds;



- construction of warehouses for storage of poisonous chemical agents, pesticides, herbicides and mineral fertilizers, sites for refueling equipment of poisonous chemical agents, arrangement of runways for air-chemical works;
- construction of new residential and tourist complexes without centralized sewage networks;
- construction of sewage treatment facilities and various types of tanks (storages) of wastewater;
- placement of new cemeteries and burial of new corpses in existing ones;
- construction of livestock and poultry farms, burial sites for animals, livestock, birds and fish;
- placement of garbage dumps, including chemical and radioactive waste, as well as the use of liquid manure for irrigation;
- arrangement of parking lots, refueling points for fuel and lubricants, maintenance, repair and washing places for vehicles and other equipment;
- application of fertilizers on snow cover, use of untreated manure-containing wastewater as fertilizers, as well as discharge of untreated industrial and domestic wastewater;
- Unnormal grazing, especially on the elements of gully and ravine network, grassing of pastures;
- cutting of trees and bushes, except forest maintenance and sanitary cutting;
- construction, dredging, bank protection and blasting works, extraction of minerals and aquatic plants, their processing, laying of pipeline networks and cable communications, drilling, agricultural and other works in water protection zones of reservoirs and other water bodies, rivers and non-drying sairs, as well as territories of underground fresh water formation that influence water conditions shall be performed only with the permission of local executive authorities in coordination with environmental and nature protection authorities, state sanitary.

Therefore, as per water protection zone requirements, any type of Project buildings, temporary/permanent waste storage area, equipment storage area, parking area etc. shall not be placed in the 150 m water protection zone.

In addition to these requirements, as stated in the State Environmental Review Conclusion (see Attachment A), "Permit for special water use" will be obtained. This permit will be obtained to withdraw water from the Uchkizil Reservoir and discharge water into the reservoir from the Basin Irrigation Systems Department prior to commissioning phase.

8.1.2 Lender Requirements

8.1.2.1 International Finance Corporation (IFC)

The IFI's applicable water use and discharge standards for the Project are given below:

- Guidance values for drinking water quality established by the World Health Organization (WHO, 2011) - IFC General EHS Guidelines
- IFC Environmental, Health, and Safety Guidelines for Thermal Power Plants
- EU BAT Reference (BREF) Note - Large Combustion Plant (LCP)

IFC PS3 for Resource Efficiency and Pollution Prevention, state that "recognizes that increased economic activity and urbanization often generate increased levels of pollution to air, water, and land, and consume finite resources in a manner that may threaten people and the environment at the local,

regional, and global levels". Specifically, for water consumption, PS3 requires that the client (in addition to applying resource efficiency measures) shall adopt measures that avoid or reduce water usage so that the Project's water consumption does not have a significant adverse impact on others. These measures include, but are not limited to, the use of additional technically feasible water conservation measures within the client's operations, the use of alternative water supplies, water consumption offsets to reduce total demand for water resources to within the available supply, and evaluation of alternative project locations.'

According to Environmental Water Quality, all kinds of drinking water sources should always be protected to meet or not exceed applicable national regulations. In the absence of national restrictions, the current WHO Guidelines for Drinking-Water Quality should be consulted. The quality of the water should comply with national standards even when the project is transmitted to the community or to the users of the project infrastructure where water can be used for drinking, cooking, washing and bathing.

The IFC, a member of the World Bank Group, has produced General EHS Guidelines that apply to investment projects in various industry sectors. Also, Project will be required to meet EU Best Available Techniques (BAT) and related emission and discharge standards, regardless of location. The relevant limit values for Thermal Power Plants wastewater are given in Table 83 with EU BAT Reference (BREF) Note.

General EHS Guidelines state that "If sewage from the industrial facility is to be discharged to surface water, treatment to meet national or local standards for sanitary wastewater discharges or, in their absence, the indicative guideline values applicable to sanitary wastewater discharges shown in Table 81.

Table 84.

Table 83: Effluent Discharge Requirements

Parameter	IFC EHS Guidelines Thermal	
	Power Plant (Table 5 – effluent guidelines) ⁴ mg/l, except pH and temperature(unless stated)/General EHS Guidelines	EUBAT Conclusions/ BAT-AEL mg/l (daily average) unless stated
pH	6-9	
TSS	50	10-30
Oil and Grease	10	-
Total Chlorine Residual	0.2	-
Fluoride	-	10-25
(Total)Chromium (Cr)	0.5	10-50 µg/l
Copper (Cu)	0.5	10-50 µg/l
Iron (Fe)	1.0	-
Zinc (Zn)	1.0	10-20 µg/l
Lead (Pb)	0.5	10-20 µg/l
Cadmium (Cd)	0.1	2-5 µg/l
Nickel (Ni)	-	10-50 µg/l
Mercury (Hg)	0.005	0.2 – 3 µg/l
Arsenic (As)	0.5	10 to 50
Phosphorous	0.5	
Salinity (dry residue)	-	20-50
Chemical consumption oxygen	-	60-150
Temperature increase by thermal discharge from cooling system	3 degrees⁵	

⁴ To be applicable at relevant wastewater stream: e.g. from FGD system, wet ash transport, washing boiler, air preheater and precipitator, boiler acid washing, regeneration of demineralisers and condensate polishers, oil-separated water, site drainage, coal pile runoff and cooling water

⁵ The effluent will be result in a temperature change of no more than 3°C at the edge of a scientifically established mixing zone which takes into account ambient water quality, receiving water use, potential receptors, and assimilative capacity. The EA for a specific project may specify a more stringent temperature change guideline

Table 84: Treated sanitary waste water discharge requirements

Pollutants	IFC/WBG General EHS Guidelines (2007), Table 1.3.1 Indicative Values for Treated Sanitary Sewage Discharges mg/l
pH	6-9
BOD	30
COD	125
Total nitrogen	10
Total phosphorus/ Tricresyl phosphate (UZB)	2
Oil and Grease	10
Total Solids Suspended	50

8.2 National Context

Water resources in Uzbekistan consist of the surface runoff of Amudarya and Surkhandarya rivers (55%), small rivers (33%), underground water (approximately 10%) and collector/drainage waters (2%). All watercourses in Uzbekistan are attributed to the Aral Sea basin. The Surkhandarya is a primary right tributary of the Amudarya in Uzbekistan. It is formed at the confluence of the rivers Karatag and To'polondaryo near the city Denov. It flows into the Amudarya in the city Termez. The river is 175 kilometres long (287 km including its source river Karatag) and has a basin area of 13,500 km².

The construction site of the SCE-1600 MW power plant is located on the shore of the Uchkizil reservoir.

The Uchkizil reservoir is located on the lower reaches of the Surkhandarya (Surkhan River), 14 km northwest of the city of Termez.

The Uchkizil reservoir is located in a natural horseshoe-shaped basin. There is no natural waterway to the reservoir: the lake is supplied with water via constructed canals, mainly the Zang Canal, from Surkhandarya (Surkhan River).

The Uchkizil reservoir is a seasonally filled impoundment with a total volume of 160 million m³ ,80 million m³ of which is usable, and is used to impound the autumn-winter runoff of the Surkhandarya River via Zang canal. The reservoir does not have an outlet stream and planned to supply irrigation water to the Termez and Angora.

8.2.1 Basin Water Organisation of Amudarya (Amu Darya)

In 1992, BWO Amudarya became the executive body of Interstate Coordination Water Commission of Central Asia (ICWC) under the Almaty agreement signed by five countries - Republic of Kazakhstan, Kyrgyz Republic, Republic of Tajikistan, Turkmenistan and the Republic of Uzbekistan.

The Amudarya Basin Water Organization has 7 sub-organizations located in three countries (Tajikistan, Turkmenistan and Uzbekistan). The BWO manages and monitors the functions for the interstate distribution of Amudarya's water resources among the three riparian countries. It was created to assess and improve the management of water resources in the basin and to develop solutions to problems of water management of the Amudarya River and its main tributaries: The Pyanj River, the Vakhsh River and the Kafirnigan River. The location of Surkhandarya (Surkhan River) and relation to Amudarya (Amu Darya River) can be seen in Figure 52.

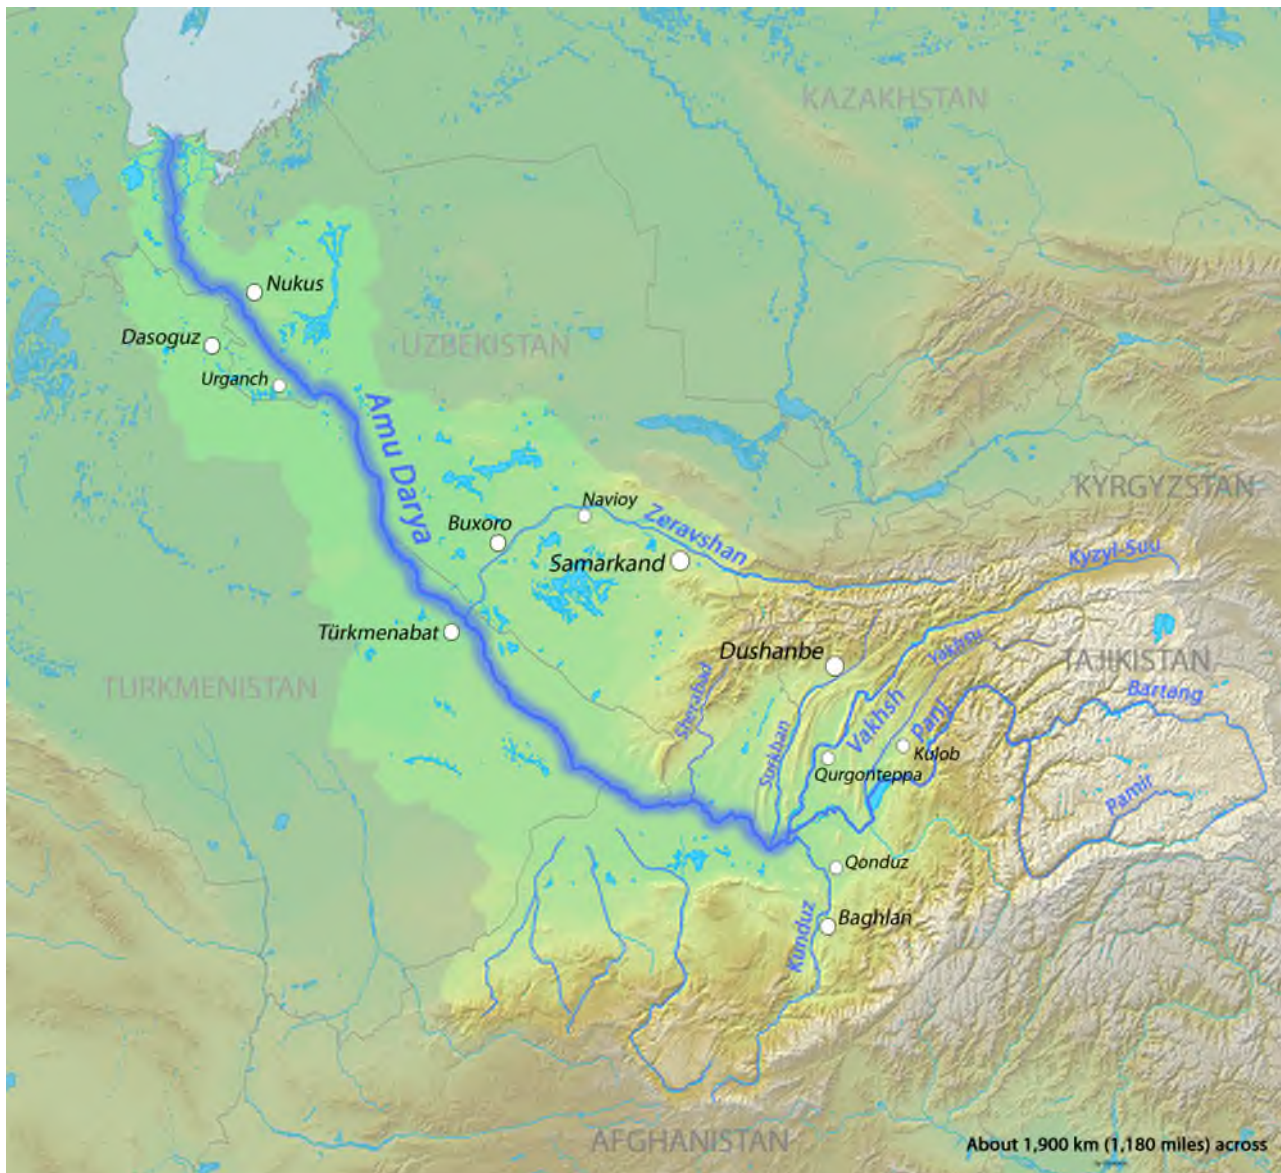


Figure 52: Amudarya River Basin

8.2.2 Existing Water Management Issues

8.2.2.1 Water Usage

The Amudarya River, the main river in the basin is a snow and glacier-fed river. The main volume of its flow originates from melting glaciers (44%), high-mountain snow and snowdrifts (37%). Rainwater runoff accounts for 1-2% and groundwater 16-18%.

The maximum flow rate of the Amudarya varies from 2800 to 6900 m³/s (with an average maximum of 4450 m³/s), with minimum values varying from 130 to 600, with an average minimum of about 325 m³/s.

The Surkhandarya is one of the large tributaries of the Amudarya. The Surkhandarya basin is bounded by the Gissar Range to the north, by its south-western spurs to the west, and by the Babatag Mountains to the east; in the south it merges imperceptibly with the Amudarya Valley. The river is 200 km long and is formed by the confluence of the Karatag and Tupolang, the largest rivers in the basin. The annual flow of these rivers is 20 and 46%, respectively, of the total flow of the Surkhandarya. According to an FAO report, as of 2010 water used from Amu River is mostly for irrigation and agricultural purposes. Average Annual Water use by country of the Amu River can be seen in Table 85.

Table 85: Average Annual Water Use

Riparian Country	Average Annual Water Use in million m ³	Share of Total Average Annual Water Use in %
Tajikistan	7500	11
Afghanistan	500	7
Uzbekistan	33000	47
Kyrgyzstan	1500	2
Turkmenistan	23000	33
Total	70000	100

*Ref: FAO Report [96]

Surveys show that livelihoods in the vicinity of the project site are primarily based on irrigated agriculture. Since Uchkizil Reservoir is fed by Surkhandarya via Zang Canal, the lake is expected to be highly loaded with macronutrients such as nitrogen and phosphorus, which come from surface runoff due to the use of fertilizers on agricultural land.

8.3 Local Context

There is no natural waterway to the irrigation reservoir: the lake is supplied with water via constructed canals, mainly the Zang Canal, from Surkhandarya (Surkhan River). The capacity of the lake is about 200 million m³ and the water collected in the lake is used for irrigation purposes in the dry seasons. The water collected in the lake is used for the irrigation of fields in Talashkan, Chinabad, Navshahar, Uchkizil and Kaftarhana towns. The lake is a seasonally filled reservoir with a total volume of 160 million m³, of which 80 million m³ is usable, and is used to store the autumn-winter runoff of the Surkhandarya River. It is fed from the Zang main channel via the Zang lower distributary channel and the feeder channel.

8.3.1 Water Resources Near the Project Site

The most readily available water source in the project area is Uchkizil irrigation reservoir which is fed from Surkhandarya River via Zang Canal. The main natural water resource in the area is the Surkhandarya River which is 200 km long is formed by the confluence of the basin's largest rivers Karatag and Tupalang. The annual total flow of Karatag and Tupalang Rivers are 20% and 46% of the total runoff of the Surkhandarya River, respectively. Their catchment areas, located on the southern slopes of the Gissar Ridge, are 634 to 2,200 km². On the right side, the Surkhandarya River receives two tributaries with constant inflow: Sangardak and Hodzhaipak, with catchment areas of 901 and 762 km², respectively. The tributaries are fed by snow and glacier. After they leave the mountains, they are used for irrigation and runoff reaches the main river only during floods. The Surkhandarya

River is also partially replenished with discharge collector water, small rivers and thinning in the river and its tributaries.[97]

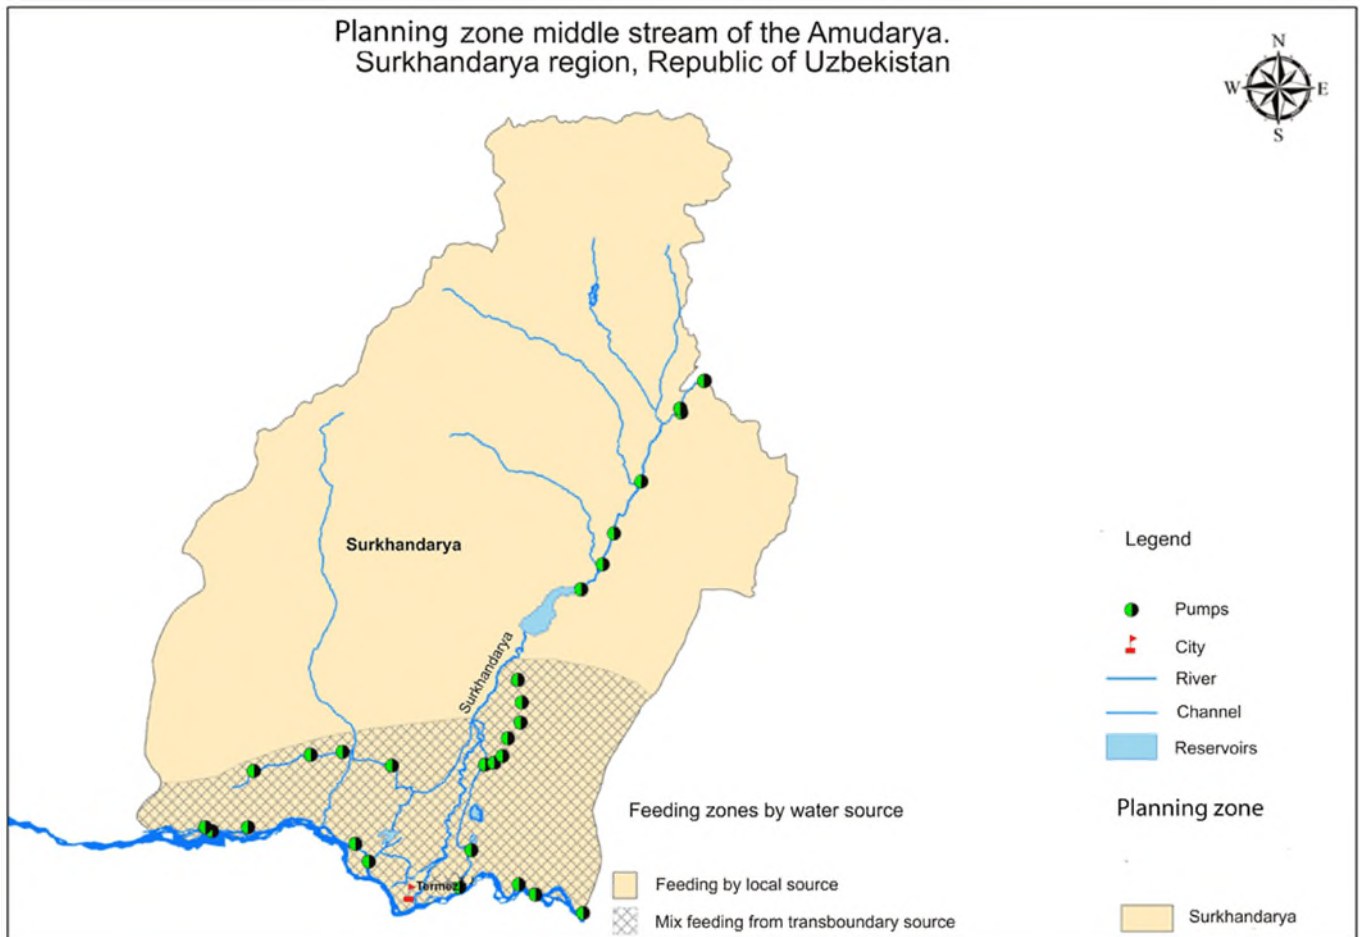


Figure 53: Irrigation System of Surkhandarya Province [15]

8.4 Baseline Studies

8.4.1 Water Quality

The main waterway of the Surkhandarya region is the Surkhandarya river, its length is 200 km, the basin area is 13,500 km², and the average water flow rate is 703 m³/s. Formed at the confluence of the Karatag and Tupalangdarya rivers the total surface inflow from the mountainous area of Surkhandarya river is equal to 128 m³/s. In the upper reaches, the waters of the Surkhandarya River are carbonate rich, with a mineralization of 0.188 g/dm³, in the middle and lower reaches, sulfate-hydrocarbonate, with a mineralization of 0.432-0.610 g/dm³, average turbidity 850 g/dm³, at the



confluence with the Amudarya - 2700 g/dm³. Floods last from April to August, the low water period - from September to February.

In the southern foothills part there are temporary streams that arise in the winter-spring period, which are fed by snow, snow-rain and spring. All of these belong to the Surkhandarya river basin. The rivers are small, 5-25 m wide, up to 1 m deep and have rocky, sandy and pebbly bottoms. Steep banks sometimes alternate with more gentle slopes. River floodplains are narrow, sometimes absent altogether.

The site specific Flood Risk Assessment will be provided in the Final ESIA report by considering last 20-years long term meteorological data.

The Uchkizil Reservoir was built on the territory of the Project. The off-channel (i.e. constructed away from the main channel of the river) Uchkizil Reservoir of seasonal regulation is located in the lower reaches of the Surkhandarya river, 14 km north-west of the city of Termez in the Angora district of the Surkhandarya region of the Republic of Uzbekistan. The Uchkizil reservoir was designed by the institutes of Sredazgiprovodkhopok, Uzgiprovodkhoz and Hydroproject JSC. It was built in 1953-1957 and commenced with operations on December 29, 1957. The reservoir has been in operation for 64 years.

The Uchkizil reservoir stores the accumulation of the autumn-winter runoff of the Surkhandarya River and is intended to increase the water supply of the existing irrigated lands by 15,200 hectares and of new lands in the Termez and Angora districts by 6000 hectares. In addition, if necessary, the Termez Canal system can be replenished by the reservoir. The reservoir does not have an outlet stream.

The area of the reservoir is 10 km², length 5.5 km, maximum width 3.5 km, maximum depth 37 m, average depth 16.0 m [16]. The reservoir is connected to the Surkhandarya River through a supply canal.

Maximum water temperature at the surface of the reservoir is 27.8°C (June) and up to 25°C at the bottom, the temperature difference reaches 10°C or more. The minimum is 6.3°C (February). At the same time, the temperature difference between the surface and natural water layers does not exceed 0.3°C. In spring, summer and autumn, there is direct stratification throughout the reservoir, without noticeable formation of a temperature jump layer [17].

The surface water and sediment samples were taken at 2 (two) observation points (SW-01, SW-02) between July 9-16, 2021.

SW-01 sample was taken from the reservoir, located 10 m from the shore, a composite water sample was collected from a water column and at the same point sediment sample was also collected to represent whole water column system at this point.

SW-02 sample is collected from tributary of Zang canal which feeds the Uchkizil Reservoir, water and sediment sample is collected from the same point.

Table 86 shows the coordinates and location of sampling points for surface water (see Figure 54).

Table 86: Coordinates and location of sampling points for surface water



Number of monitoring station	Station location	Sampling points coordinates, deg/min/sec
SW-01	Uchkizil reservoir	N = 37°22'26,7" E = 67°14'48,2"
SW-02	Zang Canal	N = 37°22'40,2" E = 67°14'32,0"



Figure 54: Location of surface water sampling points

Sampling and analysis were carried out in accordance with the established state standards according to the regulatory, methodological and instructive documents. Surface water Measurement were taken in accordance with GOST 31861-2012 "Water. General requirements for sampling".

Samples of surface water, groundwater, as well as bottom sediments were drawn up in accordance with the relevant Sampling Acts and delivered to the Center of Testing Laboratories Complex which is accredited in compliance with the requirements of the national accreditation system of the Republic of Uzbekistan O'z DSt ISO/IEC17025 for competence and independence.

The pH parameter is measured in-situ;

The sampling activities are presented Figure 55 and Figure 56.



Figure 55: Sampling of surface water from the Uchkizil Reservoir at observation station SW-01



Figure 56: Sampling of surface water from the Zang Canal SW-02

Analysis methods consisted of:

- Photometric - based on the chemical transformation of harmful substances (ammonium nitrogen, nitrite nitrogen, nitrate nitrogen, phenols, phosphates, synthetic surfactants, hydrogen sulfide, aluminum, barium, cyanides, chromium (+6), COD) into color-intensive compounds when interacting with appropriate reagents, with subsequent measurement of the density of colored compounds at a certain wavelength and allowing quick measurements with a sufficiently high accuracy;
- Titrimetric - a method of quantitative / mass analysis (chlorides, sulfates, hydrocarbons, dissolved oxygen, BOD), based on measuring the volume of a reagent solution of a precisely known concentration being consumed for the reaction with the substance being determined;
- Gravimetric - a method of quantitative chemical analysis (mineralization, suspended matter), based on an accurate measurement of the mass of a substance;
- Complexometric - titrimetric method of determination (calcium, hardness), based on the formation reactions of complex compounds of metal ions with ethylenediaminetetraacetic acid, also known as complexone III and Trilon B;
- Atomic absorption - an instrumental method of quantitative elemental analysis by atomic absorption (absorption) spectra to determine the concentration of metals (cadmium, potassium, sodium, manganese, copper, nickel, mercury, lead, zinc, chromium (+3)) in surface water and ground waters.

Analyses were carried out in accordance with certified methods that passed metrological certification and registration in the agency "Uzstandart".

The assessment of the qualitative composition of water was carried out in accordance with the document "The Generalized List of Maximum Permissible Concentrations (MPC) and Approximately Safe Exposure Levels (TSEL) of Harmful Substances for Water in Fishery Water Bodies for Surface Water", as well as certified methods for measuring pollutants (MVI - O'zO'U), which reflect the values of maximum permissible concentrations (MPC) used for analytical control in the water of reservoirs of fishery importance.

Table 87 provide a list of the methods of determination used.

Table 87: List of substances in water and methods for their determination

Parameter	Method of determination	Used Books
Hydrogen exponent (pH)	The method is based on measuring the potential difference arising at the boundaries between the outer surface of the glass membrane of the electrode and the test solution.	O'zO'U 0556: 2012
Sulfates	Methods for measuring the mass concentration of sulfate ions in natural and waste waters by the complexometric method The essence of the method is based on the precipitation of sulfate ions by barium chloride.	O'z O'U 07.0676: 2015
Chlorides	The essence of the method is based on titrimetric precipitation of chloride ion at pH = 7-10 with silver nitrate.	O'z O'U 0418: 2009
Mineralization	The method is based on the gravimetric determination of mineral and partially organic substances dissolved in water at 600 °C.	O'z O'U 07.0495: 2010
Ammonium ion	The photometric method is based on the formation of a yellow color of iodide in an alkaline medium.	O'z O'U 07.0682: 2015
Nitrite	The photometric method is based on the formation of an intensely colored diazo compound with sulfanilic acid and alphanaphthylamine (Griss reagent)	O'z O'U 07.0265: 2005
Nitrates	The determination is based on the reaction of nitrates with sodium salicylate in an acidic medium with the formation of a yellow salt of nitrosalicylic acid.	O'z O'U 0705: 2016
Mercury & Lead	Atomic absorption spectrometry (AAS). The method is based on the absorption of ultraviolet radiation by gas atoms.	O'z O'U 0422 : 2009 O'zO'U 0482: 2009
COD	Method for measuring the mass concentration of chemical oxygen demand (COD) in natural and waste waters by the photolorimetric method	O'z O'U 07.0147: 2000
Metals (copper, zinc, nickel, chromium, iron, manganese, cobalt)	Methods for measuring the mass fraction of metals (copper, zinc, nickel, chromium, iron, manganese, cobalt) in water by the atomic absorption method	O'z O'U 0744: 2016
Chromium (VI and III valence)	Method for measuring the mass concentration of total, VI and III valence chromium in natural and waste waters by the photolorimetric method	O'z O'U 0522: 2011
BOD₅	Technique for measuring the mass concentration of biochemical oxygen demand before and after n- days of incubation (BOD full) in natural, waste and treated waste waters	O'z O'U 0746: 2016
Suspended substances	Methodology for measuring the mass concentration of suspended solids in natural and waste waters by the gravimetric method	O'z O'U 0696: 2015

Parameter	Method of determination	Used Books
Aluminum	Method for measuring the mass concentration of aluminum in natural and waste waters by the photocolorimetric method	O'z O'U 0413: 2009

The results of the physicochemical analysis of the surface of the site are presented in Table 88 .

Zang Canal water condition (SW-02): The channel is located to the west of the site.

- Mineralization levels of surface water of the river goes up to 0.532 g/dm³.
- The concentrations of the following parameters exceed the MPC:
 - Suspended solids (25.2 times of MPC),
 - Sulfates (1.33 times of MPC),
 - COD value (1.6 times of MPC),
 - Cadmium (2.75 times of MPC),
 - Potassium (1.3 times of MPC),
 - Iron (2.88 times of MPC),
 - Lead (1.03 times of MPC)
 - Chromium (+6) (MPC level)
- Hydrogen sulphide concentration is analysed as The presence of hydrogen sulfide up to 0.0022 mg/dm³
- The concentrations of nitrite nitrogen, nitrate nitrogen, BOD, sodium, manganese, nickel, and zinc are below the MPC.
- The pH of the waters is within the normal range (i.e. 8.33).
- Ammonium nitrogen, phosphates, cyanides, aluminum, barium, vanadium and mercury were not detected.

The concentrations of nitrite nitrogen, nitrate nitrogen, BOD, sodium, manganese, nickel, chromium (+6) and zinc are below the MPC. The pH of the waters is within the normal range up to 8.33. Ammonium nitrogen, phosphates, cyanides, aluminum, barium, vanadium and mercury were not detected in these waters.

Surface water condition in Uchkizil Reservoir (SW -01):

- Mineralization levels of surface waters of the lake goes up to 1.16 g/dm³.
- The concentrations of the following parameters exceed the MPC:
 - Suspended solids (11.4 times of MPC),
 - Sulfates (2.9 times of MPC),
 - COD (10.6 times of MPC),
 - BOD (4.8 times of MPC),
 - Cadmium (3.6 times of MPC),
 - Potassium (1.5 times of MPC),
 - Sodium (1.16 times of MPC),
 - Iron (1.9 times of MPC),

- Copper (2.1 times of MPC)
- Lead (1.09 times of MPC)
- Hydrogen sulphide concentrations is analysed as 0.0058 mg/dm³.
- The concentrations of nitrite nitrogen, aluminum, manganese, nickel and zinc are below the MPC.
- The pH of the waters is measured in normal range (i.e. 8.44).
- Ammonium nitrogen, nitrate nitrogen, phosphates, cyanides, barium, chromium (+6), vanadium and mercury were not detected.

As Zang Canal and Uchkizil reservoir are a part of the irrigation system and Uchkizil reservoir is fed by Surkhandarya River via Zang Canal, the water in both samples (SW-01 and SW-02) contain macronutrients such as phosphorus, which likely come from surface runoff due to utilization of fertilizers on agricultural lands. Additionally, COD and BOD exceedences indicate antropogenical impact on the canal and reservoir by agricultural activities.

Table 88: Results of physicochemical analysis of surface waters of the site

Parameter name	Place of selection and content	
	River in the west from the site (SW-02)	Uchkizil reservoir (SW-01)
pH	8.33	8.44
Suspended substances, mg/dm ³	378.6	172.0
Ammonium nitrogen, mg/dm ³	<0.2	<0.2
Nitrite nitrogen, mg/dm ³	0.012	0.012
Nitrate nitrogen, mg/dm ³	1.36	<0.09
Chlorides, mg/dm ³	85.96	361.0
Sulfates, mg/dm ³	133.0	290.0
Phosphates, mg/dm ³	<0.01	<0.01
Mineralization, mg/dm ³	532.0	1160.0
Cyanides, mg/dm ³	<0.03	<0.03
Hydrogen sulfide, mg/dm ³	0.0022	0.0058
COD, mg/dm ³	24.0	160.0
BOD ₅ , mg/dm ³	2.16	14.4
Aluminum mg/dm ³	<0.02	0.01
Barium, mg/dm ³	<1.0	<1.0
Vanadium, mg/dm ³	<0.005	<0.005
Cadmium, mg/dm ³	0.00275	0.00361
Iron, mg/dm ³	0.144	0.0954

Parameter name	Place of selection and content	
	River in the west from the site (SW-02)	Uchkizil reservoir (SW-01)
Manganese, mg/dm ³	0.0213	0.00421
Copper, mg/dm ³	0.00296	0.00206
Sodium, mg/dm ³	105.50	140.85
Potassium, mg/dm ³	65.20	76.73
Nickel, mg/dm ³	0.0043	0.0076
Mercury, mg/dm ³	<0. 000005	<0. 000005
Lead, mg/dm ³	0.0103	0.0109
Chromium (+3), mg/dm ³	0.00128	0.00071
Chromium (+6), mg/dm ³	0.001	< 0.0005
Zinc, mg/dm ³	0.0092	0.0088

8.4.2 Sensitive Receptors

Along the project area sensitive receptors defined. List of sensitive receptors can be found in Table 89.

Table 89: List of Sensitive Receptors – water

Receptor	Sensitivity	Justification
Water and Sediment Quality	Medium	Any impact caused by construction and operation on water quality is expected to be time limited.
Reservoir Fauna	High	Impacts during the construction phase of the Project from dewatering and construction of the intake and outfall have the potential to have significant impacts in case management and mitigation measures are not implemented. Project area and the habitat is modified. In addition, the operational phase of the Project will only include discharge of blowdown water, service water and storm water.
Fishes Luciobarbus conocephalus Sabanejewia aralensis	Medium	Sabanejewia aralensis is a near threatened species according to Red book of Ruz. Not listed in CITES or IUCN. At the other hand Luciobarbus conocephalus is VU according to Red Book of the RUz
Reservoir's water users (fishermen, farmers, recreational users)	Medium	Reservoir water users found downstream will be particularly vulnerable to any changes in reservoir water quantities and quality as a result of Project construction and operation.

8.5 Potential Impacts, Mitigation, Management & Residual Impact

8.5.1 Construction Phase

During construction, the main activities that could negatively impact the aquatic life and water quality can be listed as follows:

- Laying of the outfall and water intake pipelines to the reservoir;
- Water usage for construction and domestic purposes
- Groundwater dewatering discharge on the reservoir banks from the construction activities on site (discussed under the soil and groundwater Section of this ESIA (Section 9));
- Habitat fragmentation as a result of construction of the intake and outfall.
- Discharge of dust into air and water due to heavy duty vehicles and working machines activities.
- Erosion due to soil movement in case unappropriated management of top soil, surplus soil, dumpsites and borrow pits.

8.5.1.1 Water Consumption and Wastewater Generation

At the construction stage of the Plant, water is mainly needed to prepare mortars, as well as for water spray for dust control at the construction site. In addition, household and drinking water needs will consist of drinking needs, showers, and cooking. The water needs during construction phase will be supplied from the nearby districts via trucks. The drinking water will be supplied by bottled water from the market.

Therefore, no water is planned to be supplied from both Uchkizil reservoir or groundwater during the construction phase of the Project. On the other hand, the water will be supplied from the Uchkizil Reservoir during the commissioning phase.

The water consumption during construction and commissioning phases are calculated in the following text.

During the construction, the daily water consumption rate was determined according to KMK 2.04.01.98, which assumes that workers will consume 25 liters/personnel.day, and engineering personnel will consume 12 liters/personnel.day.

Calculations of water consumption for production needs during construction

At the construction phase, water will be required for the preparation of concrete, cement, as well as for watering the territory in order to reduce dust emission, etc. Water consumption during construction works is determined by their volumes, and this water consumption will be an irretrievable loss.

Preparation of concrete and cement during construction.

For the preparation of 1 m³ concrete, approximately 180 liter water is needed and for the preparation of 1 m³ cement, approximately 165 liter water is needed. Therefore, the water consumption for the preparation of concrete (about 10,000 m³) and cement (about 8500 m³) will be:

$$Q_1 = 180 \times 10000/1000 = 1800 \text{ m}^3/\text{year} = 4.931 \text{ m}^3/\text{day}$$



$$Q_2 = 165 \times 8500/1000 = 1402.5 \text{ m}^3/\text{year} = 3.842 \text{ m}^3/\text{day}.$$

$$\text{Total } 3202.5 \text{ m}^3/\text{year} = 8.773 \text{ m}^3/\text{day}$$

Water consumption during dust emissions reduction

The water consumption for reducing dust is calculated by the following formula:

$$Q_3 = nr \times Sp \times dp / 106$$

Where;

Sp is the area to be watered in order to reduce dusting

nr is the rate of water consumption for irrigation of the territory in order to reduce dusting, 2.0 L/m²

dp is the number of waterings per year = 100

The watering area is assumed as 10% of the total construction area and is determined as follows:

$$Sp = S \times 0.1$$

Where;

S is the total allocated area $S = 73.4 \text{ ha} = 734,000 \text{ m}^2$

$$Sp = 734,000 \times 0.1 = 73,400 \text{ m}^2$$

Then, the water consumption for reducing dust is calculated as:

$$Q_3 = 2.0 \times 73,400 \times 100/106 = 14,680 \text{ m}^3/\text{year}$$

$$Q_3 = 14,680 \times 103/100 = 146.8 \text{ m}^3/\text{day}.$$

Calculations of water consumption for household needs during the construction phase

Approximately 2054 workers will be employed during commissioning phase, of which 134 are engineering and management of Client personnel and 1920 are subcontractor workers. Engineering personnel will work in one shift, while workers will work in three shifts, 8 hours/day.

Household drinking and household needs: 1920 worker, 25 liters/day for 1 person, 365 days.

$$V_p = 1920 \times 0.025 = 48 \text{ m}^3/\text{day} \times 365/1000 = 17.520 \text{ m}^3/\text{year}.$$

Household drinking and household needs of the daytime management personnel (134 employee), 12 liters/day for 1 person, 365 days

$$V_p = 134 \times 0.012 = 1.608 \text{ m}^3/\text{day} \times 365/1000 = 0.587 \text{ m}^3/\text{year}$$

Total:

$$\Sigma = 17.520 + 0.587 = 18.107 \text{ m}^3/\text{year}.$$

$$\Sigma = 48 + 1.608 = 49.608 \text{ m}^3/\text{day}$$

The amount of water for household needs can be calculated by the following formula:



$$V_h = [(n \times k \times h) \times d] / 1000;$$

Where:

V_h is the amount of water consumed for household needs [tm^3/year]

n is the rate of water consumption per person. [L/hour]

k is the number of toilet glasses, urinals, showers and sinks [PCS]

h is the working hours of the bathrooms [hour/day]

d is the number of working days in a year.

Shower room: There are 10 pieces of showers. Works 365 days a year. The norm is 500 L/h. The work at the enterprise is organized in the third shift. Works 1 hour per day per shift.

$$V_h = 0.500 \times 10 \times 3 = 15.0 \text{ m}^3/\text{day} \times 365/1000 = 5475.0 \text{ m}^3/\text{year}$$

Toilet (toilets with tanks): 8 points (sewage). The rate is 83 L/h for 1 point. They work 3 hours a day.

$$V_h = 0.083 \times 8 \times 3 = 1.992 \text{ m}^3/\text{day} \times 365/1000 = 727.08 \text{ m}^3/\text{year}$$

Sinks: On the territory there are 3 units. They work 3 hours a day, 365 days a year. The rate is 30.0 L/h.

$$V_h = 0.030 \times 3 \times 3 = 0.27 \text{ m}^3/\text{day} \times 365/1000 = 98.55 \text{ m}^3/\text{year}$$

In total:

$$\Sigma = 5.475 + 0.72708 + 0.09855 = 6300.63 \text{ m}^3/\text{year}$$

$$\Sigma = 15.0 + 1.992 + 0.27 = 17.262 \text{ m}^3/\text{day}$$

Water consumption for cooking

The kitchen is intended for preparing food for the employees. The rate of water consumption for cooking and washing dishes is 12.0 liters per dish for one visitor. 2048 meals are prepared every day. The facility has up to 300 visitors.

The amount of water consumption in the dining room is calculated by the following formula:

$$W_p = \frac{[(n_s \times b \times d_s)]}{10^3};$$

Where;

W_p is the amount of water in the dining room [$\text{thous. m}^3 / \text{year}$]

n_s is the rate of water consumption per dish [m^3]

d_s is the number of working days in a year [day]

b is the number of dishes [pcs.]

$$Wp1 = [(0.012 \times 2048 \times 365)] / 1000 = 8.970 \text{ thousand m}^3/\text{year} = 24.57 \text{ m}^3/\text{day}$$

Table 90: Water consumption - Commissioning phase

Process	Total Volume(m ³)
Steam flushing	60 000
Acid Cleaning	18 000
Hydraulic tests (mainly boilers and tanks)	15 000
Total	93 000

The total water consumption during the construction is calculated as 168.98 m³/day (29,347.88 m³/year), of which for; production needs - 8.773 m³/day. or 3202.5 m³/year; household and drinking needs - 91.44 m³/day (33,375.6 m³/year), irrigation of the territory - 146.8 m³/day (14680.0 m³/year).

Total water consumption for commissioning phase is approximately 93,000 m³ in total.

The total water discharge (effluent) of domestic wastewater during the construction phase will be: 91.44 m³/day = 33,375.6 m³/year.

Domestic wastewater generated during construction is planned to be directed to a temporarily installed storage tank (a waterproof cesspool) with subsequent removal to the nearest treatment facilities in the city of Termez.

Termez wastewater treatment plant has a capacity of 25,000 m³/ day as of 2020. Domestic wastewater emerged from the construction phase of Project will only occupy 0.3% of Termez Wastewater treatment capacity.

Summary of water consumption and wastewater generation during construction and commissioning phase and their source/disposal is given in Table 91.

Table 91: Water consumption and wastewater generation during construction and commissioning phases

Type	Amount	Source/Disposal
Water Consumption – Construction Phase		
Construction	8.773 m ³ /day	From nearby district via trucks
Household and Drinking	91.44 m ³ /day	Household - from nearby districts Drinking – from bottled water (market)
Irrigation of the Territory	146.8 m ³ /day	From nearby districts via trucks
Water Consumption – Commissioning		
Commissioning	93,000 m ³	From Uchkizil Reservoir

Type	Amount	Source/Disposal
Wastewater Generation		
Domestic Wastewater	91.44 m ³ /day	Deposition -waterproof septik tank Discharge - Wastewater treatment plant in Termez

During the site surveys, a meeting was performed with the competent authority regarding the amount of water used for irrigation purposes. The competent authority has stated that the water usage allowance is based on the agricultural product for each hectare. It is also mentioned that amount of irrigation water is calculated for 8-months period. The competent authority has mentioned that the Uchkizil reservoir is fed by the Zang Channel depending on the water consumption. The total irrigation water amount for different kind of agricultural product for each hectare is given below:

- Cotton: 6,600 m³
- Wheat and rice: 2,700 m³,
- Vegetables: 11,900 m³
- Fruit gardens: 6,400 m³

The competent authority has mentioned that Uchkizil Reservoir can provide up to 220 million m³ water. The annual amount of water required during the construction stage is negligible when compared to the capacity of the Uchkizil Reservoir. Therefore, it is not expected to have adverse impact on Uchkizil reservoir and on the irrigation system.

8.5.1.2 Construction of water inlet and outlet structures

Regarding onshore construction activities as seen in the project layout presented in Attachment B, there will be no structure within Uchkizil reservoir and its water protection zone other than the water intake and discharge structures and water pretreatment structure (fine and coarse screens). The letter dated 29 September 2021 from the State Committee on Ecology and Environmental Protection mentioned that;

- to develop and obtain a "Permit for special water use" (PSWU) for the intake of water from a surface watercourse - Lake "Uchkizil" in the manner prescribed by law;
- to provide a water protection zone with a width of at least 70 meters from the production sites to the water edge of Lake Uchkizil with the planting of trees and shrubs in compliance with the conditions of shore protection structures in the coastal strip of Lake Uchkizil.
- In the water protection zone of Lake Uchkizil (70 meters wide from production sites to the water edge of Lake Uchkizil), any economic activity is prohibited, including the placement of: sewage treatment facilities and various types of containers (accumulators) for waste water; livestock and poultry farms; landfills for production and consumption waste; parking lots, filling stations of fuels and lubricants, places of technical maintenance, repair and washing of vehicles and other equipment; felling of tree and shrub plantations, with the exception of felling for forest maintenance and sanitary felling.

It should be noted that as seen in Attachment B, the boundary wall of the plant is approximately 100 m away from the water protection zone of Uchkizil reservoir, in total 250 m away from the Uchkizil reservoir.

Although the final design for water intake/discharge structure is not yet finalized, it is anticipated that the diameter of the pipeline for water intake and discharge will be maximum DN 500. During the construction of the pipeline, a trench will be opened and the intake and discharge pipelines will be laid in parallel in compliance with the permissions to be obtained from relevant authorities. There are no trees within the project area and hence the construction of the pipeline will not require cut of any trees but may require cut of the shrubs. Once the pipelines are laid, the excavated material along the water intake / discharge pipeline will be assessed to be used if it is available for backfilling material. The EPC Contractor will ensure that necessary mitigative actions such as installation of sheeting walls, etc. are taken in trench regarding OHS issues. The route of the water intake / discharge pipeline will be restored following the completion of construction activities. The water intake/discharge pipelines will be constructed under the access road (see Attachment B) to minimize the disturbance within the water protection zone.

In respect to the construction activities on Uchkizil Reservoir, the discharge point will be at a sufficient distance from the shore to promote mixing with the main water body. Following the detailed design together with performing a bathymetry, hydraulic and nearshore topography survey, the exact locations will be determined and necessary relevant permits will be obtained from the national authorities.

Excavation of the reservoir banks for inlet and outlet construction will alter the Uchkizil Reservoir shore, including the potential temporary loss of associated fauna and localized impacts to water chemistry associated with an increase in suspended sediment. An increase in suspended sediment results in turbidity, which can reduce light penetration in the water column and lead to a reduction in photosynthetic activity of aquatic life in the reservoir. Turbid conditions in the water column could negatively impact the production and growth of organisms present.

Once excavation is completed, turbidity levels are expected to return to background levels as suspended sediment settles. This can be achieved practically by not disposing of excavated material into the reservoir and by using effective silt fences. Construction impacts will be limited in size and scope because they are, by definition and design, confined to the narrow corridor of the outlet pipe and inlet channel.

Following the completion of water intake/discharge pipelines, the area within the water protections zone will be planted in close cooperation with the competent authority by selecting appropriate species for the region.

8.5.1.3 Waste Water

The Project will involve construction near Uchkizil reservoir. The project also will require storage, handling and use of dangerous hazardous materials such as hydrocarbons, hazardous chemicals, paints, thinner etc. Also waste water during construction phase is expected to derive from several processes. These processes are mainly expected to be followings;

- Sanitary domestic wastewater from camps, canteens
- Waste water from carwash and vehicle maintenance
- Concrete waste water from concrete production
- Storm water which might has oil and silt
- Accidental hazardous material spills

The washing of equipment and vehicles, as well as dirty water run-off from different Project components has the potential to contaminate surface- and groundwater resources if not managed appropriately.



Waste water from car wash and vehicle maintenance activities at the other end expected to has high content of TSS, oil and grease. Appropriate silt and oil trap structures will be constructed on car wash areas prior to discharge on the reservoir to avoid future damage on water quality and aquatic life.

The waste water and sludge from concrete production shall be treated. Waste water from concrete batch plant is expected to has high pH values and high amount of TSS.

Mitigation measures to reduce impacts on water quality for construction phase are given below and summarized in Table 92.

- The Project will consult with the Uchkizil Reservoir to confirm the need and applicability for water discharge permits/licenses necessary for the successful construction of the Project. Such discharge permits/licenses will be associated with effluent discharges (including stormwater and treated sanitary/domestic sewage). The Special Terms and Conditions associated with each Water Use Permit will be followed, and adherence to such will be monitored and confirmed through routine inspections and/or audits;
- Method Statements detailing spill emergency response and clean-up procedures for spills will be developed including process, responsibilities, training and drill needs.
- Training regarding proper methods for transporting, transferring and handling hazardous substances that have the potential to impact surface and groundwater resources will be undertaken.
- Areas where spillage of soil contaminants occurs will be excavated (to the depth of contamination) and suitably rehabilitated. If any other minor spillage occurs, the spillage will be cleaned immediately and the contaminated area will be rehabilitated. All contaminated material will be suitably disposed of.
- The washing of Project vehicles in and around any surface water bodies in will be prohibited. All Project vehicles will be washed at designated wash bays on site. These wash bays should include oil/grease and sediment traps for grey water.
- The ad hoc maintenance of vehicles in and around the construction area will be prevented. All vehicles will be maintained at a designated workshop. The workshop should include containment berms and an oil/grease trap.
- All construction areas and associated facilities will be maintained in a good and tidy condition; debris and wastes will be contained in such a way that they cannot become entrained in surface run off during periods of heavy rain.
- Where practical, exposed surfaces and friable materials will be covered / sheeted.
- , construction activities will be conducted > 150 m away from water bodies as defined in "Regulation on procedure of establishing water protection zones and sanitary protection zones for water bodies".
- In the water protection zone (i.e. 150m), there will be no plant clearance and no permanent or temporary project related structures like storage buildings or area including fuel and chemical storages, vehicle or equipment washing station, vehicle park area, toilet, waste disposal area etc.
- Sufficient toilets at active work areas will be provided for site staff and workers and these will be serviced regularly by a competent and suitably qualified person.
- The sewage treatment system will be managed in a manner that results in zero discharge of raw sewage to the environment, and if treated sewage is discharged into the environment then



this should conform to recognized Uzbekistan discharge standards prior to discharge (which will be prescribed in effluent discharge permits).

- All wastewater which may be contaminated with oily substances will be managed in accordance with an approved Waste Management Plan, and no hydrocarbon-contaminated water will be released into the environment.
- Fixed fuel storage infrastructure will be minimum 250 m away from Uchkizil Reservoir , on flat, impermeable surface and surrounded by a bond with a volume of 110 percent of the volume of the storage tank(s), and fuel transfer at fixed stations will be performed on a concrete surface draining to a mechanical oil separator.
- Chemicals storage and dispensing areas will be located minimum 250 m from Uchkizil Reservoir , and in no instance should they be located drained on an irrigation channel. Storage will be on flat, impermeable surface and surrounded by a bund or enclosed storage. To avoid siltation, soil stockpile will be located minimum 250 m away from surface water bodies.

Table 92: Impacts Significance of the Water Resources and Water Environment - Construction Phase

Potential Impacts	Receptor	Sensitivity of Receptor	Magnitude of Impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
Water Intake Structure Construction	Reservoir's aquatic life, Water and Sediment Quality	High	Low	Moderate	<p>The Contractor's HSE department shall oversee the impacts caused by clearance of vegetation on reservoir banks before any excavation. Fauna shouldn't be damaged during excavation and proper escape path should remain during excavation in case any nest of animal find..</p> <p>Any animal mortality will be recorded in incident log and corrective actions should be taken for future incidents to minimize the occurrence.</p> <p>Even if the impact is short term, silt curtain should be on place to avoid siltation and suspended solids to the water bodies. Silt curtain should have concrete block attachment to avoid them floating.</p> <p>Disposal of any kind of concrete, soil or chemical will not be done nearby the reservoir. Surplus soil should be stored at least 250 meters away from the reservoir to avoid erosion impacts on the reservoir.</p> <p>Even after construction of the structure complete silt curtain should be on place to allow complete settlement of Total suspended solids. The curtain should be removed after the water TSS level reduced to the threshold limits identified in Uzbek and International regulations whichever is more stringent.</p> <p>The Project should consult with the authority to confirm the need and applicability for water discharge permits/licenses necessary for the successful construction of the Project.</p>	Minor
Environmental Emergencies (Spills, Mismanagement of HAZMAT)	Reservoir's aquatic life, Water and Sediment Quality	High	Medium	Major	<p>Method Statements detailing spill emergency response and clean-up procedures for spills should be developed.</p> <p>Training regarding proper methods for transporting, transferring and handling hazardous substances that have the potential to impact surface and groundwater resources should be undertaken.</p> <p>Areas where spillage of soil contaminants occurs should be excavated (to the depth of contamination) and suitably rehabilitated. If any other minor spillage occurs the spillage should be cleaned immediately and the contaminated area should be rehabilitated. All contaminated material should be suitably disposed of.</p> <p>The washing of Project vehicles in any surface water bodies in and around the reservoir should be prohibited. All Project vehicles should be washed at designated wash bays on site. These wash bays should include oil/grease and sediment traps for grey water.</p> <p>All construction areas and associated facilities should be maintained in a good and tidy condition; debris and wastes should be contained in such a way that they cannot become entrained in surface run off during periods of heavy rain.</p> <p>To the furthest extent practicably possible, construction activities should be conducted > 150 m, further of sanitary buffer zone, away from water bodies (in conformance to the requirements of the Uzbekistan legal requirements),.</p> <p>All wastewater which may be contaminated with oily substances should be managed in accordance with an approved Waste Management Plan, and no hydrocarbon-contaminated water should be released into the environment.</p> <p>Fixed fuel storage infrastructure will be minimum 250 m away from Uchkizil Reservoir , on flat, impermeable surface and surrounded by a bund with a volume of 110 percent of the volume of the storage tank(s), and fuel transfer at fixed stations will be performed on a concrete surface draining to a mechanical oil separator</p> <p>Chemicals storage and dispensing areas will be located minimum 250 m from Uchkizil Reservoir , and in no instance should they be located drained on an irrigation channel. Storage will be on flat, impermeable surface and surrounded by a bund or enclosed storage. To avoid siltation, soil stockpile will be located minimum 250 m away from surface water bodies</p>	Moderate



Potential Impacts	Receptor	Sensitivity of Receptor	Magnitude of Impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
Test and Commissioning Wastewater	Reservoir's aquatic life Water and Sediment Quality	High	Medium	Moderate (M)	To minimize usage in test and commissioning phase, recycling and reuse of water should be assessed. Hydro testing water can be reused in same testing procedure until this phase of testing is completed and the water is no longer usable in the process.	Moderate

8.5.2 Operational Phase

Water is a key resource required for the operation of the Power Plant. It will be used in several processes and will be sourced from the Uchkizil reservoir. Water is a key resource required for the operation of the Power Plant. It will be used in several processes and will be sourced from the Uchkizil reservoir.

The water intake structure will be at a sufficient depth below minimum water level to avoid collisions with boats and intake of warm surface water and at sufficient distance from the bed of the reservoir to avoid the intake of sediments and sludge. The water intake velocity will be limited with 0.15 m/s [18] and a bubble curtain shall be applied to prevent fish and fauna to enter the intake.

The discharge point will be at a sufficient distance from the shore to promote mixing with the main water body. Following the detailed design together with performing a bathymetry, hydraulic and nearshore topography survey, the exact locations will be determined and necessary relevant permits will be obtained from the national authorities.

Water balance diagram for the Project is given in Attachment B. In accordance with the water balance diagram;

- Below listed three main systems are merged and discharged to the receiving environment (Uchkizil Reservoir) through one discharge pipeline:
 - Storm water collection network: Collected storm water will be discharged to the Uchkizil reservoir after oil-separation unit.
 - Service water network: Water collected from the service water network will be discharged to the Uchkizil reservoir after oil-separation unit.
 - Blow-down water system: Water collected from the blow-down water system will be sent to the neutralization system (industrial wastewater treatment system). After neutralization, the collected water will be discharged to the Uchkizil reservoir.
- Domestic wastewater will be treated by sanitary water treatment system and treated water will be sent to the irrigation water storage tank for watering the green belt.
- Since close loop cooling system will be used in the plant, there will be no cooling water discharge to the Uchkizil reservoir.

The main function of the Wastewater System is to collect, temporary store and deliver for treatment and final disposal the aqueous effluents derived from the Power Plant operation.

The wastewater system shall comply with the Laws and the guidelines for liquid emissions of the plant in operation for the combined effluent stream and for the sanitary effluent stream.

The Wastewater Treatment System (WWTS) consists of the following sub-systems:

- Industrial Wastewater Treatment System (IWWTS) to treat:
 - Chemical wastewater, including laboratory wastes, regeneration wastes, and Heat recovery steam generator (HRSG) continuous and intermittent blowdown and drains.
 - Clean (non-oily) floor and equipment drains.
 - Treated oily wastewater from the Plant Oily Water Treatment System (POWTS).



- Plant Oily Water Treatment System (POWTS) to treat oily water from floor and equipment drains.
- Other Chemical wastes like from the regeneration of the Polishing Plant resins. These effluents are stored for off-site disposal by trucks.

In the Industrial Wastewater Treatment System (IWWTS) incoming categories of wastewater streams shall be routed to the IWWTS Waste Neutralization Basin.

In the IWWTS wastewater is mixed, pH is adjusted using acid and caustic dosing in the basins as needed for final discharge.

The Plant Oily Water Treatment System (POWTS) removes the oil from potentially oil contaminated plant floor and equipment drains such that the treated wastewater meets the allowed discharge limit for Oil and Grease prior to being further processed by the IWWTS.

The Oily Water Separators provide oil removal to the environmental limit requirements after which the treated wastewater is forwarded to the IWWTS Waste Neutralisation basin.

All treated Industrial Wastewater shall be discharged to the Uchkizil water reserve terminal point.

Recovered oil from the packaged oil water separators of the Plant Oily Water Treatment System (POWTS) will be disposed off-site by trucks.

8.5.2.1 Water Consumption and Wastewater Generation

The source of water supply for the facility will be Uchkizil Reservoir.

Water consumption for industrial needs is the sum of the water consumption:

- to feed the circulating cooling system of auxiliary equipment;
- to make up the steam-water cycle;
- for the need for additional water of the chemical water treatment system.

A closed-loop cooling system will be used to cool the auxiliary equipment. Demineralized water will be used as a cooling medium in a closed loop.

The make-up water consumption consists of the losses of water treatment, the circulating cooling system of auxiliary equipment, the water consumption for blowing the boilers, as well as the intake of the make-up water into the chemical water treatment system.

Calculations of industrial water consumption:

Total daily amount of water consumption will be 896.67 m³. The breakdown is given below.

- 666.19 m³/day of the extracted water will be sent to Demineralized water tank from water EDI Unit to supply water for the industrial needs. Then, 201.74 m³/day of this amount is diverted to auxiliary boiler whereas 464.45 m³/day of the water is mainly diverted to HRSG/ST unit (450.73 m³/day). The rest is distributed to ACC cleaning system, demineralized water miscellaneous consumers and GT compressor wash water.
- 164.29 m³/day water will be used in service water network, 50 m³/day is sent to irrigation water storage tank, 6 m³/day for water remineralization unit, 1,34 m³/day for sludge disposal and 8.84 m³/day is used in collection dyke of reverse osmosis unit.

Adjustment of water consumption rates will be carried out after determining all the characteristics of the equipment before putting the Project into operation.

Wastewater disposal

All effluent from the wastewater treatment plant, sample racks, laboratory wastewater, etc. will be collected and pumped out into the neutralization system. The rinse water for the gas turbine is collected in the GT rinse water reservoir and is separately discharged into the storage tank.

Industrial wastewater will be sent for treatment to a neutralization tank, a coagulation tank and further to a clarifier. Purified water enters the storage tank. In the case of extreme wastewater parameters, the treated wastewater from the holding tank can be redirected to the inlet of the wastewater treatment plant. Temperature and pH levels are continuously monitored and recorded. Alarm levels will be present for operator actions.

Wastewater treatment of waste heat boilers

The waste heat boiler blowdown water will be partially cooled by water quenching and transferred to the waste heat boiler blowdown water cooling pond. Chilled purge water (temperature approximately 80 ° C) is further cooled to acceptable limits using a jet aerator prior to neutralization. The cooled and neutralized water is directed to the tank.

Oily water separation

The oily water separation system will be sufficient to purify all oily water from the territory of the combined cycle power plant (diverted from the transformer area, the floor of the gas turbine, and so on). Waste water from oily water collected in the sump will be pumped into the buffer tank of the oily water separation system.

CPI Oil Separator (Pleated Plate Interceptor) is used to separate oil from water. The oil rising to the surface flows through the overflow of the skimmer, which is adjustable at a fixed height. The separated oil sludge will be directed by gravity into the oil sludge mine. Periodically, oil sludge should be transferred for disposal to a specialized organization.

Domestic waste water from the entire combined cycle power plant is transferred to a biological treatment plant, where it will be purified from organic matter with the formation of a stable sludge. The cleaning process is carried out as follows. Untreated wastewater from every building (toilets, showers, sinks, etc.) flows into modular septic tanks where solids are separated from liquids. Heavy solids settle to the bottom of the tank, the remaining liquids flow out of the tank into a wastewater sump, from which they are pumped to an aeration tank equipped with an extended aeration device. The aeration tank makes it possible to clean the effluent by oxidizing organic pollutants of both liquid and solid phases under aerobic conditions (oxygen saturation occurs). The wastewater is then sent to a sump where the liquid is separated from the sludge.

In the secondary sludge zone, the return of sludge to the primary sump is organized. The return of the sludge is made forcibly by an air lift. Surface liquids from the sump are disinfected in the chlorine contact chamber by dosing a hypo-chlorite solution before draining.

The total daily volume of wastewater to be discharged from the plant is 312.40 m³/day of which 309.4 m³/day received from industrial wastewater treatment system, and the remaining 3m³/day from oily water separation unit.

There will be rainwater collection system which is also connected wastewater discharge unit following the oil water separation.

Therefore, it is calculated that

$$\begin{aligned}
 \text{Daily used water} &= \text{Daily input} - \text{Daily output} \\
 &= 896.67 \text{ m}^3/\text{day} - 312.40 \text{ m}^3/\text{day} \\
 &= 584.27 \text{ m}^3/\text{day} \text{ will be extracted from Uchkizil Reservoir.}
 \end{aligned}$$

The total annual water extraction of the power plant will be approximately with 213,000 m³ which is around 0.26 % of the Uchkizil reservoir volume (80 million m³)

Table 91.

8.5.2.2 Industrial Wastewater Treatment System (IWWTS)

The IWWTS consists mainly of the following sub-systems and equipment:

- *HRSB Effluents and Auxially Boiler Collection Subsystem*: This subsystem, comprising all the necessary components including accessories, instrumentation and control devices to collect effluents
- Collection and Neutralization subsystem including:
 - Two (2) x 100% air blowers (common for each compartment) and one air distribution system for each basin compartment;
 - Neutralization Subsystem of the including:
 - Neutralization basin (divided in two compartments, one compartment filling and one controlling the PH and discharging);
 - One (1) pumping station equipped with two (2) 100% pumps for wastewater recirculation and, if possible, discharge to the wastewater collection and equalization basin;
 - Two (2) mechanical agitator;
 - Dosing equipment of chemical products for pH adjustment in the neutralization basins;
 - Instruments for continuous flow, pH and conductivity measurement
 - A water fogging system to cool down the effluents and one service water distribution system to cool down the effluents directly in the basin in case the system fogging is not enough to comply with the maximum temperature discharge;



- Instruments for continuous flow, pressure, temperature, pH, turbidity and conductivity measurement.
 - Instruments for continuous flow, pressure, temperature, pH, turbidity and conductivity measurement to ensure effluent meets project discharge standards (see Section 8.1.1).
 - The necessary electrical control panels and junction boxes;
 - Power, control and instrumentation cables inside the Wastewater Treatment Package Plant;
 - One (1) PLC with communication with the Distributed Control System (DCS);
 - Complete control system design, including operation philosophy, logic diagrams, process displays and wiring diagrams;
 - Necessary instrumentation for the automatic and continuous operation of the WWTP.

8.5.2.3 Plant Oily Water Treatment System (POWTS)

The Plant Oily Water Treatment System (POWTS) removes oil from potentially oil-contaminated plant floor and equipment runoff so that the treated effluent meets the allowable discharge limit for oil and grease before it is further processed by the IWWTS.

8.5.2.4 POWTS Collection System

The POWTS Collection System collects and conveys facility effluent with the potential for oil contamination by gravity. The POWTS collects the oily wastewater from each area in local oil separators (lamella separators) from which the treated water is pumped to the IWWTS and the oil sludge is trucked off-site for disposal.

8.5.2.5 Sanitary Waste System

The sanitary waste water collection system collects and treats all sanitary waste produced within the Facility.

The sanitary drains shall provide discharge from all lavatories, showers, sinks and similar facilities. The drains shall be plumbed from the various buildings.

Wastewater from the sanitary wastewater collection system is further transferred to irrigation water tank.

8.5.2.6 Final Effluents Discharge

The final treated wastewater shall be discharged towards the Uchkizil water reservoir.

As per the National legislation, in all cases, the MPC will be considered the existing background natural water quality for the body of water into which effluents will be discharged and the water quality objectives for the classification applied to the waterbody, which is Uchkizil Reservoir for this Project.

In no case, the MPC will set below the current background natural water quality value (in the case of polluted water bodies) or lower than the MPC set for category of water to be discharged into (for non-polluted water courses). Therefore, in order to protect Uchkizil reservoir water quality, Project discharge limits will be in line for the limit values set for fishery.

Mitigation measures to reduce impacts on water quality for construction phase are given below and summarized in Table 94.

- SCE employees will be trained on how to minimize water consumption and ensure they have an understanding of the water issues in the Project area.
- Mechanisms and management practices to further reduce the volume of water required in the plant (e.g. increased reuse rates of treated effluent) will be considered, as this would help decrease freshwater consumptions.
- Limit water intake velocity with 0.15 m/s according to IFC EHS Guideline for Thermal Power Plants at the entrance of inlet structure.
- A bubble curtain shall be installed across the entrance of the intake channel to prevent fish and other fauna from going through the intake channel.
- Periodic monitoring of intakes will be undertaken during the first year of operation to record the effectiveness and ensure that there is no injury to the vulnerable fish species.
- Brief visual observation of the intake channel will be undertaken daily to check that reptiles and large fish are not within the channel.
- Maintenance program and competent teams will be on board. Capacity of the team shall be appropriate to handle maintenance and emergencies.
- Fuel and hazardous storage facilities will be more than 150 metres from water bodies.
- Facility management shall be informed about possible negative impacts related with water use and wastewater treatment and awareness program for entire facility team shall be on place.
- Oily wastewater will be treated via an oil/water separator. A specialist contractor will remove the recovered oil for recycling. Any residual sludge will be taken to a Municipality approved hazardous waste landfill.
- Wastewater collection systems and oil water separators shall be inspected frequently, to ensure that no blockages could result in overflowing.
- Water temperature control system will be installed to the neutralization pond to ensure that the discharge temperature is within the Project discharge limits.
- Sludge from all treatment systems will be disposed in accordance with national, and IFC regulations for the hazardous wastes.
- Provisions for the containment of the first flush of storm water will be considered to ensure that the initial runoff from rainfall events does not lead to contamination of the receiving canal waters.

It is proposed to consider the need to undertake Hydrodynamic, initial dilution and dispersion modelling to define monitoring obligations to confirm no significant impact during the operation phase and if necessary define any additional design mitigation requirements. The objectives of the modelling study would be to:

- Understand near-field and far-field dilutions and dispersion of the effluent.
- To assess possible recirculation issues at the intake location (if relevant when final design is determined) as well as to determine increases in water temperature and pollutant concentrations above ambient in the vicinity of the outfall location.

Monitoring obligations to confirm the findings of the assessment are proposed as follows :

- Intake velocity will be in accordance with IFC guidance of < 0.15 m/s.

- A bubble curtain shall be installed across the entrance of the intake channel to prevent fish and other fauna from going through the intake channel.
- Periodic monitoring of intake will be undertaken during the first year of operation to record the effectiveness and ensure that there is no injury to the vulnerable fish species.
- Brief visual observation of the intake channel should be undertaken daily to check that reptiles and large fish are not within the channel.
- Survey for the presence of the *Luciobarbus conocephalus* and *Sabanejewia aralensis* prior to start of construction and half yearly during construction Within 500m upstream and downstream of intake and outfall locations.
- Survey for the presence of *Luciobarbus conocephalus* and *Sabanejewia* - Half yearly for first 3 years, within 500m upstream and downstream of intake and outfall locations.

During the operation stage, it is recommended following parameters shall be monitored at the discharge point.

Table 93 Monitoring Parameters at the Discharge Point

Parameter	Frequency
pH, Temperature, Conductivity and Flow rate	Continuous
COD, oil, TSS, Nitrogen, Phosphorus	Bi-weekly
Suite of heavy metals	Quarterly

Table 94: Impacts Significance of the Water Resources and Water Environment during - Operation Phase

Potential Impacts	Receptor	Sensitivity of Receptor	Magnitude of Impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
Water consumption during operations	Reservoir users	High	Medium	Moderate	<p>SCE employees will be trained on how to minimise water consumption and ensure they have an understanding of the water issues in the Project area.</p> <p>Mechanisms and management practices to further reduce the volume of water required in the plant (e.g. increased reuse rates of treated effluent) will be considered, as this would help decrease freshwater consumptions.</p> <p>It is recommended that SCE will seek for innovative solutions to have rainwater harvest and use the collected water for irrigation purposes</p>	Minor
Stormwater and Operation Wastewater	Reservoir water and sediment quality	High	High	Major	<p>Maintenance program and competent teams should be on board. Capacity of the team shall be appropriate to handle maintenance and emergencies.</p> <p>Facility management shall be informed about possible negative impacts related with water use and wastewater treatment and awareness program for entire facility team shall be on place.</p> <p>Oily wastewater will be treated via an oil/water separator. A specialist contractor will remove the recovered oil for recycling. Any residual sludge will be taken to a Municipality approved hazardous waste landfill.</p> <p>Wastewater collection systems and oil water separators shall be inspected frequently, to ensure that no blockages could result in overflowing.</p> <p>Sludge from all treatment systems will be disposed in accordance with national, and IFC regulations for the hazardous wastes.</p> <p>Provisions for the containment of the first flush of storm water will be considered to ensure that the initial runoff from rainfall events does not lead to contamination of the receiving reservoir waters.</p> <p>All discharges into the reservoir will meet all the specific Project discharge requirements set by the State Committee on Ecology and Environmental Protection.</p>	Moderate
Disturbance to aquatic life due to water intake	Reservoir fauna	High	Low	Moderate	<p>To avoid any harm to the aquatic life, water Intake velocity of the water should be less than 0,15 m/s in compliance with "IFC EHS Guidelines for Thermal Power Plants" which allow any fish species to escape easily from the flow.</p> <p>Bubble curtain shall be installed at the entrance of water intak structure to avoid fish and other animals to go through intake channel</p> <p>Periodic monitoring of intake structure should be done to ensure that there is no injury to aquatic life.</p>	Minor

8.6 Cumulative Impacts

The purpose of a cumulative impact assessment is to determine how the potential impacts of a proposed development might combine cumulatively, with the potential impacts of other projects or human activities as well as natural stressors such as droughts or extreme climatic events. The summary of cumulative impacts of water resources and water management is presented in Table 95.

Table 95: Summary of Cumulative Impacts of Water Resources and Water Management

Environmental and Social Aspects	Construction	Operation
Water Resources and Water Management		
Cumulative Impacts	<p>Increasing in water consumption during construction and commissioning phase of the Project may potentially affect the users downstream.</p> <p>Discharge of dewatering if not properly managed could impact the water quality for downstream users and biological environment of the waterbody.</p>	<p>Additional water consumption from the Project may potentially affect the users downstream and the discharge could lead to slight changes in the water quality of the waterbody that may affect biological environment.</p> <p>State Ecological Committee for Environment and Ecology Protection already gave positive consent regarding the water usage of the project during the local EIA process.</p>

8.7 Monitoring

The Contractor will undertake canal monitoring during the construction, commissioning and operational phase of the Project. The minimum expected requirements for the monitoring are outlined in the Table 96. The final monitoring methodology with specific details (i.e. locations, frequencies, durations, parameters etc.) will be developed in a specific 'Environmental Monitoring Plan'.

Table 96: Monitoring Requirements of Water Resources and Water Environment

Source	Parameters	Duration	Location
Construction Phase			
Fauna species	Species in the Uchkizil and its banks	Daily visual observations in the Uchkizil banks construction areas	All work areas at the Uchkizil
Ambient Water Quality	Total Suspended Solids, Turbidity	Continuous water quality analysis	Representative locations outside the silt curtains
	Range of parameters including physical heavy metals, bacteriological and hydrocarbons	Monthly sampling and laboratory analysis.	
Commissioning Phase			
Commissioning Discharge Monitoring	pH, temperature, conductivity and flow rate	Continuous	Discharge point
	Parameters of Project Discharge Standards	Bi-weekly	
	Suite of heavy metals	Quarterly	
Operation Phase			
Operational Discharge Monitoring	pH, temperature, conductivity and flow rate	Continuous	Discharge point and other points in and around the Uchkizil Reservoir (see Figure 57)
	Parameters of Project Discharge Standards	Bi-weekly	
	Suite of heavy metals	Quarterly	
Water & Sediment Quality	Uchkizil fauna species, water and sediment quality	Annually	Discharge point



Figure 57: Future water monitoring points

9. ECOLOGY

9.1 Standards and Regulatory Requirements

9.1.1 National Regulations

The relevant legislation related with ecology and biodiversity in Uzbekistan are given below:

- Law "On Nature Protection", No.754-XII, dated December 09, 1992 (as amended on April 21, 2021)".
- Law "On Protected Natural Territories", No.13 dated January 08, 2018 (as amended on December 28, 2020).
- Law "On Ecological Expertise", No.73-II dated May 25, 2000 (as amended on April 29 2021)
- Law "On Protected Natural Reserves", No.710-II dated December 03, 2004 (as amended on September 30, 2020).
- Law "On Protection and Use of the Wildlife", No.545-I dated December 26, 1997 (as amended on September 19, 2016).
- Law "On Protection and Use of Flora (new edition)", No.409 dated September 21, 2016 (as amended on April 21, 2021).
- Law "On Protection and Use of Fauna (new edition)", No.408 dated September 19, 2016 (as amended on April 21, 2021).
- Law "On Plant Quarantine", No. 113-I dated August 31, 1995 (as amended on July 09, 2018).
- Decree of the Cabinet of Ministers of the RUz "On the Settlement of the Use of Biological Resources and the Procedure of Permission of the Resolving Procedures in the Field of Nature Use", No.290 dated October, 2014 (as amended on May 27, 2019).
- Decree of the Cabinet of Ministers of the RUz "On Measures to Improve the Public Administration System in the Sphere of Protected Natural Territories" No.4247 dated March 20, 2019.
- Decree of the Cabinet of Ministers of the RUz "On the Approval of the strategy for the preservation of biological diversity in the RUz for the period 2019-2028" No.484 dated June 11, 2019.
- Decree of the Cabinet of Ministers of Uzbekistan "About measures on the organization of the preparation, edition, and management of the red book of the RUz" No.1034 dated December 19, 2018.
- Decree of the Supreme Council of Uzbekistan "On Reinforcement of the Protection of Valuable and Endangered Species of Flora and Fauna and Harmonization of their Use" No.937-XII dated September 03, 1993.
- Appendix of the Decree of the Cabinet of Ministers of the RUz "On Classification of techno genetic, natural and environmental emergencies" No.455 dated October 27, 1998.

The content of the national laws are briefly described in the following paragraphs.

Law "On Nature Protection" states legal, economic, and organizational bases for the conservation of the environment and the rational use of natural resources. Its purpose is to ensure balanced relations between man and nature, to protect the environmental system and to guarantee the rights

of the population of a clean environment. Article 25 of this Law states that SEE is a mandatory measure for environmental protection, preceded to decision-making process. In addition, Article 25 says that the implementation of the project without a positive conclusion of SEE is prohibited.

Law "On Protected Natural Territories" regulates relations in term of organization, protection, and use of protected natural territories. The main tasks of this Law are the preservation of typical, unique, valuable natural objects and complexes, the genetic fund of plants and animals, the prevention of the negative impact of human activities on nature, the study of natural processes, the monitoring of the environment, the improvement of environmental education.

Law "On Ecological Expertise" provides for conducting a mandatory expert assessment of impacts on the environment and human health, as well as a legal basis for conducting expert assessments.

Law "On Protected Natural Reserves" regulates relations in term of organization, protection, and use of protected natural territories. The main tasks of this Law are the preservation of typical, unique, valuable natural objects and complexes, the genetic fund of plants and animals, the prevention of the negative impact of human activities on nature, the study of natural processes, the monitoring of the environment, the improvement of environmental education.

Law "On Protection and Use of the Wildlife" regulates relations in the field of protection, use, restoration and reproduction of the wildlife in order to ensure the conditions of its existence, conservation of species diversity, integrity of natural communities and habitat.

Law "On Protection and Use of Flora" regulates protection and usage of flora growing in natural condition, as well as in cultivation and its reproduction and conservation of gene pool of wild plants.

Law "On Protection and Use of Fauna" regulates relations in the field of protection and use of wild animals living in a state of natural freedom on land, water, atmosphere and soil, constantly or temporarily inhabiting the territory of the Republic of Uzbekistan, as well as contained in semi-free conditions or artificially created habitat for scientific or nature protection goals.

Law "On Plant Quarantine" regulates measures on external and internal plant quarantine, aimed at the protection of the territory of the Republic of Uzbekistan from the penetration of quarantine and other dangerous pests, diseases of plants and weeds from foreign countries, which can cause significant economic damage to the national economy.

9.1.2 International Conventions/Protocols

In addition, Uzbekistan has adopted a number of international conventions, protocols, agreements, and memoranda of understanding in the field of environmental protection and sustainable development. The international agreements related to ecology in which Uzbekistan is involved are as follows:

- Convention on International Trade in Endangered Species of Wild Fauna and Flora (CITES) dated July 01, 1997.
- Convention on the Conservation of Migratory Species of Wild Animals (Bonn Convention) dated May 01, 1998.
- RAMSAR Convention on Wetlands of International Importance, especially as Waterfowl Habitat dated August 30, 2001.
- United Nations Framework Convention on Climate Change (UNFCCC) dated March 24, 1994.
- The Convention on Biological Diversity (CBD) dated October 17, 1995.



- United Nations Convention to Combat Desertification (UNCCD) dated August 31, 1995.
- Convention on Biodiversity, Cartagena Protocol dated October 11, 2019.

9.1.3 Lender Requirements

All the studies related to the terrestrial and aquatic ecology will be in line with the IFC Performance Standard (PS) 6: "*Biodiversity Conservation and Sustainable Management of Living Natural Resources*".

This PS reflects the objectives of the Convention on Biological Diversity to conserve biological diversity and promote use of renewable natural resources in a sustainable manner.

Since 1995, the RUz is a party to the "United Nations (UN) Framework Convention on Biological Diversity".

The laws of the RUz "On Nature Protection", "On Protected Natural Territories", "On Protection and Use of Flora", "On Protection and Use of Fauna" are the legislative basis in the field of biodiversity protection. In this respect, the main document is the "National Strategy and Action Plan on Biodiversity Conservation (1998)" [19].

Moreover, the Project will follow the ratified conventions and Habitats Directive 92/43/EEC and the Birds Directive 2009/147/EC, where applicable.

9.2 Biodiversity in Uzbekistan

9.2.1 General Overview

Uzbekistan is located in the central part of Central Asia and has borders with the five countries such as Kazakhstan, Kyrgyzstan, Tajikistan, Turkmenistan, and Afghanistan. This geographical location at the junction of several biogeographic regions determines antiquity, diversity, nature of origin, complex genetic relationships of flora and fauna. The gene pool of wild animals inhabiting the territory of the Republic of Uzbekistan is unique. Uzbekistan is an important habitat for endemic species and subspecies of animals of Central Asian origin. Most of it is represented by native fauna.

The special geographical position of Uzbekistan determines also the significant wealth of its animal world. At the same time, it is also a reflection of the exceptional diversity of the natural conditions of the Republic, where vast plains occupied by deserts of various types, mountain steppes, forests and alpine meadows, riparian thickets, reservoirs, cultural landscapes form characteristic ecosystems with their faunal assemblage.

The fauna of the Republic is distinguished by its antiquity and complex genetic relationships. Turanian and Turkestan endemic and autochthonous species play a significant role here. A large place also belongs to the group of animals that entered the Country in the historical past from other regions of Central Asia, Indochina, the Mediterranean, and the planes of Eurasia. Part of the fauna is represented by acclimatizers from the Far East, Transcaucasia, Europe, and America.

In general, the number of vertebrates in Uzbekistan is 714 (107 species of mammals, 467 species of birds, 61 species of reptiles, 3 species of amphibians and 76 species of fish), while the fauna of invertebrates is estimated as 15 thousand species. The flora of Uzbekistan accounts more than 4,000 species of vascular plants.

Over the past decades, because of increased nature management, many species of animals have experienced a strong anthropogenic impact and have reduced their area and number, and some of them have completely disappeared. The greatest threat is faced by large species of mammals and birds, which are of great practical value as objects of hunting, as well as endemic and locally widespread species found within vulnerable ecosystems intensively developed by humans. In particular, the Turanian tiger, cheetah, and Aral trout have already disappeared. On the verge of extinction are the leopard, striped hyena, bustard, Syrdarya, Amudarya small and large shovelnose sturgeon, Aral sturgeon. Ustyurt and Bukhara crested sparassid, markhor, caracal lynx, Central Asian otter, stiftai, mute swan, marbled duck, houbara bustard, pin-tailed sand grouse, Hentaun toad agamas, striped Fergana desert lacertas, the Aral barbel, pike asp, some helmet-shell & insects. The number of many animals has not yet reached a critical level but is steadily decreasing. All this is a consequence of the economic development of territories, environmental pollution, and the irrational use of biological resources.

An ecological network, consisting of

- 7 reserves (e.g., Gissar, Zaamin, Kitab, Nurota, Kizilkum, etc.),
- 3 national natural parks (i.e., Zaamin, Ugam-Chatkal, and Zeravshan),
- Complex (landscape) nature reserve (i.e., Saigachy),
- State reserve "Sudochoye",
- Reserves (e.g., Dengizkul, Karakir, Arnasaysky, etc.),
- Biosphere reserves (i.e., Nizhne-Amudarya and Ugam-Chatkal), and
- 10 natural monuments (e.g., Vardanzi, Yazyavan, Mingbulak, etc.).

Many species of animals included in the Red Book are protected in the Republic's reserves for example Bukhara deer, markhor, Severtsov's crested sparassid, Menzbir's marmot, Turkestan lynx, large birds of prey, and invertebrates[35].

A promising direction in the preservation and restoration of the number of rare and endangered species of animals is their breeding in semi-free conditions. An important practical step in this regard is the work carried out in the Bukhara specialized nursery "Jeyran" in the Bukhara region. Here, species included in the national Red Book and the IUCN are preserved and bred (e.g., Equus onager, Przewalski's horse (*Equus caballus*), goitered gazelle, markhor, Bukhara crested sparassid). Breeding of the endangered houbara bustard in artificial conditions with subsequent release into the wild is carried out in nurseries located in Navoi and Bukhara regions [35].

9.2.2 Protected and Important Biodiversity Areas

Uzbekistan's current designated protected areas fall into five categories as follows:

- nature reserves/national reserves (zapovedniks);
- national parks;
- one ecological centre;
- wildlife areas (zakazniks); and
- landmarks.

The Project area does not occupy and does not border on any protected areas higher than Category V (forestry, hunting management areas, breeding centers) according to the classification of the status of protected natural areas as per the Law "On Protected Natural Areas" No.710-II. However, it is also

worth mentioning that the area is adjacent to the western end of the Kattakum sandy massif, which is home to rare and endemic plant and animal species (see Figure 58).

The territory of the Kattakum sandy massif is currently not nationally protected area. However, this massif is an isolated area from the rest of the sands, and it is inhabited by a number of endemic subspecies of reptiles.

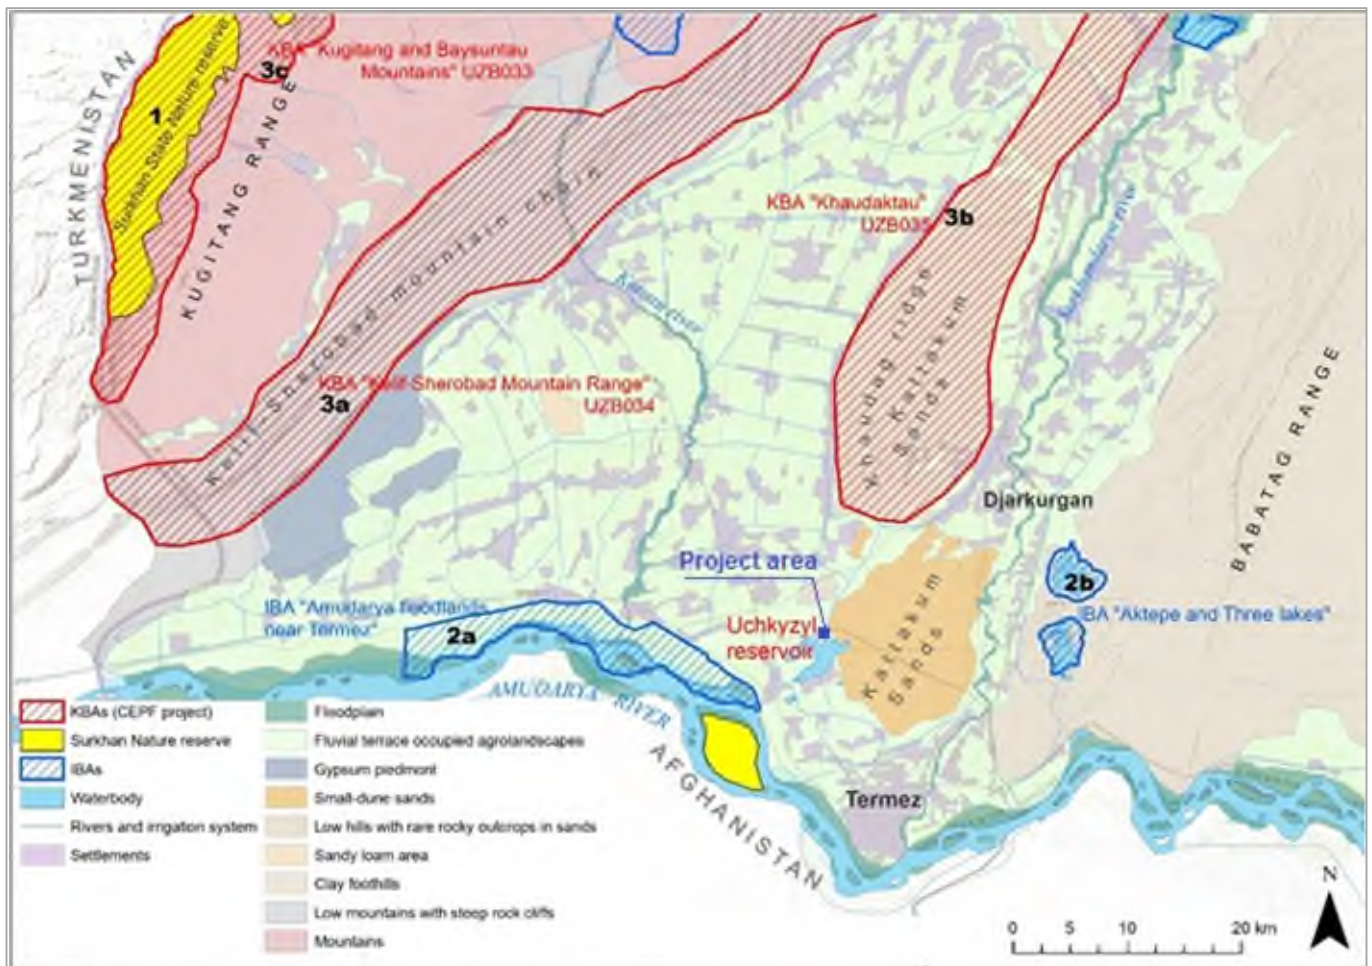


Figure 58: Map showing the National and International protected areas near the Project Area

The areas with importance of biodiversity within 50 km radius of the Project area are listed in Table 97, below.

Table 97: Important bird areas and key biodiversity areas within 50 km radius of the Project area [98][99]

Name of the Protected Area	Distance from the Project area	Description
Amudarya Floodplain near Termez Important Bird Area (IBA)	10 km	<p>Location: The IBA is situated 23 km to the NW of Termez town, in the first floodplain terrace of the Amudarya river between Kaptarhona and Sholiker villages (on the border with Afghanistan). It is 1.5-6 km wide and about 30 km long. The Amudarya river is on the south and south-west boundary, loess precipices which border the first and second floodplain terraces, waterlogged areas and reedbeds are the natural borders of the site. There are also rice and winter wheat fields, sandbanks, rivers, stream, marshes, canals and roads.</p> <p>Total area: 10,693 hectar.</p> <p>The Amudarya river is located on the south and south-west boundary, loess precipices which border the first and second floodplain terraces, waterlogged areas and reedbeds are the natural borders of the site. There are also rice and winter wheat fields, sandbanks, rivers, stream, marshes, canals and roads.</p> <p>Threat score as per the most recent IBA monitoring assessment (2006) is high.</p>
Aktepe and Three Lakes Important Bird Area (IBA)	15 km	<p>Location: Aktepe Reservoir, and adjoining lakes are located at 22-25 km North-east of Termez town and 7 km South-east of Jarkurgan town in the valley of the Surkhandarya River. It is situated in the sandy desert on the border of developed land. There are three islets with precipitous shores in the reservoir. Around the reservoir, there are shoreline thickets of reed, tugai forest and a sandy desert. A small canal flows into the South-east part of the reservoir, feeding it with the water from the Amuzang canal. The average depth is 6.5 m. The water flow is regulated. There is a wastewater canal in the South-east part of the reservoir. There is a chain of small lakes situated 7 km to the south of the reservoir, which include the so-called Three Lakes. The water level and salinity in these lakes have not been studied. In winter, these water bodies are not frozen.</p> <p>Total area: 2,987 hectar.</p> <p>Threat score as per the most recent IBA monitoring assessment (2018) is low.</p>
Kugitang and Baysuntau mountains Key Biodiversity Area (KBA) and Koytendag Important Bird Area (IBA)	50 km	<p>Location: The IBA occupies the southwest slope of the Koytendag (Kugitang) ridge - the southwest termination of the Hissar range of the Pamir-Alay mountain system. Administratively the IBA is located in the southeast of Turkmenistan, and occupies the middle.</p> <p>Total Area: -75,289 hectar</p> <p>Threat score as per the most recent IBA monitoring assessment (2007) is not assessed.</p>
Kelif-Sherabad Range Key Biodiversity Area (KBA)	40 km	<p>Location: This KBA is located on the Kelif-Sherabad Mountain Chain.</p> <p>Total Area: -95,000 hectar</p>

Name of the Protected Area	Distance from the Project area	Description
Khaudaktau Key Biodiversity Area (KBA)	10 km	<p>B1 Individual geographically restricted species type : Sites qualifying as KBAs under criterion B1 hold a significant proportion of the global population size of a geographically restricted species and so contribute significantly to the global persistence of biodiversity at the genetic and species level. Site regularly holds $\geq 10\%$ of the global population size AND ≥ 10 reproductive units of a species</p> <p>Location: This KBA is located on Khaudag ridge and Kattakum Sands at 20 km north of the Termez.</p> <p>Total Area: -44,000 hectar</p> <p>B1 Individual geographically restricted species type : Sites qualifying as KBAs under criterion B1 hold a significant proportion of the global population size of a geographically restricted species and so contribute significantly to the global persistence of biodiversity at the genetic and species level. Site regularly holds $\geq 10\%$ of the global population size AND ≥ 10 reproductive units of a species</p>

9.3 Terrestrial Ecology

The terrestrial ecology surveys have been conducted in July-2021 and April-2022, which refers to summer and spring seasons, respectively. The surveys cover both the Project area and the its surrounding. In this section of the ESIA, the baseline conditions with respect to the terrestrial ecology are discussed. The surveys aim to:

- Identify the terrestrial flora and fauna that may reside or range within the region of the proposed Project.
- Provide detailed lists of the plant, mammals, reptiles, and amphibian fauna species in the region.
- Provide the IUCN Red Data rating and protected status of the flora and fauna species in Uzbekistan, which were determined to be present or potentially occurring at the area.
- Identify the direct or indirect impacts, whether they are beneficial, adverse, or neutral, on the current terrestrial biodiversity and provide relevant mitigation measures.

In addition, the literature was also reviewed in order to gather information about the typical national, regional, and local flora and fauna within the Republic of Uzbekistan. The site survey team is presented Table 98.

Table 98: Terrestrial ecology (flora & fauna) site survey team

Name of the expert	Profession	Qualification
Timur Abduraupov	Herpetologist	Bachelor degree Department of Zoology, Faculty of Natural Sciences, Samarkand State University, Samarkand, Uzbekistan, 2009 Master degree Department of Zoology, Faculty of Natural Sciences, Samarkand State University, Samarkand, Uzbekistan
Anna Ten	Ornithologist	Bachelor degree National University of Uzbekistan, 2003 Master degree National University of Uzbekistan, 2005 Post-graduate student Institute of Zoology of Uzbekistan Academy of Science, 2008
Maria Gritsyna	Theriologist	Bachelor degree Samarkand State University, 2004 Master degree Samarkand State University, 2008
Zuri Mustafayeva	Hydrobiologist	Bachelor degree Tashkent State University - Faculty of Biology, Department of Ichthyology and Hydrobiology, 1985
Ulugbek Mirzaev, PhD	Ichthyologists	Deputy director for science Institute of Zoology of the Academy of Sciences of the Republic of Uzbekistan
Askar Kuvatov	Ichthyologists	Bachelor degree Urganch State University, 2016 Master degree Uzbekistan National University, 2018

9.3.1 Baseline Conditions

The baseline studies cover protected areas, habitats and species, and ecosystem services with the information adopted and derived from the primary and secondary sources.

The absolute altitude on the study area is from 319 m near the water edge of the Uchkizil Reservoir up to 342 m above sea level. According to the scheme adopted in Uzbekistan for identifying the vertical geographical belts, the Project area belongs to the chul belt (plains).

Physiographically, the Project area is located in the south of Uzbekistan, in the Surkhandarya intermountain area (Surkhan-Sherabad valley), inclined from north to south, to the floodplain of the Amudarya river. In the north and west, the Surkhan-Sherabad valley is limited by the Gissar ridge, the height of the axial part of which exceeds 4,000 m above sea level and its southwestern spurs, including the Chulbair Mountains (the highest elevation 3,812 m above sea level), Baysuntau (3,920 m), Susyzttau (2,124 m), Tyubere-Oland (2,139 m) and the ridge Kugitang (3,137 m).

In the east, the Surkhandarya intermountain area is bounded by the Babatag ridge (2,290 m above sea level), and in the south - by the Amudarya, which is the largest river in Central Asia. The territory of the Surkhan-Sherabad Valley is crossed in the meridional direction by the right-bank tributaries of the Amudarya - the Surkhandarya and Sherabaddarya rivers. In the central part of the valley, there are relict sand massifs of Kattakum and Khaudaktau and the remnant upland of Khaudaktau, composed of red sandstones.

The climatic conditions of the project region are determined by its geographic location and the peculiarities of the orography. The powerful mountain ridges of the Pamir-Alai protect this territory from the influence of cold northern air masses, and from the south, it is open to hot and dry air. According to the Köppen-Geiger climate classification [20], the territory is located in the cold desert climate zone (BWk). Due to high temperatures and moisture deficit, the region is characterized by intense chemical and physical weathering.

The landscape of the peripheral part of the Kattakum sands is a wavy or slightly hilly sandy plain, the central part is occupied by a rather extensive massif of semi-fixed hilly sands (the height of the hillocks is 3–7 m), among which there are small saline settlements. The Uchkizil Reservoir has an area of about 10 km² and a depth of maximum 37 m, a sandy bottom, and mostly low and gentle sandy and sandy loam shores, but its northern coast, adjacent to the Project area, has relatively steep, eroded slopes, composed of outcrops of gypsum and saline depressions.

The southern and southwestern expanses of the Surkhandarya region are open for the penetration of warm tropical air masses. The location of the mountain ridges prevents the penetration of cold air masses from the north, and the openness of the valleys from the south has formed a zone of dry subtropics with extremely hot, dry, and long summers and very mild winters. The Surkhan-Sherabad depression is currently almost completely developed and is a zone of irrigated agriculture. Various industrial crops are grown here; the largest number of sunny days in the country allows to harvest some garden crops 2-3 times a year; horticulture and viticulture are well developed [21].

These orographic features determine the natural and climatic features of this territory.

The low-lying part in the southern part of the valley (formerly the bottom of a brackish lagoon) is a flat fan that has undergone repeated aeolian treatment; an ancient, natural desert isolate with a unique spectrum of flora and fauna species.

Due to the isolation of the sandy massifs of the Surkhandarya region and the uniqueness of biodiversity, in particular, a number of reptile species living there, a number of authors proposed to create a specialized reserve in the Kattakum desert [21].

9.3.2 Survey Methodology

The baseline desktop and field studies focused on the flora and fauna species present in and around the Project area to identify the potential endemic, restricted-range, critically endangered (CR), endangered species (EN), and vulnerable species (VU).

Survey tracks and observation points for each ecology survey are represented in the respective figures. It should be noted following the additional terrestrial flora and fauna surveys to be performed in September 2022, transects will be further elaborated and plotted on the maps.

During the site visits, survey team interviewed with some of the shepherds and fishermen. It was revealed that, till the early 1970-1980s, goitered gazelles were observed, but in present they do not

exist in the region. The interview is focused only on the species that are well known by the local residents.

Botanical

During the field study, vegetation data were collected to identify habitat types and created a habitat map from satellite imagery. Plant species were identified, and distributions were checked using relevant literature. The conservation status of each of the plant species documented was researched using the IUCN data bases and the Uzbek Red List to determine the presence of species of conservation importance. Since the date of field studies was not in the appropriate season for flora researches, it is recommended to conduct secondary field surveys during the maximum vegetation development season (i.e. March to May and September).

During constitute of the preliminary list of the flora of the Kattakum sands, available sources, including reports, literature, herbarium data, as well as photographs taken by field team during the field survey was used. Latin names of plant species in the list of flora are given in alphabetical order, in accordance with the international taxonomic databases, as International Plant Names Index [22], The Plant List [23] and Plants of the World Online [24]. Their synonyms are given according to the "Conspectus Florae Asiae Mediae" [25] (optional) are provided in parentheses.

Herpetological

During the field survey an attempt was made to assess the status of reptiles and amphibians in the study area (specification of the species and quantitative composition, territorial distribution, including places of concentration, the state of habitats). However, it should be noted that cold weather did not allow for a full survey in this area, while single records of reptiles do not give a complete understanding of the composition of the biodiversity in the area. Therefore, the combination of field survey and desktop analysis was used.

Field studies were carried out according to generally accepted zoological methods for identifying species composition. The following methodological guidelines were used in the survey: L. G. Dinesman, M. L. Kaletskaya (1978) [56], V. M. Makeev, A. T. Bozhansky (1988) [57] and N. N. Shcherbak (1989) [58], D. A. Bondarenko, Chelintsev, (1996) [59]. Literature sources and statistical data had been processed.

The main research method used was mixed stationary and transect survey. Points and transects for conducting research were outlined at the project monitoring stations in accordance with different types of habitats.

The field research methodology reflects the following aspects:

- species composition in the study area;
- distribution across habitats;
- daily and seasonal changes in activity;

Thus, the method of quantitative assessment was based on the ecology of the species under consideration, landscape and geographical conditions, season and type of work.

The quantitative assessment of reptiles and amphibians was mainly based on the transect survey. The transect method consists in counting individuals along a fixed long line (transect), on both sides of it, with the duration of the survey determined by the known distance, which is selected depending on

the type of reptile and the area, but does not exceed 1 km in one way. In this case, all individuals encountered on the transect are registered, regardless of the distance they are identified at. The perpendicular distance is measured between the transect axis and each individual. The results obtained are used to calculate the density of recorded reptiles. The one-kilometer transect was chosen because heaviest errors arise when long transects are used for species that, like the Russian Tortoise, have high density, daily and seasonal activity cycles fluctuations with high peak values, and are caused by incorrect selection of a minimum survey area for a particular species (Vashetko et al, 2001) [60].

The Russian tortoise population density (D) was calculated using the following formula (Bondarenko, Chelintsev, 1996) [59]:

$$D = \frac{n}{2LB}$$

Where;

n – number of animal individuals recorded on the transect;

L – length of the transect;

B – formula to calculate an effective width of the survey strip:

$$B = W(0,79F + 0,21F^4)$$

Where;

W – width of the limited strip on both sides of the transect axis;

$$F = \frac{2y}{W}$$

The use of perpendicular distances to carry out survey on a strip of limited width excludes underestimation of the population density of the Russian tortoise caused by a decrease in their detectability in remote parts of the survey strip, regardless of the degree of its limitation (Bondarenko and Chelintsev, 1996) [59].

The abundance of the reptiles in habitats was estimated using the following population density scale for 1 ha (Kuzyakin, 1962): 0.1 – 0.9 – rare, 1.0 – 9.9 – common, 10.0 and higher – abundant.

Ornitological

The main goal of the study was to determine the species composition of the avifauna of the project area. The main research methods are point and transect counts (Bibby et al., 2000) [61]. Point count was used near water reservoir Uchkizil on the base of Delany's Guidance on waterbird counts (2010) [62] and potential nesting raptors habitats (loess breaks around Uchkizil). The transect count was the main ones, we recorded all bird species, their number and location for project site. We used next optical equipment – binocular x10, telescope x60, photo digital camera Nikon+300mm. We used also mobile phone with navigator application Locus. The composition of the avifauna was supplemented by our previous studies near project site and Uchkizil, as well as available publications.

Theriological

Research methods were divided into two phases: preparatory work before leaving the field was the analysis of detailed topographic maps of the area (scale: 1:100 000, 1:200 000) and satellite images



of Google Earth. The maps were used to determine locations (GPS coordinates) of potential sites for setting up trail cameras, observations of the area and laying walking transects. The data were then transferred to the LocusPro smartphone program for further use in the field.

Field works, the following approaches were used to conduct zoological work:

Car Route Transects (CRT). Observations were made during all movements by car. The length of the vehicle transect was recorded using LocusPro. In case of mammal records, coordinates of the place of registration, time and species of the animal were recorded.

Walking Transects (WT), were carried out in pre-planned sites. The length of the route in one biotope was from 300 m to 2 km. The width of the transects for tracks, spoor, and burrows was 5 m; for medium-sized mammals, 200-500 m, depending on the landscape. The length of the transect was determined using LocusPro. Time of the transect start and end, biotope, and presence/absence and type of anthropogenic impact were recorded. During the transect surveys, the data obtained were entered into a field journal. In addition, animals and traces of their life activities were photographed (if possible). Binoculars were used to survey the area during the walking transects and at all points where stops were made.

During fauna survey, 16.7 km were covered by pedestrian routes (transects) during the field trip for herpetofaunal and mammal observations. All facilities encountered were photographed and recorded in a field notebook. To analyze the availability /non-availability as well as to determine the degree of activity, a Nasedal hygro-thermometer with an elongated sensor was used to determine the temperature and humidity of the air and an infrared remote electronic thermometer to determine the temperature of the substrate DT-8380. A digital camera with wide-focus lens was used for visual record. In addition, in this section, it is tried to show the primary number of reptiles found during survey at the counting points (transects) and the average density at each of their transects derived by analyzing the primary data. In order to obtain more comprehensive information on vertebrate representation in the area, surveyed not only the area proposed for the construction, but also adjacent areas - the coastline on the east, south and west sides. The ornitological survey does not allow a full assessment of nesting birds in the project area as nesting ended in June. However, conclusions were made based on habitat conditions and the location of the area, how the area is used by birds. In total the survey covered 5 sites in different biotopes. In addition, the breeding and migratory habits were researched using Bird Life International databases to derive the species lists. Birds that could potentially frequent the proposed Project site have been classified according to their migratory, breeding and resident statuses.

Considering that the activity patterns of many terrestrial species are hugely variable (i.e. many are nocturnal), it is possible that certain small species (particularly small mammals, reptiles and amphibians) could have been overlooked during the daily site surveys.

9.3.3 Habitat Classification

Like other intermountain valleys of Central Asia, the Surkhan-Sherabad Valley is a densely populated ancient agricultural oasis. With reference to the IFC PS 6 Habitat Classification, some part of the Project area can be classified as "Modified Habitat" due to the previous clay mining activities, and the remaining parts can be classified as "Natural Habitat" [26].

Most of the Surkhan-Sherabad Valley is occupied by cultural landscapes (mainly agricultural landscape and residential landscape). Areas of natural landscapes preserved in the central part of the valley on the Kattakum sandy massif and on the Khaudaktau Upland are intensively used by the local population for grazing, including the project area.

The habitat classification was conducted based on the available literature data and the data obtained during the field trip on the confinement of phytocenoses to a certain range of elevations, relief and soils, stock geobotanical descriptions, topographic, landscape and geobotanical maps, field survey and interpretation of satellite images available on Internet resources [27]. Following 4 types of biotopes were preliminarily identified in the project area (see Figure 59 and Figure 60)

- Flat or wavy sandy plain with desert bindweed-ephemeral- ephemeroid (*Convolvulus hamadae*, *Carex pachystylis*, *Carex physodes*, *Poa bulbosa*, *Bromus tectorum*, *Hordeum murinum* subsp. *leporinum*), saltwort-desert bindweed-ephemeroid (*Convolvulus hamadae*, *Salsola arbuscula*, *S. orientalis*, *Carex pachystylis*, *Carex physodes*, *Poa bulbosa*) and ephemeroid-sagebrush (*Artemisia diffusa*, *Carex physodes*, *Carex pachystylis*, *Poa bulbosa*) vegetation;
- Shallow, semi-fixed sands with ephemeral-ephemeroid- *Calligonum* (*Calligonum microcarpum*, *C. setosum*, *Carex physodes*, *Poa bulbosa*, *Bromus tectorum*, *Hordeum murinum* subsp. *leporinum*) and ephemeral-desert bindweed-calligonum (*Calligonum microcarpum*, *C. setosum*, *Carex physodes*, *Poa bulbosa*, *Bromus tectorum*, *Hordeum murinum* subsp. *bulbosa*, *Bromus tectorum*, *Hordeum murinum* subsp. *leporinum*) vegetation, in places with saxaul and calligonum;
- Outcrops of gypsum-bearing and saline sandstones with camel thorn-saltwort vegetation (*Salsola arbusculiformis*, *S. orientalis*, *Climacoptera* sp., *Halostachys caspica*, *Halimocnemis* sp., *Suaeda* sp., *Alhagi kirghisorum*), in some places with tamarisk (*Tamarix laxa*) and bean caper (*Zygophyllum atriplicoides*);
- Anthropogenically disturbed areas with sparse secondary weed-ephemeral vegetation (*Poa bulbosa*, *Bromus tectorum*, *Hordeum murinum* subsp. *leporinum*, *Alhagi kirghisorum*, *Peganum garmala*, *Sophora pachycarpa*, *Salsola paulsenii*).

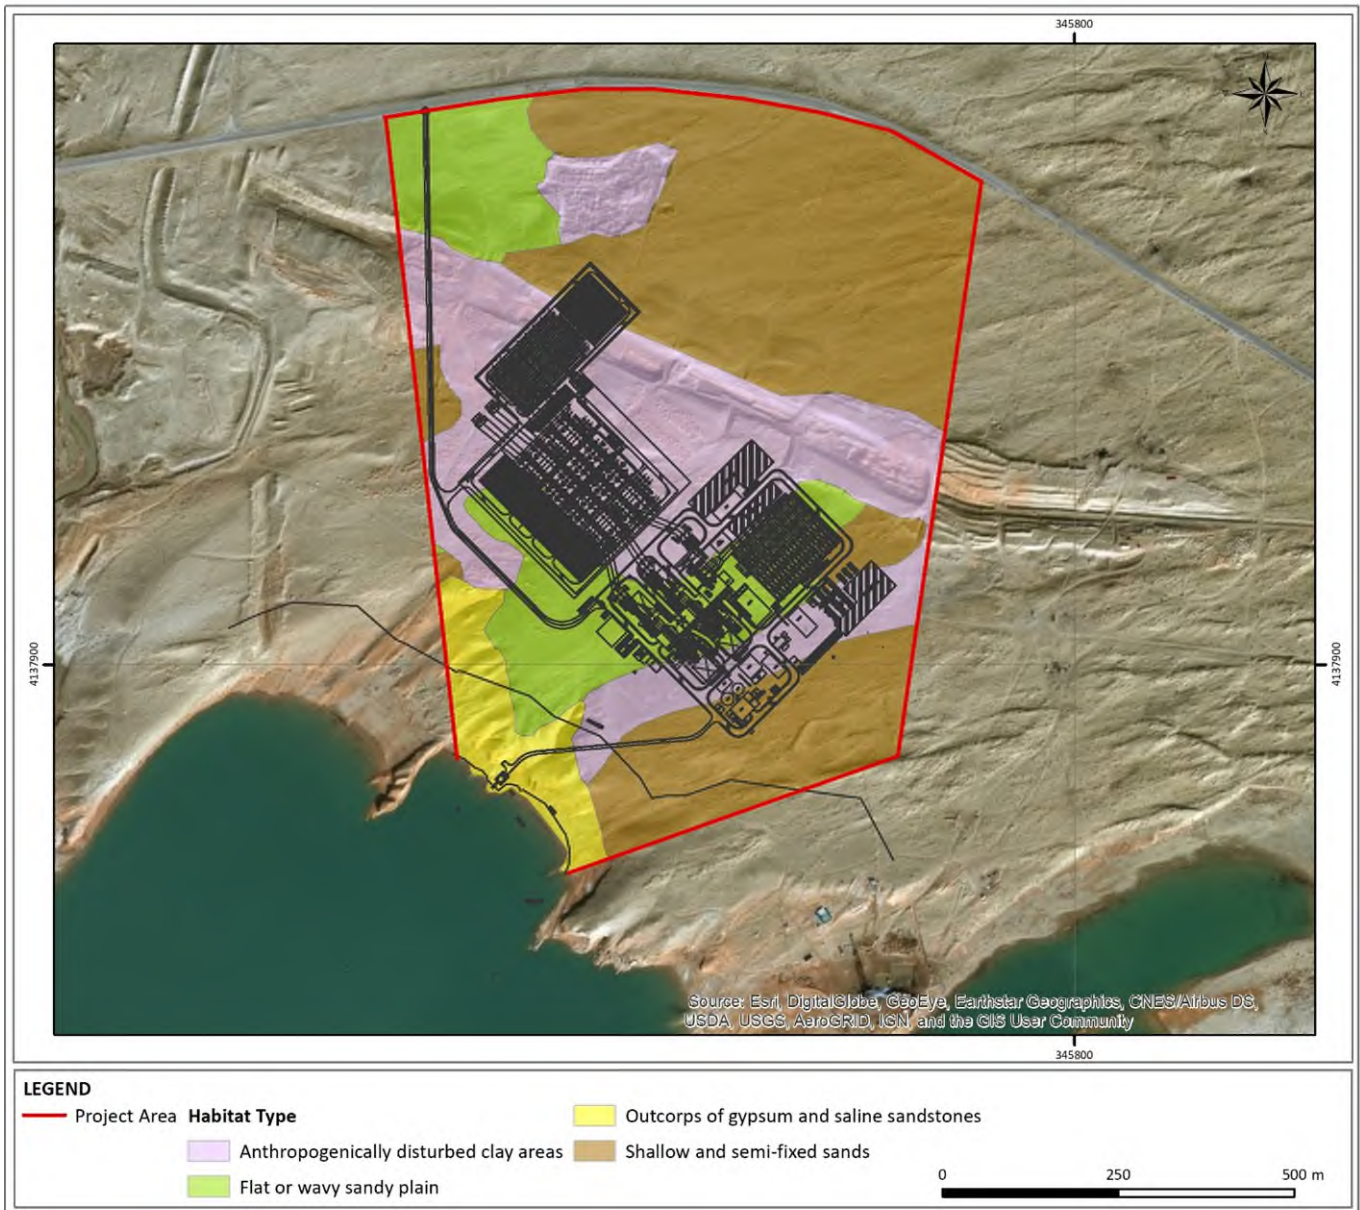


Figure 59: Biotope map of the project area,



Figure 60: The sandy area in the Project areaThe project territory

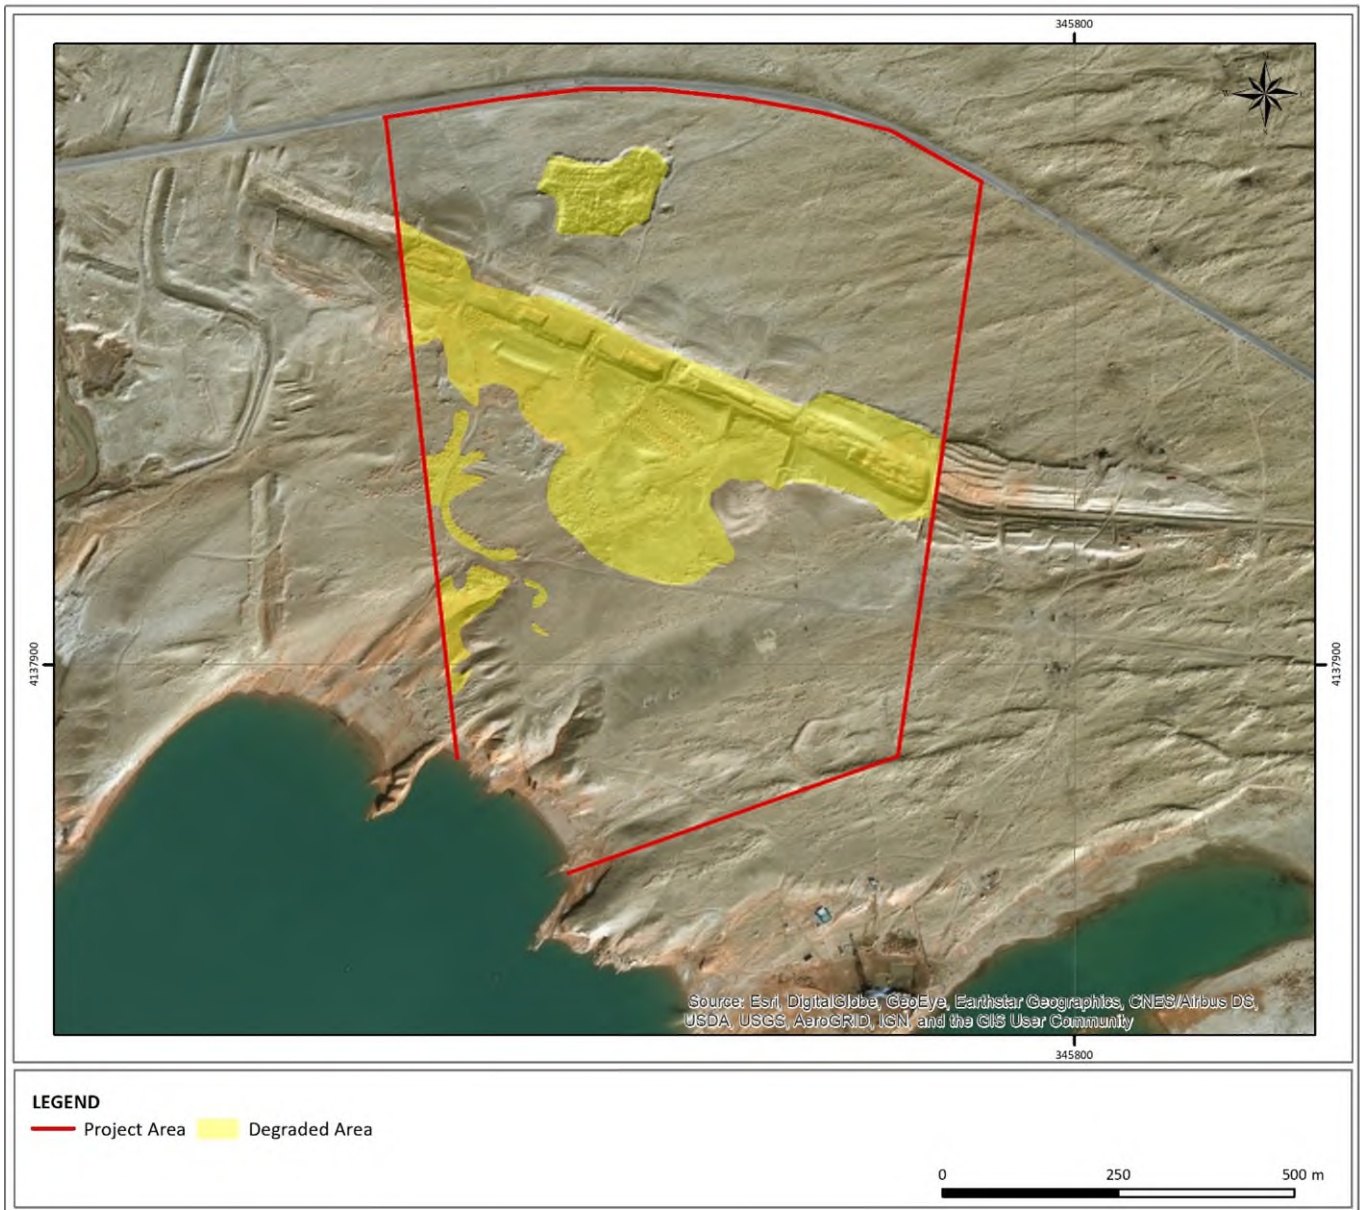


Figure 61: Map of degraded area due to clay extraction

Table 99: Habitat types in the Project area and their ratios

	Habitat Type	Area (ha)	Habitat Type %
Under the Layout of the Project	Anthropogenically disturbed clay areas	11.55	15.74
	Flat or wavy sandy plain	6.50	8.86
	Outcorps of gypsum and saline sandstones	0.08	0.11
	Shallow and semi-fixed sands	1.94	2.65
Outside the Layout of the Project	Anthropogenically disturbed clay areas	14.08	19.18
	Flat or wavy sandy plain	6.71	9.15
	Outcorps of gypsum and saline sandstones	4.40	5.99
	Shallow and semi-fixed sands	28.13	38.32
Whole Project area	Anthropogenically disturbed clay areas	25.63	34.92
	Flat or wavy sandy plain	13.22	18.01
	Outcorps of gypsum and saline sandstones	4.47	6.09
	Shallow and semi-fixed sands	30.07	40.97
	Total Project Area	73.40	100.00

In general, there are degraded areas of anthropogenic origin in the project area. There are quarries for clay extraction to produce bricks and sand extraction. All this led to a strong degradation of the substrate on the territory. 25.63 hectares (or 35% of the site) of the territory have traces of anthropogenic impact associated with damage to the soil cover (see Figure 61 and Table 99).

Anthropogenically disturbed areas are located in the central part of the project site and occupy approximately 1/3 of its area. The photographs of these habitats are represented between Figure 62 to Figure 68.



Figure 62: Wavy sands with saltwort-desert blindweed-ephemeroid vegetation



Figure 63: Semi-fixed hilly sands. On the background – anthropogenically disturbed area (clay extraction place)



Figure 64: Anthropogenically disturbed area (clay extraction place) with community formed by camel thorn, saltworts and weeds



Figure 65: *Haloxylon and sagebrush communities on fixed sands*



Figure 66: *Steep northern coast of the Uchkizil water reservoir, with outcrops of saline sandstones and with sparse camel thorn-saltwort vegetation*



Figure 67: Saline lands with tamarisk thickets near the shore of water reservoir



Figure 68: Anthropogenically disturbed area with camel thorn and weeds

9.3.4 Terrestrial Ecological Surveys

9.3.4.1 Flora and Vegetation

The flora and vegetation of the Surkhandarya region of the Republic of Uzbekistan, and in particular, the Surkhan-Sherabad valley are well studied. The history of botanical research in this region goes back about 140 years.

According to the modern scheme of botanical-geographical zoning of Uzbekistan the Uchkizil project area belongs to the Surkhan-Sherabad botanical-geographical region of the West Gissar district of the Mountainous Central Asian province. This botanical-geographical region covers the Surkhan-Sherabad valley, expanding from north to south, and the foothills of the Gissar ridge, Kugitang and Babatag, bordering it.

According to the typology of vegetation used in Uzbekistan, the predominant type of vegetation in the Kattakum sands is psammophilic vegetation of sandy deserts (Psammophyta), on the outcrops of sandstones, gypsophilic vegetation (Gypsophyta), and along the coast of the Uchkizil Reservoir and in saline depressions among the sands, there is fragmentary saline vegetation (Halophyta).

According to the literature data within the sandy massif of Kattakum, on hilly sands, psammophilic arboreal and shrub vegetation is developed, represented mainly by communities of the Juzgun formation (Calligoneta), such as the ephemeral-ephemeroid-saxaul-juzgun (Calligoneta), *C. setosum*, *Haloxylon persicum*, *Carex physodes*, *Poa bulbosa*, *Bromus tectorum*, *Hordeum murinum subsp. leporinum*, *Calligonum microcarpum*, *Convolvulus hamadae*, and *Hordeum murinum subsp. leporinum*. In the vertical structure of these kindred, a shrub layer with a closeness of up to 0.3–0.4 is distinguished, formed by white saxaul bushes up to 2–2.5 m high and kandym or juzgun 100–150 cm high, in some places with the participation of sandy acacia (*Ammodendron conollyi*).

The herbaceous layer of the above associations is dominated by the most important edificator of the sandy deserts of Central Asia - rhizome psammophyte bloated sedge or silt (*Carex physodes*) as well as bulbous bluegrass (*Poa bulbosa*) and annual grasses. The projective cover of the grass layer is low, on semi-fixed sands, on average, up to 15–20%, and on broken sands it does not exceed 5–10%. Partec-ephemeral-ephemeroid (*Convolvulus hamadae*, *Carex pachystylis*, *Carex physodes*, *Poa bulbosa*, *Bromus tectorum*, *Hordeum murinum subsp. leporinum*), saltwort-partek-ephemeral orientalis, *Carex pachystylis*, *Carex physodes*, *Poa bulbosa*) and ephemeroid-wormwood (*Artemisia diffusa*, *Carex physodes*, *Carex pachystylis*, *Poa bulbosa*) phytocenoses, in places with local thickets of yantak or camel thorn (Alhagi) kirghalaum Persian (*Hulthemia persica*), which are confined to anthropogenically disturbed areas around settlements, livestock farms, etc. Sandstone outcrops are associated with sparse gypsophyte and ephemeroid-saltwort associations (*Salsola arbusculiformis*, *S. orientalis*, *Poa bulbosa*, *Carex pachystylis*) or saltwort (*Salsola arbusculiformis*, *S. orientalis*, *Climacoptera sp.*, *Halimocnehaeda sp. kirghisorum*) kindred, in places with tamarisk (*Tamarix laxa*), carabarak (*Halostachys caspica*), and green leaf (*Zygophyllum atriplicoides*). In saline areas in relief depressions and near the shore of the reservoir, amber-saltwort-tamarisk (*Tamarix laxa*, *Halostachys caspica*, *Climacoptera sp.*, *Salsola sp.*, *Suaeda sp.*, *Alhagi kirghisorum*) or annual saltwort kindred (*Climacoptera sp.*, *Salsola sp.*, *Suaeda sp.*).

The species composition of phytocenoses is formed by natural dominants, subdominants, and characteristic species. In general, the degree of vegetation degradation in the Kattakum sandy massif can be estimated as average. The main negative anthropogenic factors are grazing, cutting down psammophilic shrubs for firewood, spontaneous expansion of the roads network.

The flora survey was carried out in the Project area and the observation locations are presented in Figure 69.



Figure 69: Flora survey observation locations

Species included in the IUCN Red List with the status of CR, EN or VU, according to preliminary data, are absent on the territory.

The preliminary list of the flora of the Kattakum sands, compiled on the basis of available sources, including reports, literature, herbarium data, as well as photographs taken by field team during the field survey, includes 131 species (see Table 100), this check-list contains mainly typical representatives of the flora of sandy and saline deserts of the southern part of Central Asia. All species are native. Latin names of plant species in the table are given in alphabetical order, in accordance with the international taxonomic databases, as International Plant Names Index [22], The Plant List and Plants of the World Online [23]. Their synonyms are given according to the "Conspectus Florae Asiae Mediae" [25] (optional) are provided in parentheses. Some representatives of the flora of the project area are given in Table 100 with family and status of each species. The families are listed according to the modern plant system APG IV [28]. The species assessed as threatened in the national Red Book or IUCN Red List, as well as alien species and weeds are indicated in the "Status" column. The status of alien species (non-native in Uzbekistan) and weeds was identified on the basis of available data [29] [30].

Table 100: Preliminary Flora List of Project Area of Influence

Plant species	Family	IUCN Category	Red Book of RUz
<i>Adiantum capillus-veneris</i>	Pteridaceae	LC (Least Concern)	N/A Native
<i>Aeluropus litoralis</i>	Poaceae	LC (Least Concern)	N/A Native
<i>Agriophyllum lateriflorum</i>	Amaranthaceae	N/A	N/A Native

Plant species	Family	IUCN Category	Red Book of RUz
<i>Agriophyllum latifolium</i>	Amaranthaceae	N/A	N/A Native
<i>Alhagi canescens</i>	Fabaceae	N/A	N/A Native
<i>Alhagi kirghisorum</i>	Fabaceae	N/A	N/A Native
<i>Allium borszczowii</i>	Amaryllidaceae	N/A	N/A Native
<i>Allium caspium</i>	Amaryllidaceae	N/A	N/A Native
<i>Allium griffithianum</i>	Amaryllidaceae	N/A	N/A Native
<i>Allium ophiophyllum</i>	Amaryllidaceae	N/A	N/A Native
<i>Allium protensum</i>	Amaryllidaceae	N/A	N/A Native
<i>Alyssum desertorum</i>	Brassicaceae	N/A	N/A Native
<i>Ammodendron conollyi</i>	Fabaceae	N/A	N/A Native
<i>Arnebia coerulea</i>	Boraginaceae	N/A	N/A Native
<i>Arnebia decumbens</i>	Boraginaceae	N/A	N/A Native
<i>Artemisia diffusa</i>	Asteraceae	N/A	N/A Native
<i>Astragalus campylorrhynchus</i>	Fabaceae	N/A	N/A Native
<i>Astragalus chivensis</i>	Fabaceae	N/A	N/A Native
<i>Astragalus excedens</i>	Fabaceae	N/A	N/A Native
<i>Astragalus filicaulis</i>	Fabaceae	N/A	N/A Native
<i>Astragalus kelifi</i>	Fabaceae	N/A	N/A Native
<i>Astragalus oxyglottis</i>	Fabaceae	N/A	N/A Native
<i>Astragalus persipolitanus</i>	Fabaceae	N/A	N/A Native
<i>Astragalus petunnikovii</i>	Fabaceae	N/A	N/A Native
<i>Astragalus rubromarginatus</i>	Fabaceae	N/A	N/A Native
<i>Astragalus tribulooides</i>	Fabaceae	N/A	N/A Native
<i>Astragalus unifoliolatus</i>	Fabaceae	N/A	N/A Native
<i>Atriplex dimorphostegia</i>	Amaranthaceae	N/A	N/A Native
<i>Atriplex moneta</i>	Amaranthaceae	N/A	N/A Native
<i>Bromus tectorum</i>	Poaceae	N/A	N/A Native (Ruderal)
<i>Calligonum caput-medusae</i>	Polygonaceae	N/A	N/A Native (Natural Dominant)
<i>Calligonum microcarpum</i>	Polygonaceae	N/A	N/A Native (Natural Dominant)
<i>Calligonum mongolicum</i>	Polygonaceae	N/A	N/A Native
<i>Calligonum setosum</i>	Polygonaceae	N/A	N/A Native (Natural Dominant)
<i>Capparis spinosa</i>	Capparaceae	N/A	N/A Native

Plant species	Family	IUCN Category	Red Book of RUz
<i>Carex pachystylis</i>	Cyperaceae	N/A	N/A Native (Natural Dominant)
<i>Carex physodes</i>	Cyperaceae	N/A	N/A Native (Natural Dominant)
<i>Caroxylon incanescens</i>	Amaranthaceae	N/A	N/A Native
<i>Caroxylon orientale</i>	Amaranthaceae	N/A	N/A Native
<i>Caroxylon scleranthum</i>	Amaranthaceae	N/A	N/A Native
<i>Carthamus oxyacanthus</i>	Asteraceae	N/A	N/A Native (Natural Dominant)
<i>Ceratocarpus arenarius</i>	Amaranthaceae	N/A	N/A Native (Ruderal)
<i>Ceratocephala falcata</i>	Ranunculaceae	N/A	N/A Native (Ruderal)
<i>Chorispora tenella</i>	Brassicaceae	N/A	N/A Native
<i>Climacoptera longistylusa</i>	Amaranthaceae	N/A	N/A Native
<i>Climacoptera sukaczewii</i>	Amaranthaceae	N/A	N/A Native
<i>Climacoptera turcomanica.</i>	Amaranthaceae	N/A	N/A Native
<i>Colchicum robustum</i>	Colchicaceae	N/A	N/A Native
<i>Consolida camptocarpa</i>	Ranunculaceae	N/A	N/A Native
<i>Consolida rugulosa</i>	Ranunculaceae	N/A	N/A Native
<i>Convolvulus hamadae</i>	Convolvulaceae	N/A	N/A Native
<i>Cousinia oxiana</i>	Asteraceae	N/A	N/A Native
<i>Cousinia patentispina</i>	Asteraceae	N/A	N/A Native
<i>Cousinia pusilla</i>	Asteraceae	N/A	N/A Native
<i>Cousinia resinosa</i>	Asteraceae	N/A	N/A Native
<i>Cutandia memphitica</i>	Poaceae	N/A	N/A Native
<i>Cynanchum acutum subsp. sibiricum</i>	Apocynaceae	N/A	N/A Native
<i>Descurainia sophia</i>	Brassicaceae	N/A	N/A Native (Ruderal)
<i>Eminium lehmanii</i>	Araceae	N/A	N/A Native
<i>Epilasia acrolasia</i>	Asteraceae	N/A	N/A Native
<i>Eremopyrum bonaepartis</i>	Poaceae	N/A	N/A Native
<i>Eremopyrum orientale</i>	Poaceae	N/A	N/A Native
<i>Erodium ciconium</i>	Geraniaceae	N/A	N/A Native (Ruderal)
<i>Erodium cicutarium</i>	Geraniaceae	N/A	N/A Native (Ruderal)
<i>Fritillaria gibbosa</i>	Liliaceae	N/A	N/A Native
<i>Gagea divaricata</i>	Liliaceae	N/A	N/A Native
<i>Gagea pseudoreticulata</i>	Liliaceae	N/A	N/A Native
<i>Gagea stipitata</i>	Liliaceae	N/A	N/A Native

Plant species	Family	IUCN Category	Red Book of RUz
<i>Gamanthus gamocarpus</i>	Amaranthaceae	N/A	N/A Native
<i>Gastrocotyle hispida</i>	Boraginaceae	N/A	N/A Native
<i>Halimocnemis longifolia</i>	Amaranthaceae	N/A	N/A Native
<i>Halimocnemis mollissima</i>	Amaranthaceae	N/A	N/A Native
<i>Halimocnemis villosa</i>	Amaranthaceae	N/A	N/A Native
<i>Halocharis hispida</i>	Amaranthaceae	N/A	N/A Native
<i>Halocnemum strobilaceum</i>	Amaranthaceae	N/A	N/A Native
<i>Halostachys caspica</i>	Amaranthaceae	N/A	N/A Native
<i>Halothamnus subaphyllus</i>	Amaranthaceae	N/A	N/A Native
<i>Haloxylon griffithii</i>	Amaranthaceae	N/A	N/A Native
<i>Haloxylon persicum</i>	Amaranthaceae	N/A	N/A Native
<i>Heliotropium arguzioides</i>	Boraginaceae	N/A	N/A Native
<i>Heliotropium dasycarpum.</i>	Boraginaceae	N/A	N/A Native
<i>Heliotropium lasiocarpum</i>	Boraginaceae	N/A	N/A Native
<i>Heliotropium supinum</i>	Boraginaceae	N/A	N/A Native
<i>Holosteum umbellatum</i>	Caryophyllaceae	N/A	N/A Native
<i>Horaninovia ulicina</i>	Amaranthaceae	N/A	N/A Native
<i>Hordeum murinum subsp. leporinum</i>	Poaceae	N/A	N/A Native (Ruderal)
<i>Hulthemia persica</i>	Rosaceae	N/A	N/A Native (Ruderal)
<i>Hyalea pulchella</i>	Asteraceae	N/A	N/A Native
<i>Hyoscyamus pusillus.</i>	Solanaceae	N/A	N/A Native
<i>Iris longiscapa</i>	Iridaceae	N/A	N/A Native
<i>Ixiolirion tataricum</i>	Ixioliriaceae	N/A	N/A Native
<i>Koelpinia linearis</i>	Asteraceae	N/A	N/A Native
<i>Lagonychium farctum</i>	Fabaceae	N/A	N/A Native (Ruderal)
<i>Leptaleum filifolium</i>	Brassicaceae	N/A	N/A Native
<i>Lomelosia olivieri</i>	Caprifiliaceae	N/A	N/A Native
<i>Meniocus linifolius</i>	Brassicaceae	N/A	N/A Native
<i>Nonea caspica</i>	Boraginaceae	N/A	N/A Native
<i>Oligochaeta vvedenskyi</i>	Asteraceae	N/A	VU Native
<i>Onopordum leptolepis</i>	Asteraceae	N/A	N/A Native (Ruderal)
<i>Oreosalsola arbusculiformis</i>	Amaranthaceae	N/A	N/A Native
<i>Peganum harmala</i>	Nitrariaceae	N/A	N/A Native (Ruderal)
<i>Phlomooides boissieriana</i>	Lamiaceae	N/A	N/A Native

Plant species	Family	IUCN Category	Red Book of RUz
<i>Phragmites australis.</i>	Poaceae	N/A	N/A Native
<i>Poa bulbosa.</i>	Poaceae	N/A	N/A Native (Natural Dominant)
<i>Ranunculus pinnatisectus</i>	Ranunculaceae	N/A	N/A Native
<i>Ranunculus sewerzowii</i>	Ranunculaceae	N/A	N/A Native
<i>Salsola iberica</i>	Amaranthaceae	N/A	N/A Native (Ruderal)
<i>Salsola paulsenii</i>	Amaranthaceae	N/A	N/A Native (Ruderal)
<i>Senecio subdentatus</i>	Asteraceae	N/A	N/A Native
<i>Smirnowia turkestanica</i>	Fabaceae	N/A	N/A Native
<i>Sophora pachycarpa</i>	Fabaceae	N/A	N/A Native
<i>Sphaerophysa salsula</i>	Fabaceae	N/A	N/A Native
<i>Stipagrostis karelinii</i>	Poaceae	N/A	N/A Native
<i>Stipagrostis pennata</i>	Poaceae	N/A	N/A Native
<i>Stipagrostis plumosa</i>	Poaceae	N/A	N/A Native
<i>Streptoloma desertorum</i>	Brassicaceae	N/A	N/A Native
<i>Strigosella grandiflora.</i>	Brassicaceae	N/A	N/A Native
<i>Strigosella turkestanica</i>	Brassicaceae	N/A	N/A Native
<i>Suaeda arcuata</i>	Amaranthaceae	N/A	N/A Native
<i>Suaeda microsperma</i>	Amaranthaceae	N/A	N/A Native
<i>Tamarix laxa</i>	Tamaricaceae	N/A	N/A Native
<i>Tamarix meyeri.</i>	Tamaricaceae	N/A	N/A Native
<i>Tamarix ramosissima</i>	Tamaricaceae	N/A	N/A Native
<i>Tribulus macropterus.</i>	Zygophyllaceae	N/A	N/A Native
<i>Tribulus terrestris.</i>	Zygophyllaceae	N/A	N/A Native (Ruderal)
<i>Trigonella geminiflora</i>	Fabaceae	N/A	N/A Native
<i>Xanthium spinosum</i>	Asteraceae	N/A	N/A Native (Ruderal)
<i>Xanthium strumarium.</i>	Asteraceae	N/A	N/A Native (Ruderal)
<i>Xylosalsola arbuscula</i>	Amaranthaceae	N/A	N/A Native
<i>Xylosalsola richteri</i>	Amaranthaceae	N/A	N/A Native
<i>Zygophyllum atriplicoides</i>	Zygophyllaceae	N/A	N/A Native

The preliminary list of the flora of the Kattakum sands, compiled on the basis of reports, literature data, herbarium data and photographs taken by field team during the field survey includes 131 species, mainly typical representatives of the flora of sandy and saline deserts of the southern part of Central Asia. The vast majority of species are native; the number of alien plant species is extremely insignificant. Anthropogenically disturbed areas occupy about 1/3 of the project area (see Table 99).

Only 3 species included in the Red Book of Uzbekistan (*Allium rhodanthum*, *Dipcadi turkestanicum*, *Oligochaeta vvedenskyi*) are noted based on literature and herbarium data for the sandy massifs of Kattakum and Khaudaktau in the central part of the Surkhan-Sherabad valley, the first two of them are known only from Khaudaktau and have not been noted for the past several decades, despite special searches. Nevertheless, there is a possibility of finding these species in the Kattakum sands (not excluding the project area).

The photos belonging to observed plant species are given Figure 70.



Convolvulus hamadae



Zygophyllum atriplicoides



Adiantum capillus-veneris



Xanthium strumarium and Tamarix sp.



Haloxylon persicum**Calligonum caput-medusae**

Figure 70: The Examples Observed Plant Species in Project Area

9.3.4.2 Fauna**Herpetofauna**

The lists of these species are preliminary and are based on the available literary, departmental, personal field data of the authors of the report for past studies and data from a short field trip. Tracks and locations are given in Figure 71.



Figure 71: Locations of survey tracks and observation points during field trip

There are 27 species of reptiles belonging to 12 families on a relatively small and rather highly urbanized project area.

The total number of reptile species at the project area surroundings is 43.5% of all reptile species of Uzbekistan. Also, the project area is inhabited by representatives of all available reptile families inhabiting the territory of Uzbekistan. Among them, 8 species included in the Red Book of the Republic of Uzbekistan (2019) (29.6% of the total number of species inhabiting the project area), 2 species included in the Red List of the International Union for the Conservation of Nature (IUCN Red List) [31] - 7.4% of the total number of species inhabiting the project area) and 4 species - in the Annex of the Convention on International Trade in Endangered Species of Fauna and Flora (14.8% of the total

number of species inhabiting the project area). The list of amphibians in the project area consists of 2 species from 2 families, which is 40% of the list of all amphibians in Uzbekistan (see Table 101).

Table 101: List of potential reptile species inhabiting the project area

No	Species name	Availability of species as per literature source.	History proprietary data	Field trip data for July 2021.	Abundance of species	Endemism	Status in accordance to		
							RB RUz	IUCN	CITES
Amphibia									
Bufonidae									
1	<i>Bufo turanensis</i>	+	+		Normal	UZ, TM, IR, AF			
Ranidae									
2	<i>Pelophylax ridibundus</i>	+	+		Normal			LC	
Reptilia									
Testudinidae									
1	<i>Testudo horsfieldii</i>	+	+		Rare		2 (VU)	VU	II
Gekkonidae									
2	<i>Crossobamon evermanni</i>	+	+	+	Normal				
3	<i>Tenuidactylus bogdanovi</i>	+	+	+	Normal	UZ, TJ, TM		LC	
Sphaerodactylidae									
4	<i>Teratoscincus scincus</i>	+	+	+	Normal				
Agamidae									
5	<i>Trapelus sanguinolentus</i>	+	+	+	Normal				
6	<i>Phrynocephalus mystaceus galli</i>	+	+		Not abundant			LC	
7	<i>Phrynocephalus halus</i>	+	+	+	Not abundant	UZ, TJ, TM	2 VU:D	LC	

No	Species name	Availability of species as per literature source.	History proprietary data	Field trip data for July 2021.	Abundance of species	Endemism	Status in accordance to		
							RB RUz	IUCN	CITES
	<i>raddei boettgeri</i>								
8	<i>Phrynocephalus sogdianus</i>	+	+	+	Normal	UZ, TJ			
Anguidae									
9	<i>Pseudopus apodus</i>	+			Not abundant				
Scincidae									
10	<i>Ablepharus pannonicus</i>	+			Normal				
11	<i>Eumeces schneideri</i>	+			Not abundant				
Lacertidae									
12	<i>Eremias grammica</i>	+	+		Not abundant				LC
13	<i>Eremias lineolata</i>	+	+	+	Normal	UZ, TJ, TM, KZ, AF			LC
14	<i>Eremias nigrocellata</i>	+	+	+	Normal	UZ, TJ, TM, AF	2 VU:D		LC
15	<i>Eremias velox</i>	+	+	+	Normal				
16	<i>Eremias scripta lazdini</i>	+	+	+	Normal	UZ, TJ			LC
Varanidae									
17	<i>Varanus griseus caspius</i>	+	+	+	Rare		2 VU:D		I
Boidae									
18	<i>Eryx tataricus</i>	+	+		Rare		3(NT)		II
Colubridae									
19	<i>Boiga trigonata melanocephala</i>	+	+	+	Not abundant		2 VU:R		

No	Species name	Availability of species as per literature source.	History proprietary data	Field trip data for July 2021.	Abundance of species	Endemism	Status in accordance to		
							RB RUz	IUCN	CITES
20	<i>Psammophilus lineolatus</i>	+	+	+	Normal				
21	<i>Hemorrhois ravergeri</i>	+	+		Normal				
22	<i>Platycephalus karelinii</i>	+	+		Not abundant				
23	<i>Spalerosophis diadema</i>	+	+		Not abundant				
24	<i>Natrix tessellata</i>	+	+	+	Normal				
25	<i>Lycodon striatus bicolor</i>	+			Rare		2 (VU:R)		
Elapidae									
26	<i>Naja oxiana</i>	+			Rare		3 (NT)	DD	II
Viperidae									
27	<i>Echis multisquamatus</i>	+	+		Not abundant				

RBRUz - species / subspecies is included in the Red Book of the Republic of Uzbekistan (2019) (CR - Species on the verge of extinction; VU - vulnerable species; NT - species close to vulnerable position); IUCN - species included in the Red List of Vanishing Species of the International Union for Conservation of Nature (VU - vulnerable species; NT - species close to vulnerable position); CITES I, II - a species included in Appendix (I, II) of the Convention on International Trade in Endangered Species of Fauna and Flora; Endemism: AF-Afghanistan, KZ - Kazakhstan; TM - Turkmenistan; KG - Kyrgyzstan; TJ - Tajikistan; UZ - Uzbekistan

The list of reptile counts in the project area is presented in Table 102.

Table 102: Results of reptile counts in the project area during field trip 2021

No	North	East	Date	Species	No of sp.	Density in \ha	Soil t °C	Air t °C	Humidity
UK-Herp_1	37,374 27	67,24974	16.07. 2021	Comb-toed gecko <i>Crossobamon evermanni</i>	1	1	+26,2	+26,5	28%

No	North	East	Date	Species	No of sp.	Density in\ha	Soil t°C	Air t°C	Humidity
				Bogdanov's thin-toed gecko <i>Tenuidactylus bogdanovi</i>	30	12			
				Common Wonder Gecko <i>Teratoscincus scincus</i>	2 set of footprints	-			
				Tajikistan Toadhead Agama <i>Phrynocephalus sogdianus</i>	2	0,8			
				Lasdin's sand racerunner <i>Eremias scripta lasdini</i>	4	1,6			
				Rapid Racerunner <i>Eremias velox</i>	1	0,4			
				Indian gamma snake <i>Boiga trigonata</i>	1	0,19			
UK-Herp_2	37,378 19	67,24296	17.07. 2021	Bogdanov's thin-toed gecko <i>Tenuidactylus bogdanovi</i>	3	1,5	+42,8	+32,1	22%
				Steppe Agama <i>Trapelus sanguinolentus</i>	2	1,03			
				Tajikistan Toadhead Agama <i>Phrynocephalus sogdianus</i>	3	1,5			
				Rapid Racerunner <i>Eremias velox</i>	2	1,03			
				Dice snake <i>Natrix tessellata</i>	1	0,5			

No	North	East	Date	Species	No of sp.	Density in\ha	Soil t°C	Air t°C	Humidity
				Sand racer <i>Psammophis lineolatus</i>	1	0,5			
UK-Herp_3	37,36358	67,25097	17.07.2021	Bogdanov's thin-toed gecko <i>Tenuidactylus bogdanovi</i>	5	3,3	+38,9	+33,1	24%
UK-Herp_4	37,35902	67,20017	17.07.2021	-	-	-	+36,7	+31,2	24%
UK-Herp_5	37,37885	67,25285	18.07.2021	Steppe Agama <i>Trapelus sanguinolentus</i>	4	2,3	+44	+32,3	24%
				Tajikistan Toadhead Agama <i>Phrynocephalus sogdianus</i>	8	4,7			
				Boettger Caspian Toadhead Agama <i>Phrynocephalus raddei boettgeri</i>	2	1,2			
				Black-ocellated racerunner <i>Eremias nigrocellata</i>	5	2,9			
				Lasdin's sand racerunner <i>Eremias scripta lasdini</i>	3	1,7			
				Caspian Monitor <i>Varanus griseus caspius</i>	1 chain of footprints	-			
				Indian gamma snake <i>Boiga trigonata</i>	1	0,17			
UK-Herp_6	37,37947	67,24992	18.07.2021	Comb-toed gecko <i>Crossobamon evermanni</i>	1	0,5	+27,6	+27,9	27%

No	North	East	Date	Species	No of sp.	Density in\ha	Soil t°C	Air t°C	Humidity
				Indian gamma snake <i>Boiga trigonata</i>	1 skin slough	-			
UK-Herp_7	37,37560	67,25628	19.07.2021	Comb-toed gecko <i>Crossobamon evermanni</i>	1	0,4	+26,3	+27,3	28%
				Common Wonder Gecko <i>Teratoscincus scincus</i>	2	0,9			
UK-Herp_8	37,378215	67,256268	18.07.2021	Steppe Agama <i>Trapelus sanguinolentus</i>	3	2	+43,3	+32,2	24%
				Tajikistan Toadhead Agama <i>Phrynocephalus sogdianus</i>	19	9,5			
				Boettger Caspian Toadhead Agama <i>Phrynocephalus raddei boettgeri</i>	2	1			
				Caspian Monitor <i>Varanus griseus caspius</i>	1 chain of footprints	-			

Despite the fact that the project area is sufficiently developed and even degraded in places, in a short time, field trip in 2021, it is noted 14 species of reptiles (22.6% of the entire list of species of Uzbekistan and 51.8% of those noted in this area for literature data of species), of which 4 species (28.6% of the encountered species) are rare and listed in the Red Book of the Republic of Uzbekistan, 1 species (7.1% of the encountered species) is included in CITES [32] Appendix I and 4 narrow-range, endemic taxa (28.6% of the encountered species). None of the species observed during the summer survey is listed in the IUCN.

The results of the reptile counts in the project area during 2022 site visit is given in Table 103.

Table 103: Results of reptile counts in the project area during field trip 2022

No	North	East	Date	Species	Number	Density in\ha	Soil t°C	Air t°C	Humidity
UK_P L- Herp_1	37,37427	67,24974	26.04 2022	Comb-toed gecko <i>Crossobamon eversmanni</i>	12	9.6	+22.4	+17.2	48%
				Bogdanov's thin-toed gecko <i>Tenuidactylus bogdanovi</i>	16	12.8			
				Saw-scaled Viper <i>Echis carinatus</i>	2	1.6			
				Diadem Snake <i>Spalerosophis diadema</i>	1	0.4			
				Tartar Sand Boa <i>Eryx tataricus</i>	1	0.4			
			27.04 2022	Tajikistan Toadhead Agama <i>Phrynocephalus sogdianus</i>	4	4.8	+30,5	+28,8	28%
				Lasdin's sand racerunner <i>Eremias scripta lasdini</i>	7	8.3			
				Rapid Racerunner <i>Eremias lineolata</i>	5	5,4			
				Black-ocellated racerunner <i>Eremias nigrocellata</i>	2	1.2			
				Steppe Agama <i>Trapelus sanguinolentus</i>	7	8.8			
Boettger Caspian Toad-head Agama <i>Phrynocephalus raddei boettgeri</i>	2	1.2							
UK_P L-	37,37819	67,24296	27.04 2022	Comb-toed gecko <i>Crossobamon eversmanni</i>	6	5.3	Nocturnal census		
								42%	

No	North	East	Date	Species	Number	Density in\ha	Soil t °C	Air t °C	Humidity
Herp_2				Common Wonder Gecko <i>Teratoscincus scincus</i>	8	2.3	+23.6	+18.1	
				Steppe Agama <i>Trapelus sanguinolentus</i>	2	1.03	Daytime census		
				Tajikistan Toadhead Agama <i>Phrynocephalus sogdianus</i>	5	4.3	+42,8	+32,1	22%
				Secret Toadhead Agama <i>Phrynocephalus mystaceus</i>	2	1.3			
				Reticulate Racerunner <i>Eremias grammica</i>	3	0.97			
				Caspian Monitor <i>Varanus griseus caspius</i>	1 chain of footprints				
UK_P L- Herp_3	37,36358	67,25097	28.04.2022	Tajikistan Toadhead Agama <i>Phrynocephalus sogdianus</i>	6	5,2	+31,3	+27,8	29%
				Secret Toadhead Agama <i>Phrynocephalus mystaceus</i>	1	1			
				Reticulate Racerunner <i>Eremias grammica</i>	4	2,1			
				Steppe Ribbon Racer <i>Psammophis linealatus</i>	1	1			
UK_P L- Herp_4	37,35902	67,20017	28.04.2022	Steppe Agama <i>Trapelus sanguinolentus</i>	2	1,1	+44,2	+35,1	24%
				Tajikistan Toadhead Agama	4	3.6			

No	North	East	Date	Species	Number	Density in\ha	Soil t °C	Air t °C	Humidity
				<i>Phrynocephalus sogdianus</i>					
				Reticulate Racerunner <i>Eremias grammica</i>	2	0.7			
				Steppe Ribbon Racer <i>Psammophis linealatus</i>	1	1			
				Caspian Monitor <i>Varanus griseus caspius</i>	1	0.5			
UK_P L- Herp_ 5	37,37885	67,25285	28.04 2022	Steppe Agama <i>Trapelus sanguinolentus</i>	1	0.7	+46, 7	+37, 2	20%
				Lasdin's sand racerunner <i>Eremias scripta lasdini</i>	3	2.3			
				Caspian Monitor <i>Varanus griseus caspius</i>	1 chain of footprints				
UK_P L- Herp_ 6	37,37947	67,24992	28.04 2022	Comb-toed gecko <i>Crossobamon eversmanni</i>	16	9.7	Nocturnal census		
				Common Wonder Gecko <i>Teratoscincus scincus</i>	13	1.9	+22. 3	+18. 2	43%
				Tartar Sand Boa <i>Eryx tataricus</i>	1 track				
			29.04 2022	Tajikistan Toadhead Agama <i>Phrynocephalus sogdianus</i>	30	36.3	Daytime census		
				Lasdin's sand racerunner <i>Eremias scripta lasdini</i>	5	1.8	+32, 8	+28, 1	30%
				Rapid Racerunner <i>Eremias lineolata</i>	4	1.1			

No	North	East	Date	Species	Number	Density in\ha	Soil t°C	Air t°C	Humidity
				Reticulate Racerunner <i>Eremias grammica</i>	6	4.2			
				Steppe Agama <i>Trapelus sanguinolentus</i>	1	1.1			
				Secret Toadhead Agama <i>Phrynocephalus mystaceus</i>	3	0.8			
UK_P L- Herp_ 7	37,37560	67,25628	29.04 · 2022	Black-ocellated racerunner <i>Eremias nigrocellata</i>	3	9.3	+36, 7	+29, 5	23%
				Boettger Caspian Toad-head Agama <i>Phrynocephalus raddei boettgeri</i>	5	4.9			
UK_P L- Herp_ 8	37.532008 °	67.325327 °	30.04 .2022	Black-ocellated racerunner <i>Eremias nigrocellata</i>	3	9.3	+37, 5	+27, 2	27%
				Boettger Caspian Toad-head Agama <i>Phrynocephalus raddei boettgeri</i>	5	4.9			
				Bogdanov's thin-toed gecko <i>Tenuidactylus bogdanovi</i>	8	7,6			
				Indian gamma snake <i>Boiga trigonata melanocephala</i>	1	1			
UK_P L- Herp_ 9	37.508306 °	67.308283 °		Tajikistan Toadhead Agama <i>Phrynocephalus sogdianus</i>	29	29.06	+41, 3	+31, 4	23%
				Black-ocellated racerunner <i>Eremias nigrocellata</i>	2	5.3			

No	North	East	Date	Species	Number	Density in\ha	Soil t °C	Air t °C	Humidity
				Boettger Caspian Toad-head Agama <i>Phrynocephalus raddei boettgeri</i>	3	2.9			
				Bogdanov's thin- toed gecko <i>Tenuidactylus bogdanovi</i>	10	12,6			
				Rapid Racerunner <i>Eremias lineolata</i>	3	4.7			
				Steppe Agama <i>Trapelus sanguinolentus</i>	1	0.3			
				Tartar Sand Boa <i>Eryx tataricus</i>	1	1			
UK_P L- Herp_ 10	37.568671 °	67.285745 °	30.04 .2022	Steppe Agama <i>Trapelus sanguinolentus</i>	1	0.7	+42, 1	+33, 2	22%
				Black-ocellated racerunner <i>Eremias nigrocellata</i>	1	0.9			
				Bogdanov's thin- toed gecko <i>Tenuidactylus bogdanovi</i>	12	13,8			
				Rapid Racerunner <i>Eremias lineolata</i>	2	3.1			
				Lasdin's sand racerunner <i>Eremias scripta lasdini</i>	6	9.3			
				Reticulate Racerunner <i>Eremias grammica</i>	4	1.3			
				Boettger Caspian Toad-head Agama <i>Phrynocephalus raddei boettgeri</i>	1	0.7			



No	North	East	Date	Species	Number	Density in\ha	Soil t°C	Air t°C	Humidity
UK_P L- Herp_ 11	37.532008 °	67.325327 °	30.04 .2022	Turan toad <i>Bufo turanensis</i>	7	7.3	+36, 4	+34, 4	29%
				Eurasian marsh frog <i>Pelophylax ridibundus</i>	32	18,7			
				Rapid Racerunner <i>Eremias velox</i>	2	1,6			
				Dice snake <i>Natrix tessellata</i>	1	1			
UK_P L- Herp_ 12	37.508306 °	67.308283 °		Tajikistan Toadhead Agama <i>Phrynocephalus sogdianus</i>	29	29.06	+38, 6	+32, 4	23%
				Boettger Caspian Toad-head Agama <i>Phrynocephalus raddei boettgeri</i>	3	2.7			
				Lasdin's sand racerunner <i>Eremias scripta lasdini</i>	6	4			
				Reticulate Racerunner <i>Eremias grammica</i>	6	5.3			
				Rapid Racerunner <i>Eremias lineolata</i>	4	4.7			
				Steppe Agama <i>Trapelus sanguinolentus</i>	1	0.3			
				Black-ocellated racerunner <i>Eremias nigrocellata</i>	4	7.2			
UK_P L- Herp_ 13	37.568671 °	67.285745 °	30.04 .2022	Steppe Agama <i>Trapelus sanguinolentus</i>	1	0.7	+37, 2	+31, 1	24%
				Black-ocellated racerunner	3	1.9			

No	North	East	Date	Species	Number	Density in\ha	Soil t °C	Air t °C	Humidity
				<i>Eremias nigrocellata</i>					
				Tajikistan Toadhead Agama <i>Phrynocephalus sogdianus</i>	12	23.6			
				Rapid Racerunner <i>Eremias lineolata</i>	2	3.1			
				Lasdin's sand racerunner <i>Eremias scripta lasdini</i>	6	9.3			
				Reticulate Racerunner <i>Eremias grammica</i>	3	1.2			
				Boettger Caspian Toad-head Agama <i>Phrynocephalus raddei boettgeri</i>	4	3.4			

Despite the fact that the project area is sufficiently developed and even degraded in places, in a short time, field trip in 2022, it is noted 16 species of reptiles (25.8% of the entire list of species of Uzbekistan and 59.2% of those noted in this area for literature data of species), of which 4 species (25% of the encountered species) are rare and listed in the Red Book of the Republic of Uzbekistan, 1 species (7.1% of the encountered species) is included in CITES [32] Appendix I and 4 narrow-range, endemic taxa (25% of the encountered species). None of the species observed during the spring survey is listed in the IUCN.

The photos are given observed species and potential species in Figure 72.



Crossobamon eversmanni at point UK-Herp_1



Tenuidactylus bogdanovi at the point UK-Herp_1



Eryx tataricus at point UK_PL-Herp_1



Eremias scripta lasdini at point UK_PL-Herp_1



Eremias nigrocellata at point UK_PL-Herp_1



Phrynocephalus mystaceus at point UK_PL-Herp_2



Eremias grammica at point UK_PL-Herp_2



Echis carinatus at point UK_PL-Herp_4



Teratoscincus scincus



Trapelus sanguinolentus at point UK-Herp_5



Phrynocephalus raddei boettgeri at point UK-Herp_5



Phrynocephalus sogdianus at point UK-Herp_2



Eremias lineolata at point UK-Herp_5



Eremias nigrocellata at point UK-Herp_5



Eremias velox at point UK-Herp_2



Eremias scripta lasdini at point UK-Herp_1



Tracks of a young Varanus griseus caspius at point UK-Herp_5



Eryx tataricus in Kattakum sand



Boiga trigonata melanocephala in Kattakum sands



Hemorrhois ravergieri at Karakyr foothill



Matrix tessellate at point UK-Herp_2



Echis multisquamatus in Kattakum sands

Figure 72: The Photos of Observed and Potential Reptile Species of the Project Area

Ornithofauna

The project area is located on the shore of the Uchkizil reservoir in Surkhandarya region, 10 km from IBA "Amudarya floodlands near Termez". This is the territory of regular mass wintering of a large number of waterfowl and near-water birds. This is due to the location of the region on the Central Asian flyway. Despite the fact that IBA has great attractiveness for most species, nevertheless, Uchkizil can potentially also attract them due to the water surface, food and as a recreation area.

Within the framework of this analysis, a list of key bird species (endemism, International Union for Conservation of Nature (IUCN) [31], Convention on International Trade in Endangered Species (CITES) [32], UN Convention on the Conservation of Migratory Species of Wild Animals (CMS) [34], Convention on the Conservation of European Wildlife and Natural Habitats (Bern Convention) [33], Uzbekistan Red Data Book [35] was given in Table 104.

A total of 149 bird species can be identified for the region around the project area, which are rare or listed. The only endemic bird of Uzbekistan, Podoces panderi does not live here. Among them, 21 species have IUCN statuses (NT-10 species, VU - 7 species and EN - 4 species). 33 species are included in the Red Book of Uzbekistan (2019) 4 species with the EN status, 23 - VU and 6 NT species. CITES

Appendix I includes 5 species, and 33 species in Appendix II. Appendix II of the Berne Convention included 104 species. The CMS (Convention on Migratory Speies) list in Appendix I included 12 types, and in Appendix II - 82 types. Of these species, representatives of 12 orders: Galliformes - 1 species, Anseriformes - 21 species, Pelecaniformes - 3 species, Ciconiiformes - 9 species, Podicipediformes - 2 species, Falconiformes - 29 species, Gruiformes - 3 species, Charadriiformes - 31 species, Pterocliiformes - 1 species, Columbiformes - 1 species, Strigiformes - 3 species, Caprimulgiformes - 1 species, Apodiformes - 1 species, Coraciiformes - 3 species, Bucerotiformes - 1 species, Passeriformes - 25 species (see Table 104)[31] [32] [33] [34] [35].

During the field surveys, 49 bird species were recorded, 26 of them directly in the planned area (see Table 104) also shows the association of birds with the project area.

Table 104: Inventory of ornithofauna for the Amudarya floodplain area and the southern part of the Surkhandarya region

ID	Scientific name of the species	English name	Status of residence*	IUCN status 2020	Uzbek Red Book 2019	CITES	CMS	Bern conv	Field data July 2021-2022	Previously data
	Galliformes	Gallinaceous								
1	Coturnix coturnix	Common Quail	M				II			
	Anseriformes	Geese & allies								
2	Cygnus olor	Mute Swan	B,M,W		NT		II			
3	Anser albifrons	Greater White-fronted Goose	W				II			Amudarya 21Jan2018 - 200 birds (Lampila et al. 2018a), 9Dec2018 - 500 (Lampila et al. 2019), 18 birds in 2003-2005 in Amudarya (Lanovenko 2008a)
4	Anser erythropus	Lesser White-fronted Goose	W	VU	VU:R		I	II		Amudarya 21Jan2018 - 10 birds (Lampila et al. 2018a), 9Dec2018 - 50 birds (Lampila et al. 2019), IBA data 54-500 birds in 2003-2005 in Amudarya (Lanovenko 2008a)
5	Anser anser	Greylag Goose	B,M,W				II			Amudarya 21Jan2018 - 800 bird (Lampila et al. 2018a), 9Dec2018 - 700-1000 (Lampila et al. 2019), 5Mar2020-170 (Ten pers.data), IBA data 5942-31010 birds in 2003-2005 in Amudarya (Lanovenko 2008a)
6	Branta ruficollis	Red-breasted Goose	W	VU	VU:R	II	I	II		
7	Tadorna ferruginea	Ruddy Shelduck	B,M,W				II	II		Amudarya 21Jan2018 - 3 birds (Lampila et al. 2018a), 9Dec2018 - 4 birds (Lampila et al. 2019), IBA data 31-69 birds in 2003-2005 in Amudarya, and 14 birds in 2004 in Aktepa (Lanovenko 2008b)
8	Tadorna tadorna	Common Shelduck	B,W				II	II		
9	Anas penelope	Eurasian Wigeon	M,W				II			IBA data 7-146 birds in 2003-2005 in Amudarya (Lanovenko 2008a), and 113-1669 birds in 2003-06 in Aktepa (Lanovenko 2008b)
10	Anas strepera	Gadwall	M,W				II			Amudarya 5Mar2020- -14 birds (Ten pers.data), IBA data 1-3 birds in 2003-2005 in Amudarya (Lanovenko 2008a), and 4-9 birds in 2003-06 in Aktepa (Lanovenko 2008b)
11	Anas crecca	Common Teal	M,W				II		25 birds at Uchkizil water reserve at 27.04.2022	Amudarya 21Jan2018 - 10 birds (Lampila et al. 2018a), 9Dec2018 - 200 (Lampila et al. 2019), 10 Mar2020 -234, IBA data 8-818 birds in 2003-2005 in Amudarya(Lanovenko 2008a), and 10-575 birds in 2003-06 in Aktepa(Lanovenko 2008b)
12	Anas platyrhynchos	Mallard	B,M,W				II			Amudarya 21Jan2018 - 4000 birds (Lampila et al. 2018a), 9Dec2018 - 4000 (Lampila et al. 2019), IBA data 5728-14057 birds in 2003-2005 in Amudarya (Lanovenko 2008a), and 308-1892 birds in 2003-06 in Aktepa (Lanovenko 2008b)
13	Anas acuta	Northern Pintail	M,W				II			IBA data 2 birds in 2003 in Aktepa (Lanovenko 2008b)
14	Anas clypeata	Northern Shoveler	W				II			IBA data 86 birds in 2003-2005 in Amudarya (Lanovenko 2008a)
15	Marmaronetta angustirostris	Marbled Teal	B,W	VU	EN		I	II		IBA data 4 birds in 2005-06 in Aktepa (Lanovenko 2008b)

ID	Scientific name of the species	English name	Status of residence*	IUCN status 2020	Uzbek Red Book 2019	CITES	CMS	Bern conv	Field data July 2021-2022	Previously data
16	Netta rufina	Red-crested Pochard	B,M,W				II			Amudarya 21Jan2018 - 4 birds (Lampila et al. 2018a), IBA data 10-141 birds in 2003-2005 in Amudarya (Lanovenko 2008a), and 1-457 birds in 2003-06 in Aktepa(Lanovenko 2008b)
17	Aythya ferina	Common Pochard	B,M,W	VU			II			Amudarya 21Jan2018 - 4 birds (Lampila et al. 2018a), 5Mar2020- 7 birds (Ten pers.data), IBA data 30-35 birds in 2003-2005 in Amudarya (Lanovenko 2008a), and 451-1067 birds in 2003-06 in Aktepa (Lanovenko 2008b)
18	Aythya nyroca	Ferruginous Duck	B,M,W	NT	VU:D		I			IBA data 1 birds in 2003-2005 in Amudarya (Lanovenko 2008a) and 1-3 in 2003-2006 in Aktepa (Lanovenko 2008b)
19	Aythya fuligula	Tufted Duck	M,W				II			Aktepe 21Jan2018 - 5 birds (Lampila et al. 2018a), 7Mar2020- -4 birds (Ten pers.data), IBA data 15-117birds in 2003-06 in Aktepa (Lanovenko 2008b)
20	Bucephala clangula	Common Goldeneye	W				II			Yuzhno-Surkhan reservoir 22 Jan2018 – 10 (Lampila et al. 2018a), IBA data 8 in 2004 in Aktepa (Lanovenko 2008b)
21	Mergus merganser	Goosander	W				II			Yuzhno-Surkhan reservoir 22 Jan2018 – 2 (Lampila et al. 2018a)
22	Mergellus albellus	Smew	W				II	II		IBA data 11-197 birds in 2003-06 in Aktepa (Lanovenko 2008b)
Pelecaniformes		Pelicans & allies								
23	Pelecanus onocrotalus	Great White Pelican	M,W		VU:D		I	II		IBA data 1 birds in 2003in Amudarya (Lanovenko 2008b)
24	Pelecanus crispus	Dalmatian Pelican	M,W	NT	EN	I	I	II		IBA data 3 birds in 2003 in Amudarya (Lanovenko 2008a), and 3 birds in 2004-05 in Aktepa (Lanovenko 2008b)
25	Phalacrocorax pygmeus	Pygmy Cormorant	B,M,W		NT		II	II	8 bird Uchkizil at 17Jul2021	Amudarya 21Jan2018 - 10 birds (Lampila et al. 2018a), IBA data 30-103 birds in 2003-2005 in Amudarya (Lanovenko 2008a)
26	Phalacrocorax carbo	Great Cormorant	W				II	II		IBA data 9-2211 birds in 2003-2005 in Amudarya and 444-2687 in Aktepa (Lanovenko 2008a)
Ciconiiformes		Storks & allies								
27	Ardeola ralloides	Squacco Heron	W		VU:R			II		Amudarya 9Dec2018 – 1 (Lampila et al. 2019)
28	Botaurus stellaris	Eurasian Bittern	B,W				II	II		IBA data 3 birds in 2003-2005 in Amudarya (Lanovenko 2008a)
29	Ixobrychus minutus	Little Bittern	B,M				II	II		
30	Nycticorax nycticorax	Black-crowned Night Heron	B,W					II		Amudarya 5Mar2020- - 2 birds (Ten pers.data)
31	Egretta garzetta	Little Egret	M,W		VU:D			II		IBA data 1 birds in 2003-2005 in Amudarya (Lanovenko 2008a)
32	Casmerodius albus	Great Egret	B,M,W				II	II		Amudarya 21Jan2018 - 5 birds (Lampila et al. 2018a), 9Dec2018 - 5 (Lampila et al. 2019), IBA data 27-103 birds in 2003-2005 in Amudarya (Lanovenko 2008a)
33	Ardea cinerea	Grey Heron	BW						8 birds in project area at 30.04.2022	

ID	Scientific name of the species	English name	Status of residence*	IUCN status 2020	Uzbek Red Book 2019	CITES	CMS	Bern conv	Field data July 2021-2022	Previously data
34	Ardea purpurea	Purple Heron	B				II	II		IBA data 2 birds in 2005 in Aktepa (Lanovenko 2008b)
35	Ciconia nigra	Black Stork	B		VU:R	II	II	II		Sherobad river 13Mar2020 – 1 (Ten pers.data), IBA data 2 birds in 2003-2005 in Amudarya (Lanovenko 2008a)
36	Ciconia ciconia	White Stork	B		NT		II	II		fields 1 nest 6Mar2020(Ten pers.data) IBA data 9 birds in 2003 (Lanovenko 2008a)
37	Plegadis falcinellus	Glossy Ibis	M	LC	VU:D		II		14 birds in project area at 30.04.2022	
	Podicipediformes	Grebes								
38	Tachybaptus ruficollis	Little Grebe	B,M,W					II	1 bird Uchkizil at 17Jul2021	Amudarya 21Jan2018 - 1 bird (Lampila et al. 2018a), IBA data 2-1 birds in 2003-2005 in Amudarya (Lanovenko 2008a)
39	Podiceps cristatus	Great Crested Grebe	M,W						2 birds in project area at 27.04.2022	
40	Podiceps nigricollis	Black-necked Grebe	W					II		Amudarya 21Jan2018 - 15 birds (Lampila et al. 2018a), 17-137 birds in 2003-06 in Aktepa (Lanovenko 2008b)
	Falconiformes	Falcons & allies								
41	Falco naumanni	Lesser Kestrel	B		NT	II	I	II		
42	Falco tinnunculus	Common Kestrel	B,W			II	II	II		Amudarya 21Jan2018 - 2 birds (Lampila et al. 2018a), 9Dec2018 – 5 (Lampila et al. 2019), IBA data 9-10 birds in 2003-2005 in Amudarya (Lanovenko 2008a)
43	Falco columbarius	Merlin	W			II	II	II		Amudarya 21Jan2018 - 2 birds (Lampila et al. 2018a), 9Dec2018 - 2(Lampila et al. 2019)
44	Falco subbuteo	Eurasian Hobby	B			II	II	II		
45	Falco cherrug	Saker Falcon	B	EN	EN	II	I	II		IBA data observed in Amudarya (Lanovenko 2008a)
46	Falco peregrinus	Peregrine Falcon	M,W		VU:R	I	II	II		IBA data observed in Aktepa (Lanovenko 2008b)
47	Falco pelegrinoides	Barbary Falcon	B		VU:R	I	II	II		IBA data observed in Aktepa (Lanovenko 2008b)
48	Pandion haliaetus	Osprey	M,W		VU:R	II	II	II		
49	Haliaeetus leucoryphus	Pallas's Fish-eagle	W	EN	EN	II	I	II		IBA data 1 birds in 2005 in Aktepa (Lanovenko 2008b)
50	Haliaeetus albicilla	White-tailed Sea-eagle	W		VU:R	I	I	II		Amudarya 21Jan2018 - 5 birds (Lampila et al. 2018a), 9Dec2018 – 5 (Lampila et al. 2019), IBA data 6-14 birds in 2003-2005 in Amudarya (Lanovenko 2008a), IBA data 1-14 birds in 2003-06 in Aktepa(Lanovenko 2008b)
51	Gyps fulvus	Griffon Vulture	R		VU:D	II	II	II	1 bird in project site at 30.04.2022	Kattakum and Khaudag sands 4-5Mar2020 - 1(Ten pers.data)
52	Aegypius monachus	Cinereous Vulture	R	NT	NT	II	II	II	1 bird in project site at 30.04.2022	Kattakum and Khaudag sands 4-5Mar2020 - 1(Ten pers.data)
53	Gypaetus barbatus	Bearded Vulture	R	NT	VU:R	II	II	II		Kattakum and Khaudag sands 4-5Mar2020 - 1(Ten pers.data)
54	Neophron percnopterus	Egyptian Vulture	B,M	EN	VU:D	II	II	II	1 juv bird in project sites at 17Jul2021	Kattakum and Khaudag sands 4-5Mar2020 - 2, project site - 1 juv (Ten pers.data)

ID	Scientific name of the species	English name	Status of residence*	IUCN status 2020	Uzbek Red Book 2019	CITES	CMS	Bern conv	Field data July 2021-2022	Previously data
									1 bird in project site at 30.04.2022	
55	Circaetus gallicus	Short-toed Snake-eagle	B B,W		VU:D	II	II	II		
56	Circus aeruginosus	Western Marsh Harrier				II	II	II	2 birds in project sites and 5 birds near Uchkizil at 17Jul2021	Amudarya 21Jan2018 - 15 birds (Lampila et al. 2018a), 9Dec2018 - 10 (Lampila et al. 2019), Kattakum and Khaudag sands 4-5Mar2020 - 1 (Ten pers.data), IBA data 27-55 birds in 2003-2005 in Amudarya (Lanovenko 2008a), IBA data 3-14 birds in 2003-06 in Aktepa (Lanovenko 2008b)
57	Circus cyaneus	Hen Harrier	M,W			II	II	II		Amudarya 21Jan2018 - 5 birds (Lampila et al. 2018a), 9Dec2018 - 3 (Lampila et al. 2019), Kattakum and Khaudag sands 4-5Mar2020 - 1 (Ten pers.data) IBA data 86 birds in 2003-20052-4 in Amudarya (Lanovenko 2008a), IBA data 2 birds in 2005 in Aktepa (Lanovenko 2008b)
58	Circus macrourus	Pallid Harrier	M,W	NT	NT	II	II	II		Amudarya 21Jan2018 - 1 birds (Lampila et al. 2018a), IBA data 1 birds in 2003-2005 in Amudarya (Lanovenko 2008a)
59	Circus pygargus	Montagu's Harrier	M			II	II	II		
60	Accipiter badius	Shikra	B			II	II	II		
61	Accipiter nisus	Eurasian Sparrowhawk	B,M			II	II	II		Amudarya 21Jan2018 - 1 birds (Lampila et al. 2018a) fields near Karasu 5Mar2020-3 (Ten pers.data)
62	Accipiter gentilis	Northern Goshawk	M			II	II	II		
63	Buteo buteo	Eurasian Buzzard	M,W			II	II	II		Kattakum and Khaudag sands 4-5Mar2020 - 1 (Ten pers.data), IBA data 1 birds in 2003-2005 in Amudarya (Lanovenko 2008a)
64	Buteo rufinus	Long-legged Buzzard	B,M,W			II	II	II		Amudarya 21Jan2018 - 4 birds (Lampila et al. 2018a), Kattakum and Khaudag sands 4-5Mar2020 - 1 (Ten pers.data), IBA data 6 birds in 2003-2005 in Amudarya (Lanovenko 2008a)
65	Aquila clanga	Greater Spotted Eagle	M,W	VU	VU:R	II	I	II		IBA data 1 birds in 2003-2005 in Amudarya(Lanovenko 2008a)
66	Aquila nipalensis	Steppe Eagle	M,W	EN	VU:D	II	II	II		Amudarya 5Mar2020- - 2 birds (Ten pers.data), IBA data 5 birds in 2003-2005 in Amudarya (Lanovenko 2008a), IBA data 2 birds in 2003 in Aktepa (Lanovenko 2008b)
67	Aquila heliaca	Eastern Imperial Eagle	M,W	VU	VU:D	I	I	II		Amudarya 21Jan2018 - 3 birds (Lampila et al. 2018a), 9Dec2018 - 1 (Lampila et al. 2019), 5Mar2020 - 1, Kattakum and Khaudag sands 4Mar2020 - 1, (Ten pers.data) IBA data 1-6 birds in 2003-2005 in Amudarya (Lanovenko 2008a), IBA data 2 birds in 2004 in Aktepa (Lanovenko 2008b)
68	Aquila chrysaetos	Golden Eagle	R		VU:R	II	II	II		IBA data 1 birds in 2003-2005 in Amudarya (Lanovenko 2008a)
	Gruiformes	Cranes, Rails, And Relatives								
69	Anthropoides virgo	Demoiselle Crane	M			II	II	II		IBA data 140-1500 birds in 2003-2005 in Amudarya (Lanovenko 2008a)

ID	Scientific name of the species	English name	Status of residence*	IUCN status 2020	Uzbek Red Book 2019	CITES	CMS	Bern conv	Field data July 2021-2022	Previously data
70	Grus grus	Common Crane	M,W			II	II	II		Amudarya 21Jan2018 - 2210 birds (Lampila et al. 2018a), 9Dec2018 - 1000 (Lampila et al. 2019), 5Mar2020-368 (Ten pers.data), Kattakum 5Mar2020-9 (Ten pers.data), IBA data 6010-22169 birds in 2003-2005 in Amudarya (Lanovenko 2008a)
71	Tetrax tetrax	Little Bustard	M,W	NT	VU:D	II		II		Amudarya 21Jan2018 - 1980 birds (Lampila et al. 2018a), 9Dec2018 - 400 (Lampila et al. 2019), IBA data 150-2000 birds in 2003-2005 in Amudarya (Lanovenko, 2008 a)
	Charadriiformes	Shorebirds								
72	Burhinus oedicnemus	Eurasian Thick-knee	B				II	II		IBA data 1 birds in 2006 in Aktepa (Lanovenko 2008b)
73	Haematopus ostralegus	Eurasian Oystercatcher	B	NT						IBA data 4 birds in 2006 in Aktepa (Lanovenko 2008a)
74	Himantopus himantopus	Black-winged Stilt	B					II	1 bird near Uchkizil at 17Jul2021 15 birds at Uchkizi water reserve at 27.04.2022	
75	Recurvirostra avosetta	Pied Avocet	M				II	II		
76	Vanellus vanellus	Northern Lapwing	M,W	NT			II			Amudarya 21Jan2018 - 18 birds (Lampila et al. 2018a), 9Dec2018 -55 (Lampila et al. 2019) IBA data 7-2193 birds in 2003-2005 in Amudarya (Lanovenko 2008a), IBA data 2-490 birds in 2003-06 in Aktepa (Lanovenko 2008b)
77	Vanellochettusia leucura	White-tailed Lapwing	B				II			IBA data 2 birds in 2006 in Aktepa (Lanovenko 2008b)
78	Charadrius dubius	Little Ringed Plover	B				II	II	4 birds in project sites and 8 birds near Uchkizil at 17Jul2021 5 birds in project sites at 30.04.2022 and 3 birds near Uchkizil at 27.04.2022	IBA data 7 birds in 2006 in Aktepa (Lanovenko 2008b)
79	Charadrius alexandrinus	Kentish Plover	B,M				II	II	2 birds in project sites at 17Jul2021	
80	Gallinago gallinago	Common Snipe	W				II			Amudarya 21Jan2018 - 2 birds (Lampila et al. 2018a)
81	Limosa limosa	Black-tailed Godwit	W	NT	VU:D		II			Amudarya 9Dec2018 - 15 (Lampila et al. 2019)
82	Actitis hypoleucos	Common Sandpiper	M,W				II			
83	Tringa totanus	Common Redshank	M,W				II			Amudarya 21Jan2018 - 1 birds (Lampila et al. 2018a), 9Dec2018 - 4 (Lampila et al. 2019), IBA data 2-23 birds in 2003-06 in Aktepa (Lanovenko 2008b)
84	Tringa stagnatilis	Marsh Sandpiper	M				II	II		
85	Tringa nebularia	Common Greenshank	M,W				II		2 birds at Uchkizil water reserve at 27.04.2022	Amudarya 9Dec2018 - 1 (Lampila et al. 2019), IBA data 2-6 birds in 2003-06 in Aktepa (Lanovenko 2008b)
86	Tringa ochropus	Green Sandpiper	M,W				II	II		Amudarya 9Dec2018 - 2 (Lampila et al. 2019), Kattakum and Khaudag sands, fields near Karasu 4-5Mar2020 - 4 (Ten

ID	Scientific name of the species	English name	Status of residence*	IUCN status 2020	Uzbek Red Book 2019	CITES	CMS	Bern conv	Field data July 2021-2022	Previously data
										pers.data), IBA data 2 birds in 2003-2005 in Amudarya (Lanovenko 2008a)
87	Tringa glareola	Wood Sandpiper	M				II		2 birds in project area at 30.04.2022	
88	Calidris minuta	Little Stint	M				II	II		IBA data 3 birds in 2006 in Aktepa (Lanovenko 2008b)
89	Calidris temminckii	Temminck's Stint	M				II	II		
90	Calidris ferruginea	Curlew Sandpiper	M	NT			II	II		
91	Calidris alpina	Dunlin	M,W				II	II		
92	Philomachus pugnax	Ruff	M				II			
93	Glareola pratincola	Collared Pratincole	B,M				II	II		IBA data 21 birds in 2006 in Aktepa (Lanovenko 2008b)
94	Limicola falcinellus	Broad-billed Sandpiper	M				II			
95	Larus ichthyaetus	Pallas's Gull	M,W		VU:D		II			IBA data 1 birds in 2005 in Aktepa (Lanovenko 2008b)
96	Larus genei	Slender-billed Gull	M				II	II		IBA data 11-55 birds in 2005 in Aktepa (Lanovenko 2008b)
97	Gelochelidon nilotica	Common Black-headed Gull	B,M							
98	Larus minutus	Little Gull	M					II		
99	Gelochelidon nilotica	Common Gull-billed Tern	M				II			IBA data 36 birds in 2005 in Aktepa (Lanovenko 2008b)
100	Chlidonias niger	Black Tern	B				II	II		IBA data 2 birds in 2005 in Aktepa (Lanovenko 2008b)
101	Hydroprogne caspia	Caspian Tern	M,W				II	II		
102	Sterna hirundo	Common Tern	B,M				II		33 birds in project sites and 19 birds near Uchkizil at 17Jul2021 50 birds near Uchkizil at 27.04.2022	IBA data 168 birds in 2005 in Aktepa (Lanovenko 2008b)
103	Sterna albifrons	Little Tern	B				II		1bird near Uchkizil at 17-18Jul2021 2 birds near Uchkizil at 27.04.2022	IBA data 85 birds in 2005 in Aktepa (Lanovenko 2008b)
	Pterocliiformes	Sandgrouses								
104	Pterocles orientalis	Black-bellied Sandgrouse	B					II		Kattakum and Khoudag sands, fields near Karasu 4-5Mar2020 – 18 (Ten pers.data), IBA data 9 birds in 2005 in Aktepa (Lanovenko 2008b)
	Columbiformes	Pigeons								
105	Streptopelia turtur	European Turtle-dove	B,M	VU	VU:D		II			IBA data 1 birds in 2005 in Aktepa (Lanovenko 2008b)
106	Columba livia	Rock Pigeon	R						15 birds in project sites at 30.04.2022 and 5 birds near Uchkizil at 27.04.2022	
	Strigiformes	Owls								

ID	Scientific name of the species	English name	Status of residence*	IUCN status 2020	Uzbek Red Book 2019	CITES	CMS	Bern conv	Field data July 2021-2022	Previously data
107	Bubo bubo	Eurasian Eagle-owl	R			II		II		
108	Athene noctua	Little Owl	B			II		II	2 birds in project sites and 2 birds near Uchkizil at 17-18Jul2021 1 bird in project area at 30.04.2022	Kattakum and Khaudag sands 4-5Mar2020 – 1 (Ten pers.data), BA data 1 birds in 2006 in Aktepa (Lanovenko 2008b)
109	Asio flammeus	Short-eared Owl	W			II		II		Amudarya 21Jan2018 - 2 birds (Lampila et al. 2018a), IBA data 4 birds in 2003-2005 in Amudarya (Ten pers.data)
		Caprimulgiformes								
110	Caprimulgus aegyptius	Egyptian Nightjar	B					II	1 bird near Uchkizil at 27.04.2022	IBA data 1 birds in 2006 in Amudarya (Lanovenko 2008a)
		Apodiformes								
111	Apus melba	Alpine Swift	M					II		IBA data 3 birds in 2006in Aktepa (Lanovenko 2008b)
112	Apus apus	Common Swift	B,M						8 birds in project area at 29.04.2022	
		Coraciiformes								
113	Coracias garrulus	European Roller	B				II	II	1 bird in project area at 30.04.2022	IBA data 21 birds in 2006in Aktepa (Lanovenko 2008b)
114	Alcedo atthis	Common Kingfisher	R					II		IBA data 1 birds in 2004-06 in Aktepa (Lanovenko 2008b)
115	Merops apiaster	European Bee-eater	B				II	II		
116	Merops persicus	Blue-cheeked Bee-eater	B						6-7 birds in project sites at 28-29.04.2022 and 3 birds near Uchkizil at 27.04.2022	
		Bucerotiformes								
117	Upupa epops	Common Hoopoe	B,W					II	1 bird near Uchkizil at 17Jul2021 2 birds in project sites at 28.04.2022	Amudarya 9Dec2018 – 1 (Lampila et al. 2019), Kattakum and Khaudag sands 4-5Mar2020 – 1 (Ten pers.data)
		Passeriformes								
118	Galerida cristata	Crested Lark	R						1 bird in project sites at 28.04.2022 and 1 bird near Uchkizil at 27.04.2022	
119	Melanocorypha calandra	Calandra Lark	W					II		Amudarya 21Jan2018 - 300 birds (Lampila et al. 2018a), 9Dec2018 – 200 (Lampila et al. 2019)
120	Riparia riparia	Collared Sand Martin	B					II		IBA data 89 birds in 2006in Aktepa (Lanovenko 2008b)
121	Riparia diluta	Pale Sand Martin	B					II		

ID	Scientific name of the species	English name	Status of residence*	IUCN status 2020	Uzbek Red Book 2019	CITES	CMS	Bern conv	Field data July 2021-2022	Previously data
122	Hirundo rustica	Barn Swallow	B					II	12 birds in project sites and 115 birds near Uchkizil at 17Jul2021	IBA data 134 birds in 2006in Aktepa (Lanovenko 2008b)
123	Delichon urbicum	Northern House Martin	B					II		
124	Motacilla flava	Yellow Wagtail	M					II		
125	Motacilla lutea	Yellow-headed Wagtail	M					II		
126	Motacilla citreola	Citrine Wagtail	M					II		IBA data 1 birds in 2006 in Aktepa (Lanovenko 2008b)
127	Motacilla alba	White Wagtail	M					II		
128	Motacilla personata	Masked Wagtail	B					II	1 bird in project sites at 28.04.2022 and 1 bird near Uchkizil at 27.04.2022	
129	Erythropygia galactotes	Rufous Scrub-robin	B					II		IBA data 6 birds in 2006 in Aktepa (Lanovenko 2008b)
130	Erithacus rubecula	European Robin	W					II		
131	Luscinia megarhynchos	Common Nightingale	B					II		IBA data 3 birds in 2006 in Aktepa (Lanovenko 2008b)
132	Luscinia svecica	Bluethroat	B						1 bird in project sites at 28.04.2022	
133	Saxicola maurus	Siberian Stonechat	M					II	2 birds in project sites at 30.04.2022 and 2 birds in vicinity of Uchkizil at 27.04.2022	
134	Oenanthe pleschanka	Pied Wheatear	B					II		IBA data 1 birds in 2006in Aktepa (Lanovenko 2008b)
135	Oenanthe isabellina	Isabelline Wheatear	B					II		
136	Oenanthe finschii	Finsch's Wheatear	B						2 birds in project sites at 30.04.2022	
137	Phylloscopus collybita	Common Chiffchaff	M						10 birds in project sites at 27.04.2022	
138	Muscicapa striata	Spotted Flycatcher	M				II	II		
139	Sylvia communis	Common Whitethroat	M					II		
140	Sylvia curruca	Lesser Whitethroat	M					II	8 birds in project sites at 27.04.2022 and 3 birds in project sites at 27.04.2022	
141	Sylvia nana	Asian Desert Warbler	B					II		
142	Parus bokharensis	Turkestan Tit	B					II		IBA data 4 birds in 2006 in Amudarya, (Lanovenko 2008a), IBA data 4 birds in 2006in Aktepa (Lanovenko 2008b)
143	Lanius isabellinus	Isabelline Shrike	B					II		
144	Lanius phoenicuroides	Red-tailed Shrike	M					II		Kattakum and Khaudag sands 4-5Mar2020 - 6 migrating (Ten pers.data)

ID	Scientific name of the species	English name	Status of residence*	IUCN status 2020	Uzbek Red Book 2019	CITES	CMS	Bern conv	Field data July 2021-2022	Previously data
145	Lanius schach	Long-tailed Shrike	B					II		
146	Lanius meridionalis	Steppe Grey Shrike	M					II		Fields near Karasu 4-5Mar2020 - 4 migrating (Ten pers.data)
147	Pastor roseus	Rosy Starling	B						1000 birds near Uchkizil at 27.04.2022	

*Status of residence was identified for southern part of Surkhandarya region including Project area, Uchkizil reservoir, Amudarya floodlands, Aktepa and Three lakes: R –resident, B –breeding-migrating species, M –migrating species, W - wintering species.

. The spring and summer field surveys revealed the presence of 33 bird species on and off the Project site (see Table 105). Nesting of Common Tern and Little Tern terns were noted on islands and capes in the reservoir to the south of the Project area. Western Marsh Harrier nesting has been noted in reed and tamarisk thickets along the Zang Canal. Little Ringed Plover, Little Owl, European Roller, Blue-cheeked Bee-eater, Common Hoopoe, Crested Lark, Pale Sand Martin, Pied Wheatear, Isabelline Wheatear and Rock Pigeon can nest in the project area. The rest of the birds are migratory, wintering or nesting in the nearby area.

In total the survey covered 5 sites in different biotopes: UK-Orn_1 - aeolian deposits forming sandy loam hills and low bluffs near the shore up to 5-6m high; UK-Orn_2 - a ravine in sandstone formed by the Amu-Zang River flowing into the reservoir, low bluffs up to 4-5m, with moss and ferns growing along the gully bed; UK-Orn_3 - southern sandy bank of the reservoir with rare comb and ambergrass bushes, low bluffs up to 5-6 m high; UK-Orn_4 - sandy bank with rare comb and ambergrass bushes, low bluffs up to 4-5 m high; UK-Orn_5 - sandy fine-hilly plain near the route with Kandym and Sarsazan (see Figure 73).

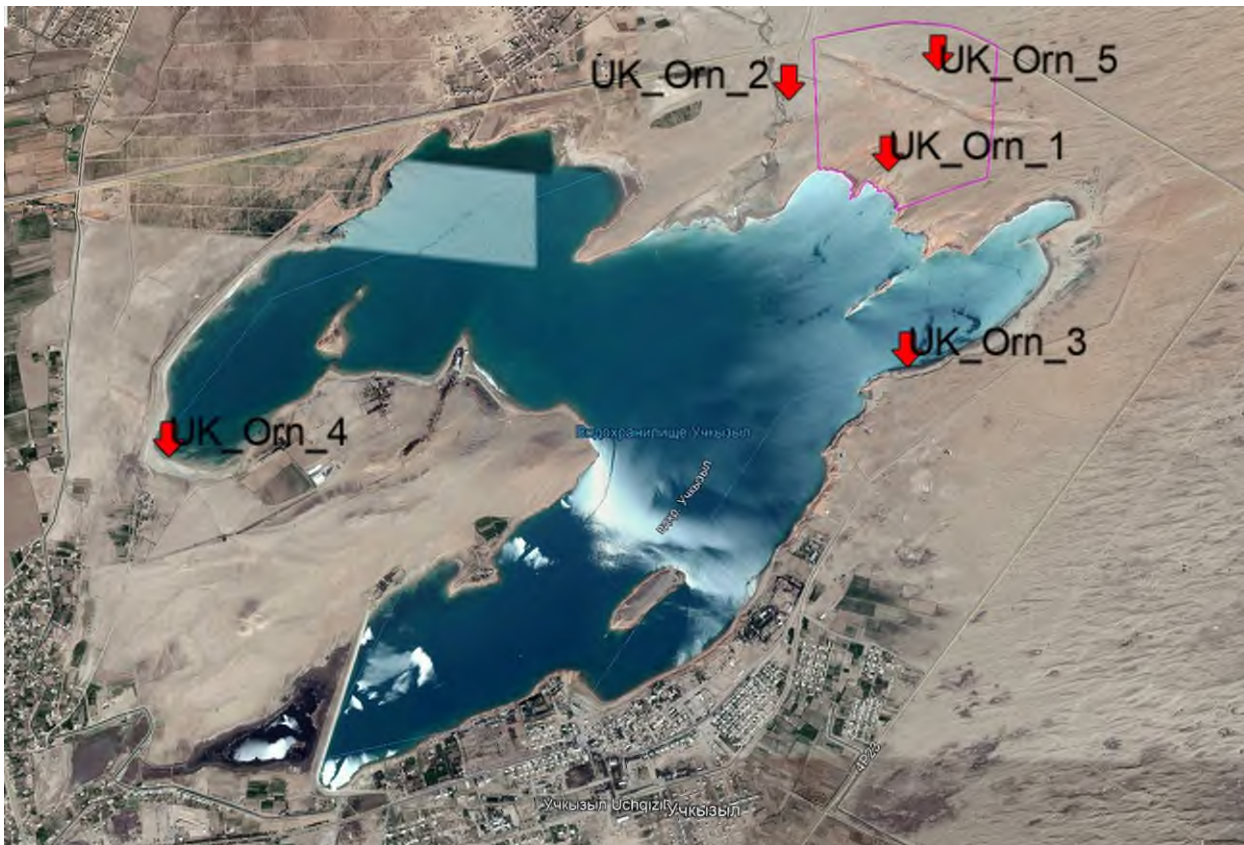


Figure 73: The ornithological fauna survey points at Uchkizil also covered the adjoining area

Table 105: Field ornithological survey data in the area in 2021

Site №	North	East	Date	Biotope	Species	Number	Activities
UK_Orn-1	37,37427	67,24974	17.07.2021	Sandy loam hills, aeolian deposits, low cliffs up to 5-6 m high	Common Tern - <i>Sterna hirundo</i>	33	nesting, close foraging area on lake
UK_Orn-1	37,37427	67,24974	17.07.2021	Sandy loam hills, aeolian deposits, low cliffs up to 5-6 m high	Grey Heron - <i>Ardea cinerea</i>	9	close foraging area on lake
UK_Orn-1	37,37427	67,24974	17.07.2021	Sandy loam hills, aeolian deposits, low cliffs up to 5-6 m high	Barn Swallow - <i>Hirundo rustica</i>	12	nesting, foraging area
UK_Orn-1	37,37427	67,24974	17.07.2021	Sandy loam hills, aeolian deposits, low cliffs up to 5-6 m high	Rock Dove - <i>Columba livia</i>	12	crossing
UK_Orn-1	37,37427	67,24974	17.07.2021	Sandy loam hills, aeolian deposits, low cliffs up to 5-6 m high	Little Ringed Plover - <i>Charadrius dubius</i>	4	nesting, close foraging area on lake
UK_Orn-1	37,37427	67,24974	17.07.2021	Sandy loam hills, aeolian deposits, low cliffs up to 5-6 m high	Common Sandpiper - <i>Actitis hypoleucos</i>	4	Foraging area on lake
UK_Orn-1	37,37427	67,24974	17.07.2021	Sandy loam hills, aeolian deposits, low cliffs up to 5-6 m high	Masked Wagtail - <i>Motacilla personata</i>	1	Foraging area on lake
UK_Orn-1	37,37427	67,24974	17.07.2021	Sandy loam hills, aeolian deposits, low cliffs up to 5-6 m high	Western Marsh Harrier - <i>Circus aeruginosus</i>	2	Foraging area
UK_Orn-1	37,37427	67,24974	17.07.2021	Sandy loam hills, aeolian deposits, low cliffs up to 5-6 m high	Blue-cheeked Bee-eater - <i>Merops persicus</i>	6	nesting in close sites, foraging area
UK_Orn-1	37,37427	67,24974	17.07.2021	Sandy loam hills, aeolian deposits, low cliffs up to 5-6 m high	Common Coot - <i>Fulica atra</i>	7	Foraging area on lake
UK_Orn-1	37,37427	67,24974	17.07.2021	Sandy loam hills, aeolian deposits, low	Crested Lark - <i>Galerida cristata</i>	2	nesting

Site №	North	East	Date	Biotope	Species	Number	Activities
				cliffs up to 5-6 m high			
UK_Orn-1	37,37427	67,24974	17.07.2021	Sandy loam hills, aeolian deposits, low cliffs up to 5-6 m high	Kentish Plover - Charadrius alexandrinus	2	nesting
UK_Orn-1	37,37427	67,24974	17.07.2021	Sandy loam hills, aeolian deposits, low cliffs up to 5-6 m high	Black-headed Gull - Larus ridibundus	1	nesting
UK_Orn-1	37,37427	67,24974	17.07.2021	Sandy loam hills, aeolian deposits, low cliffs up to 5-6 m high	Little Owl - Athene noctua	1	nesting
UK_Orn-2	37,37819	67,24296	17.07.2021	A small river in a sandstone flowing into a reservoir, low cliffs up to 4-5 m, mosses and ferns grow along the river bed	Common Tern - Sterna hirundo	2	nesting
UK_Orn-2	37,37819	67,24296	17.07.2021	A small river in a sandstone flowing into a reservoir, low cliffs up to 4-5 m, mosses and ferns grow along the river bed	Barn Swallow - Hirundo rustica	около сотни	nesting
UK_Orn-2	37,37819	67,24296	17.07.2021	A small river in a sandstone flowing into a reservoir, low cliffs up to 4-5 m, mosses and ferns grow along the river bed	Indian Sparrow - Passer indicus	38	nesting
UK_Orn-2	37,37819	67,24296	17.07.2021	A small river in a sandstone flowing into a reservoir, low cliffs up to 4-5 m, mosses and ferns grow along the river bed	Little Ringed Plover - Charadrius dubius	4	nesting
UK_Orn-2	37,37819	67,24296	17.07.2021	A small river in a sandstone flowing into a	Masked Wagtail - Motacilla personata	2 juv	Foraging area



Site №	North	East	Date	Biotope	Species	Number	Activities
				reservoir, low cliffs up to 4-5 m, mosses and ferns grow along the river bed			
UK_Orn-2	37,37819	67,24296	17.07.2021	A small river in a sandstone flowing into a reservoir, low cliffs up to 4-5 m, mosses and ferns grow along the river bed	Western Marsh Harrier - Circus aeruginosus	1	Foraging area
UK_Orn-3	37,36358	67,25097	17.07.2021	southern shore of the reservoir, sandy shore with rare tamarix and camel torn bushes, low cliffs max. 5-6m	Little Owl - Athene noctua	1	nesting
UK_Orn-3	37,36358	67,25097	17.07.2021	southern shore of the reservoir, sandy shore with rare tamarix and camel torn bushes, low cliffs max. 5-6m	Western Marsh Harrier - Circus aeruginosus	2	Foraging area
UK_Orn-3	37,36358	67,25097	17.07.2021	southern shore of the reservoir, sandy shore with rare tamarix and camel torn bushes, low cliffs max. 5-6m	Little Ringed Plover - Charadrius dubius	3	nesting
UK_Orn-3	37,36358	67,25097	17.07.2021	southern shore of the reservoir, sandy shore with rare tamarix and camel torn bushes, low cliffs max. 5-6m	Common Tern - Sterna hirundo	4	nesting



Site №	North	East	Date	Biotope	Species	Number	Activities
UK_Orn-3	37,36358	67,25097	17.07.2021	southern shore of the reservoir, sandy shore with rare tamarix and camel torn bushes, low cliffs max. 5-6m	Caspian Gull - Larus cachinnans	1	nesting
UK_Orn-3	37,36358	67,25097	17.07.2021	southern shore of the reservoir, sandy shore with rare tamarix and camel torn bushes, low cliffs max. 5-6m	Barn Swallow - Hirundo rustica	15	nesting
UK_Orn-3	37,36358	67,25097	17.07.2021	southern shore of the reservoir, sandy shore with rare tamarix and camel torn bushes, low cliffs max. 5-6m	Blue-cheeked Bee-eater - Merops persicus	8	nesting
UK_Orn-3	37,36358	67,25097	17.07.2021	southern shore of the reservoir, sandy shore with rare tamarix and camel torn bushes, low cliffs max. 5-6m	Eurasian Hoopoe - Upupa epops	1	nesting
UK_Orn-4	37,35902	67,20017	17.07.2021	Sandy shore with rare tamarix and camel torn bushes. Low cliffs with a maximum height of 4-5m	Black-winged Stilt- Himantopus himantopus	6	nesting
UK_Orn-4	37,35902	67,20017	17.07.2021	Sandy shore with rare tamarix and camel torn bushes. Low cliffs with a maximum	Little Grebe - Tachybaptus ruficollis	1	Foraging area



Site №	North	East	Date	Biotope	Species	Number	Activities
				height of 4-5m			
UK_Orn-4	37,35902	67,20017	17.07.2021	Sandy shore with rare tamarix and camel torn bushes. Low cliffs with a maximum height of 4-5m	Grey Heron - Ardea cinerea	4	Foraging area
UK_Orn-4	37,35902	67,20017	17.07.2021	Sandy shore with rare tamarix and camel torn bushes. Low cliffs with a maximum height of 4-5m	Caspian Gull - Larus cachinnans	1	Foraging area
UK_Orn-4	37,35902	67,20017	17.07.2021	Sandy shore with rare tamarix and camel torn bushes. Low cliffs with a maximum height of 4-5m	Western Marsh Harrier - Circus aeruginosus	2	Foraging area
UK_Orn-4	37,35902	67,20017	17.07.2021	Sandy shore with rare tamarix and camel torn bushes. Low cliffs with a maximum height of 4-5m	Common Tern - Sterna hirundo	13	nesting
UK_Orn-4	37,35902	67,20017	17.07.2021	Sandy shore with rare tamarix and camel torn bushes. Low cliffs with a maximum height of 4-5m	Little Ringed Plover - Charadrius dubius	1	nesting
UK_Orn-4	37,35902	67,20017	17.07.2021	Sandy shore with rare tamarix and camel torn bushes. Low cliffs with a maximum height of 4-5m	Little Tern - Sterna albifrons	1	nesting

Site №	North	East	Date	Biotope	Species	Number	Activities
UK_Orn-4	37,35902	67,20017	17.07.2021	Sandy shore with rare tamarix and camel torn bushes. Low cliffs with a maximum height of 4-5m	Common Myna - <i>Acridotheres tristis</i>	2	Foraging area
UK_Orn-4	37,35902	67,20017	17.07.2021	Sandy shore with rare tamarix and camel torn bushes. Low cliffs with a maximum height of 4-5m	Little Owl - <i>Athene noctua</i>	1	nesting
UK_Orn-4	37,35902	67,20017	17.07.2021	Sandy shore with rare tamarix and camel torn bushes. Low cliffs with a maximum height of 4-5m	Wood Sandpiper - <i>Tringa glareola</i>	2	Foraging area
UK_Orn-4	37,35902	67,20017	17.07.2021	Sandy shore with rare tamarix and camel torn bushes. Low cliffs with a maximum height of 4-5m	Pygmy Cormorant - <i>Phalacrocorax pygmaeus</i>	8	Foraging area
UK_Orn-5	37,37971	67,25319	18.07.2021	sandy shallow hilly plain near the road, Calligonum and Halocnemum bushes.	Egyptian vulture - <i>Neophron percnopterus</i>	1 juv	Foraging area
UK_Orn-5	37,37971	67,25319	18.07.2021	sandy shallow-hilly plain near the road, Calligonum and Halocnemum bushes.	Little Owl - <i>Athene noctua</i>	1	nesting
UK_Orn-5	37,37971	67,25319	18.07.2021	sandy shallow-hilly plain near the road, Calligonum and	Indian Sparrow - <i>Passer indicus</i>	12	nesting

Site №	North	East	Date	Biotope	Species	Number	Activities
				Halocnemum bushes.			
UK_Orn-5	37,37971	67,25319	18.07.2021	sandy shallow-hilly plain near the road, Calligonum and Halocnemum bushes.	Crested Lark - Galerida cristata	3	nesting
UK_Orn-5	37,37971	67,25319	18.07.2021	sandy shallow-hilly plain near the road, Calligonum and Halocnemum bushes.	Rock Dove - Columba livia	5	Foraging area
UK_Orn-5	37,37971	67,25319	18.07.2021	sandy shallow-hilly plain near the road, Calligonum and Halocnemum bushes.	Blue-cheeked Bee-eater - Merops persicus	6	nesting
UK_Orn-5	37,37971	67,25319	18.07.2021	sandy shallow-hilly plain near the road, Calligonum and Halocnemum bushes.	Streaked Scrub Warbler - Scotocerca inquieta	2	nesting

Table 106: Field ornithological survey data in the area in 2022

No	North	East	Date	Biotope	Species	Number	Activities
UK_PL-Orn-1	37,37819	67,24296	27.04.2022	North-Eastern coast of Uch Kizil storage reservoir, with the sandy loam hills, aeolian deposits, low cliffs up to 5-6 m high	Common Tern <i>Sterna hirundo</i>	50	nesting, close foraging area on lake
					Black-headed Gull <i>Larus rudibundus</i>	6	over the lake
					Little Tern <i>Sterna albifrons</i>	2	over the lake
					Rock Dove <i>Columba livia</i>	5	crossing
					Masked Wagtail <i>Montacilla personata</i>	15	feeding on the shore
					Rose-collared Starling <i>Sturnus roseus</i>	1000	crossing
					Teal <i>Anas crecca</i>	25	Foraging area on lake
					Great Crested Grebe <i>Podiceps cristatus</i>	2	Foraging area
					Marsh Harrier <i>Circus aerogenosus</i>	1	nesting in close sites, foraging area
					Little Ringed Plover <i>Charadrius dubius</i>	3	
Black-winged Stilt <i>Himantopus himantopus</i>	15	nesting					
Common Sandpiper <i>Actitis hypoleucos</i>	2	nesting					

No	North	East	Date	Biotope	Species	Number	Activities
					Greenshank <i>Tringa nebularia</i>	2	nesting
					Little Owl - <i>Athene noctua</i>	1	nesting
UK_PL-Orn-2	37,37819	67,24296	27.04.2022	Sand dunes with typical desert Vegetation along transmission line	Crested Lark - <i>Galerida cristata</i>	1	
					Masked Wagtail - <i>Motacilla personata</i>	4	Foraging area
					Blue-cheeked Bee-eater - <i>Merops persicus</i>	3	
UK_PL-Orn-3	37,36358	67,25097	27.04.2022	Depression surround by sandy missives with tamarix and camel torn bushes.	Egyptian Vulture <i>Neophon percnopterus</i>	1	crossing
					Siberian Stonechat <i>Saxicola maurus</i>	2	
					Chiffchaff <i>Phylloscopus collebita</i>	10	crossing
					Lesser Whitethroat <i>Sylvia curruca</i>	8	nesting
UK_PL-Orn-4	37,35902	67,20017	28.04.2022	Sand dunes with typical desert Vegetation along transmission line	Blue-cheeked Bee-eater - <i>Merops persicus</i>	6	
					Crested Lark - <i>Galerida cristata</i>	1	
UK_PL-Orn-5	37,37971	67,25319	28.04.2022	Sand dunes with typical desert Vegetation along	Bluethroat <i>Luscinia svecica</i>	1	crossing

No	North	East	Date	Biotope	Species	Number	Activities
				transmission line			
				Sand dunes with typical desert	Common Hoopoe <i>Upupa epops</i>	2	crossing
				Vegetation along transmission line			
				Sand dunes with typical desert	Eurasian Nightjar <i>Caprimulgus europaeus</i>	1	nesting
				Vegetation along transmission line			
				Sand dunes with typical desert	Western Marsh Harrier <i>Circus aeruginosus</i>	2	nesting
				Vegetation along transmission line			
					Little Ringed Plover <i>Charadrius dubius</i>	5	nesting
					Wood Sandpiper <i>Tringa glareola</i>	2	crossing
					Masked Wagtail <i>Motacilla personata</i>	2	crossing

Theriofauna

Approximately 22 species of mammals belonging to 6 families have been recorded in project area its surrounding area based on available literature sources.

The territory is potentially inhabited by 6 species of mammals included in the Red Book of the Republic of Uzbekistan [35]; *Otonycteris hemprichi*, *Vulpes corsak turkmenicus*, *Vormela peregusna*, *Lutra lutra seistanica*, *Hyaena hyaena*, *Felis margarita*, *Caracal caracal michaelis*, *Vormela peregusna*. and the 5 species are included CITES (*Lutra lutra*, *felis chaus*, *Felis lybica*, *Felis margarita*, *Caracal caracal michaelis*). Two species are Central Asian endemics that *Rhinolophus bocharicus* and *Allactaga severtzovi* (see Table 105). *Gazella subgutturosa* that used to inhabit the area has been completely exterminated.

Table 107: Rare mammal species potentially inhabiting the project area

No.	Type	Red Book (2019)	IUCN status (2021)	CITES	CMS	Endemity
1	<i>Rhinolophus bocharicus</i>	-	LC	-	-	AF, IR, KZ, KR, TM, TJ, UZ
2	<i>Otonycteris hemprichi</i>	2(VU:R)	LC	-	-	-
3	<i>Allactaga severtzovi</i>	-	LC	-	-	KZ, TM, TJ, UZ
4	<i>Vulpes corsak turkmenicus</i>	2(VU:D)	-	-	-	-
5	<i>Vormela peregusna</i>	2(VU:D)	VU	-	-	-
6	<i>Lutra lutra seistanica</i>	1(EN)	NT	I	-	-
7	<i>Hyaena hyaena</i>	1(CR)	NT	-	-	-
8	<i>Felis chaus</i>	-	LC	II	-	-
9	<i>Felis lybica ornata</i>	-	LC	II	-	-
10	<i>Felis margarita</i>	3(NT)	LC	II	-	-
11	<i>Caracal caracal michaelis</i>	1(CR)	LC	I	-	-

In order to obtain more comprehensive information on vertebrate representation in the area, –Project area and its surroundings are surveyed including the coastline on the east, south and west sides. The field survey locations are given in Figure 74.

The presence of 7 species was confirmed during site survey with the locations and given in Table 108.



Figure 74: Survey tracks and observation points for theriofauna during the field trip

Table 108: Mammals on the project territory per the points (routes) of the survey

Point No.	N	E	Type	Type of activity
UK_Ter_1	37.375730	67.241900	<i>Hemiechinus auritus</i>	3 footprints
			<i>Meriones meridianus</i>	Living colonies
			<i>Vulpes vulpes</i>	Footprints
			<i>Lepus tolai</i>	Footprints, 1 specimen
			<i>Felis lybica</i>	1 specimen
UK_Ter_2	37.379488	67.249397	<i>Meriones meridianus</i>	Living colonies
			<i>Vulpes vulpes</i>	1 specimen, footprints
			<i>Allactaga elater</i>	Two Footprints
			<i>Lepus tolai</i>	Footprints
UK_Ter_3	37.375974	67.254911	<i>Lepus tolai</i>	footprint of one specimen
			<i>Allactaga elater</i>	Three footprints
			<i>Meriones meridianus</i>	Living colonies
UK_Ter_4	37.371922	67,250728	<i>Vulpes vulpes</i>	11 chains & one scrape
			<i>Meriones meridianus</i>	Living colonies
			<i>Vulpes corsak turkmenicus</i>	Footprints at two places

Point No.	N	E	Type	Type of activity
			<i>Vulpes vulpes</i>	24 chains of footprints
			<i>Canis aureus</i>	Footprints
			<i>Hemiechinus auritus</i>	Footprints
UK_Ter_5	37.363061	67.250516	<i>Vulpes vulpes</i>	Footprints
UK_Ter_6	37.357979	67.246822		
UK_Ter_7	37.350256	67.213808	<i>Vulpes vulpes</i>	Footprints
UK_Ter_8	37.354939	67.204657	<i>Vulpes vulpes</i>	1 specimen
UK_Ter_9	37.370852	67.211542	<i>Meriones meridianus</i>	Living colonies

In general, the surroundings of the Project area has been greatly transformed as a result of anthropogenic activity e.g. livestock grazing, fishing, cattle burial ground which is not actively used at approximately 4 km northeast of the Project area, oil production is going on a network of highways is developed, there are agricultural fields and residential buildings. The southern part of the reservoir is used as a public beach and a number of recreation areas, which, in addition to the usual activities for such places, organize boat rides on the water (see Figure 75).

However, despite such pressure, the territory does not lose its importance as a habitat for a number of vertebrates – the presence of the tributary of Zang Canal is important for the vital activity of such animals as muskrat, reed and steppe cats, jackal, etc. Vegetation creates good shelters and living conditions for these animals. The reservoir itself is potentially a habitat for the Central Asian otter (IUCN Red List - NT). Fields and ruderal areas also create shelters, are breeding grounds, a number of mammals find food here. The sand massif is part of the Kattakum Desert, which creates a connection with its fauna. It is obvious that the reservoir itself is an important source of water supply (see Figure 75).

Only two mammal species namely, *Hyaena hyaena* (IUCN Red List - NT) and *Vormela peregusna* (IUCN Red List - VU), can be found along the border of the sands and the reservoir. However, during the field trips in summer of 2021 and in spring of 2022, no traces or burrows of these species were observed, which most likely indicates their absence in the project area.





Oil Production



Boating on the Reservoir



Canal Zang



Tamarix family thickets near the canal&lake



Kattakum desert in 2021

Agricultural fields



Kattakum Desert in 2022

Tamarisk family thickets near the canal & lake in 2022

Figure 75: The photos of the regarding of the mammal species assesment

In the project area, the habitats of mammals are represented by natural and anthropogenic complexes, to which different groups of mammals have adapted. Most carnivorous mammals are adapted to almost all types of deserts. The distribution of small mammals is largely dependent on the substrate and the vegetation growing on it. Thus, all habitats are inhabited by different groups of mammals.

9.3.5 Terrestrial Sensitive Receptors

The terrestrial sensitive receptors are given in Table 109 and the details are explained in Section 8.5.

Table 109: Terrestrial Sensitive Receptors

Receptor	Sensitivity	Justification
Flora	Low	There is no protected plant species in the project area.
Fauna/Reptiles	High	The region is rich in reptile diversity. The project site contains reptile species that are endemic and sensitive to the region.
Fauna/Ornithofauna	Medium	Project area is located nearly 10 km from two international bird area. Therefore, Uchkizil can potentially also attract them due to the water surface, food and as a recreation area. Nesting biotope is absent on the open banks of the Uchkizil Reservoir which intersects with the Project area, therefore, it is not expected to be nesting of water birds in the project area.
Fauna/Mammals	Medium	The determined species both of potential and observed are exposed over large areas in Uzbekistan. But the reservoir is an important source of water for the mammal species in the region.
Ecosystem Services	Medium	There are ecosystem services used by the local communities such as grazing domestic animals, usage as recreation.

9.4 Aquatic Ecology

This report presents the results of a one-time expeditionary hydrobiological survey (July 15, 2021) of the Uchkizil Reservoir at one station, where 4 hydrobiological Measurement were taken (phytoplankton, zooplankton, periphyton, zoobenthos and additionally macrophytes).

The main task of this study is to summarize hydrobiological information on the composition and structure of aquatic biocenoses, which makes it possible to directly assess the state of aquatic biota as an element of aquatic ecosystems influenced by both seasonal and anthropogenic factors (pollution, flow regulation, etc.), to assess water quality and pollution based on the biological response of aquatic biocenoses.

9.4.1 Baseline Conditions

Uchkizil Reservoir is located 14 km from Termez city, in the Surkhandarya River basin, and belongs to the group of inflowing reservoirs. Uchkizil Reservoir is located in Surkhandarya river basin, it was built in 1960, in the middle of massif of non-irrigated, water-scarce lands and occupies natural depression, full capacity 160 mln m³, which useful 80 mln m³. The area of the reservoir is 10 km², length 5.5 km², maximum width 3.5 km, maximum depth 37 m, average depth 16.0 m [29]. The reservoir is connected to the Surkhandarya River through a supply canal.

Maximum water temperature at the surface is 27.8° (June) and up to 25° at the bottom, the temperature difference reaches 10° or more. The minimum is 6.3° (February). At the same time, the temperature difference between the surface and natural water layers does not exceed 0.3°. In spring, summer and autumn, there is direct stratification throughout the reservoir, without noticeable formation of a temperature jump layer [17].

Hydrogeochemistry - The quantity of dissolved oxygen in the water ranges from 68.0 to 121.0% of saturation. The active water reaction (pH) is 7.68-8.21. Free carbon dioxide is detected only in deep waters in spring, summer and autumn (2.64-5.28 mg/l). Permanganate water acidity varies within small limits from season to season, which is explained by the low content of organic matter in the river. Extremely high values of acidity (2.12-5.54 mg O₂/l) were recorded in spring.

The water of the Uchkizil Reservoir belongs to sulphate-calcium class II of type II. The sum of ions is 683.4-949.6 mg/l. Total water hardness 7.8-8.9 mg/l.

Aquatic organisms - Water bodies of Surkhandarya basin are poor in zooplankton. Protozoa, rotifers and crustaceans are found in mid- and downstream ponds. Zoobenthos of Surkhandarya is represented by 50 forms of organisms. Insects are dominated by the larvae of dipterans (17 species), larvae of caddisflies (10), mayflies (8), dragonflies (4), bristleworms and water mites (1 species each). Stony riverbeds are predominantly inhabited by blue-green and diatom algae. In the middle and lower reaches of the rivers, green and grey algae are the most common. In general, the benthic invertebrate fauna of the mountainous part of the basin's rivers is the most diverse - 35 species, in the foothills - 17 species, and in the plain part - 14 species. The populations of river bottoms form different communities depending on the nature of the substrate; speed of flow [36] [37].

Currently, the use of biotic indices for the determination of surface water quality and biomonitoring is of current importance in connection with the recommendations of the European Water Framework Directive [38]. Assessment of the status and dynamics of the ecological quality of surface waters is based on the ecological status of the biotic index values.

This report presents the results of one-time expedition hydrobiological survey of the Uchyzyl reservoir at one station (see Figure 76) where 4 hydrobiological Measurement (phytoplankton, zooplankton, periphyton, zoobenthos and additionally macrophytes) were collected.



Figure 76: Hydrobiological sample sampling location

The main objective of this study is to summarize hydrobiological information on the composition and structure of aquatic biocenoses, which allows directly assessing the condition of aquatic biota as an element of aquatic ecosystems under the influence of both seasonal and anthropogenic factors (pollution, flow regulation, etc.), assessing water quality and pollution by biological response of aquatic biocenoses.

The final conclusion about water quality was made on the basis of formal saprobiotic indices, as well as considering changes in species composition, structure, presence of characteristic indicator species in the dominant complex of organisms, their ecological and geographical characteristics and ecological state of aquatic biocenoses. Various visual signs of contamination of water mass and bottom sediments, morphological diversity of aquatic biocenoses or their monotony were also considered.

Characteristic factor determining the processes of formation and development of aquatic biocenoses is sedimentation of suspended solids brought with water flow, siltation of water body bowl during water release for agricultural needs, etc.

At the time of sampling visual observations, the water was greenish-blue in colour, with a slight odour of hydrogen sulphide, under the upper sandstone and clay layer of black silt deposits.

Table 110: Hydrobiological sampling point data for the surveyed area of the Uchkizil reservoir

Sampling date & time	Sample log number	Station name and location	Weather conditions during sampling	Distance from shore, depth, m	Transparency, m, water colour	Water temperature	Soil	Vegetation	Number of Measurement collected
15/07/2021	No.1	Uchkizil Reservoir	Air temperature 35.7 oC, slightly windy, sunny	Distance from shore is 12 m (from water brim); Sampling depth is 70-90 cm	Light ripples Transparency: slightly turbid, visibility to bottom. Chromaticity: blue at depth Nature of suspended solids: sand particles, silt particles. Contamination of water surface: domestic and other rubbish, fragments of aquatic vegetation	31.4°C	Grey to dark grey layered silt with hydrogen sulphide odour, detritus, coarse sand, clay inclusions (household and other waste is present in the water and on the bottom)	Rupia, sea naiad, pierced-leaf pondweed, crested pondweed, chara	Phytoplankton: 500 ml Zooplankton: filtered 30 l and quality sampled with a 5 m d=10 cm zooplankton net; Periphyton: sampled from macrophytes; Zoobenthos: sampled with a scraper (1x) from the bottom of the pond and macrophytes.

No current, slight ripples in the water. At the time of sampling, the water moved 20-25 m from the coast. Water temperature in the morning at 11.00 is 31.4oC, clear to the bottom, 0.90 cm over the Secchi disk. The bottom is clay-sandy with moderate silt and silty-sandy with plant detritus. The bottom is 90-95% densely covered with pondweed (*Potamogeton pectinatus* L., *P. crispus* L.), *Myriophyllum spicatum* up to 80%, *Ceratophyllum demersum* L.), *Harovieae* up to 50% and separate spots with *Najas marina* L. and *Carex* sedges along the bank (see Figure 77)



Figure 77: Taller aquatic vegetation covering the bottom of the surveyed section of the Uchkizil reservoir

9.4.2 Survey Methodology

The survey objects were aquatic biocenoses (ichthyofauna, phytoplankton, zooplankton, periphyton and macrozoobenthos) of the Uchkizil Reservoir in Surkhandarya province.

Hydrobiologist - Zuri Mustafayeva worked on the project area on July 15, 2021. Ichthyologists Ulugbek Mirzaev and Askar Kuvatov worked in this area from 22 to 25 July 2021.

To determination of the hydrobiological state of aquatic ecosystems, it was determined of the species composition and trophic relationships in water bodies, and indicator species in biomonitoring, the ecological status of water bodies and potential productive capacity of water bodies.

For the determination of surface water quality and biomonitoring biotic indices are used with the recommendations of the European Water Framework Directive (Directive 2000/60/EC). Assessment of the status and dynamics of the ecological quality of surface waters was based on the ecological status of the biotic indices values. This report presents the results of one-time expedition hydrobiological survey of the Uchyzyl reservoir at one station where 4 hydrobiological Measurement (phytoplankton, zooplankton, periphyton, zoobenthos and additionally macrophytes) were collected.

Fish species were netted and inspected visually from 1^o nets (net mesh: 30 to 55 mm), each of which were 100 meters in length and 3 in width. The species were defined in line with L.S. Berg [39], The taxonomic list of fish was provided in accordance with U. T. Mirzaev, A.Q. Kuvatov [40].

For the determination of the benthic organisms, the scraper was used to secure proper zoobenthos research in the shoreline. The quantitative probe has been sampled from the shoreline of the Uchkizil water reservoirs from the depth of 0.4-0.5 m. The soil was run through the gauze mesh (№ 36) and fixed with 4% formaline. During the sampling of the thick macrofite growth and filamentous algae, the scraper was dipped into the middle and stirred. This allows to collect good Measurement. In cases where sampling had to be done in a loamy soil, the scraper was immersed to a depth of 10 cm. The live organisms are extracted 2-3 times on average rather than the fixed. Should the immediate sorting be impossible or prompt lad delivery unfeasible, the sample was placed in the glass or polyethelen container and fixed in the 70% spirit or 4% phormaline. Once in the lab, the fixated sample was washed and rinsed – live organisms are extracted under the binocular. The rinsed sample was checked in the Petrie dish under the binoculars and the organisms were extracted by tweezers and placed in the penicillin dish with 4% formaline solution. The lab research has been conducted with M5C-10 and MC-300X microscopes, electronic scale, as per the guidelines [41].[42], detectors were used to identify the species [43] [44].

To determination of the phytoplanktonic organisms, bathometry is the most reliable sampling method. Bathometry-sampled probes are used for both the quantitative and qualitative probe characterizartion.

Other measurements taken during the bottomline sampling are depth, lucidity, water and air temperature. Macrophytes Measurement have also been collected to define the quantitative and qualitative composition of plants.

Analysis of species, quantity, biomass

The lab analysis is about recalculating quantity indicators by 1 m² identifying dominant and subdominant species, assessing water quality abd the environmental conditions of the bottom biocenose with the help of formal approaches/indexes, absolute biological characteristics and visual data which is always given in the log.

Quantity recalculation by 1 m²

A standard table created by G.P. Bulgakov can generally be used to recalculate the quantities by 1 m. One scraper (1x) counts as one sample 800 m². The Table 111 contains relative abundance values for zoobenthos. This allows for a better insight into the composition and structure of benthos communities – dominant (5-9 points) and subdominant (3 points) organisms.

Table 111: Recalculation of benthos sample organisms by 1 m², G.P. Bulgakov's methodology [41]

Abundance point	Encounter frequency	No. of organisms discovered in a sample:							pcs/m ²
		1x	1,5x	2x	2,5x	3x	4x	5x	
1	Sporadic	-	-	1	1	1	1-2	1-3	до 6
2	Very rarely	1	1-2	2	2	2-3	3-4	4-5	7-12
3	Rarely	2-5	3-7	3-10	3-13	4-15	5-20	6-25	13-62
5	Not so rarely	6-10	8-15	11-20	14-25	16-30	21-40	26-50	63-125
7	Frequently	11-20	16-30	21-40	26-50	31-60	41-80	51-100	126-250
9	Very frequently	>20	>30	>40	>50	>60	>80	>100	>250

Zoobenthos and water quality was assessed with the help of Bulgakov's Modified Biotic Index (MBI) [41]. MBI range makes up 10 points that are correlated with water qualities same as Woodiwis points (see Table 112).

Table 112: Correspondence between MBI and water quality

Water class	Water quality	MBI values	State of biocenose (expected/ expert evaluation)
I	Very clean	10	Background (standard)
II	Clean	9-7	Background (good)
III	Moderately dirty	6-5	Satisfactory
IV	Dirtied	4	Unsatisfactory
V	Dirty	3-2	Bad
VI	Very dirty	1-0	Unacceptable

Each species of flatworms, oligochaetes (save for the Nais), each type of leeches, shellfish, crustaceans, stoneflies, mayflies, beetles, dragonflies, beetles, ticks, double-winged larvae (except for chironomids and small flies), caddis flies is considered a Woodiwis group in MBI.

Phytoplankton sampling has been delivered in line with the widely accepted algologic methodology [45] [46] [47] while definers are used to identify the typical composition of microweeds [48].

Sampled material has been doused in 40% phormaline and Lugole solution, has been labeled (smple No., date, station, water area, sample volume). Sedimentation has been used in the laboratory environment as the sedimentation rate of planktome cells comes to 1 cm/3 hrs [49] Measurement are kept in the darkened place for 5-10 days, and are later syphoned out. Probe gets to be compacted in 2 stages: from 0.5 liter to 0.1 liter (100 ml), and after 5 days in wait, the solution is syphoned out until it is 10 ml.

Goriyaev chamber is used to calculate the No. of the seaweed. The recalculation of the total count is done as per the following formula:

$$N=n \times v_1 / v_2 \times W,$$

Where;

N – Number of cells in 1 cm³ of water;

n – Number of cells in a 1 mm³ chamber;

v1 – Sample concentrate (cm³);

v2 – Chamber volume (cm³);

W – Sample volume (cm³).

Zooplanktome Measurement were made through the Jedy conic net (d=10 cm, cell №68) and have been processed in line with the methodology [49]. They were fixated with 40% phormaline, increasing the concentration of up to 4% and labeling as per the notes in the field log. Materials were made ready for storage right after identification and processing. Triocular and binocular microscopes are used to identify the zooplanktome species [50]. Unified water qualities research methodology was used to define the indicator values of zooplanktome saprobity.

To periphyton analysis, fouling was scraped with a scraper, scalpel, and tweezers mainly from thalloms of higher aquatic vegetation, namely, pondweeds (*Potamogeton pectinatus* L., *P. crispus* L.), urticate (*Myriophyllum spicatum* L.), and algae (*Chara*) that covered almost all bottom of the study area (see Figure 78).



Figure 78: Macrophytes: *Potamogeton crispus* L., *P. pectinatus* L. and *Chara* sp., from the thalloms of which the periphyton of the Uchkizil Reservoir was sampled

A small amount of selected material together with water was placed in a 0.5 L wide-necked jar with a lid and plenty of air. The periphyton sample was preserved with 40% formalin. In the laboratory, the selected sample was placed in a Petri dish and the material was disassembled using a soldering needle and tweezers before processing and analysis. A small amount of material was then placed on a slide, covered with a coverslip, and analyzed (microbial identification) using a Meiji microscope.

Identification of the species composition of microalgae was performed according to the qualifiers of freshwater algae according to the analyzed group of hydrobionts and other generally accepted qualifiers [51].

The indicator organisms method of Pantle and Buck, modified by Sladeczek (Pantle and Buck, 1955; Sladeczek, 1970), was used to estimate the saprobic index (IS) (organic pollution) of water. This method considers the frequency of occurrence (abundance) of hydrobionts h and their indicator importance S (saprobic valence). The indicator value of S and the saprobicity zone are determined for each species according to the saprobicity lists of the organisms of the CEA [52].

Mass (dominant) species, forming the main complex, are considered species whose abundance is 5-9 points; subdominant species are those whose abundance is 3 points; single species are those whose abundance is 1-2 points.

Organisms of clean water - xenosaprotonic zone species-indicators IS is in the range 0-0.50; organisms of slightly polluted water - oligosaprotonic - 0.51-1.50; organisms of moderately polluted water - b - mesosaprotonic - 1.51-2.50; a-mesosaprotonic - 2.51-3.50; organisms of dirty water - polysaprotonic - 3.51-4.00.

Conclusions about water quality by indicators of periphyton were made taking into account the information about species composition and diversity, frequency of species occurrence, saprobity of leading forms and saprobity index, as well as the biotic periphyton index (BPI) [53] and the values with BPI are given in Table 113.

Table 113: Quality and environmental classifier of the surface waters. IS values and BPI as per Talskih [53]

Water category	Water quality	IS value	BPI value	Environmental condition (desired/ expert assesment)
I	Very pure	< 1,0	10-9	Background (reference value) – AB (Φ)
II	Pure	1,1–1,5	8-7	Background (good) – AB
III	Moderately polluted	1,6–2,5	6-5	Satisfactory – AB
IV	Polluted	2,6–3,5	4	Unsatisfactory – AB-AB
V	Dirty	3,6–4,0	3-2	Bad – AB
VI	Very dirty	> 4,0	1-0	Unallowable – ab

The proposed assessment system mainly taking into consideration the sequence of loss from the periphyton composition of individual indicator species, higher taxa and groups of organisms, which are demanding on water quality, changes in the functional structure of the periphyton (change in the ratio of producers, consumers and reducers) as the pollution load increases (see Table 113).

In addition, the table shows the characteristics of the ecological invariant states of biocenoses, which are encoded in the form of letter symbols: AB (F) - a background ecological state in which biocenoses are in a state of metabolic and ecological progress and are represented by a complex of species reflecting the natural (undisturbed) gene pool of the region; AB - satisfactory ecological state, characterized by metabolic and ecological progress of biocenoses; AB-Ab - a transitional ecological state associated with a noticeable change in the taxonomic and functional structure of biocenoses; Ab - unsatisfactory ecological state, pronounced degradation of the ecological structure of the original biocenoses; ab - absolutely unacceptable ecological state, complete degradation of biocenoses [53].

Meaning of alphabetic characters: A - the state of metabolic progress of biocenoses (active metabolism of aquatic biocenoses); a - the state of metabolic regression of biocenoses (inhibition of the metabolism of aquatic biocenoses); B - the state of ecological progress of biocenoses (complication of the ecological structure of aquatic biocenoses); b - the state of ecological regression of biocenoses (simplification of the ecological structure of aquatic biocenoses).

The above assessment methods using IP and BPI indices are considered as basic indicators and their application reflects the true environmental picture.

9.4.3 Aquatic Ecological Surveys

9.4.3.1 Ichthyofauna

The formation of the ichthyofauna of the Uchkizil Reservoir is inextricably linked to the ichthyofauna of the Surkhandarya River[54].

According to recent data, there are 20 fish species in Uchkizil reservoir, of which 9 are native and 11 are acclimatised or accidentally introduced (see Table 114). *Abramis brama* and *Chalcalburnus chalcoides aralensis*, are the most numerous in the reservoir. *Chalcalburnus chalcoides aralensis* makes up about 50% of the total fish catch, bream from 19 to 27%, pikeperch up to 19-22% [17]. Thus, the ichthyofauna of the Uchkizil Reservoir was formed from the aboriginal fish species of the Surkhandarya river and is represented by: *Varicorhinus*, *Cyprinus carpio*, *Luciobarbus capito conocephalus* & *Barbus brachycephalus brachephalus*, *Leuciscus lehmani*, *Pelecus cultratus*, *Silurus glanis*, *Capoetobrama kuschakewitschi*, *Aspius aspius*, *Rutilus rutilus bucharensis*, *Gobio gobio lepidolaeraus*, *Aspius cobitis taenia*, *Paracobitis longicauda*, two species of *Alburnoides* & *Gambusia affinis*[55].

The fish samples are collected from the locations given in Figure 79.

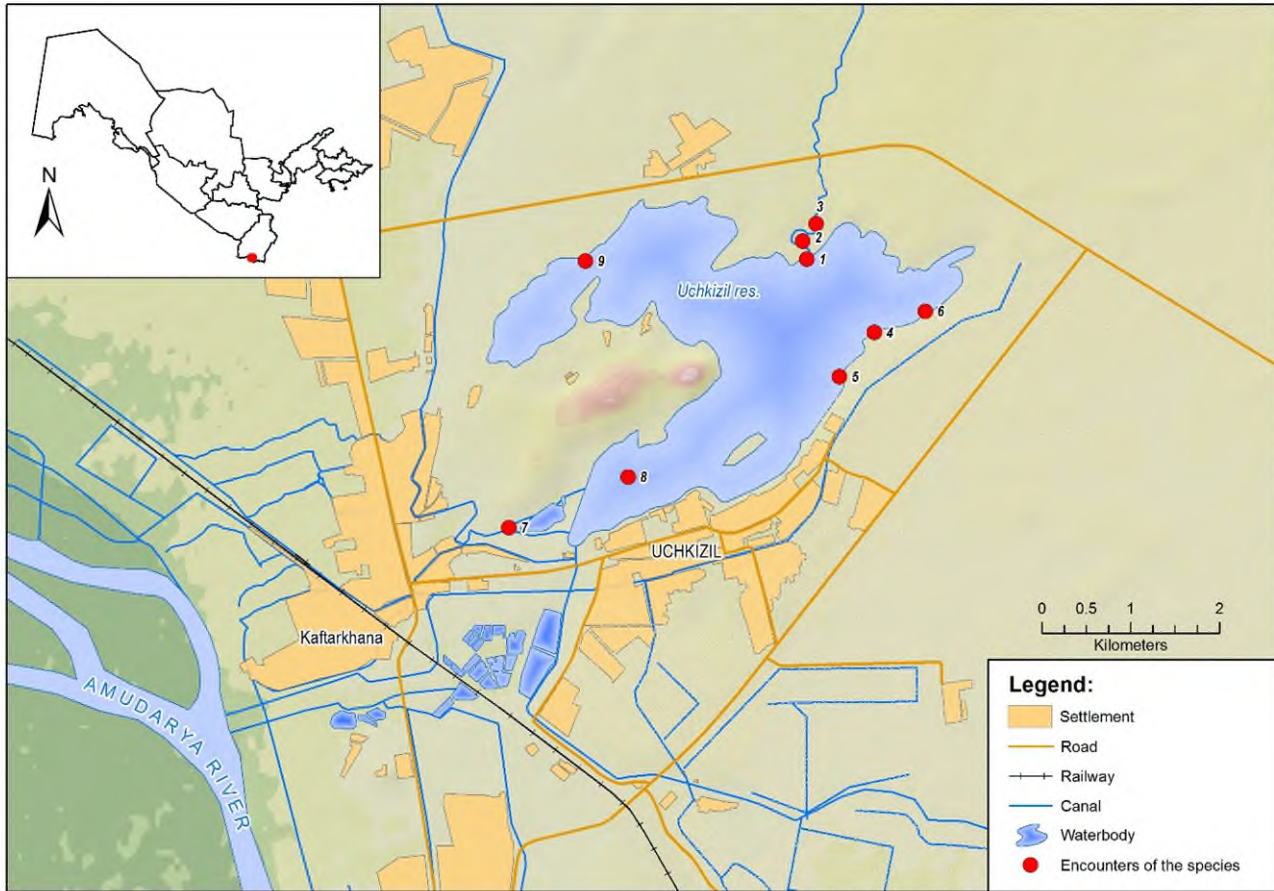


Figure 79: Fish sampling points at the Uchkizil water reservoir

Table 114: The species composition of the fish fauna of the Uchkizil reservoir

No.	Species	Local species	Alien species	Endemism	Conservation status			Commercial species
					UzRDB	IUCN	CITES	
Cyprinidae								
1	<i>Rutilus aralensis</i> (Berg, 1916)	+	-	+	-	-	-	-
2	<i>Rhodeus ocellatus</i> (Kner, 1866)	-	+	-	-	-	-	-
3	<i>Ctenopharyngodon idella</i> (Valenciennes, 1844)	-	+	-	-	-	-	+
4	<i>Gobio lepidolaemus</i> (Kessler, 1872)	+	-	+	-	-	-	-

No.	Species	Local species	Alien species	Endemism	Conservation status			Commercial species
					UzRDB	IUCN	CITES	
5	<i>Pseudorasbora parva</i> (Temminck et Schlegel, 1846)	-	+	-	-	-	-	-
6	<i>Luciobarbus conocephalus</i> (Kessler, 1872)	+	-	+	+	-	-	-
7	<i>Chalcarburnus chalcaoides aralensis</i> (Berg, 1923)	+	-	+	-	-	-	+
8	<i>Alburnoides bipunctatus eichwaldi</i> (Filippi, 1863)	+	-	-	-	-	-	-
9	<i>Alburnoides teaniatus</i> (Kessler, 1874)	+	-	-	-	-	-	-
10	<i>Abramis brama orientalis</i> (Berg, 1949)	-	+	-	-	-	-	+
11	<i>Carassius gibelio</i> (Bloch, 1782)	-	+	-	-	-	-	+
12	<i>Cyprinus carpio</i> (Linnaeus, 1758)	+	-	-	-	-	-	+
13	<i>Hypophthalmichthys molitrix</i> (Valenciennes, 1844)	-	+	-	-	-	-	+
14	<i>Aristichthys nobilis</i> (Richardson, 1844)	-	+	-	-	-	-	+
Cobitidae								
15	<i>Sabanejewia aralensis</i> Kessler, 1877	+	-	+	+	-	-	-
Siluridae								
16	<i>Silurus glanis</i> (Linnaeus, 1758)	+	-	-	-	-	-	-
Poecilidae								
17	<i>Gambusia holbrooki</i> (Girard, 1859)	-	+	-	-	-	-	-
Percidae								

No.	Species	Local species	Alien species	Endemism	Conservation status			Commercial species
					UzRDB	IUCN	CITES	
18	<i>Sander lucioperca</i> (Linnaeus, 1758)	-	+	-	-	-	-	+
Gobiidae								
19	<i>Rhinogobius brunneus</i> (Temminck et Schlegel, 1845)	-	+	-	-	-	-	-
Channidae								
20	<i>Channa argus</i> (Cantor, 1842)	-	+	-	-	-	-	-
Total:		9	11	5	2	0	0	8

The following locations were covered during the field visit and fish caught coordinates with the species are given in Table 115.

Table 115: Fish caught at the monitoring points of Uchkizil water reservoir

Point No.	Coordinates	Identified species
UK-Ich_1	37°22'14.23"N, 67°14'25.32"E	Sander lucioperca (2 in), Rhinogobius brunneus (5 in), Rutilus aralensis (1 in), Carassius gibelio (3 in), Chalcarburnus chalcaoides aralensis (2 in).
UK-Ich_2	37°22'20.70"N, 67°14'23.24"E	Sander lucioperca (5 in), Rhinogobius brunneus (6 in).
UK-Ich_3	37°22'27.16"N, 67°14'29.25"E	Sander lucioperca (4 in), Chalcarburnus chalcaoides aralensis (8 in), Rhodeus ocellatus (7 in).
UK-Ich_4	37°21'47.84"N, 67°14'56.82"E	Rhinogobius brunneus (8 in), Rutilus aralensis (2 in), Chalcarburnus chalcaoides aralensis (6 in), Abramis brama orientalis (8 in), Carassius gibelio (3 in), Cyprinus carpio (1 in).
UK-Ich_5	37°21'31.45"N, 67°14'41.32"E	Rhinogobius brunneus (1 in), Rutilus aralensis (3 in), Chalcarburnus chalcaoides aralensis (3 in), Abramis brama orientalis (3 in), Carassius gibelio (4 in), Cyprinus carpio (1 in).
UK-Ich_6	37°21'55.97"N, 67°15'20.05"E	Rhinogobius brunneus (2 in), Rutilus aralensis (1 in), Chalcarburnus chalcaoides aralensis (4 in), Abramis brama orientalis (4 in), Carassius gibelio (3 in), Cyprinus carpio (3 in), Sander lucioperca (4 in).
UK-Ich_7	37°20'33.99"N, 67°12'10.99"E	Rhodeus ocellatus (12 in), Gobio lepidolaemus (5 in), Pseudorasbora parva (6 in), Sabanejewia aralensis (3 in), Gambusia holbrooki (7 in), Rhinogobius brunneus (3 in), Alburnoides teaniatus (35 in).



Point No.	Coordinates	Identified species
UK-Ich_8	37°20'53.35"N, 67°13'5.19"E	Rhinogobius brunneus (2 in), Rutilus aralensis (1 in), Chalcarburnus chalcaoides aralensis (2 in), Abramis brama orientalis (5 in), Carassius gibelio (4 in), Cyprinus carpio (2 in), Sander lucioperca (3 in).
UK-Ich_9	37°22'11.96"N, 67°12'43.75"E	Gambusia holbrooki (10 in), Rhinogobius brunneus (9 in), Rutilus aralensis (1 in), Chalcarburnus chalcaoides aralensis (3 in), Abramis brama orientalis (2 in), Carassius gibelio (1 in), Sander lucioperca (2 in), Cyprinus carpio (2 in).

Two types of fish on a Red Book of the republic of Uzbekistan were found in the Uchkizil water reservoir - *Luciobarbus conocephalus* and *Sabanejewia aralensis*. Accordingly, five fish species are endemic.

Cyprinidae make up the majority of fish species in the Uchkizil water reservoir (see Figure 80). All in all, fish species can be subdivided into 3 groups: Commercial fishing, non-commercial and protected species.

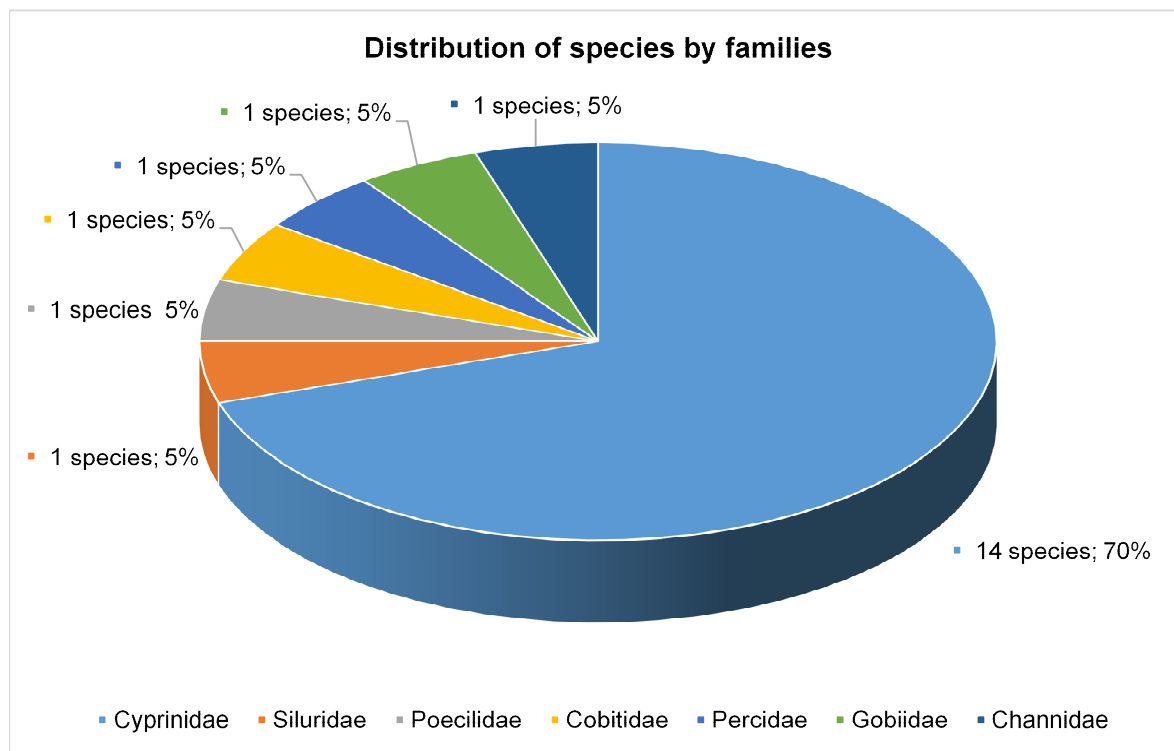


Figure 80: Distribution of fish species by families in the Uchkizil water reservoir

Commercial fish species are *Ctenopharyngodon Idella*, *Chalcarburnus chalcaoides aralensis*, *Abramis brama orientalis*, *Carassius gibelio*, *Cyprinus carpio*, *Hypophthalmichthys molitrix*, *Aristichthys nobilis*, *Rutilus aralensis*, *Siluris glanis*, *Sander lucioperca*, *Channa argus*

Non-commercial types are *Rhodeus ocellatus*, *Gobio lepidolaemus*, *Pseudorasbora parva*, *Alburnoides bipunctatus eichwaldi*, *Alburnoides teaniatus*, *Gambusia holbrooki*, found in the Zang canal. *Rhinogobius brunneus* found along the shoreline of the water reservoir and are dominant species.

2 Protected species are in the Red Book of the RUz [35] were known in the reservoir:

- *Luciobarbus conocephalus* are currently in the Red Book of the RUz [35], as the "2 (VU:D): Vulnerable endemic species"
- *Sabanejewia aralensis* are in the Red Book of the RUz (2019), as the "3 (NT): Close to the vulnerable aral endemic species. Is on the Red list (LC)" [35].

The aforementioned 2 species - *Luciobarbus conocephalus* and *Sabanejewia aralensis* are not in the CITES convention list [32].

Uchkizil water reservoir is not a native or relict one with unique fauna. The current fish fauna of the water reservoir has been formed by that of the Surkhandarya river. Consequently, irrespective of the damage as a result of construction, all fish type can be recovered. Some of the reservoir fish are on the Red Book of the RUz even though the water reservoir is not their natural habitat – they propagate through the river and form the fauna of the water reservoir. Although no fish farms present in the Uchkizil Reservoir, the reservoir is used by fisherman to supply water for fish breeding pools located in nearby villages. .It is recommended that screens are installed to prevent entrainment of fishes into water intakes. Recommended screen materials include stainless steel, galvanized steel, aluminum, brass, bronze, or monel metal. Stainless steel is preferred since corrosion is greatly reduced. And also, the screen mesh size should be determined in accordance with the fish species body shapes and sizes. In addition, it should be monitored whether these screens used during the operation period are useful.

9.4.3.2 Benthic Organizm

Macrozoobenthos (bentos - depth is the community of visible invertebrates (body size above 2 mm), that inhabit the sea bottom (benthic), aquatic vegetation (phytal), as well as other substratum, including different hydrotechnical structures. Zoobenthos is represented by: worms (planaria, oligochaete, leech, nematodes), gastropods (gastropod, bivalves), crustacean (amphipods, isopods, denocodes, etc.), arachnids, maggots (chironimids, heledes, ephemeral flies, plecopterans, tricoptherans, dragonflies, etc.). Functionally speaking zoobenthos is an important part of heterotrophic components and the living bodies thereof are consumers.

The type and quantity development of benthic characterize contamination level of the soil and bottom waters. The phytal zone population are characterized by the large water quantities.

The composition of zoobentos communities is relatively homogenous so long as they remain within the conditions they were developed in. Bottom communities within clear waters and well-aired areas are characterized by a variety of species, which is indicative of the normal water system. Polluted waters may contain groups of animals that are more susceptible to pollutants. This leads to the violations of special and trophic structure of zoobenthos which eventually degrades bottom-level biozones.

Uchkizil benthos are characterized by a set of freshwater and saline organisms. Bottomline fauna make up the basis of the benthos, such as the phytophilous fauna and are represented by oligochaetes of Tubificidae family, chironimids for the moderately dirty waters.

Species wise Zoobenthos was quite limited in July 2021. Physa fontinalis make up the most of bentofauna at the zoobentos probing point, as well as representatives of Chironomus, and Cricotopus, plus oligochets: Nais elinguis, Paranais litoralis and representatives of Tubificidae (see Table 116).

Table 116: Zoobentos species of the Uchkizil water reservoir

Species	S	Abundancy point
Ephemoptera		
Caenis macrura Stephens	a	3
Chironomidae		
Cricotopus gr. bicinctus Meigen	β-a	3
Tanytarsus gr. Gregarious Kieffer	β-a	3
Tanytarsus gr. Lobatifrons Kieffer	a	5
Tanytarsus mancus V.D. Wulp.	a	5
Chironomus plumosus Linnaeus	ρ	3
Oligochaeta		
Nais elinguis O.F. Müller	β-a	3
Nais pseudoptusa Piguet	β-a	3
Nais barbata O.F. Muller	β-a	3
Paranais litoralis O.F. Müller	β-a	3
Branchiura sowerbyi Beddard	ρ	2
Limnodrilus udekemianus Claparede	ρ	5
Limnodrilus hoffmeisteri f. typica Claparede	ρ	5
Euiliodrilus hammoniensis (Michaelsen)	ρ	9
Tubifex tubifex O.F. Muller	ρ	3
Total:		15

Table 116 and Table 117 show that zoobentos sampling revealed the following 15 zoobentos types, of which: 1 type of dayflies, 9 species of Oligochaete, two-wingers from the 5 species of Chironomidae family.

Table 117: Zoobentos properties at the Uchkizil water reservoir

Taxonomic group	Species	Q-ty m ²	Biomass g/m ²	Saprobity of species (S)	Saprobity of water reservoir
Ephemeroptera	Caenis macrura Stephens	25	0.0875	a	3.23
	Cricotopus gr. bicinctus Meigen	25	0.0575	β-a	
	Tanytarsus gr. Gregarious Kieffer	25	0.0625	a	
Diptera	Tanytarsus gr. Lobatifrons Kieffer	63	0.1250	a	
	Tanytarsus mancus V.D. Wulp.	63	0.1313	a	
	Chironomus plumosus Linnaeus	25	0.0286	ρ	
Oligochaeta	Nais elinguis O.F. Müller	38	0.0041	β-a	
	Nais pseudoptusa Piguet	50	0.0050	β-a	
	Nais barbata O.F. Muller	25	0.0025	β-a	
	Paranais litoralis Müller	25	0.0035	β-a	
	Branchiura sowerbyi Beddard	13	0.0390	ρ	
	Limnodrilus udekemianus Claparede	75	0.0011	ρ	
	Limnodrilus hoffmeisteri f. typica Claparede	100	0.0160	ρ	
Euilyodrilus hammoniensis (Michaelson)	675	2.7000	ρ		

Taxonomic group	Species	Q-ty m ²	Biomass g/m ²	Saprobity of species (S)	Saprobity of water reservoir
	Tubifex tubifex O.F. Muller	38	0.3675	ρ	
3 group	15	1265	3.6311	α	

Table 118: Q-ty and biomass of the taxonomic zoobenthos groups of the researched Uchkizil water reservoir

Date	Reservoir name	Taxonomic group	No. of species in a group	Q-ty Pcs./m ²	Biomass g/m ²
15.07.2021	Uchkizil water reservoir	Ephemeroptera	1	25	0.0875
		Diptera	5	201	0.4049
		Oligochaeta	9	1039	3.1577
		3	15	1265	3.6311

Table 117 shows that zoobentos Measurement in the Uchkizil water reservoir equals β - α - and α - of the area, i.e. saprobe indicators (S) within the 3.00 to 3.50 range. Which means that the quality of water in zoobentos equal category III-IV and IV (moderately dirtied waters).

The α - mesasaprobic zone is characterized by the presence of amino and amido acids in the water, the conditions of the hydroenvironment tend to turn into a semi-anaerobic regime, there is little oxygen dissolved in the water, which can cause freezing at the bottom and at night due to the cessation of photosynthesis, the presence of hydrogen sulfide in significant amounts is noted (layered gray and dark gray, or even black silts with the smell of hydrogen sulfide), the nature of the biochemical processes is reductive-oxidative.

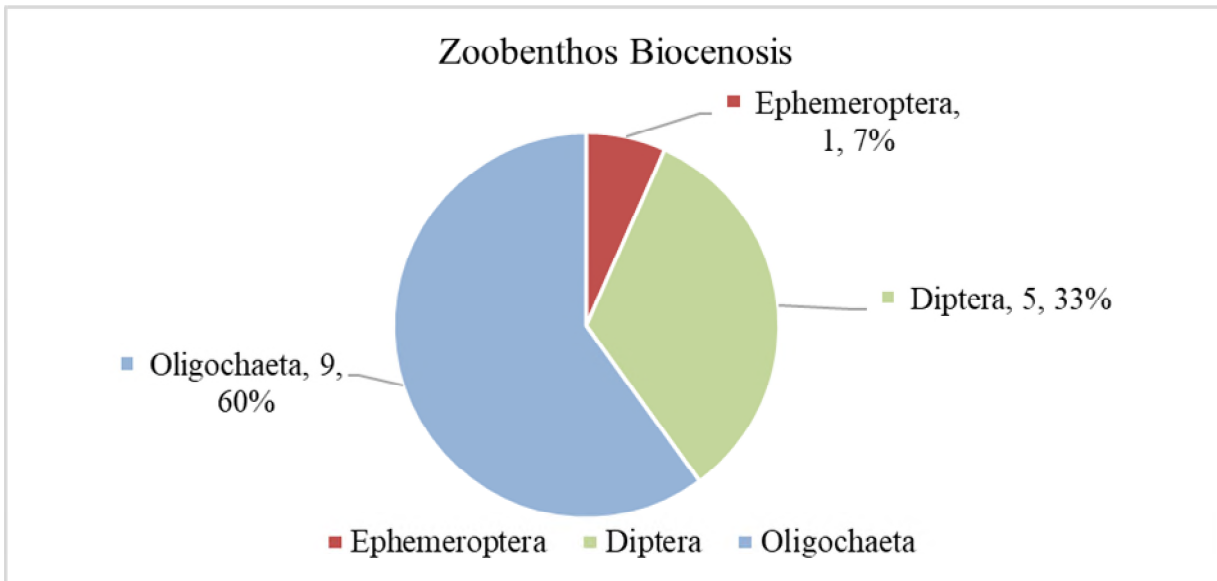


Figure 81: Taxonomic properties of zoobenthos biocenosis

The overall quantity of zoobenthos bodies sampled in the shoreline area of the Uchkizil water reservoir came to – 1265 pcs/m², while the biomass – 3.6311 g/m².

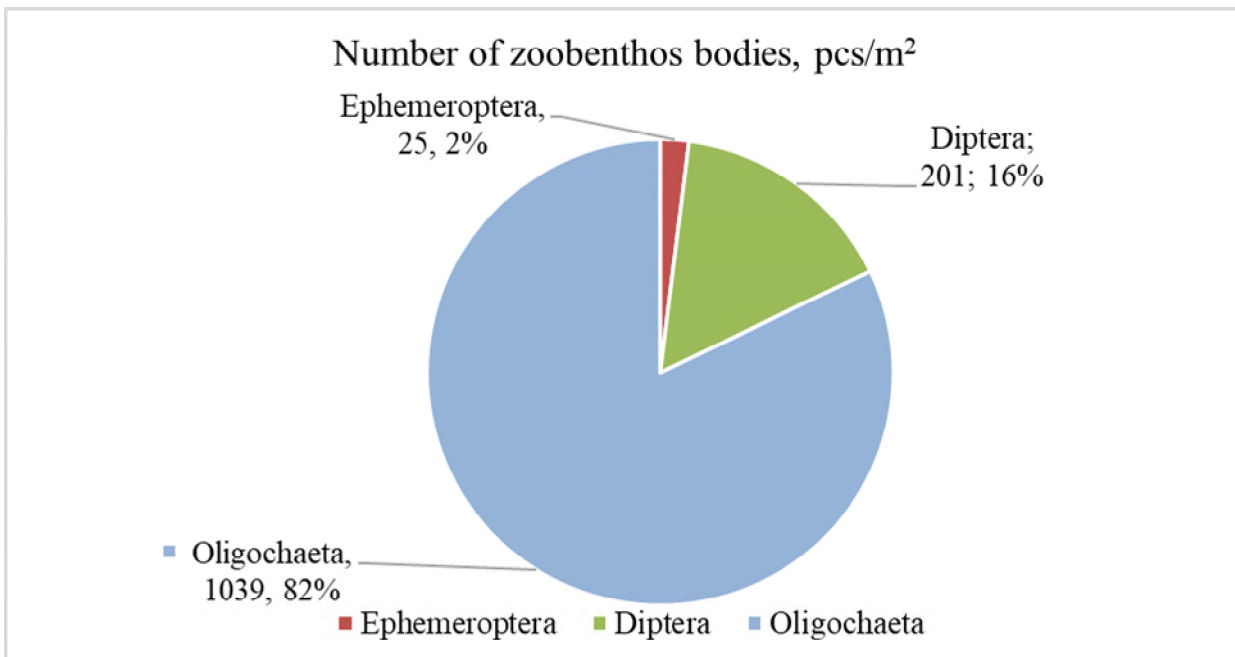


Figure 82: Abundance of zoobenthos organisms by taxonomic groups

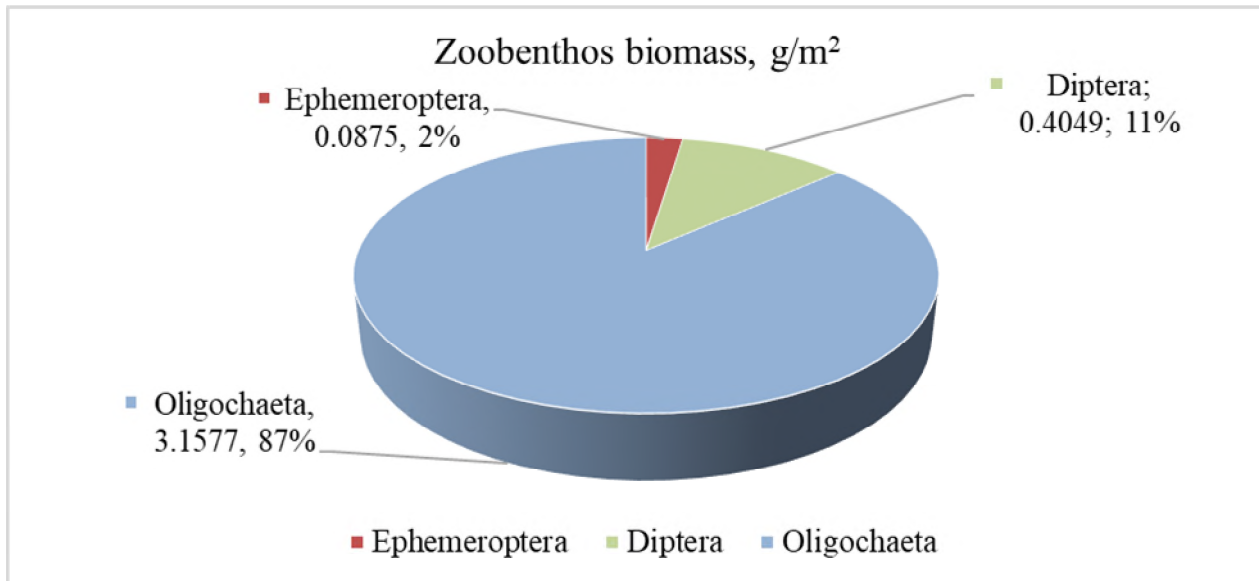


Figure 83: Biomass of zoobenthos organisms by taxonomic groups

Among the discovered organisms of zoobenthos, the dominant species are small-bristle worms of the family. Tubificidae, in particular *Euiliodrilus hammoniensis*.

The ecological character of the fauna develops in accordance with the peculiarities of the aquatic environment, which in the surveyed section of the reservoir include

- Increased mineralization, which is evidenced by the salt crust on the coast, as well as the presence of such macrophytes as charovaceae, rupee and sea naiad;
- Unstable hydrological state of the reservoir: at the time of sampling, the water moved from the initial level of seasonal filling by more than 20-25 meters;

The biocenose contains organisms belonging to the psammophilis populating silty and sandy sediments of the stagnating pools, as well as those, preferring acidified mineral muds: *Euiliodrilus hammoniensis* Michaelsen, *Limnodrilus hoffmeisteri f. typica* Claparede, *Limnodrilus udekemianus* Claparede, *Chironomus plumosus* Linnaeus.

9.4.3.3 Phytoplanktonic Organisms

Phytoplanktons are the microscopic bodies freely travelling in the water thickness or participating in the photosynthesis. They are considered one of the key water ecosystem elements as they participate in water reservoir productivity and shaping the water quality.

As a result of the analysis the phitoplanktone sample contains 77 seaweed varieties, of which Cyanophyta are 17 Bacillariophyta – 34, Chlorophyta – 13, Chrysophyta – 3, Dinophyta – 8, as well as 1 Cryptophyta and Xanthophyta respectively. The dominant set of phitoplanktone communities was represented in the first place by producents, namely blue and green, diatomic and green ones. Other families of microweeds appear to contain insignificant quantity and quality indicators. Taxonomic

composition and the quantitative development of the phitoplanktone community at the researched area of the Uchkizil water reservoir for July 2021 can be found in Table 119 and Table 120.

Table 119: Taxonomic composition of the phitoplanktone of the Uchkizil Reservoir

Taxone/Sample No.	1
Cyanophyta	17
Bacillariophyta	34
Cryptophyta	1
Chrysophyta	3
Dinophyta	8
Chlorophyta	13
Xanthophyta	1
No. of microweeds	77

In the phytoplankton sample, a moderate development of blue-green (Cyanophyta) algae was noted, a total of 17 species (22.08%), forms and varieties of algae were noted. Blue-green colonial and filamentous β - mesosaprobic forms from the genera *Synechococcus*, *Microcystis*, *Merismopedia*, *Gloeocapsa*, *Coelosphaeria*, *Anabaenopsis*, *Oscillatoria*, *Phormidium*, *Lyngbya* are represented. The number of blue-green algae in the sample corresponded to 8800.00×10^3 cells / l, and the biomass was 248,588 mg / l (see Table 120).

Diatoms (Bacillariophyta), in terms of taxonomic diversity (34 species), occupy one of the dominant positions in phytoplankton (44.16%) of the studied area and are represented by both planktonic α -, α - β - and representatives of phytobenthos β -mesosaprobic species from the genera *Cyclotella*, *Fragilaria*, *Synedra*, *Eunotia*, *Cymbella*, *Amphora*, *Navicula*, *Nitzschia*, certain types kotoryhpredpochitayut eutrophic water (*Eunotiaarcus* Ehr., *E. gracilis* (Ehr.) Rabenh., *Mastogloia Smithiiv. amphicephala* Hofm., *Synedratabulata* (Ag.) Kutz., *Cymbellaobtusiuscula* (Kutz.) Grun. Et al.) The number of diatoms in the sample was 562.500×10^3 cells / l, the abiomass was 382.225 mg / l (see Table 119).

Golden (Chrysophyta) algae are represented by the genera *Dinopryon*, *Chromulina*, their number in the sample was 150.00×10^3 cells / l, and the biomass, respectively, was 50.075 mg / l; dinophytes (Dinophyta) are represented by the genera *Glenodinium*, *Peridinium*, *Ceratium*, the number was 87.50×10^3 cells / l., and the biomass, respectively, - 118.713 mg / l; yellow-green (Xanthophyta) originally presented *Tribonema*, number amounted to 206.250×10^3 cells / L, respectively, and the biomass -. 185,213 mg / l (see Table 119).

Table 120: Phitoplanktone quality at the Uchkizil Reservoir

Taxone	№ 1
Cyanophyta	<u>8800,00</u> 248.588
Bacillariophyta	<u>562,500</u> 382.225

Taxone	№ 1
Cryptophyta	<u>12,500</u> 12.575
Chrysophyta	<u>150,00</u> 50.075
Dinophyta	<u>87,500</u> 118.713
Chlorophyta	<u>368,750</u> 129.475
Xanthophyta	<u>206,250</u> 185.213
q-ty (kl*10³) / biomass (mg/l)	<u>10217,500</u> 1126,924

The diagrams in Figure 84 and Figure 85 show the percentage ratio of taxonomic diversity and quantitative development of phytoplankton microalgae in the sample of the Uchkizil reservoir, July 15, 2021.

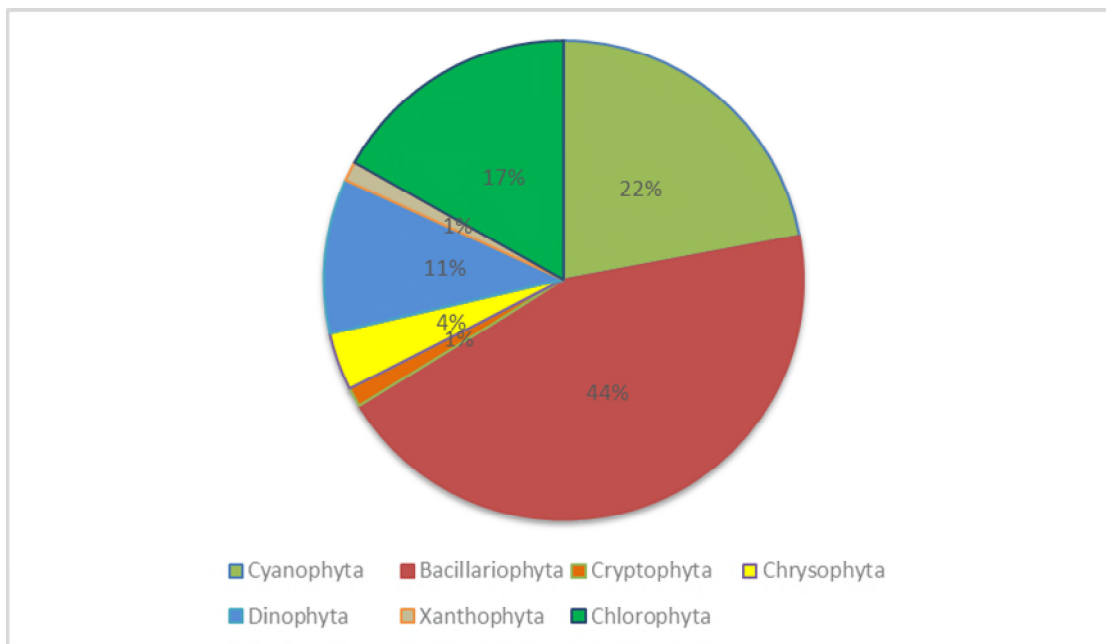


Figure 84: Percentage of phytoplankton taxa in the Uchkizil Reservoir

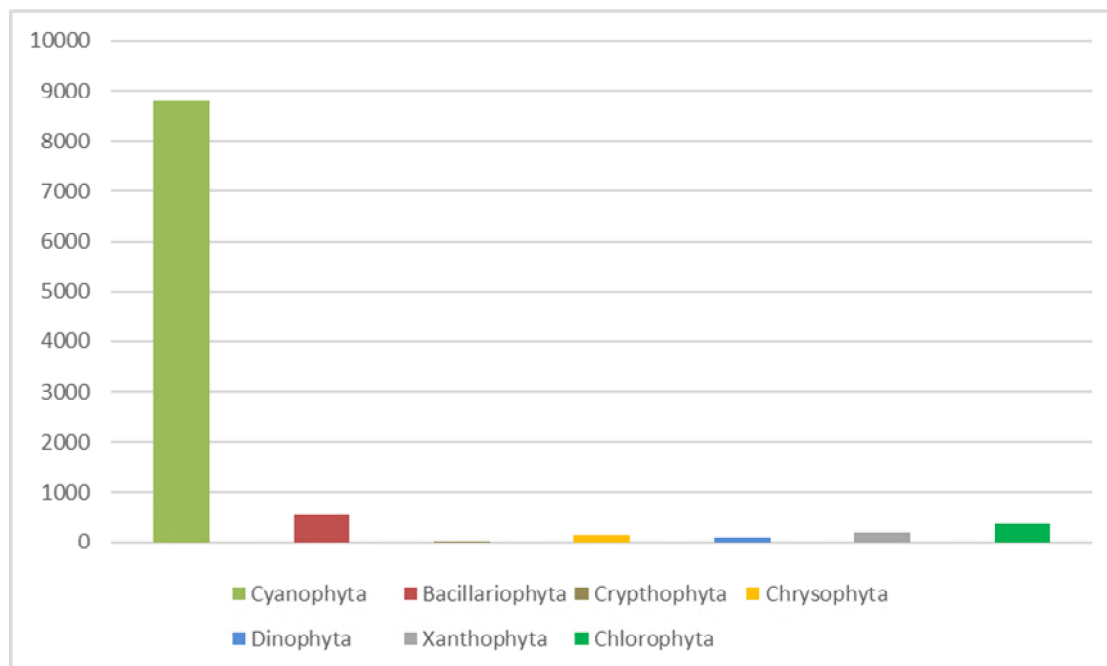


Figure 85: Quantity of phytoplankton in the Uchkizil Reservoir

Based on the results obtained, it can be noted that the dominant phytoplankton complex of the investigated section of the Uchkizil Reservoir is represented mainly by widespread freshwater α - β - and freshwater-brackish β - mesosaprobic forms of diatoms, blue-green, green, dinophytic, golden and yellow-green algae. The ecological state in terms of the indicator corresponds to AB - a satisfactory ecological state, characterized by metabolic and ecological progress of biocenoses.

9.4.3.4 Zooplanktone

Zooplankton is a community (group) of aquatic invertebrate organisms inhabiting the body of water and leading to float freely, independent of the solid substrate as a support member, lifestyle (colorless flagellates, rotifers (Rotatoria), cladocerans (order Cladocera) and copepods (order Copepoda) consuming phytoplankton, bacteria and detritus, it itself is the most important component in the diet of fish and carnivorous invertebrates. mass develop microalgae

The quantitative assessment of zooplanktone development has been conducted on the following scale (Chinov, 2007) to make sure the zooplanktone biomass (mg/m^3) meets the water body trophicity values: "poorly developed" - from 1-400 (ultraoligotrophite), "poorish development" - from 400-1000 (oligatrophite), "average" - from 1000-2000 (mesotrophic) and "abundantly developed" - 2000-4000 and more (eutrophic) (see Table 121).

Table 121: Concentration of phosphorous, bio and ichtiomass of zooplanktone in water bodies

Water body type	Phosphorous, mg/m^3	Zooplanktone biomass, g/m^3	Ichtiomass, g/m^2
Ultraoligotrophite	3	0.5	1.25
Oligatrophite	1-10	0.5-1	1.25-2.5
Mesotrophic	4-40	1-4	2.5-10

Eutrophic	200-400	4-16	10-40
Hypereutrophic	400	16	40

In July 2021, 1 zooplankton sample was taken from the Uchkizil reservoir. Table 122 shows the species composition of zooplankton, saprobity indices for the identified species and the mass rate of their detection in each sample. 7 species of zooplankton were found: 2 species of cladocera (Cladocera) - *Diaphanosomalacustris* and *Chydorusphaericus*, 4 species of copepods (Copepoda) - *Thermocyclopsvermifer* dominated en masse; also found mature female cyclops *Mesocyclopsaequatorialissimilis*, *Harpacticoidagen harpacticides. sp.*, immature individuals of *Diaptomidaegen. sp.* and 1 species of rotifers.

The level of saprobity - organic pollution of water (Table 122) for zooplankton species from the Uchkizil Reservoir ranged from 1.5-1.75, which corresponds to the β - saprobic zone - slightly-moderate organic pollution of water: the presence of organic and mineral compounds with signs of oxygen oxidation.

Table 122: Zooplanktome species, mass propagation and saprobity index as well as quantitative characteristics of zooplanktome species in Uchkizill reservoir

No. and station name	Zooplanktome specie	Propagation (h)	Saprobity (s)
№ 1	Rotifera:		
	<i>Euchlanis dilatata</i>	1	β -o - 1,5
	Cladocera:		
	<i>Diaphanosoma lacustris</i>	7	β -o - 1,55
	<i>Chydorus sphaericus</i>	3	β -o - 1,75
	Copepoda:		
	<i>Thermocyclops vermifer</i> , Lindberg, 1935	9	β -o - 1,7
	<i>Mesocyclops aequatorialis similis</i> Van de Velde, 1935	5	β -o - 1,65
	<i>Harpacticoida gen. sp.</i>	3	-
<i>Diaptomidae gen. sp.</i>	3	-	

Quantitative zooplankton development Uchkizilskom reservoir was negligible: v. Total number - 7033 copies / m³ and the total biomass - 143.02 mg / m³ due to equal contributions to the development of quantitative Cladocera and Copepoda (Table 123).

Table 123: Number of species, overall number (pcs./m³) and biomass (mg/m³) of 3 zooplankton taxonomic groups of the Uchkizil water reservoir

Station No. and name	Taxonomic group	No. species per group	No. of species, pcs. m ³	Biomass, mg/m ³
№ 1	Rotifera	1	33	0.02
	Cladocera	2	1200	68
	Copepoda	4	5800	75
	Total:	7	7033	143.02

The level of trophicity of the Uchkizil reservoir, determined by the biomass of zooplankton, corresponds to the "oligotrophic" level and shows the lack of nutrients (nitrogen and phosphorus) in the reservoir, which affects the quantitative indicators of zooplankton.

In the summer sample of the investigated section of the Uchkizil reservoir, 7 species of zooplankton were found, which indicates the average biodiversity of the reservoir.

The species found in the sample are widespread, thermophilic species - indicators of moderately polluted waters, the indicator of indicator significance for organic pollution by decay products corresponds to the β - saprobic zone - a zone of slightly-moderate organic pollution. The level of biomass of zooplankton in the reservoir was 143.02 g / m³, which characterizes waters with an insufficient amount of nutrients (the level of water trophicity), and poor development of zooplankton organisms (clean or unpolluted).

9.4.3.5 Periphyton

Periphyton (fouling) - communities of organisms that live on a variety of underwater (living or dead) substrates, outside the specific bottom layer of water and is one of the most complex communities in aquatic ecosystems.

Periphyton fouling includes representatives of three main functional groups of organisms: autotrophic organisms - producers - algae;

- heterotrophic organisms - consumers: protozoa, rotifers, ciliates, crustaceans, cyclops, daphnia, sponges, bryozoans, worms, bivalve molluscs and others; - decomposers - filamentous, coccoid, rod-shaped, zooglea and other bacteria, fungi.

Periphyton, as an integral part of aquatic ecosystems, undergoes various changes along with it, due to various natural and anthropogenic factors, which is expressed in the spatial and temporal successions of periphytic communities.

Outwardly, the fouling of periphyton looked mainly as brown and clay deposits, films and layers, slimy to the touch formations, from light gray to brownish-green interspersed with clay on the stems and leaves of macrophytes (

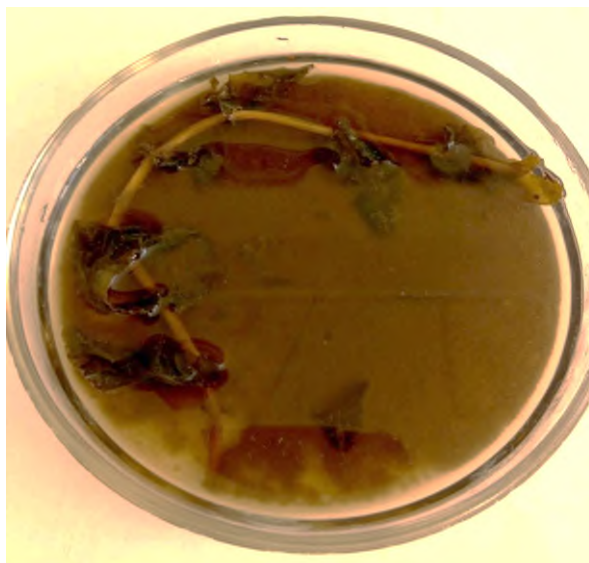


Figure 86: Uchkizil Reservoir, external appearance of periphyton

In total, 119 species of aquatic organisms were found in the selected summer sample of periphyton, of which 110 species from the producer group (microalgae), 7 species from the consumer group, and 2 species from the reducers group.

The dominant group in the Measurement consisted of producers are 110 species, varieties and forms of microalgae, of which blue-green (Cyanophyta) - 28 species, diatoms (Bacillariophyta) - 64 species, green (Chlorophyta) - 11 species, (Dinophyta) - 4 species, yellow- green (Xanthophyta) - 2 species and cryptophyte (Cryptophyta) - 1 species (see Table 124).

Table 124: Taxonomic structure of the periphyton of the investigated section of the Uchkizil water reservoir

Taxon / Sample No.	1
Cyanophyta	28
Bacillariophyta	64
Cryptophyta	1
Dinophyta	4
Xanthophyta	2
Chlorophyta	11
Number of microalgae species	110

In total, the periphyton sample showed good development of 28 species of blue-green (Cyanophyta) algae, or 25.45% of the total amount of algae. Blue-green are represented mainly by widespread freshwater and freshwater-brackish-water colonial and filamentous forms from the genera *Synechococcus*, *Merismopedia*, *Microcystis*, *Gloeocapsa*, *Anabaenopsis*, *Oscillatoria*, *Phormidium*, *Lyngbya*, *Spirulina*, etc.

The common species in the Measurement were: *Synechococcus aeruginosa*, *Merismopedia glauca*, *Microcystis aeruginosa*, *Gloeocapsa alpina.*, *Anabaenopsis Raciborskii*, *Oscillatoria amphibia*, *Osc.geminata*, *Osc.planctonica*, *Osc.formosa*, *Phormidium ambiguum*, *Ph. papillaterminatum*, *Lyngbya Kuetzingii*, *L. limnetica*, etc.

Diatoms (Bacillariophyta), in terms of taxonomic diversity, occupy a dominant position in the periphyton of 64 species (58.18%) and are represented as widespread planktonic freshwater-brackish-water species of α - β -mesosaprobic conditions of algae of the genera *Cyclotella*, *Fragilaria*, *Synedra*, and phytobenthos β -, β a-mesosaprobic species from the genera *Achnanthes*, *Denticula*, *Cymbella*, *Cocconeis*, *Eunotia*, *Mastogloia*, *Gomphonema*, *Gyrosigma*, *Navicula*, *Nitzschia*, *Cymatopleura*. of which are simultaneously characteristic of eutrophied water bodies, as well as species characteristic of biotopes with accumulation of plant detritus (*Synedra ulna*, *S. tabulata.*, *Amphora veneta*, *Cymbella obtusiuscula.*, *Navicula cryptocephala*, *Mastogloia Smithii*, *Amphicephala*, *Nitzschia vermicularis*, *N. obtusa*, etc.

Periphytic communities of gray color, well developed and in various combinations formed the leading complex of algae.

Green algae (Chlorophyta) in the investigated section of the Uchkizil Reservoir developed moderately, 11 species were recorded here, which accounted for 10% of the total number of species. Presented are green, mainly planktonic β -mesosaprobic chlorococcal, protococcal and desmidian algae from the genus *Chlorococcum*, *Chlorella*, *Oocystis*, *Cosmarium*, *Scenedesmus*, *Tetraedron* and filamentous yellow-green algae of the genera *Vaucheria*, *Tribonema* (see Table 126).

In the Measurement of periphyton, protozoa from the consumer group were also noted (amoeba, Rotifera: *Cephalodella gibba*, *Chilodonella uncinata*, *Colurella uncinata*, *Rotaria*, chironomid larvae, roundworms Nematoda gen.sp. and others.). It should be noted that organisms from the group of decomposers were also found in the Measurement. (*Bacterium sp*, *Sphaerotilus dichotomus*), fungus. The species composition of the periphyton organisms is presented in the Table 126.

As can be seen from Table 125, the indicators of the water quality class, the saprobity index and the ecological state of water masses in terms of periphyton correspond to class III (moderately polluted waters), IS - 1.90, the ecological state - AB, a satisfactory ecological state, characterized by metabolic and ecological progress of biocenoses.

Table 125 presents a comparative characteristic of the species composition of phytoplankton and periphyton communities in the surveyed section of the Uchkizil reservoir.

Table 125: Saprobity index, biotic periphyton index, water quality class, ecological state of the periphyton of the investigated section of the Uchkizil water reservoir

Sample No.	1
SI	1.90
BPI	6
Water quality class	III
Ecological condition	AB

Table 126: Species composition of phytoplankton and periphyton communities in the surveyed section of the Uchkizil reservoir

Taxa / indicators	S	Phytoplankton	Periphyton
CYANOPHYTA			
1.Synechococcus aeruginosa Nag.	o-b	D	D
2.Merismopedia glauca (Ehr.) Nag.	b	D	D
3.Merismopedia tenuissima Lemm.	b-a	-	C
4.M.elegans A.Br.	b	C	C
5.Microcystis aeruginosa Woron.	b-o	D	D
6.Aphanothece stagnina (Spreng.) B.-Peters. et Geitl. Emend.	o-b	-	C
7.Gloeocapsa alpina Nag.end. Brend	b	C	D
8.Gl. alpina f.lignicola (Rabenh.) Hollerb.	b	-	+
9.Gl. mimima (Kütz.) Hellerb.	b	+	+
10.Gl. turgida (Kütz.) Hellerb.	o-b	-	+
11.Coelosphaerium Kuetzingiana Kütz.	b	C	+
12.Anabaena Bergii	b	-	+
13.Anabaenopsis Raciborskii Wolosz.	b	C	D
14.Schizothrix sp.	b	-	C
15.Oscillatoria amphibia Ag	b	C	C
16.Osc.brevis Ag.	b	C	-
17.Osc.formosa Bory	a	-	C
18.Osc.geminata (Menegh.) Gom.	b	D	D
19.Osc.limosa Ag.	b-a	-	C
20.Osc.spirulinoides Woronich.	b-a	-	C
21.Osc.planctonica Wolosz.	o- b	D	D
22.Spirulina major Kütz.	b	D	D
23.Sp.laxa Smith.	b	-	C
24.Phormidium ambiguum Gom.	b	-	C
25.Ph.papillaterminatum Kissel.	b	D	D
26.Lyngbya Kuetzingii (Kütz.) Schmidle	b	D	D
27.L.limnetica Lemm.	b	D	D
28.L.martensiana Menegh.	b	C	D
BACILLARIOPHITA			
1.Cyclotella kuetzingiana Thw.	b	C	+
2.C.meneghiniana Kütz	b-a	+	C
3.C.caspia Grun.	a-b	C	-
4.Fragilaria crotonensis Kitt.	o-b	C	C
5.Fr.capucina Desm.	o-b	+	D

Taxa / indicators	S	Phytoplankton	Periphyton
6.Fr.construens (Ehr.) Grun.	b	-	D
7.Synedra acus Kütz.	o-b	-	C
8.S.capitata Ehr.	b	+	+
9.S.minuscula Grun.	a-b	+	C
10.S.tabulata (Ag.) Kütz.	b	-	+
11.S.tabulata v.parva (Kütz.) Grun.	b	+	C
12.S.tabulata v.fasciculata (Kütz.) Grun.	b	+	+
13.S.ulna (Nitzsch.) Ehr.	b	+	+
14.Eunotia arcus Ehr.	o-b	C	D
15.E.gracilis (Ehr.) Rabenh.	o-b	-	C
16.Cocconeis placentula Ehr.	o-b	-	+
17.C.placentula v.euglypta (Herib.et Perag) Cl.	b	-	+
18.Achnanthes hungarica	b	-	+
19.Ach.affinis Grun.	o	-	C
20.Ach.minutissima Kütz.	o-b	-	C
21.Mastogloia Smithii Thw.	b-a	-	+
22.M.Smithii v.amphicephala	b-a	+	+
23.Denticula tenue Kütz.	o	+	+
24.Diploneis Smithii v.pumilla (Grun.) Hust.	b	+	+
25.Navicula atomus (Nag.) Grun.	b	-	+
26.N.anglica Ralf.	b	C	D
27.N.bacillum Ehr.	b-a	-	+
28. N.cryptocephala Kütz.	a-b	+	C
29.N.cryptocephala v. intermedia Grun.	b	+	+
30.N.cryptocephala v.veneta (Kütz.) Grun.	a-b	-	C
31.N.cincta (Ehr.) Kütz.	a-b	-	+
32.N.exiqua (Greg.) O.Mull.	b	C	D
33.N.kolbei Poretzky et Anissimova	b-a	C	C
34.N.Gregaris Donk.	b-a	-	D
35.N.hungarica Grun.	b	-	+
36.N.microcephala Grun.	o-b	-	C
37.N.pupula Kütz.	b	+	+
38.N.protracta v.subcapitata Woronichin	b-a	C	D
39.Pinnularia.viridis (Nitzsch.) Ehr.	b	+	+
40. Gyrosigma scalpoides (Rabenh.) Cl.	b	+	C
41.G.Spenceri (W.S.) Cl.	b	-	C

Taxa / indicators	S	Phytoplankton	Periphyton
42.Tropidoneis Lepidoptera Grun.	b	-	+
43.Amphora veneta Kütz.	b-a	+	C
44.Amp.coffeaformis Ag.	b-a	-	+
45.Cymbella cistula (HEMP.) Grun.	b	+	C
46.C.obtusiuscula (Kütz.) Grun.	a-b	+	C
47.C.pusilla Grun.	a-b	-	+
48.C.tumida (Breb.) V.H.	b	-	+
49.Gomphonema olivaceum (Lyng.) Kütz.	b	+	D
50.G.olivaceum v.calcareum (Ehr.) Kütz.	b	-	C
51.G.parvulum (Kütz.) Grun.	b	-	C
52.Nitzschia amphibia Grun.	b-a	+	-
53.N.apiculata (Greg.) Grun.	a-b	+	+
54.N.capitellata Hust.	b	+	D
55.N.filiformis (W.Sm.) Hust.	b	-	C
56.N.holsatica Hust.	b	+	+
57.N.hungarica Grun.	a	-	+
58.N.obtusa W.Sm.	b	-	C
59.N.palea (Kütz.) Grun.	a	-	+
60. N.paleacea Grun.	b	-	C
61. N.tryblionella Hantzsch.	a-b	+	+
62.N.tryblionella v.levidensis (W.Sm.) Grun.	a-b	-	C
63. N.vermicularis Hust.	b	+	+
64.Cymatopleura solea (Breb.) W.Sm.	b-a	+	+
CHRYSOPHYTA			
1.Dinopryon soliale Ehr.	o	C	-
2.D.divergens Imhof.	o	C	-
3.Chromulina sp.	b	+	-
CRYPTOPHYTA			
Cryptomonas sp. (curvata Ehr.)	b	+	+
DINOPHYTA			
1.Glenodinium borgei (Lemm.) Schiller	b-o	+	+
2.Gl.quadridens (Stein.) Snhiller	b-o	+	-
3.Gl.Penardii Lemm.	b	+	-
4.Gymnodinium aeruginosa	b	-	+
5.Peridinium caudatum (O.F.M.)	b	+	+
6.P.biceps Stein	b-o	+	+

Taxa / indicators	S	Phytoplankton	Periphyton
7.P.biceps f.tabulatum (O.F.M.)	b-o	+	-
8.P.pusillum (Penard.) Lemm.	b	+	-
9.Ceratium hirundinella (O.Mull.) Schrank	o-b	+	-
XANTHOPHYTA			
1.Vaucheria geminate Klebs.	b	-	C
2.Tribonema sp.	b	C	D
CHLOROPHYTA			
1.Kirchneriella lunaris	b-o	+	-
2.Chlorococcum sp. (humicola?)	b	+	+
3.Ch.turgida	b	-	+
4.Chlorella sp.	b-a	+	+
5.Oocystis natans Lemm.	b	+	+
6.Oocystis sp. (marssonii?)	b	-	+
7.Chlamidomonas sp.	b	+	-
8.Ch.ovale	b	+	-
9.Carteria Klebsi	b-a	C	-
10.Dunaliella sp.	b-a	+	-
11.Cosmarium formulosum Hofm.	b	+	C
12.C.granatum Ralfs.	b	+	+
13.C.ornatum	b	-	+
14.Scenedesmus quadricauda (Turp.) Breb.	b	-	+
15.Sc.perforatus Chodat	b	-	+
16.Tetraedron minimum Hansg.	b	+	+
17.Dictyosphaerium ehrenbergianum Naeg.	b	+	-
18.algae sp.	b	C	-
Total		77	110
Consumers:			
1.Amoeba proteus	b-a	-	+
2.Colurella uncinata	b-a	+	+
3.Chilodonella uncinata	b-a	-	+
4.Cephalodella gibba	b	-	+
5.Lecane ovalis	b	+	
6.Rotaria rotatoria	a-b	+	+
7.Nematoda gen.sp.	a	+	C
8.Chironomidae gen.sp.	a	+	+
Deconsumers:			

Taxa / indicators	S	Phytoplankton	Periphyton
Bacterium sp.	a	-	+
Pelonema subtilissima	a-b	-	-
Sphaerotilus dichotomus	a-b	-	+

Legend: S - saprobity of organisms; + - single occurrence; C - subdominants; D - dominants

Based on the results obtained on the indicators of summer periphyton, the following conclusions can be drawn:

dominant algological complex of phytoplankton and periphyton communities is most diversely represented, first of all, by producers: diatoms, blue-green and green algae. Dinophytic, golden, cryptophytic, and yellow-green algae were observed with a low abundance.

Aquatic biocenoses of the reservoir investigated area are mainly represented by o-b-, b-, b-a-mesosaprobic species of organisms.

The water quality corresponds mainly to class III (moderately polluted waters), which is associated with pollution and a slight increase in mineralization. The values of the biotic periphyton index (BPI) are mainly 6 points, IS - 1.90, ecological state - AB (satisfactory ecological state, characterized by metabolic and ecological progress of biocenoses).

9.4.4 Aquatic Sensitive Receptors

The terrestrial sensitive receptors are given in Table 127 and Table 109 and the details are explained in Section 9.5.

Table 127: Aquatic Sensitive Receptors

Receptor	Sensitivity	Justification
Water Quality and Ecological Conditions	Medium	<p>The water quality corresponds to class III (moderately polluted waters), which is associated with pollution and a slight increase in mineralization. The characteristics of the ecological invariant states of biocenose is AB - satisfactory ecological state, characterized by metabolic and ecological progress of biocenoses.</p> <p>Zooplankton types are the common heat-loving species – indicators of moderately polluted waters equal β-o saprobe area (an area of weak and moderate pollution). Zooplanktone biomass level is which is characteristic of water with insufficient q-ty of biogenic substances and underdevelopment of zooplanktonic species.</p>

Receptor	Sensitivity	Justification
Ichthyofauna	Medium	The species found in the sample are widespread, the dominant species are indicators of moderately polluted waters. Two fish species is listed as vulnerable in the Uzbekistan Red book. The current fish fauna of the water reservoir has been formed by that of the Surkhandarya river. Consequently, irrespective of the damage as a result of construction, all fish type can be recovered.
Ecosystem Services	Medium	There are ecosystem services used by the local communities such as, fishing, watering animals, usage as recreation and tourism area. The area is also used to water sources both wild and domestic animals.

9.5 Preliminary Critical Habitat Assessment

9.5.1 The Critical Habitat Assessment Process

The CHA process assesses the importance of a defined area to one or more biodiversity receptors that meet the requirements of IFC PS-6 in terms of Critical Habitat or Priority Biodiversity Features determination.

Determining the presence of Critical Habitat/Priority Biodiversity Features is a process that is explicitly separate from any consideration of a project's impacts, mitigation strategy, etc. The only influence of a project on the CHA process is for identification of the location and extent of the area to be assessed. This is determined by the Project's Area of Influence (AoI).

To assist with the determination of Critical Habitat or Priority Biodiversity Features, the guidance and threshold criteria described within IFC PS-6 has been followed.

PS-6 defines two sets of criteria for use in defining Critical Habitats or Priority Biodiversity Features.

These are as follows:

Critical Habitat

- (i) highly threatened or unique ecosystems;
- (ii) habitats of significant importance to endangered or critically endangered species;
- (iii) habitats of significant importance to endemic or geographically restricted species;
- (iv) habitats supporting globally significant migratory or congregatory species;
- (v) areas associated with key evolutionary processes; or
- (vi) ecological functions that are vital to maintaining the viability of the above biodiversity

features.

Priority Biodiversity Features

- (i) threatened habitats;
- (ii) vulnerable species;
- (iii) significant biodiversity features identified by a broad set of stakeholders or governments (such as Key Biodiversity Areas or Important Bird Areas); and ecological structure and functions needed to maintain the viability of priority biodiversity features described above.

The triggering of anyone (or more) of the above will result in Critical Habitat being classified (as such, features being considered against the above criteria are referred to as potential Critical Habitat or Priority Biodiversity Feature 'triggers'). Each category also has a corresponding Priority Biodiversity Feature threshold. These thresholds are referenced within the assessment where appropriate.

STEP 1 – Define the Study Area

Under the requirements of PS-6, it is necessary for an appropriately defined area to be assessed for the presence of Critical Habitat. This is referred to in a number of ways; international guidance documents make reference to an 'ecological appropriate area of assessment' (EAAA), which is the wider distribution of a feature or receptor (often at a landscape level) within which there is connectivity between the ecological process that supports the feature or receptor. The EAAA is used throughout this report as the basis for the application of each of the criteria thresholds in order to determine Critical Habitat (or Priority Biodiversity Feature) EAAA.

Defining an appropriate EAAA is an important step in the CHA process as it ensures assessment of an ecologically relevant feature/area, rather than an area influenced only by the project footprint. It also has inherent appreciation of ecological function across an area, and therefore avoids the risk of considering the specific areas in which a Critical Habitat trigger may be present discontinuously or seasonally.

EAAAs should be identified separately for each individual biodiversity receptor being assessed during the CHA process.

Step 2 – Stakeholder Consultation and Initial Desktop Review Of Available Data

Step 2 is designed to identify features that may trigger Critical Habitat – the screening process. This is done through consultation with relevant stakeholders and a review of readily available data and published literature. At this stage, use of the Integrated Biodiversity Assessment Tool (IBAT)7 is recommended.

Step 3 – Verification of Available Information

This includes fieldwork and engagement with relevant stakeholders/specialists.

Step 4 – Confirmation of Biodiversity

This comprises review of confirmed biodiversity against the Critical Habitat (and Priority Biodiversity Features) criteria.

Step 5 – Determination of Critical Habitat Status

This comprises concluding remarks against each EAAA regarding Critical Habitat status, based upon Steps 1-4 above.

Critical Habitat Criteria

Assessment of each biodiversity receptor against the Critical Habitat (and associated Priority Biodiversity Feature) criteria makes use of both qualitative and quantitative thresholds. These are detailed within below.

Table 128 Criteria and Conditions for Identifying Priority Biodiversity Features and Critical Habitats

Criterion	Priority Biodiversity Feature	Critical Habitat
1. Priority Ecosystems		
1i Threatened ecosystems		
a) Resolution 4 of Bern Convention (signatory nations only) b) IUCN Red-List EN or CR ecosystems	EAAA is habitat type listed in Annex 1 of EU Habitats Directive or Resolution 4 of Bern Convention b) EAAA < 5% of the global extent of an ecosystem type with IUCN status of CR or EN	a) EAAA is habitat type listed in Annex 1 of EU Habitats Directive marked as "priority habitat type" b) EAAA ≥ 5% of global extent of an ecosystem type with IUCN status of CR or EN c) EAAA is ecosystem determined to be of high priority for conservation by national systematic conservation planning
2. Priority Ecosystems		
2i Threatened species		
a) Species and their habitats listed in EU Habitats Directive and Bern Convention (signatory nations only) b) IUCN Red List EN or CR species	a) EAAA for species and their habitats listed in Annex II of Habitats Directive, Annex I of Birds Directive, or Resolution 6 of Bern Convention b) EAAA supports < 0.5% of global population OR < 5	a) EAAA for species and their habitats listed in Annex IV of the Habitats Directive b) EAAA supports ≥ 5% of the global population AND ≥ 5% reproductive units of a CR or EN species

Criterion	Priority Biodiversity Feature	Critical Habitat
c) IUCN Red List VU species d) Nationally or regionally listed EN or CR species	reproductive units of a CR or EN species. c) EAAA supports VU species d) EAAA for regularly occurring nationally or regionally listed EN or CR species	c) EAAA supports globally significant population of VU species necessary to prevent a change of IUCN Red List status to EN or CR, and satisfies threshold (b) d) EAAA for important concentrations of a nationally or regionally listed EN or CR species
2ii Range-restricted species		
	a) EAAA for regularly occurring range-restricted species	a) EAAA regularly holds $\geq 10\%$ of global population and ≥ 10 reproductive units of the species
2iii Migratory and congregatory species		
	a) EAAA identified per Birds Directive or recognized national or international process as important for migratory birds (esp. wetlands)	a) EAAA sustains, on a cyclical or otherwise regular basis, $\geq 1\%$ of the global population at any point of the species' lifecycle b) EAAA predictably supports $\geq 10\%$ of global population during periods of environmental stress

Critical Habitat Determination

Determining the Candidate List Of Biodiversity Receptors

This CHA focusses on biodiversity receptors identified during the baseline data collection process, which are considered to have the potential to trigger Critical Habitat or Priority Biodiversity Features. These biodiversity receptors are listed in Table 129 together with reason for their inclusion/exclusion. Table 129 provides a candidate list based upon relevant published literature/information, together with the application of internationally recognized expertise, relevant to the region and prevailing habitats. An assessment of Critical Habitat against each of the 'screened in' candidate species is provided below.

Table 129 Observation of the Species

Biodiversity Value	Scientific Name	IUCN CR	IUCN EN	IUCN VU	Other Listing (UZ RDB)	Screening Comments	CH/PBF Criteria
Plant	<i>Allium rhodanthum</i>				1 (CR)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods.	-
Plant	<i>Dipcadi turkestanicum</i>				0 (EX)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods.	-
Plant	<i>Oligochaeta vvedenskyi</i>				3 (NT)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods.	-
Central Asian tortoise	<i>Testudo horsfieldii</i>			X	2(VU)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods.	-
Radde's toad-headed agama	<i>Phrynocephalus raddei boettgeri</i>				2(VU:D)	Screened in: species was observed in project area	_
Black-ocellated racerunner	<i>Eremias nigrocellata</i>				2(VU:D)	Screened in: species was observed in project area	-

Biodiversity Value	Scientific Name	IUCN CR	IUCN EN	IUCN VU	Other Listing (UZ RDB)	Screening Comments	CH/PBF Criteria
Caspian Monitor	<i>Varanus griseus caspius</i>				2(VU:D)	Screened in: species was observed in project area	-
Tatary sand boa	<i>Eryx tataricus</i>				3 (NT)	Screened in: species was observed in project area	-
Indian gamma snake	<i>Boiga trigonata melanocephala</i>				2(VU:R)	Screened in: species was observed in project area	-
Northern wolfsnake	<i>Lycodon striatus bicolor</i>				2(VU:R)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods. However, encounters along the Zang Canal are possible.	-
Central Asian cobra	<i>Naja oxiana</i>				3 (NT)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods. However, encounters along the Zang Canal are possible.	-
Mute Swan	<i>Cygnus olor</i>				3 (NT)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods.	-



Biodiversity Value	Scientific Name	IUCN CR	IUCN EN	IUCN VU	Other Listing (UZ RDB)	Screening Comments	CH/PBF Criteria
						However, rare encounters are possible in winter.	
Lesser White-fronted Goose	<i>Anser erythropus</i>			X	2(VU:R)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods. However, rare encounters are possible in winter.	-
Red-breasted Goose	<i>Branta ruficollis</i>			X	2(VU:R)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods. However, rare encounters are possible in winter.	-
Marbled Teal	<i>Marmaronetta angustirostris</i>			X	1 (EN)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods.	-
Common Pochard	<i>Aythya ferina</i>			X		Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods. However, rare encounters during seasonal migrations are possible.	-

Biodiversity Value	Scientific Name	IUCN CR	IUCN EN	IUCN VU	Other Listing (UZ RDB)	Screening Comments	CH/PBF Criteria
Ferruginous Duck	<i>Aythya nyroca</i>				2(VU:D)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods. However, rare encounters during seasonal migrations are possible.	-
Great White Pelican	<i>Pelecanus onocrotalus</i>				2(VU:D)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods. However, rare encounters during seasonal migrations are possible.	-
Dalmatian Pelican	<i>Pelecanus crispus</i>				1 (EN)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods. However, rare encounters during seasonal migrations are possible.	-
Pygmy Cormorant	<i>Phalacrocorax pygmeus</i>				3 (NT)	Screened in: species was observed in project area	-
Squacco Heron	<i>Ardeola ralloides</i>				2(VU:R)	Screened out: This species was not observed in the project area or in its vicinity during surveys	-

Biodiversity Value	Scientific Name	IUCN CR	IUCN EN	IUCN VU	Other Listing (UZ RDB)	Screening Comments	CH/PBF Criteria
						in the spring and summer periods. However, rare encounters during seasonal migrations are possible.	
Little Egret	<i>Egretta garzetta</i>				2(VU:D)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods. However, rare encounters during seasonal migrations are possible.	-
Black Stork	<i>Ciconia nigra</i>				2(VU:R)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods. However, rare encounters during seasonal migrations are possible.	-
White Stork	<i>Ciconia ciconia</i>				3 (NT)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods. However, rare encounters during seasonal migrations are possible.	-

Biodiversity Value	Scientific Name	IUCN CR	IUCN EN	IUCN VU	Other Listing (UZ RDB)	Screening Comments	CH/PBF Criteria
Glossy Ibis	<i>Plegadis falcinellus</i>				2(VU:D)	Screened in: species was observed on project area	-
Lesser Kestrel	<i>Falco naumanni</i>				3 (NT)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods. However, rare encounters during seasonal migrations are possible.	-
Saker Falcon	<i>Falco cherrug</i>		X		1 (EN)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods.	-
Peregrine Falcon	<i>Falco peregrinus</i>				2(VU:R)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods.	-
Barbary Falcon	<i>Falco pelegrinoides</i>				2(VU:R)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods.	-
Osprey	<i>Pandion haliaetus</i>				2(VU:R)	Screened out: This species was not observed in the project area or in its vicinity during surveys	-

Biodiversity Value	Scientific Name	IUCN CR	IUCN EN	IUCN VU	Other Listing (UZ RDB)	Screening Comments	CH/PBF Criteria
						in the spring and summer periods. However, rare encounters during seasonal migrations are possible.	
Pallas's Fish-eagle	<i>Haliaeetus leucoryphus</i>		X		1 (EN)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods. However, rare encounters are possible in winter.	-
White-tailed Sea-eagle	<i>Haliaeetus albicilla</i>				2(VU:R)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods. However, rare encounters are possible in winter.	-
Griffon Vulture	<i>Gyps fulvus</i>				2(VU:D)	Screened in: species was observed on project area	-
Cinereous Vulture	<i>Aegypius monachus</i>				3 (NT)	Screened in: species was observed on project area	-
Bearded Vulture	<i>Gypaetus barbatus</i>				2(VU:R)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods.	-

Biodiversity Value	Scientific Name	IUCN CR	IUCN EN	IUCN VU	Other Listing (UZ RDB)	Screening Comments	CH/PBF Criteria
Egyptian Vulture	<i>Neophron percnopterus</i>		X		2(VU:D)	Screened in: species was observed close to project area	-
Short-toed Snake-eagle	<i>Circaetus gallicus</i>				2(VU:D)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods. However, rare encounters during seasonal migrations are possible.	-
Pallid Harrier	<i>Circus macrourus</i>				3 (NT)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods. However, rare encounters during seasonal migrations are possible.	-
Greater Spotted Eagle	<i>Aquila clanga</i>			X	2(VU:R)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods. However, rare encounters during seasonal migrations are possible.	-
Steppe Eagle	<i>Aquila nipalensis</i>		X		2(VU:D)	Screened out: This species was not observed in the project area or in its vicinity during surveys	-



Biodiversity Value	Scientific Name	IUCN CR	IUCN EN	IUCN VU	Other Listing (UZ RDB)	Screening Comments	CH/PBF Criteria
						in the spring and summer periods. However, rare encounters during seasonal migrations are possible.	
Eastern Imperial Eagle	<i>Aquila heliaca</i>			X	2(VU:D)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods. However, rare encounters during seasonal migrations are possible.	-
Golden Eagle	<i>Aquila chrysaetos</i>				2(VU:R)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods.	-
Little Bustard	<i>Tetrax tetrax</i>				2(VU:D)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods. However, rare encounters are possible in winter.	-
Black-tailed Godwit	<i>Limosa limosa</i>				2(VU:D)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods.	-

Biodiversity Value	Scientific Name	IUCN CR	IUCN EN	IUCN VU	Other Listing (UZ RDB)	Screening Comments	CH/PBF Criteria
						However, rare encounters during seasonal migrations are possible.	
Pallas's Gull	<i>Larus ichthyaetus</i>				2(VU:D)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods. However, rare encounters are possible in winter.	-
European Turtle-dove	<i>Streptopelia turtur</i>				2(VU:D)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods.	-
Hemprich's Long-eared Bat	<i>Otonycteris hemprichi</i>				2(VU:R)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods.	-
Corsac Fox	<i>Vulpes corsak turkmenicus</i>				2(VU:D)	Screened in: species was observed on project area	-
Marbled Polecat	<i>Vormela peregusna</i>			X	2(VU:D)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods.	-

Biodiversity Value	Scientific Name	IUCN CR	IUCN EN	IUCN VU	Other Listing (UZ RDB)	Screening Comments	CH/PBF Criteria
Central Asian Otter	<i>Lutra lutra seistanica</i>				1(EN)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods.	-
Striped Hyena	<i>Hyaena hyaena</i>				1(CR)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods.	-
Sand Cat	<i>Felis margarita</i>				3(NT)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods.	-
Caracal	<i>Caracal caracal michaelis</i>				1(CR)	Screened out: This species was not observed in the project area or in its vicinity during surveys in the spring and summer periods.	-

In accordance with the PS-6, Conditions for Working within Critical Habitat criteria, Critical Biodiversity Areas are also subject to Priority Biodiversity Feature and Critical Habitat if they are located within a 30 km radius of the project area.

Within a 30 km radius of the Project area: IBA Amudarya Floodplain near Termez, IBA Aktepe and Three Lakes, KBA Khaudagtau UZB035, as well as isolated Kattakum sands that do not have a protected status, but have a high level of biodiversity, including endemic subspecies of plants and animals (see Figure 87).

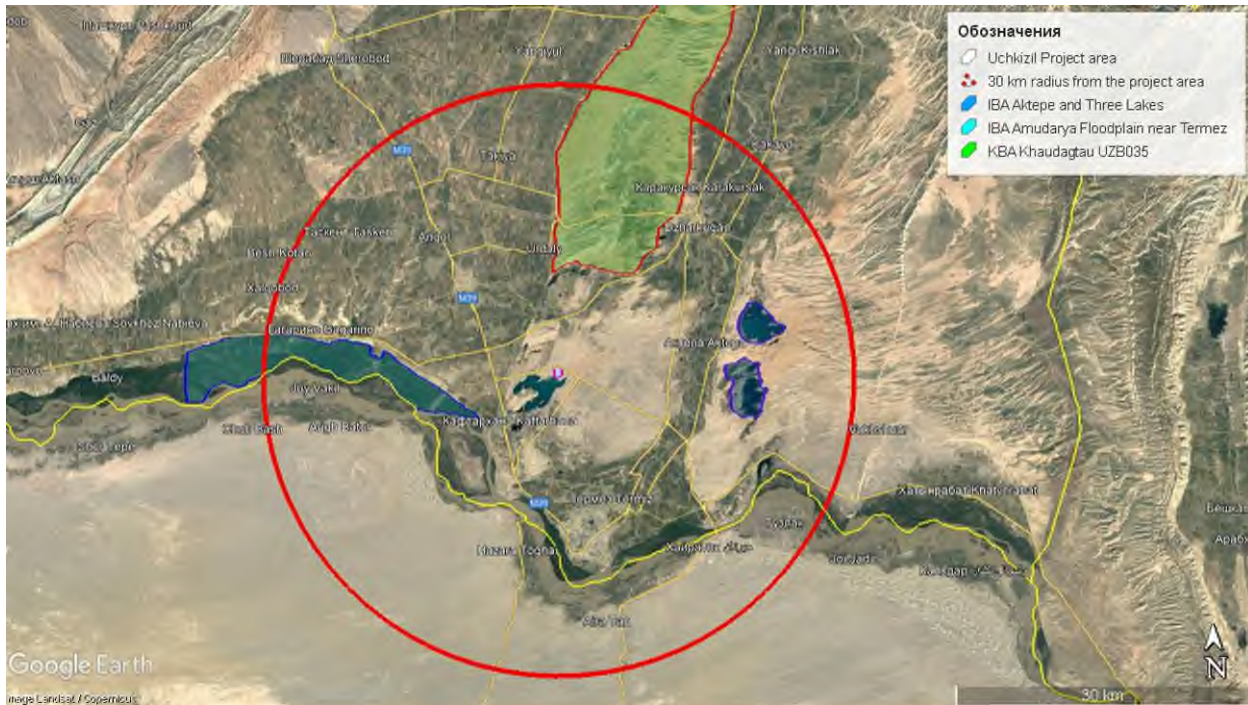


Figure 87: Critical areas for biodiversity within a 30 km radius of the project area

Table 130 The most numerous bird species visiting IBA Amudarya Floodplain near Termez and their maximum number

Species	Current IUCN Red List Category	Season	Year(s) of estimate	Population estimate	IBA Criteria Triggered
Greylag Goose <i>Anser anser</i>	LC	winter	2003-2005	5,942-31,010 adults	A4i
Lesser White-fronted Goose <i>Anser erythropus</i>	VU	winter	2003-2005	54-500 adults	A1, A4i
Marbled Teal <i>Marmaronetta angustirostris</i>	VU	passage	2001-2005	100 individuals	A1, A4i
Mallard <i>Anas platyrhynchos</i>	LC	winter	2003-2005	5,728-15,781 adults	A4i
Demoiselle Crane <i>Anthropoides virgo</i>	LC	passage	2005	140-1,500 adults	A4i

Species	Current IUCN Red List Category	Season	Year(s) of estimate	Population estimate	IBA Criteria Triggered
Common Crane <i>Grus grus</i>	LC	winter	2001-2005	6,010-22,169 adults	A4i
Little Bustard <i>Tetrax tetrax</i>	NT	winter	2003-2005	150-2,000 adults	A1
Great Cormorant <i>Phalacrocorax carbo</i>	LC	winter	2003-2005	9-2,211 individuals	A4i
Eastern Imperial Eagle <i>Aquila heliaca</i>	VU	winter	2005	6 individuals	A1
Saker Falcon <i>Falco cherrug</i>	EN	resident	2005	common	A1
A4iii Species group - waterbirds	n/a	winter	2003-2005	39,811-68,881 individuals	A4iii

Table 131: The most numerous bird species visiting IBA Aktepe and Three Lakes and their maximum number

Species	Current IUCN Red List Category	Season	Year(s) of estimate	Population estimate	IBA Criteria Triggered
Great Crested Grebe <i>Podiceps cristatus</i>	LC	winter	2003-2006	20-357 adults	A4i
Pygmy Cormorant <i>Microcarbo pygmaeus</i>	LC	winter	2003-2006	167-751 adults	A4i
Great Cormorant <i>Phalacrocorax carbo</i>	LC	winter	2003-2006	444-2,687 adults	A4i
European Roller <i>Coracias garrulus</i>	LC	breeding	2006	30 adults	A1

Species	Current IUCN Red List Category	Season	Year(s) of estimate	Population estimate	IBA Criteria Triggered
A4iii Species group - waterbirds	n/a	winter	2003-2004	21,267-26,354 individuals	A4iii

Table 132: IBA Amudarya Floodplain near Termez

Factor	Description
Species Conservation Status	International Bird Area
Receptor EAAA	Protected area site boundary. See Figure 80
Summary Description	<p>The IBA is situated 23 km to the NW of Termez town, in the first floodplain terrace of the Amudarya river between Kaptarhona and Sholiker villages (on the border with Afghanistan). It is 1.5-6 km wide and about 30 km long. The Amudarya river is on the south and south-west boundary, less precipices which border the first and second floodplain terraces, waterlogged areas and reedbeds are the natural borders of the site. There are also rice and winter wheat fields, sandbanks, rivers, stream, marshes, canals and roads. bird list of this region is about 230 species. Winter IBA surveys in 2003-2005 recorded 59 species, including the globally threatened <i>Pelecanus crispus</i>, <i>Anser erythropus</i>, <i>Aythya nyroca</i>, <i>Aquila clanga</i>, <i>Aquila heliaca</i> and <i>Tetrax tetrax</i>. <i>Phalacrocorax pygmaeus</i>, <i>Ciconia nigra</i>, <i>Ciconia ciconia</i>, <i>Haliaeetus albicilla</i>, <i>Aquila chrysaetos</i> and <i>Aquila nipalensis</i> are included in the National Red Data Book. This site is internationally important for wintering and migratory waterbirds. 55,868 birds of 30 species wintering here in 2003-2004. The data presented below are relevant for 2001-2005. The dominant species were:</p> <p><i>Anser anser</i> - 31,010 individuals ($\geq 1\%$ of the global population - $1\% = 10\,000 - 11\,000$ in)</p> <p><i>Anser erythropus</i> - 54-500 individuals ($\geq 1\%$ of the global population - $1\% = 240 - 400$ in)</p> <p><i>Grus grus</i> - 6,010-22,169 individuals ($\geq 1\%$ of the global population - $1\% = 4910 - 5030$ in)</p> <p><i>Tetrax tetrax</i> - 2000 individuals ($\geq 1\%$ of the global population - $1\% = 1000 - 4999$ in)</p> <p>Species group – waterbirds - 21,267-26,354 individuals</p>
Assessment	Given the data in the table for records of some bird species in the IBA Amudarya Floodplain near Termez, the number of migratory waterfowl would fit under category 2iii(a) Critical Habitat, but such concentrations of specific bird species are not regularly observed.

Factor	Description
	Therefore, IBA Amudarya Floodplain near Termez is not considered of sufficient value for it to qualify as Critical Habitat under Criterion 2iii. But IBA Amudarya Floodplain near Termez is considered of sufficient value for it to qualify as a Priority Biodiversity Feature under Criterion 2iii (a).

Table 133: IBA Aktepe and Three Lakes

Factor	Description
Species Conservation Status	International Bird Area
Receptor EAAA	Protected area site boundary. See Figure 80
Summary Description	<p>Aktepe Reservoir, and adjoining lakes, are situated in the south of Uzbekistan, 22-25 km NE of the town of Termez and 7 km SE of the town of Jarkurgan, in the valley of the River Surkhandarya. It is situated in the sandy desert on the border of developed land. The area is hilly and the coastline is indented; in some places, it is precipitous. There are three islets with precipitous shores in the reservoir. Around the reservoir, there are shoreline thickets of reed, tugai forest and a sandy desert. A small canal flows into the SE part of the reservoir, feeding it with the water from the Amuzang canal. The average depth is 6.5 m. The water flow is regulated. There is a wastewater canal in the SE part of the reservoir. There is a chain of small lakes situated 7 km to the south of the reservoir, which include the so-called Three Lakes. The water level and salinity in these lakes have not been studied. In winter, these water bodies are not frozen. It is suggested that the IBA will include two sites.</p> <p>In recent years, 96 species (mainly waterbirds) have been recorded in the IBA area during winter and breeding. Aktepe together with adjoining lakes is of high importance for wintering birds. Winter counts (2003-2006) resulted in the record of 55 avian species. There are 34 species of waterbirds among them. Six species included in the IUCN Red List are included, namely, <i>Pelecanus crispus</i>, <i>Marmaronetta angustirostris</i>, <i>Aythya nyroca</i>, <i>Haliaeetus leucoryphus</i>, <i>Aquila heliaca</i> and <i>Tetrax tetrax</i>. During the 2006 summer survey (7 to 10 June 2006), 69 species were recorded, of which 3 species are included in the IUCN Red List: <i>Marmaronetta angustirostris</i>, <i>Aythya nyroca</i> and <i>Coracias garrulous</i>, as well as 4 species representing the biome 4b: <i>Caprimulgus aegyptius</i>, <i>Hippolais rama</i>, <i>Parus bokharensis</i>, and <i>Emberiza bruniceps</i>. Five globally endangered species were recorded there but in low numbers <i>Marmaronetta angustirostris</i> and <i>Aythya nyroca</i> are thought to be nesting in summer. <i>Coracias garrulus</i> is a common nesting species in this area. <i>Falco cherrug</i> and <i>Falco pelegrinoides</i> regularly visit the BOT area from adjoining territories for hunt. A flock of 30 <i>Tetrax tetrax</i> individuals was recorded in the neighboring fields in the spring 2005.</p> <p>See Table 131: The most numerous bird species visiting IBA Aktepe and Three Lakes and their maximum number</p>
Assessment	The IBA does not support sufficient numbers of any single species to qualify as Critical Habitat under Criterion 4(a), with none of the IBA qualifying species' populations reaching 1% of the global population. The waterbirds assemblage at the IBA has been recorded as exceeding the waterbird assemblage threshold for Ramsar designation (20,000 or more waterbirds, under Ramsar selection criterion 5) within single years (such as 2003 and

Factor	Description
	<p>2005); however, numbers within the last three years (potentially longer) have not exceeded this threshold. When considering the requirement for Ramsar designation under (Ramsar selection) Criterion 5 is for sites that '...regularly support 20,000 or more waterbirds.', and that 'regularly' in this context equates to two-thirds (or more) of seasons, then it is concluded that this site does not currently meet the threshold of Ramsar selection Criterion 5.</p> <p>The IBA Aktepe and Three Lakes is therefore not considered of sufficient value for it to qualify as Critical Habitat under Criterion 2iii.</p> <p>The IBA Aktepe and Three Lakes is therefore considered of sufficient value for it to qualify as a Priority Biodiversity Feature under Criterion 2iii.</p>

KBA Khaudagtau UZB035 does not meet any criteria, despite the fact that it is inhabited by many species of animals and plants, including endemic subspecies. However, these subspecies have a low conservation status in the local Red Book and low status in the IUCN Red List. It should be noted that the IUCN Red List does not consider the degree of threat to subspecies. Despite this, it should be noted that it is anticipated that the project will not have adverse impact on the KBAs, both during construction and during the operational phase..

Conclusions

- In accordance with the outcomes of the 2 site surveys (summer and spring), none of the species encountered meet the criteria for CHA.
- Neophron percnopterus, which temporarily visits the Project area in search of food, since there is a household waste dump near the project area, also does not meet the criteria for CHA, since its number is less than 0.5% of the global population.
- There are no nesting sites for the Egyptian Vulture in the project area.
- The project area is not located in protected natural areas, however, within a 30 km radius there are 2 IBAs that meet the 2iii (a) Priority Biodiversity Feature criteria and 1 KBA that does not meet the Critical Habitat and Priority Biodiversity Feature criteria.
- The rest of the plant and animal species that we found in the project area included in the national red book of the Republic of Uzbekistan (2019) have local conservation statuses NT and VU - which does not meet the CHA criteria.
- Animal species from literary sources that have high IUCN Red List statuses and meet CHA criteria is not encountered during site surveys.

9.6 Potential Impacts, Mitigation, Management & Residual Impact

This section assesses the potential impacts on terrestrial ecology that may occur as a result of the Project construction and operational activities and identifies recommended measures that can be implemented in order to mitigate and manage such impacts.

9.6.1 Construction Phase

Loss of Habitat/Habitat Fragmentation

The impact is generally direct as habitat will be lost through construction activities and this could include direct destruction of flora or damage to fauna habitat. The natural vegetation at the Project site has been substantially altered by human activities, especially farming. Based on the site survey observation, there are limited flora diversity in the Project area and it should be noted that 1/3 of the Project area is already under anthropogenic effect. In addition, there exist similar habitats around the Project area. Hence, it is not considered as a sensitive area.

Inadequate storage and handling of hazardous materials, and inappropriate design and storage of wastes could result with contamination of soils and groundwater which may also attract pest species and potential for disease. Pests may also be attracted to site by the accumulation of wastes (particularly domestic food wastes) if these are not stored and disposed of appropriately.

Loss of Flora

The desk study indicates that mainly common species of flora are present in the project effected area. These are generally considered to be of low conservation value and of low sensitivity. Impacts on these locally important species are considered to be minor adverse in magnitude and the likely effects are assessed as negligible. Although field surveys were conducted in spring and summer periods, additional field survey is recommended to be carried out in autumn to catch appropriate vegetation periods for some species such as saltworts.

Micro survey will be conducted prior to site clearance. The EPC contractor should be educated about these rare plant species with photos and report to site Environmental Specialist and authority for transplanting of such plants, if observed.

Disturbance of Nature Conservation Areas

The risk of designated conservation areas being affected during operation is considered to be negligible given the distance to the Project area. Project impacts on protected areas during operation are therefore not expected to cause any significant effect.

Disturbance of Fauna

The reservoir is an important source of water supply for fauna species. However, it is possible to say that the impact on these species will be low due to the fact that similar habitats cover very large areas in the region and the ease of movement of large and medium mammal species. The generated noise due to construction activities, machinery and working personnel will have a negative impact on large and medium-sized mammals, the noise will scare them away. Light pollution will also deter these animals, which may affect their ability to access the reservoir and use some of it as a watering hole.



Therefore, noise and light pollution will be minimized by applying noise reducing mitigation measures (see Section 7) and by adopting illumination measures and minimizing the construction activities at night time.

In addition, while small fauna species (such as small mammals and reptiles) will be disturbed due to clearing and excavation of the area, The temporary noise and vibration and dust deposition during construction will affect the adjacent habitats. Movement of vehicles and heavy machinery within the Project area as well as the site clearance and excavation could potentially cause direct mortality of some fauna species such as reptile species. .

In the project area, part of the reptiles, i.e. some species of *Eremias*, *Phrynocephalus* and colubrid snakes have a hibernation period between the end of October and February. Whereas other species such as *Varanus griseus caspius*, *Naja oxiana*, *Boiga trigonata melanocephala* have a hibernation period between August-September and end of April. The Central Asian tortoise is active only a few months a year. It leaves the state of hibernation in early March, and leaves for estivation, which usually goes into hibernation by the end of May. As a result, the best time to relocate reptiles from the project area is from mid-April to the end of May.

Prior to construction, micro-route survey is recommended to be conducted for reptile species and experts will move them outside the project area before the site clearance. The micro-route survey will also assess the impacts along internal temporary and permanent access roads.

Increased risk of local pollution events due to use of construction vehicles affecting adjacent habitats and local changes in air quality resulting from construction activities and increased vehicle movements through the area may occur.

The area contains many reptilian species and three of them (*Testudo horsfieldii*-Potential, *Phrynocephalus raddei boettgeri*-observed, *Eremias nigrocellata*-observed), are in the vulnerable category in the Uzbekistan Red List on which the construction activities may have significant impacts. In order to minimize the impacts on these species, closed zones shall be allocated for these species in the long term within the Project area. As mentioned earlier, the project facilities will not occupy the entire Project area and there will be suitable habitats for these species. The Project Company will also monitor these species not only during construction but also in operation period.

Also, one of the effective methods of preserving the biodiversity of reptiles is the creation or support of centers for the rehabilitation and breeding of reptiles - to create a stable population in captivity with the subsequent settlement of a part of the bred individuals in a certain area.

Disturbance of Avifauna

The state of the habitats of the project area has already been significantly influenced by human activities, and at the moment it is unattractive for birds. On the other hand, Project area is located nearly 10 km from two international bird area. Therefore, Uchkizil can potentially also attract them due to the water surface, food and as a recreation area. Nesting biotope is absent on the open banks of the Uchkizil, therefore, it is not expected to be nesting of water birds in the project area but the region is of particular importance for the wintering. These impacts are considered direct and permanent.

Accidental Loss of Fauna

Movement of vehicles and heavy machinery within the Project site as well as the site clearance and excavation could potentially cause direct mortality of fauna species such as reptiles. Also, Access to the construction area and displacements from various field activities increase the risk of accidents for small species.

Introduction of Alien Species

Accidental introduction and dispersal of invasive species from construction activities may occur.

Damage to Aquatic Ecosystem/Loss of Habitat

The sensitivity of these species to pollution is not considered to be medium. But there is a risk that to be high with the cumulative effects. Especially in the event of a spillage, the effects may change from moderate to high.

Excavation works may result in a temporary disturbance to aquatic fauna through noise and vibration originating from the excavation activities. Fish, frogs, and water snakes are likely to be the most sensitive receptors to the noise and vibration. The main response of the fish and other species to noise levels is typically avoidance. Therefore, during noise creating activity it is probable that these fauna species would move away from the immediate source of the noise.

During commissioning, the hydro testing and steam cleaning will require 89,000 m³ water. The water will also be used in the operation phase. On the other hand, a small amount of treated blowdown water will be discharged back to Uchkizil Reservoir. Therefore, there will be no significant impact on the aquatic environment. .

If the Project area is not properly graded and no erosion barriers are installed, then runoff composed of sediment and organic material may be washed into the reservoir and potentially compromise the water quality.

Barrier Effects on Fauna

The main natural biotopes are located to the east of the project area. Whereas in the west of the Project area, there are agricultural lands and settlements. Thus, the project area does not break any natural biotopes and migration corridors are not disturbed due to construction and operation activities of the project. Therefore, the project will not have barrier effect for reptiles and mammal. On the other hand, limited construction activities regarding the water intake in Uchkizil reservoir may have temporary indirect barrier impact on bird species.

Loss of Ecosystem Services

There are ecosystem services used by the local communities such as grazing and browsing by domestic animals, fishing and usage the area as recreational. However, such impact will be limited to the Project site.

Apart from these, a Biodiversity Management Plan shall be prepared by the EPC contractor prior to the site clearance. The Project Company will include binding conditions in the EPC contract to prepare such plans.



Table 134: Impacts Significance of the Ecology during Construction Phase

Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
Loss of Habitat/Habitat Fragmentation (Terrestrial)	Flora	Medium	Medium	Moderate	All areas to be cleared should be precisely demarcated and work carried out only within those areas to decrease the disturbance. A Biodiversity Management Plan shall be prepared by the EPC contractor prior to the site clearance. Site clearance should avoid hibernation period. The best time to relocate reptiles from the project area is from mid-April to the end of May. Minimise permanent and temporary land take for civil works, clearaminince restricted to work sites. Prior to construction, micro-route survey for flora and fauna species is recommended to be conducted for reptile species and experts will move them outside the project area before the site clearance. The micro-route survey will also assess the impacts along internal temporary and permanent access roads. Additional site survey shall be performed during the appropriate vegetation period (September) for especially saltwort species Additional site survey for bird species during migratory season Closed zones shall be allocated for vulnerable reptile species in the long term within the Project area. Hazardous materials used during the construction stage shall be adequately managed, in order to minimise the potential risk of spillage and therefore potential contamination of the ecosystem. Cleared areas no longer required for construction activities shall be rehabilitated by re-seeding with locally found grasses and shrubs increase soil stability. All vehicles and equipment to be restricted to within the project boundaries and only along the approved access road route. Access roads shall be defined before the beginning of the construction activities. Some of the public roads may need to be used for access. Driving out of the access roads by the construction vehicles taking part of the construction activities shall not be allowed. First stage of mitigation should ensure that the Project site is prepared in such a way as to discourage animals from using the Project area. Initial site preparation and clearance could result in the loss of nesting birds and any other breeding species and where possible the initial preparatory work will be undertaken during the non-breeding season.	Minor
	Fauna	High	Medium	Major		Moderate
	Avifauna	Medium	Medium	Moderate		Moderate
Disturbance of Nature Conservation Areas	Important Bird Areas	Low	Low	Minor	All vehicles and equipment to be restricted to within the project boundaries and only along the approved access road route. Where additional sites are needed (eg storage area), the distance of potential sites to IBAs will be determined. Care shall be taken not to work within 5 km of these areas.	Minor

Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
Disturbance of Fauna	Small mammals and Reptiles	High	Medium	Major	<p>There will be no encroachment to land outside of the Project footprint, or defined laydown areas, site access road.</p> <p>The project area boundaries shall be fenced to avoid fauna from entering the active construction site where they may be injured.</p> <p>A pre-construction survey should be completed for works undertaken in the breeding season to check for animals (reptiles and active bird nests) and, if species of conservation importance are identified, appropriate measures will be taken.</p> <p>If possible, gradual vegetation clearance will be conducted, to enable fauna to move to other areas</p> <p>The collection or hunting of any animals must be strictly prohibited. A 'no tolerance' policy must be adopted with respect to construction and operations workers.</p> <p>To clarify the existing situation, it is necessary to conduct focal field studies, during the period of the highest activity of amphibians and reptiles (April, May, June), as a result of which complete lists of species.</p> <p>Additional surveys should be performed for wintering bird species and should be monitored during construction at intervals deemed appropriate by experts.</p> <p>Destructive searches for reptiles (including Central Asian tortoise) should be undertaken during site clearance under the supervision of a suitably experienced ecologist. Destructive searches for reptiles and amphibians involve the careful removal of turf and 100mm of topsoil in potentially suitable habitats.</p>	Minor
	Big and medium mammals and bats	Medium	Medium	Moderate	<p>Staff should be briefed on risks of exposure to scorpions, spiders and snakes as well as the preventative measures. Workers in the field should wear protective clothing; long trousers, closed shoes and leather gloves. Information regarding nearest location of treatment for any bites and stings should be made available.</p> <p>Route directions and speeds limit will be placed along the access road into the project site</p> <p>Trees located on the Project site shall be inspected before they are cleared or translocated to ensure there are no nesting birds or roosting bats. Clearance of trees from the Project site shall not be conducted during the nesting season if it is established that there are birds on site.</p> <p>Any bird eggs observed in any nests on the Project site will not be disturbed and any damage to the eggs shall be recorded.</p> <p>Where lizard burrows are encountered on the project site the contractor will make efforts to ensure that they vacate their burrows prior to site clearance and excavation works.</p>	Minor
	Birds	Medium	Medium	Moderate	<p>Any sightings of fauna must be reported to the Environmental Manager and action taken recorded.</p>	Minor
	Barrier Effects on Fauna	Medium	Medium	Moderate	<p>If necessary, work site and access roads should be irrigated to minimize dust impact.</p> <p>Appropriate training should be provided to relevant personnel concerning noise, vibration and lighting control and management</p> <p>Noise emission will be limited as much as possible: speed limit for vehicles, maintenance programs of machinery, avoidance of emission of noise during the night, etc.</p> <p>Wastes created during the construction activities will be managed under an Environmental and Social Management Plan (ESMP), to limit the disturbance to fauna as a result of presence of wastes and spills.</p>	Minor

Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
Accidental Loss of Fauna	Small mammals, Reptiles and Birds	Medium	Medium	Moderate	<p>Project staff require environmental toolbox talks during construction to raise awareness, limit conflict and reduce additional disturbance to fauna and avifauna.</p> <p>Drivers operating in the area must be well briefed and must be aware of the dangers that vehicles pose to the local fauna.</p> <p>Route directions and speeds limit shall be placed along the access road into the project site</p> <p>Speed of vehicles shall be limited, in order to limit emission of dust in nonpaved accessed roads and in order to limit the risk of accidents with fauna.</p> <p>Any snakes encountered at the site must not be handled or harmed by Project workers. Animals must be relocated by appointed personnel.</p> <p>Staff shall be briefed on risks of exposure to scorpions, spiders and snakes as well as the preventative measures. Workers in the field should wear protective clothing; long trousers, closed shoes and leather gloves. Information regarding nearest location of treatment for any bites and stings should be made available.</p>	Minor
Introduction of Alien Species	Change of Habitat	Medium	Medium	Moderate	<p>Potential invasive flora species shall be identified, and action must be taken to clear these species if they occur in or around areas designated for bush clearance to prevent establishment after clearing.</p> <p>A monitoring plan shall be carried out to record alien species populations in the project area of influence and aimed at removing new populations and preventing them from spreading throughout the AoI. In addition, prompt revegetation (i.e. sowing of native herbaceous species and/or planting native shrubs/trees) on bare soil with natural or semi-natural vegetation will reduce the spread of alien species.</p> <p>No planting of alien species shall occur in the camps or any areas within the AoI, including landscaping of re-vegetated areas.</p>	Minor
Damage to Aquatic Ecosystem/ Loss of Habitat	Water Quality Fish	Medium Medium	Medium Medium	Moderate Moderate	<p>Wastes and any other product containing hazardous chemical substances (i.e. fuel) will not be stored in the proximity of reservoir features. Their management will be done according to the Environmental and Social Management Plan (ESMP) that will consider among their objectives the avoidance of any spill affecting to the aquatic ecosystems.</p> <p>Excavated materials will not be dumped into aquatic features, nor will they be stored in their proximity, to avoid any increase of the turbidity levels.</p> <p>Maintain buffer shall be performed between construction and water boides if it is practical.</p> <p>As far as possible, care should be taken not to cause any effect in the aquatic environment during the spawning period of the fish.</p> <p>Vegetation clearance works will avoid affecting the riparian vegetation, whenever possible, since it provides areas for spawning and sheltering of many aquatic organisms.</p>	Minor Minor

Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
Loss of Ecosystem Services	Fishing, grazing, usage of recreation and tourism area, watering animals	Medium	Medium	Medium	<p>There will be no encroachment to land outside of the Project footprint, or defined laydown areas, site access road.</p> <p>Minimise permanent and temporary land take for civil works, clearaminince restricted to work sites.</p> <p>Prior to project equipment and machinery transportation, a traffic survey/study shall be done and Warning signs along the motorway, to advice drivers about the risk of run over fauna. The survey includes necessary oversize haulage permits, local and international regulations along the path to the project area.</p> <p>The Emergency Response Plan shall be developed and the plan shall be include based on the results of the risk assessment (and in conformance with statutory requirements), design of spill prevention/containment structures around sensitive equipment, installation of appropriate spill clean-up equipment and development of response procedures.</p>	Minor

9.6.2 Operational Phase

Loss of Habitat/Habitat Fragmentation and Damage of Habitats

There are no sensitive habitats on the Project sites and AoI (Area of Influence) that would be affected during operation. The habitats that may be affected by accidental pollution are of minor or moderate conservation value. Project effects can be stabilized with monitorings and migrations measures.

Inadequate storage and handling of hazardous materials, and inappropriate design and storage of wastes could result with contamination of soils and groundwater which may also attract pest species and potential for disease. Pests may also be attracted to site by the accumulation of wastes (particularly domestic food wastes) if these are not stored and disposed of appropriately.

Accidental Loss of Fauna

Depending on the intake design, water drawn in by the intake system may contain a variety of organisms from the reservoir. Some organisms are small enough to pass through the mesh screens into the intake. This process, called entrainment, may affect plankton and fish eggs and larvae (ichthyoplankton). Because of the abundance and short regeneration times of plankton, impacts of entrainment on these organisms have rarely been documented outside the immediate vicinity of the plant and are considered to be of little consequence. Therefore, entrainment impacts to phytoplankton and zooplankton are considered to have a relatively small significance. Aquatic organisms that are drawn into the intake and are too large to pass through the debris screens may be impinged against the screens. Mortality of fish that are impinged is high because they are eventually suffocated by being held against the screen mesh or are abraded, which can result in fatal infection. Depending on the design and location, impingement can affect large numbers of fish and is considered a medium negative impact. Impingement occurs when the intake through-screen velocity is too high for species, such as fish, to swim away and results in them being retained against the screens.

Disturbance of Fauna

Uchkizil can potentially also attract them due to the water surface, food and as a recreation area. Nesting biotope is absent on the open banks of the Uchkizil, therefore, it is not expected to be nesting of water birds in the project area but the region is of particular importance for the wintering. The proposed Project will have 65 m stack, which rarely pose a collision danger during daylight. However, lighted stacks may pose a collision danger since birds may be attracted by the lighted area. Therefore, lighting of stacks should be downward-directed and lights should be used that omit the red spectrum to avoid attracting birds and causing bird collisions. In order to minimize the impact on the aquatic life, following mitigations will be applied:

- Water intake velocity shall be limited with 0.15 m/s according to IFC EHS Guideline for Thermal Power Plants at the entrance of inlet structure.
- A bubble curtain shall be installed across the entrance of the intake channel to prevent fish and other fauna from going through the intake channel.
- Periodic monitoring of intakes will be undertaken during the operation phase to record the effectiveness and ensure that there is no injury to the vulnerable fish species.
- Brief visual observation of the intake channel will be undertaken daily to check that reptiles and large fish are not within the channel
- Water temperature control system will be installed to the neutralization pond to ensure that the discharge temperature is within the Project discharge limits (see Table 82).



The generated noise due to operation activities and working personnel will have a negative impact on large and medium-sized mammals, the noise will scare them away. Light pollution will also deter these animals, which may affect their ability to access the reservoir and use some of it as a watering hole. Therefore, noise and light pollution will be minimized by applying noise reducing mitigation measures (see Section 7). The illumination will be designed in such a way that, lights will be directional and will not point outward of the plant.

Table 135: Impacts Significance of the Ecology during Operation Phase

Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
Loss of Habitat/Habitat Fragmentation and Damage of Habitats	Flora	Low	Low	Minor	A Biodiversity Management Plan shall be prepared by the operation contractor for Operation and Maintenance. During routine maintenance any invasive flora species shall be removed. Landscaping on site shall be incorporate indigenous plant species to minimise irrigation requirements and the need for fertilisers/pesticides. Intentional replanting of vegetation will enhance the biodiversity of the site as well as improve the visual aesthetics of the site. Hazardous materials and chemicals shall be stored in designated areas in accordance with the national requirements and standards and good practices guidelines so as to prevent any spillage on the site. Use of persistent biocides shall be prohibited. In terms of surface run-off drainage, the Environmental Management Plan shall include: all surface run-off of the approaches, pollution prevention, water discharges etc. Periodic water and air quality, and noise level monitoring shall be performed.	Minor
	Fauna	Low	Low	Minor		Minor
	Avifauna	Low	Low	Minor		Minor
	Terrestrial Habitat	Low	Low	Minor		Minor
	Aquatic Habitat	Low	Low	Minor		Minor
Disturbance of Fauna	Birds	Low	Low	Minor	Monitoring studies shall be conducted to determine the use of the area by bird species that use the area as accommodation and feeding areas and to evaluate the effects. Appropriate training should be provided to relevant personnel concerning noise, vibration and lighting control and management. Water intake velocity shall be limited with 0.15 m/s according to IFC EHS Guideline for Thermal Power Plants at the entrance of inlet structure. A bubble curtain shall be installed across the entrance of the intake channel to prevent fish and other fauna from going through the intake channel. Periodic monitoring of intakes will be undertaken during the operation phase to record the effectiveness and ensure that there is no injury to the vulnerable fish species. Brief visual observation of the intake channel will be undertaken daily to check that reptiles and large fish are not within the channel Water temperature control system will be installed to the neutralization pond to ensure that the discharge temperature is within the Project discharge limits (see Table 82). Lighting of stacks should be downward-directed and lights should be used that omit the red spectrum to avoid attracting birds and causing bird collisions The illumination will be designed in such a way that, lights will be directional and will not point outward of the plant Noise emission will be limited as much as possible: speed limit for vehicles, maintenance programs of machinery, avoidance of emission of noise during the night, etc. Wastes created during the operation activities will be managed under an Environmental and Social Management Plan (ESMP), to limit the disturbance to fauna as a result of presence of wastes and spills.	Minor
	Reptiles and Mammals	Low	Low	Minor		Minor
Accidental Loss of Fauna	Plankton	Moderate	Moderate	Moderate	In cases where a large amount of water is required from the reservoir, the water will be withdrawn from the region with low fish populations. Especially during the spawning period, water intakes will not be made from the shore. The surface of the deeper middle parts of the reservoir can be evaluated.	Minor
	Fish	Moderate	Moderate	Moderate		Minor



9.7 Cumulative Impacts

The current main negative anthropogenic factors are grazing, cutting down psammophilic shrubs for firewood, spontaneous expansion of the earth roads network, fishing, oil production, using of the southern reservoir as public beach, recreational activities. Any anthropogenic intervention, especially major construction, alters the environment and subject ecosystems to change. It is possible to reduce the degradation and pressure on vertebrate populations caused by the construction of modern infrastructure with proper and long-term planning of activities.

The Project area is predominantly rural and agricultural and any other future developments in the Project's area of influence are unknown at this point. Summary of Cumulative Impacts of Ecological Environment is presented in Table 136.

Table 136: Cumulative Effects on Ecological Environment

Terrestrial Ecology		
Impact	Construction Phase	Operation Phase
Cumulative Impact on Flora and Fauna	The Project site habitat is classified two habitat types according to IFC Requirements. one of them is "Modified Habitat" due to agricultural practices and activities and the other type is Natural Habitats. The Project site is limited in flora diversity and there is no protected species i. Therefore, the effect on the flora is negligible with the implementation of mitigation and management measures that mentioned Table 134 and Table 135.	During the operational phase, cumulative effects are considered negligible as there is no negative activity to the flora in the adjacent area. There is a possibility of the spread of invasive/foreign species in the area due to anthropogenic impacts not related to the project. The movement of project tools has the potential to have an impact that will facilitate this diffusion. The effect on the flora is negligible with the implementation of mitigation and management measures that mentioned Table 134 and Table 135.
	The detailed potential effects on fauna are explained in Section 9.6.1	The detailed potential effects on fauna are explained in Section 9.6.2
	Due to the similarities of the IFC Project site and the Project site, the impacts are expected to be similar during the construction phase of the Project.	Due to the similarities of the IFC Project site and the Project site, the impacts are expected to be similar but to minor during the construction phase of the Project.



Terrestrial Ecology		
Impact	Construction Phase	Operation Phase
Cumulative Impacts on Aquatic Ecosystem	Changes in noise, air quality and water quality are possible. with the implementation of mitigation measures defined in the project related management plans, the effects will be at a moderate level.	The cumulative effect of projected temperature and water changes could be important with climate change effects. Thermal pollution of water bodies. Even with a slight increase in temperature in the reservoir, all chemical reactions are accelerated, and oxygen deficiency increases. Over time, the reservoir can become waterlogged. This has a significant impact on the fauna - its composition changes, and species that need running water disappear.

9.8 Monitoring

The program for monitoring the flora and fauna of terrestrial and aquatic ecosystems should be carried out along the perimeter of the entire reservoir and within the AoI for Ecology determined in Section 2.4 (see Figure 19). It should cover all groups of terrestrial and aquatic organisms.

Table 137 shows the most suitable time of the year for the site surveys and Table 138 shows the monitoring plan for the Project. .

Table 137: Preliminary deadlines of research for each of the biodiversity groups in the project area.

	January (10-20)	March (15-25)	April (10-20)	May (10-20)	July (10-20)	September (5-15)	October (1-10)	Total:
Botany		+	+	+		+		15 field days
Herpetology			+	+	+	+		15 field days
Ornithology	+	+	+		+	+		25 field days
Theriology	+		+		+		+	20 field days
Ichthyology	+	+		+			+	20 field days
Hydrobiology		+	+	+	+			20 field days



Table 138: Monitoring plan for Ecology Elements

	Suitable Time Period	Purpose
Pre-construction period		
Botany	Spring (from mid April to end of May)	to determine existence of the rare species and relocation if necessary
Herpetology, Ornithology, Theriology	Spring (from mid April to end of May)	to determine existence of the species, nest, burrow, etc. and relocation if necessary,
Ichthyology, Hydrobiology	Spring (from mid April to end of May)	to determine existence of the rare species and define additional mitigation measures
Construction Period		
Botany	Spring - Autumn	To observe application of mitigation measures, determine project related impacts and define additional mitigation impacts, if needed
Herpetology, Ornithology, Theriology	Spring - Autumn	
Ichthyology, Hydrobiology	Spring	
Operation Period		
Botany	Spring - Autumn	To observe application of mitigation measures, determine project related impacts and define additional mitigation impacts, if needed
Herpetology, Ornithology, Theriology	Spring - Autumn	
Ichthyology, Hydrobiology	Spring	

The deadlines for research were chosen taking into account the specificity of the biology of organisms inherent in each of the research groups. The most optimal deadlines were chosen to catch the peaks of the activity of certain organisms in the project area.

Monitoring is carried out by species from the list of species approved by the State Committee for Ecology for Republican.

Also, for a more detailed analysis of the territory, it is required to conduct the following research in the future:

- Explore in more detail the adjacent areas of the Kattakuma Desert and the Zang Canal;
- To register the presence of rare species, the most acceptable way is to use camera traps installed for a long time, however, given the existing anthropogenic pressure on the territory, there is a risk that the camera will be stolen. Consider the option of short-term use, either installing cameras with SIM cards, or with an agreement with local residents for their safety;
- Collect survey data on the presence / absence of rare species from the local population and fishermen.



10. SOIL, GEOLOGY AND GROUNDWATER

10.1.1 National Standards

The relevant legislation related to soil and groundwater protection, quality of soil, groundwater and geology in Uzbekistan are given below:

- Land Code of the RUz, No.598-I dated April 30, 1998 (as amended on December 23, 2020).
- Law "On Subsoil" No.444-II dated December 13, 2002 (as amended on April 21, 2021).
- Law "On Water and Water Use", No.837-XII dated May 06, 1993 (as amended on April 21, 2021).
- Resolution of the Cabinet of Ministers "On Approval of the Regulations on the Order of Establishment of Water Protection Zones and Sanitary Protection Zones of Water Bodies in the Territory of the RUz" No.981 dated December 11, 2019.
- Decree of the Cabinet of Ministries of the RUz Regulation on Measures for Ground Water Management, Enhancement of Ground Water Protection against Pollution and Depletion, No.179 dated April 18, 1992.
- SanPiN No.0272-09 "Sanitary rules and norms for compiling hygienic justifications for soil protection schemes from pollution".
- SanPiN No.0191-05 "Maximum permissible concentrations (MPC) and Approximate allowable concentrations (AAC) of exogenous harmful substances in the soil".
- SanPiN No.0212-06 "Sanitary rules and norms for the hygienic assessment of soil contamination of different types of land use".
- SHNK 1.02.07-15 "Engineering surveys for construction Basic provisions".
- SHNK 1.02.09-15 "Engineering and geological surveys for construction. Set of rules".
- KMK 2.01.01-94 "Climatic and physical-geological data for design".
- KMK 2.01.03-96 "Construction in seismic areas. Change No.1.
- SHNK 4.02.01-04 "Collection of elementary estimate norms for construction work. Collection Earthwork. Additions and amendments to the technical part".
- KMK 2.03.11-96 "Protection of building structures from corrosion".
- GOST 5180-2015 "Soils. Laboratory methods for determination of physical characteristics".
- GOST 12071-2000 "Soils, selection, packaging, transportation, and storage of measurement".
- GOST 18164-72 "Drinking water. Method for determination of total solids content".
- GOST 4389-72 "Drinking water. Methods for determination of sulphate content".
- GOST 4245-72 "Drinking water. Methods for determination of chloride content".
- GOST 4151-72 "Drinking water. Method for determination of total hardness".
- GOST 31957-2012 "Water. Methods for determination of alkalinity and mass concentration of carbonates and hydro carbonates".
- GOST 9602-2005 "Unified system of protection against corrosion and aging. Underground structures. General requirements for corrosion protection".



- N.N. Goryainov, F.M. Lyakhovitsky. Seismic methods in engineering geology. Moscow, "Nedra": 1979.

Land Code No.598-I aims to regulate land relations in order to ensure that present and future generations have science-based, sustainable use and conservation of land, breeding and improvement of soil fertility, conservation and improvement of the environment and creating conditions for equitable development of all forms of management, the protection of individuals and legal entities' right for land, as well as strengthening the rule of law in this area.

Law "On Subsoil" aims to regulate relations arising from the possession, use, and disposal of subsoil (mountain relations).

SanPiN No.0272-09 provides the basic requirements for development of hygienic justification for the soil protection schemes against pollution, duties, and functions of state sanitary supervision bodies in this area.

SanPiN No.0191-05 defines MPC and AAC values of chemicals and pesticides polluting the soil. MPCs and AACs are designed to ensure that there is no negative direct or indirect impact on human health, its future generations, and public health through soil contact.

SanPiN No.0212-06 provides a unified methodology for hygienic assessment of soil pollution using a nomenclature of indicators of soil hygienic condition, which should be used both in the development of regulatory and technical documentation on the hygiene of soils, and in assessing the degree of its pollution.

10.1.2 Lender Requirements

IFC PS-3 (Resource Efficiency and Pollution Prevention) states that "the client will avoid the release of pollutants or, when avoidance is not feasible, minimize and/or control the intensity and mass flow of their release. This applies to the release of pollutants to air, water, and land due to routine, non-routine, and accidental circumstances with the potential for local, regional, and transboundary impacts. Where historical pollution such as land or ground water contamination exists, the client will seek to determine whether it is responsible for mitigation measures. If it is determined that the client is legally responsible, then these liabilities will be resolved in accordance with national law, or where this is silent, with GIIP."

There are no detailed numerical requirements to soil quality established by IFC guidance documents. Therefore, the Dutch Standards will be used to compare with national standards to identify maximum allowable concentrations for contaminants in soil, sediment, and groundwater (see Table 139).



Table 139: Soil Quality Parameters with National Standards

Parameter	Unit	National Standard (SanPiN No.0191-05)	Dutch Intervention Values 2013 (Soil Remediation Circular 2013)
Antimony	mg/kg	4.5	22
Arsenic	mg/kg	2.0	76
Barium			-
Cadmium	mg/kg		13
Chromium	mg/kg	6.0	
Chromium VI	mg/kg		78
Cobalt	mg/kg	5.0	190
Copper	mg/kg	3.0	190
Mercury (organic)	mg/kg	2.1	4
Lead	mg/kg	32.0	530
Molybdenum	mg/kg	10.0	190
Nickel	mg/kg	4.0	100
Selenium	mg/kg		100
Zinc	mg/kg	23.0	720
Cyanides	mg/kg		20 (free) 50 (complex)
Benzene	mg/kg	0.3	1.1
Ethylbenzene	mg/kg		110
Toluene	mg/kg	0.3	32
Xylenes (sum)	mg/kg		17
Styrene (vinylbenzene)	mg/kg	0.1	86
Phenol	mg/kg		14
Vanadium	mg/kg	150.0	250
Nitrates	mg/kg	130.0	-
Sulphates (H₂SO₄)	mg/kg	160.0	-
Total Petroleum Hydrocarbons (Mineral Oil)	mg/kg		5,000
PAHs (total)	mg/kg		40
Ammonia Nitrogen	mg/kg		1.5



10.1.3 Other Requirements

ASTM D 1586/ D1586M-18 "Standard Test Method for Standard Penetration Test and Split-Barrel Sampling of Soils".

10.2 Baseline Data

10.2.1 Survey Methodology

Territory of Uzbekistan forms part of the Turan Platform. Its multiply folded basement, which includes sedimentary, metamorphic and igneous rocks, belongs to the Uralo-Mongolian Late Paleozoic orogenic belt. Major ancient continental blocks are the Kazakh and Karakum-Tajik microcontinents separated by the Turkestanian paleo-oceanic structure. The latter originated by rifting during Late Proterozoic and closed progressively from the Ordovician through the Early Triassic. The last collision of both microcontinents followed the formation of a large nappe pile intruded by granite in S of Uzbekistan and the formation of a volcanic-plutonic belt in the N. Mesozoic and Cenozoic terrestrial and shallow-marine platform sediment unconformably overlie the orogenic belt. A Late-Neogene-Quaternary secondary orogeny formed the present appearance of the territory.

The platform consists of weakly deformed sedimentary rocks of Jurassic to Recent age. The SE part of the Turan Platform underwent secondary orogenic process the same as in the Alpine fold belt (Pamir). As a result of this secondary tectonic activity, a new orogenic belt – The Tien Shan Mountains – appeared. This special geological position of the country has two advantages from the angle of regional geology; on one hand, through new tectonic activity the basement of the platform was exposed, which made it possible to investigate its composition and structure, and on the other hand, the existing geological relations within the basement were not affected by renewed movements, as frequently is the case in the high mountain parts of Tien Shan. These phases of deformations led to development of the current geological and tectonic settings which several active faults cross the region and control the seismicity as well as geological settings of the study area. These active faults are present at the north and southeast of the study area.

10.2.2 Geomorphological Structure and Hydrographic Network

The study area is located in the Termez district of the Surkhandarya region, south of the Republic of Uzbekistan. This area is at the north of the Amudarya River and at the northeastern coast of Uchkizil Reservoir. The main units covering the area are the Quaternary Upper Section (QIII), Quaternary Holocene (Qh), Upper Pliocene (N2-2) and Upper Miocene-Pliocene (N1-2) formation. However, the QIII unit dominantly covers the majority of the area and the study area is within this unit (see Figure 88). This unit is a sequence of various Alluvial, fluvial deposits, which the main lithological unit is sand.

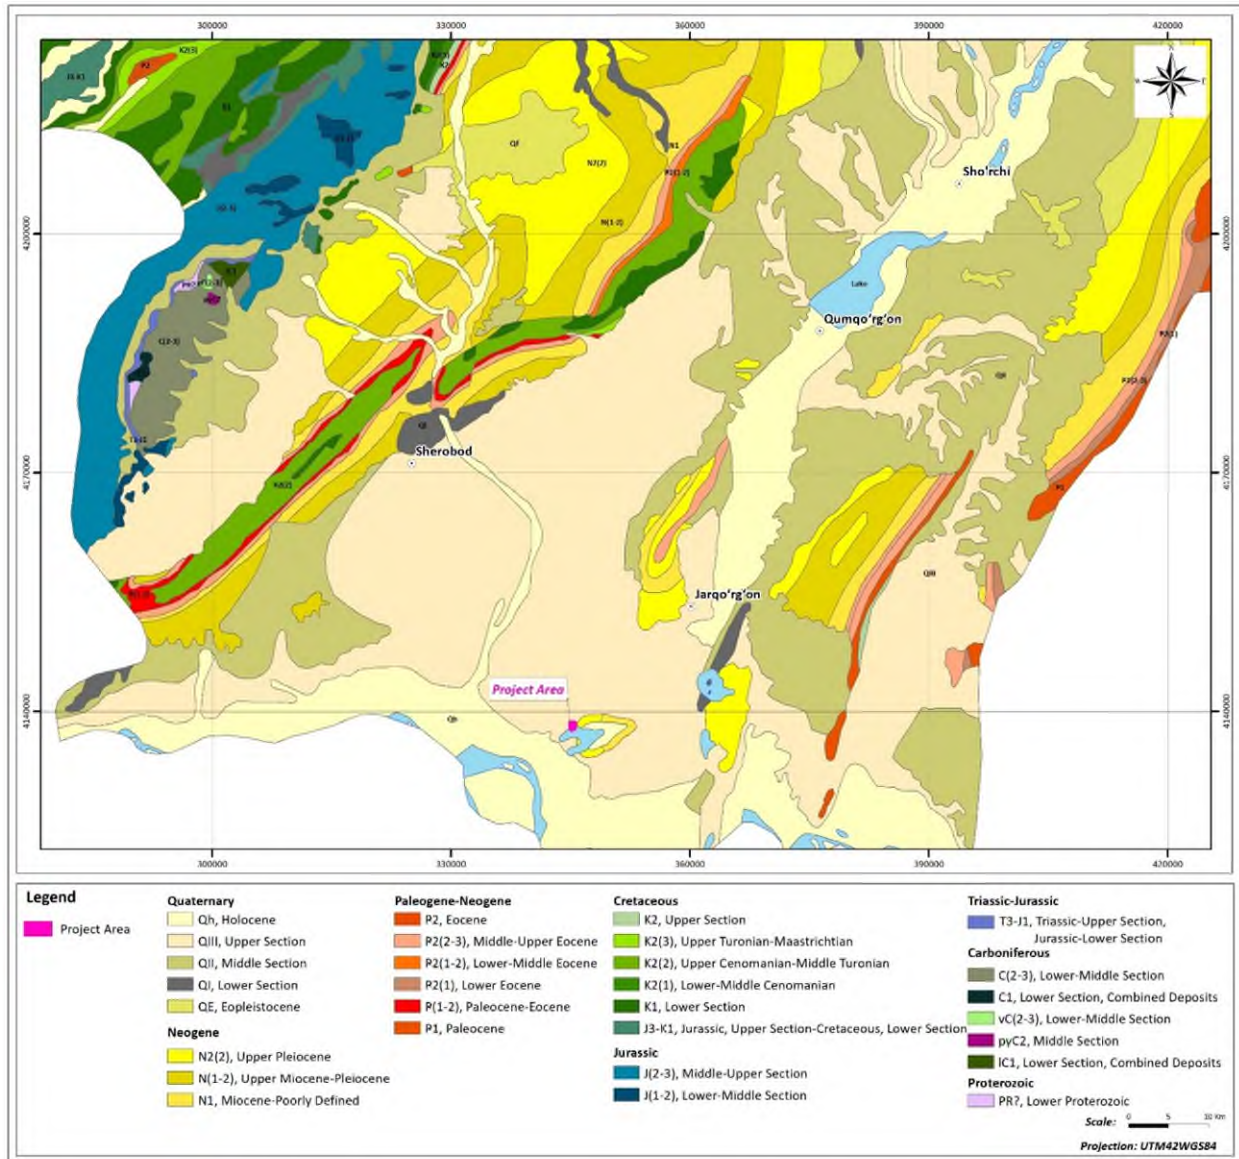


Figure 88: Geological map of the region

10.2.3 Local Geology

In the study area, the surface is covered with the Quaternary deposits and the top soil with vegetation is dominantly covering the most of the parts. However, from place to place, Aeolian sand dunes also can be observed (see Figure 88). Towards south, the study area is limited to the Uchkizil Reservoir. On the other hand, considering the morphology of the study area, no surficial feature is apparent and the area is almost flat with a very gentle undulation and very gentle slope towards south. This morphology changes at the coastal zone in which, the elevation drops more than 20 meters (see Figure 89).



In order to assess the subsurface geological structure of the study area and understanding the lateral and vertical variations of the lithological units, 4 boreholes within the study area were drilled. These boreholes are clustered at the center of the area as illustrated in Figure 90 and all have the maximum depth of 30 m. They were used to obtain the core measurement as well as disturbed soil Measurement from the subsurface which, in one hand are used in determination of the geological units and on the other hand, are used in various laboratory tests.

The lithological units of all boreholes are almost similar with slight variation. The top soil is a common unit that is present in all boreholes and contains vegetation and has the thickness between 20 cm to 40 cm. below this unit there is a sand layer, which in BH-7 is classified as Aeolian sand but this Aeolian sand is not present in other boreholes. This sand layer has 1 m - 1.5 m of thickness. Further down, a relatively thick layer of granular Gypsum with thickness varying between 7-9 m underlain by a relatively thinner layer of sand (2.5 - 4 m of thickness). Below these layers, there is a relatively thin layer of clay (between 90 cm and 1.7 m of thickness) and the lower unit which, is encountered in the drilling program is a thick sandstone layer with thickness of about 16 m - 17 m. In addition, dividing the lithological units into two major groups seems to be logical, the loose top layer of sand and sandy materials with thickness of about 14 m and hard sandstone layer with thickness of about 16 m.

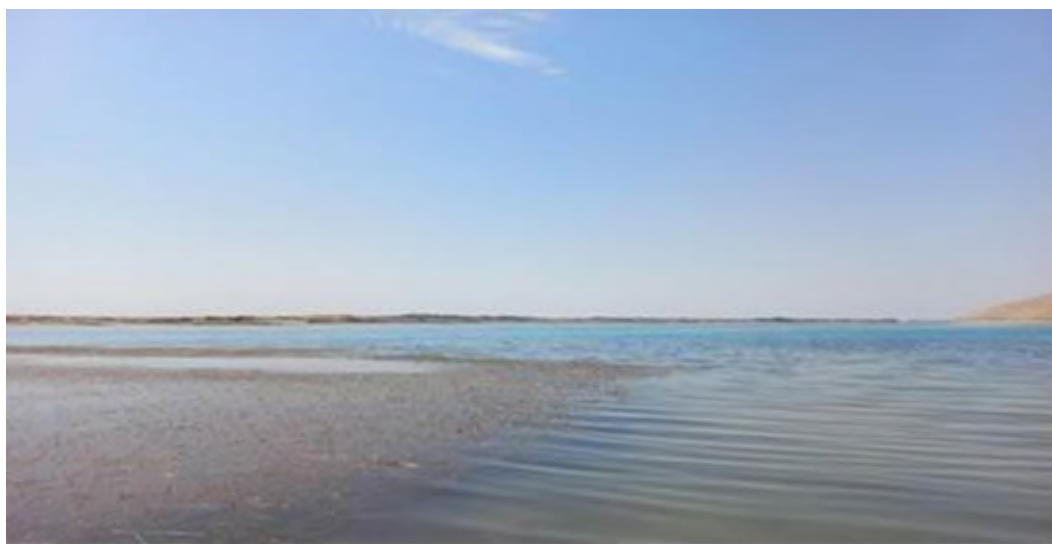
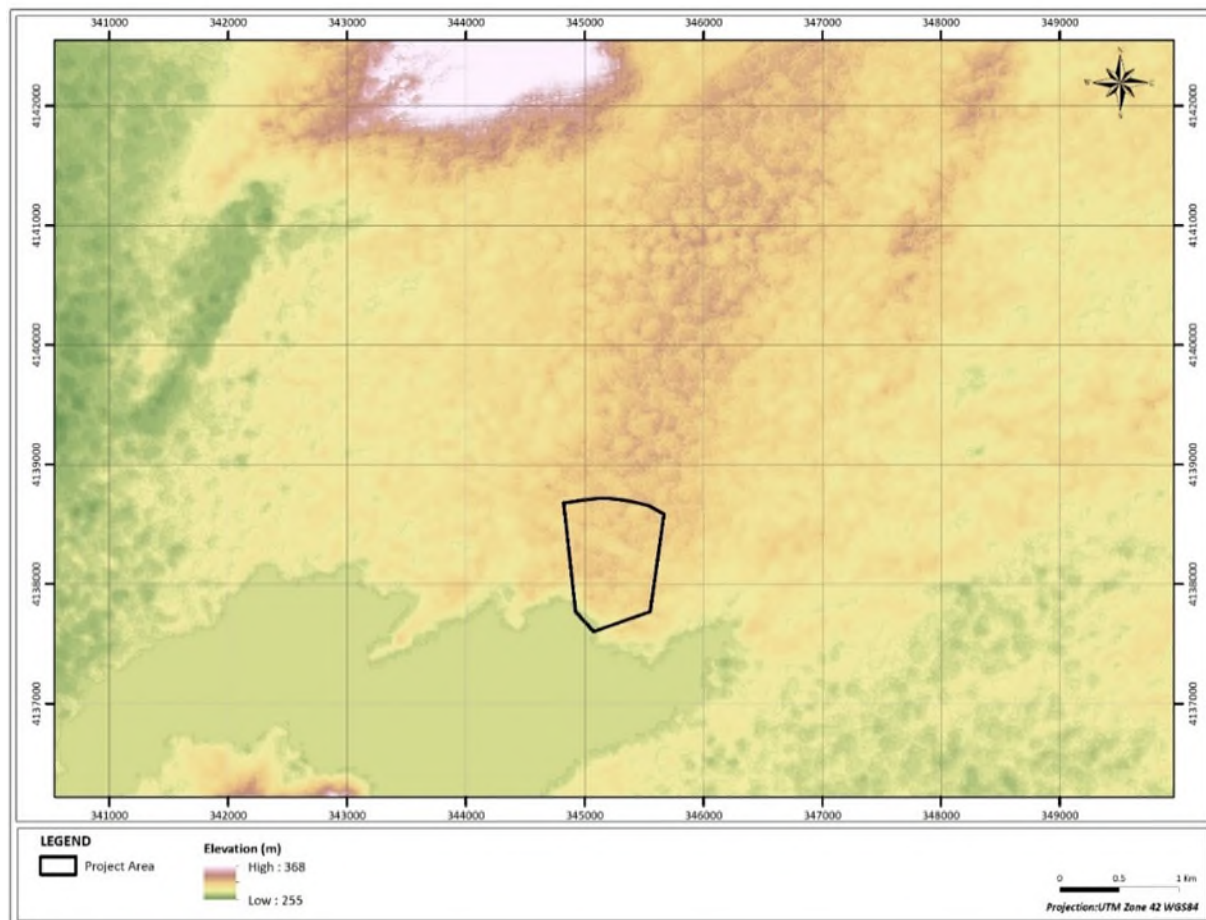


Figure 89: Topography of the region (top) and (bottom) a view from the Uchkizil Reservoir

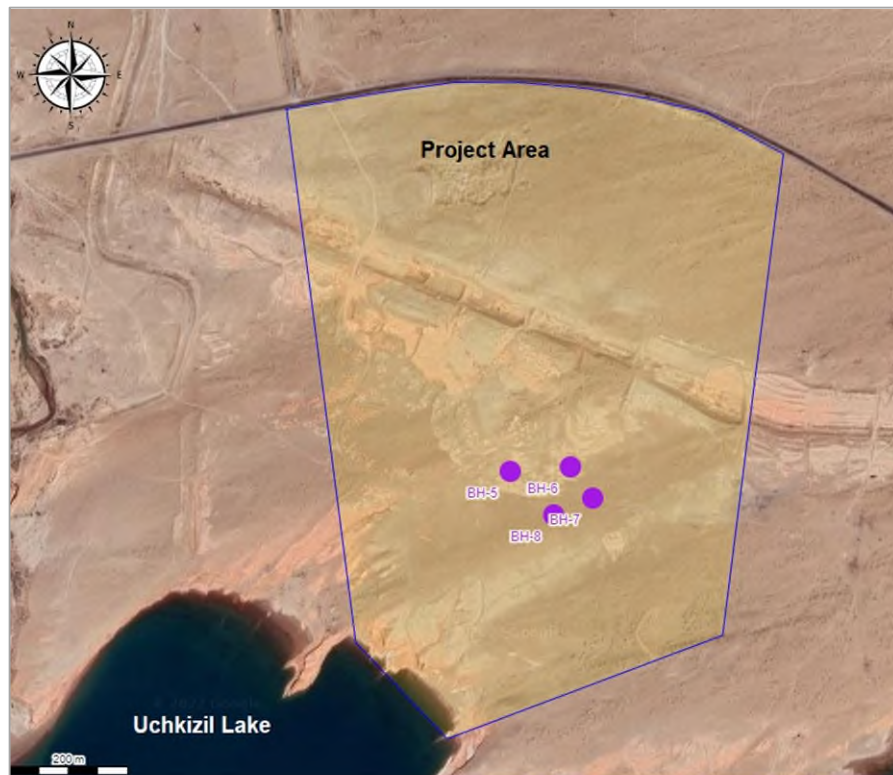


Figure 90: Location map of the boreholes

10.2.4 Geotechnical investigations

To assess the properties of the materials, which are present in the area, several geotechnical tests were conducted. These tests include downhole seismic survey (Goryainov and Lyakhovitsky 1979) in two boreholes, which yielded the one-dimensional velocity structure of the area, and performing in-situ and laboratory test. The in-situ tests include the Standard Penetration Test (SPT) and various laboratory tests to determine the physical properties as well as the grain size of the soils, which are present in the area.

It must be noted that the various engineering surveys, which were carried out are in accordance with the requirements of KMK 2.01.01, KMK 2.01.03, SHNK 1.02.07, SHNK 1.02.09 and SHNK 4.02.01 standards. However, in some tests and data processing, ASTM standards also were benefited.

The results of the downhole seismic logging confirm the general classification of the lithological units into two layers. These results show two distinct layers with very different velocity structures. The top layer has primary wave velocity (V_p) between 480 m/s and 620 m/s with the average of 535 m/s, and shear wave velocity (V_s) between 250 m/s and 280 m/s with the average of 265 m/s. The second layer, on the other hand, has significantly higher velocities with V_p ranging between 2240 m/s and 2760 m/s with the average value of 2510 m/s and V_s values ranging between 850 m/s and 1120 m/s with the average value of 980 m/s.



In addition, the obtained V_s values were used to calculate the harmonic average of shear wave velocity for top 30 m (V_{s30}), the calculated V_{s30} values for BH-6 and BH-8 are 550 m/s and 574 m/s respectively. In this regard, the site will fall into class C (Dense soil and soft rock) according to NEHRP, National Earthquake Hazard Reduction Program

In total 41 SPT tests were carried out according to ASTM-D 1586 in 4 boreholes, at the depths varying from 1.5 m to 16.5 m. the result reveal that, at the depths of more than 11 m-12 m the SPT N values (more details can be seen in "the Project Surkhandarya, Interpretive Geotechnical Report") pass the value of 50 and it can be inferred that the materials which are present at this depth have high strength.

On the other hand, soil laboratory measurements were performed on the Measurement obtained from the different depths and units in each boreholes and the results show that the upper soil layers have the average particle density of 2.74 gr/cm^3 , Average dry density of 1.59 gr/cm^3 and average bulk density of 1.97 gr/cm^3 whereas the lower sandstone layer has the particle density of 2.67 gr/cm^3 , average dry and bulk densities of 2.33 gr/cm^3 and 2.38 gr/cm^3 respectively. All parameters were obtained in accordance to GOST 5180-2015.

The ground water level (GWL) also was measured in all boreholes and the results show that the GWL is below 12.7 m depth for all boreholes. Hence, it can be inferred that, the surficial soil layers, which have lower SPT values and low elastic wave velocities, located above the GWL and are unsaturated.

Additionally, the water Measurement were taken to perform the chemical analysis on the collected Measurement according to GOST 12071-2014. A standard chemical analysis was performed on groundwater Measurement in accordance with GOST 18164-72; GOST 4389-72; GOST 4245-72; GOST 4151-72; GOST 31957-2012.

The content of SO_4 ions "varies from 1670.0 to 2890.0 mg / l, with an average content of 2250 mg / l, Cl 'ions - varies from 730.0 mg / l to 4158.0 mg / l, with an average content of 1680 mg / l. Hence, with respect to GOST 9602, the water can be considered as corrosive and corrosion resistance cements must be used during the construction.in order to protect the construction from the negative effects of corrosion in accordance to KMK 2.03.11-96.

10.2.5 Hazardous Phenomena

10.2.5.1 Earthquake Hazards

In Uzbekistan and surrounding regions, there have been several earthquakes with magnitude $ML > 7$ in historical and modern times (see Figure 91). Therefore, maintenance of seismic safety is vital. The seismicity of the study area is controlled by several active faults as presented in Figure 91. Additionally, the seismic activity maps. The solution maps reveal that the dominant faulting in the region is Reverse in the mega seismic zone of the southern Uzbekistan. The study area is roughly 50 km away from the closest active fault and therefor is prone to effects of the seismic activity. According to research undertaken by the Institute of Seismology under the Academy of Science of the Republic of Uzbekistan, the seismic hazard zone map of Uzbekistan is presented in Figure 92. According to the generated map, the study area is located in seismic zone of 7.

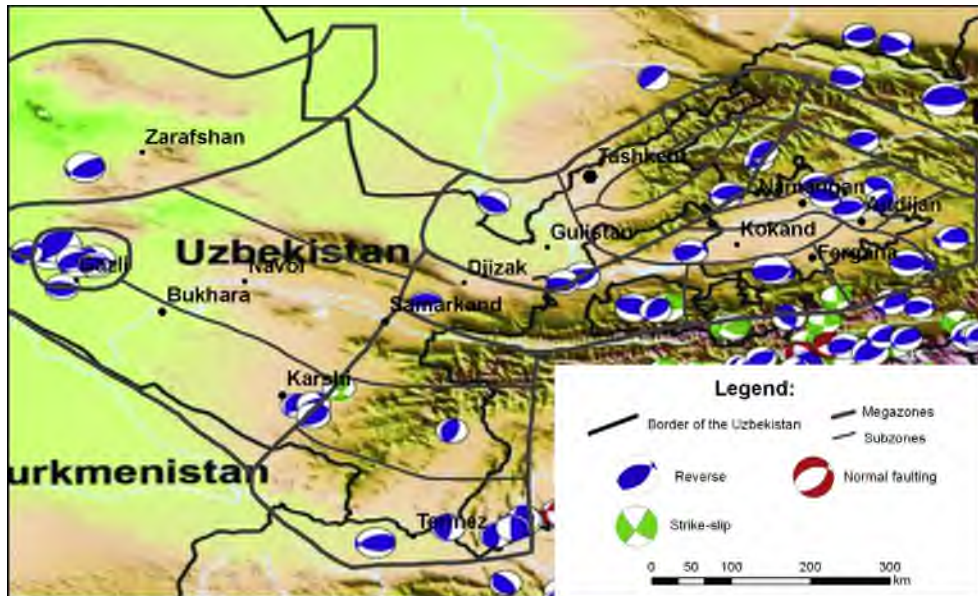


Figure 91: Focal mechanism solutions of large earthquakes occurred from 1976 to 2013 (top) and Map of Active faults in the region (bottom)

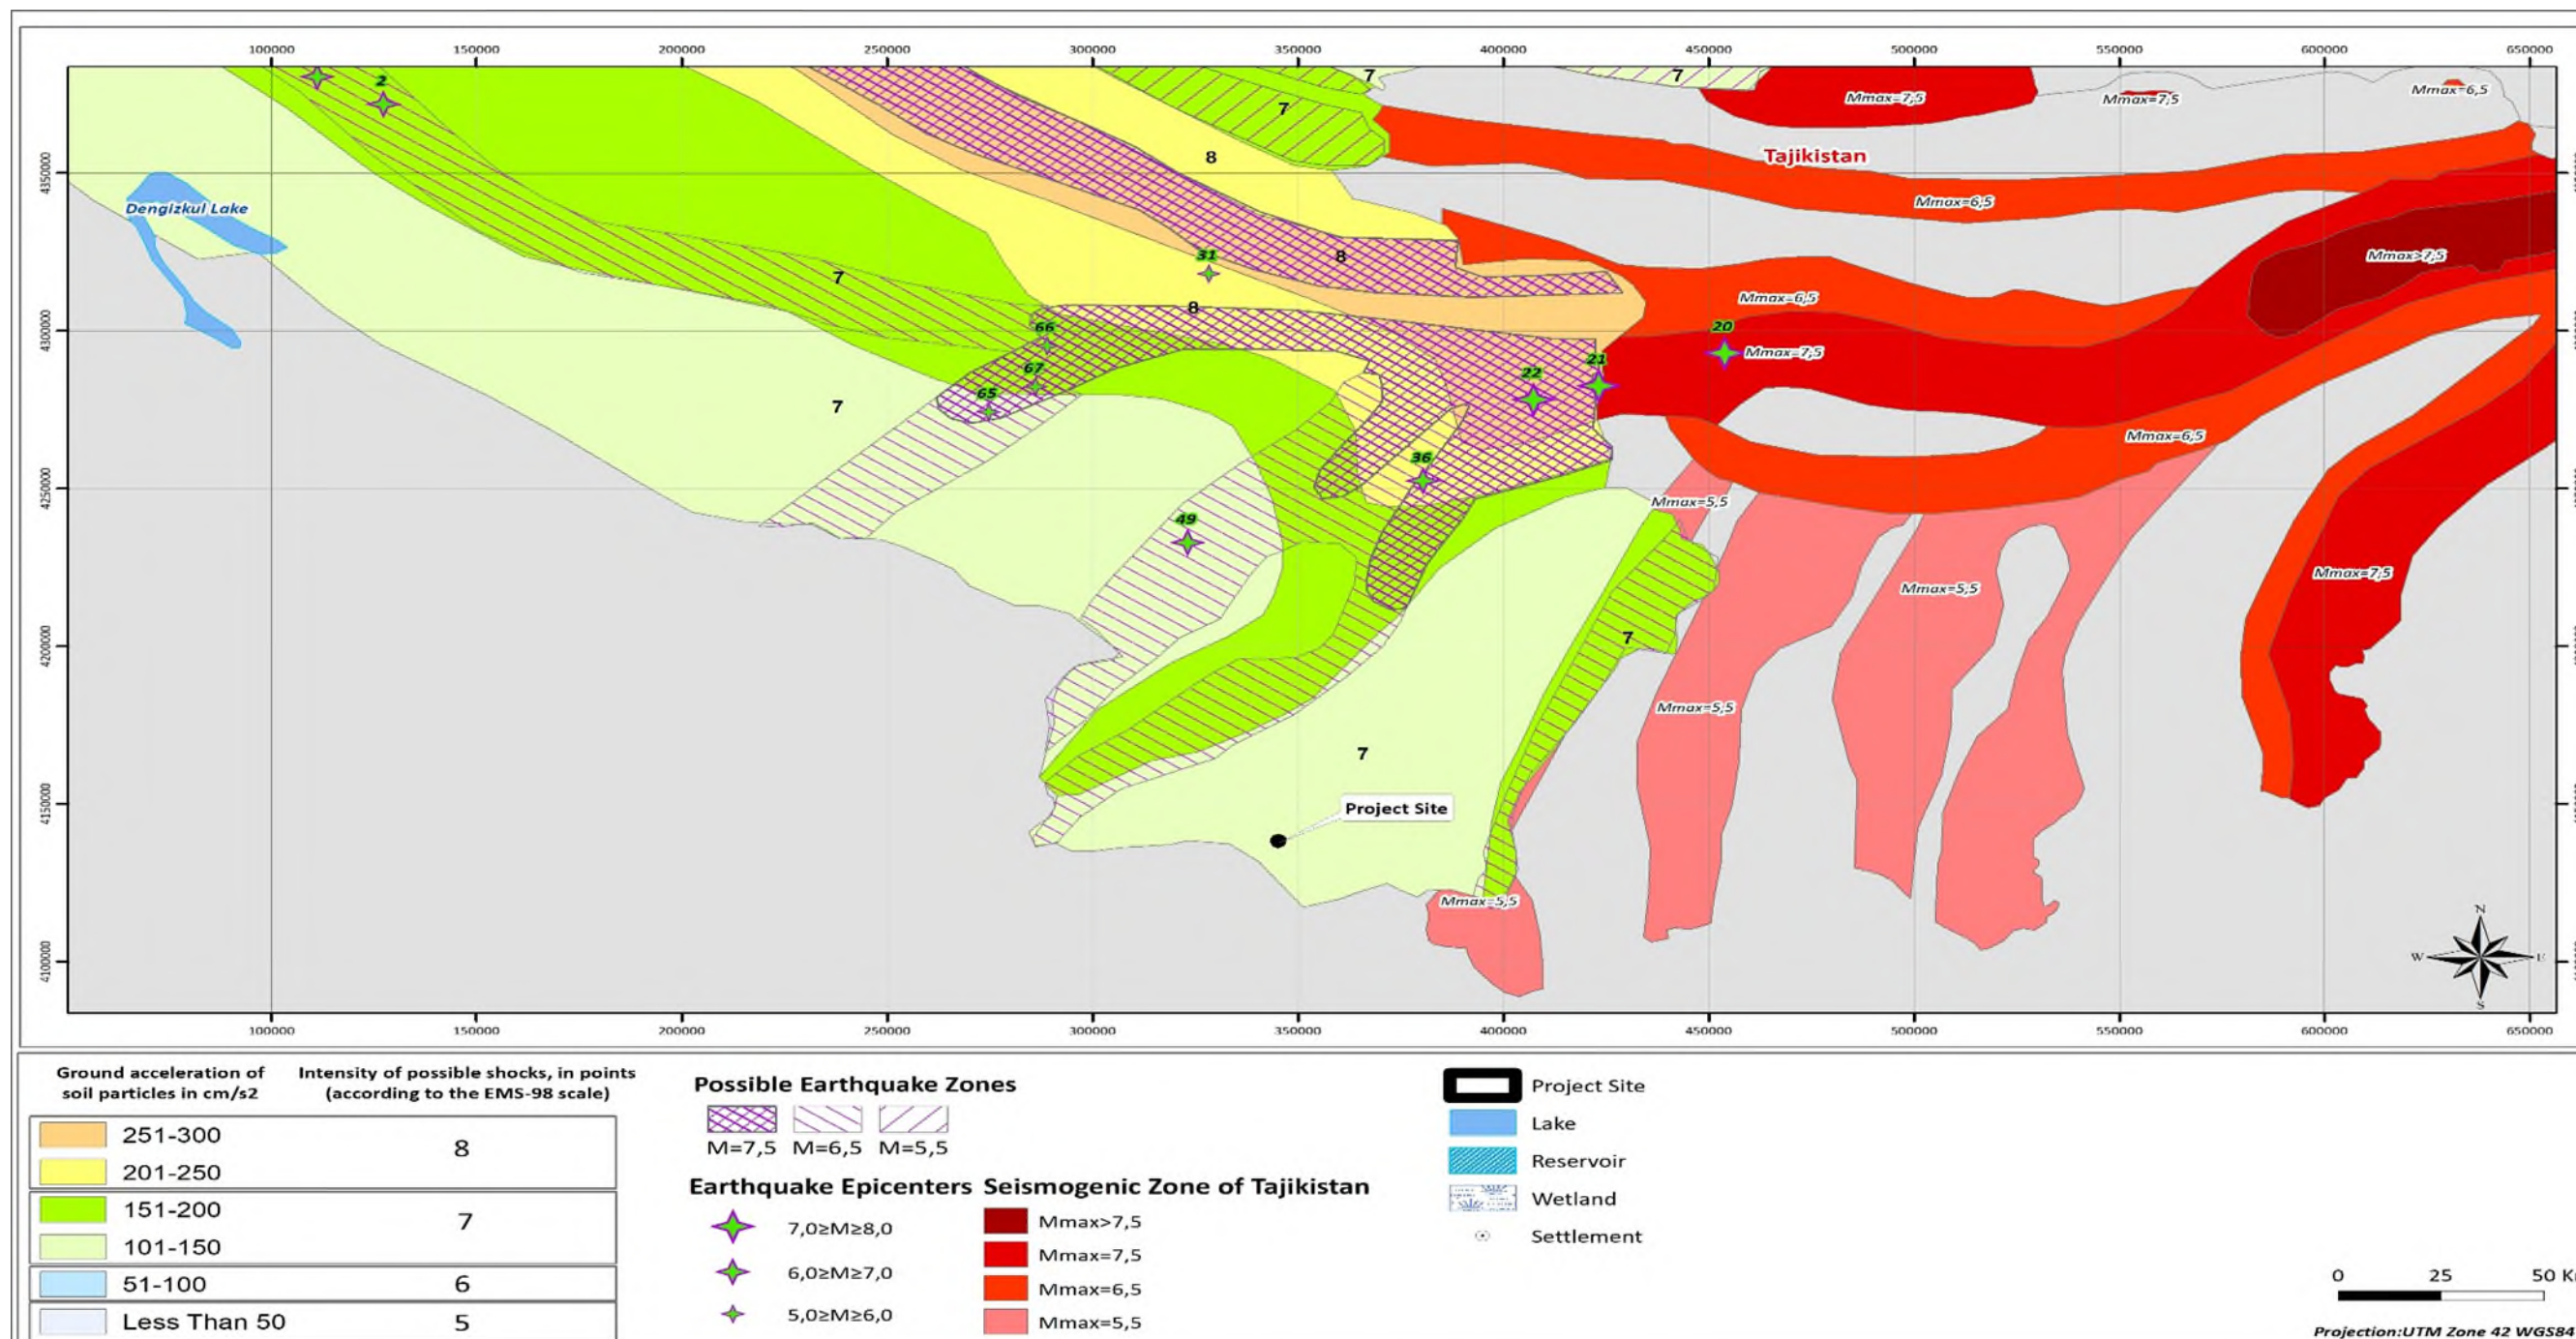


Figure 92: Seismicity Zone Map



On the other hand, while the dominant surficial material in the area is sand with the thickness of about 12 m, liquefaction can be another hazardous phenomena, however, while the surficial sand layer is above the water level, and lower sandstone has high strength the possibility of liquefaction is low. But, by changing in the current setting including the water level (which might change in different seasons) the possibility of the liquefaction must be assessed.

10.2.6 Sand Dune Migration and Aeolian sand transportation

While the Aeolian sand is present in the study area and there are sand dunes in various locations of the area, the sand dune migration as well as the sand transportation can induce hazard on the future structures. Also considering that the wind is one of the major transportation factor in the area as discussed in details in "The Project Surkhandarya, Interpretive Geotechnical Report" and there are various dominant directions of wind blow as shown in the wind rose diagram (see Figure 93), the effects of Aeolian sand should be considered and minimized by using engineering solutions.

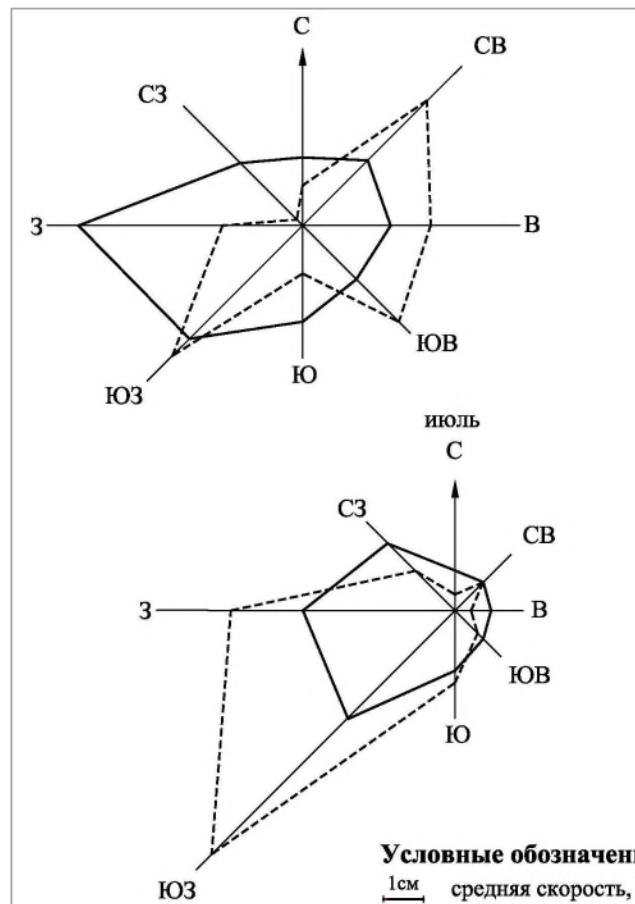


Figure 93: Wind rose diagram maps. The dominant wind directions are shown with dashed lines for cold season (top) and warm season (bottom)



10.2.7 Groundwater

Groundwater and interstratal waters in the foothills are formed due to atmospheric precipitation and the inflow of groundwater from the mountains, occur at a depth of 3-10 m in river valleys, and at a depth of 50 m in the mountainous part. In the mountains, in some places they pinch out in the form of springs.

In hydrogeological terms, the following aquifers are distinguished in the study area:

- Aquifer complex of Oligocene deposits: sandstones, interbedded with clays and siltstones;
- Aquifer complex of chalk deposits: interbedded strata of sandstones, clays, less often limestones, sands, conglomerates, siltstones;
- Aquifer complex of Jurassic deposits: sandstones, gypsum, siltstones, clays, limestones, conglomerates [12]

10.2.7.1 Groundwater Quality Survey

Groundwater sampling activities were conducted in order to determine the baseline groundwater conditions in the Project area. The groundwater sample was taken from 1 point (UW-01) between July 9 and July 16, 2021 (see Table 140). Groundwater sampling stations are presented in Figure 94. Since there is no existing groundwater well in the Project area, one sample was taken from the closest well to the area. Prior to construction activities, the EPC contractor shall analyse the groundwater to document there is no any groundwater contamination from the wells to be drilled in the Project area.

Table 140: Groundwater Quality Sampling Station Coordinates

Monitoring Station	Station Location	Coordinates (deg/min/sec)
UW-01	SSG Kattakum Yangi Hayot Street, 24	N = 37°22'50,30" E = 67°13'34,62"



Figure 94: Locations of the groundwater quality sampling station (UW-01)

Sampling and analysis were conducted (see Figure 95) by an accredited laboratory of Yuksak Musaffo Tabiat LLC Company in accordance with the established state standards as specified by the corresponding regulatory, methodological and instructive documents.



Figure 95: Sampling of groundwater at UW-01



Groundwater sampling was carried out in accordance with GOST 31861-2012 "Water. General requirements for sampling". The list of methods used to detect the substances in soil and bottom sediments is presented in Table 143. Assessment of the qualitative composition of groundwater was carried out in accordance with O'z DSt 950: 2011 "Drinking water. Hygiene requirements and quality control".

The results of groundwater quality studies are presented in Table 141. Accordingly;

- The pH is within the normal range at 8.13.
- Mineralization in groundwater samples that were analysed as 1.69 g/dm³.
- Sulphates, aluminium, iron, manganese, copper, nickel, lead and zinc concentrations are below the MPC
- Suspended solid concentrations are analysed as 194 mg/dm³,
- Nitrite nitrogen concentrations are analysed as 0.009 mg/dm³
- COD concentrations are found as 26.4 mg/dm³,
- BOD concentrations are found as 2.37 mg/dm³,
- The concentrations of the following parameters exceed the MPC:
 - Chloride (1.37 times of MPC),
 - Cadmium (5.8 times of MPC),
 - Mineralization (1.6 times of MPC).

The exceedance of chloride, cadmium, and mineralization can be caused by both natural and anthropogenic sources as follows:

- The presence of chloride in groundwater can result from the weathering of soils and common contamination sources are animal waste, fertilizer, and septic systems.
- Cadmium is a non-essential trace element that is widely distributed in the environment. Both geogenic and anthropogenic sources can elevate Cd concentrations in soils and groundwater.
- The groundwater mineralization is influenced by precipitation, base ion exchange process, anthropogenic activities, and water-rock interaction through weathering.

Since the groundwater sampling station is near agricultural areas, agricultural activities such as fertilizing, animal faces, etc. can cause an exceedance of MPC from these parameters.



Table 141: Groundwater Measurement Analysis Result

Parameters	Unit	Analysis Result	National Limit Value (O'z DST 950:2011)
pH	-	8.13	6-9
Suspended substances	mg/dm ³	194	N/A
Ammonium nitrogen	mg/dm ³	<0.2	N/A
Nitrite nitrogen	mg/dm ³	0.009	N/A
Nitrate nitrogen	mg/dm ³	<0.09	45
Chlorides	mg/dm ³	343.86	250
Sulfates	mg/dm ³	338.8	400
Phosphates	mg/dm ³	0.08	3.5
Mineralization	mg/dm ³	1,694	1000
COD	mg/dm ³	26.4	N/A
BOD₅	mg/dm ³	2.37	N/A
Cyanides	mg/dm ³	<0.03	N/A
Hydrogen sulfide	mg/dm ³	<1.0	N/A
Aluminum	mg/dm ³	0.011	0.2
Barium	mg/dm ³	<1.0	0.1
Vanadium	mg/dm ³	<0.005	-
Cadmium	mg/dm ³	0.0058	0.001
Potassium	mg/dm ³	49.71	-
Sodium	mg/dm ³	73.90	-
Iron	mg/dm ³	0.101	0.3
Manganese	mg/dm ³	0.0237	0.1
Copper	mg/dm ³	0.00535	1
Nickel	mg/dm ³	0.0115	0.1
Mercury	mg/dm ³	<0.000005	0.0005
Lead	mg/dm ³	0.0186	0.03
Chromium (+3)	mg/dm ³	0.000036	N/A
Chromium (+6)	mg/dm ³	<0.0005	0.05
Zinc	mg/dm ³	0.00998	3



10.2.8 Soil

The soils of the Surkhandarya region are located in a continental climate, with intense solar radiation, aridity and at various absolute elevations from high mountains to foothills and sloping valleys. This creates conditions for the manifestation of a wide zoning. The following types of soils are identified in Surkhandarya region:

- Belt of light brown soils (highlands).
- Belt of brown soils (medium-altitude mountains with a highly dissected relief).
- Belt of dark gray soils (foothills and low mountains).
- A belt of typical gray soils (low mountains and sloping piedmont plains).
- Belt of light gray soils (foothills and piedmont wide-wavy plain).
- Semi-fixed and non-fixed sands.

Analysis of the areal distribution of soil types shows that 47% of the area falls on typical gray soils - 1579.82 km². In second place are light gray soils - 849.8 km² (25% of the area). The third and fourth places are occupied by dark gray soils (495.3 km², 15% of the area) and brown soils (424.2 km², 12% of the area).

At the Site there are typical sierozem soils of medium and light loamy, medium washed out, saline, in places crushed, overlying the proluvium and eluvium of tertiary saline rocks. Poor pastures, selectively rainfed crops are developed on these soils. Typical serozems are characterized mainly by medium and light loams, with well-built skeletal cartilaginous filler of bedrocks.

The formation of the soil cover of the Project area under consideration is largely influenced by climatic conditions, the original underlying sediments of a variegated composition and heterogeneous structure with interbedded sands, loams, and clays, which are characterized by semi desert factors of soil formation, with the influence of saline groundwater.

The soil cover on the high terraces is represented by light gray soils in combination with old-irrigated gray soils. Old-irrigated soils were formed with periodic participation of groundwater. In terms of texture, loamy soil varieties prevail, formed on loamy-pebble and loamy-sandy deposits. Salinization is observed in some places. The content of carbonates increased to 6-9%. In the case of drainage, which ensures a constant outflow of groundwater, salinization is not threatening.

The landscape of the Project area is characterized by an exposed bedrock surface.

To the north of the construction site, to the east and west, the soil layer is represented by dark gray soils, eroded, loamy and rubble loamy. The soils are formed on skeletal-fine earthy diluvium and eluvium, subject to water erosion, moderately washed away, the humus content is low (1-1.5%).

Like other intermontane valleys of Central Asia, the Surkhan-Sherabad valley, where the gas-steam power plant is planned to be located, is a densely populated ancient agricultural oasis. Most of the valley is occupied by cultural landscapes (mainly agricultural and residential landscape).



In general, there are degraded areas of anthropogenic origin in the project area. There are quarries for the extraction of clay for the production of bricks and the extraction of sand. All this led to a strong degradation of the substrate on the territory.

10.2.8.1 Soil Quality Survey

Soil sampling activities were conducted in order to determine the baseline soil quality conditions in the project area. Soil Measurement were taken at three locations (i.e. S-01, S-02, S-03) and the background observation point (S-04) between July 9 and July 16, 2021 (see Table 142 and Figure 96.). Soil sampling stations are presented in Figure 96.

Soil samples are selected to represent the Project area and its surroundings. S-02 and S-03 stations are selected from agricultural areas; S-01 is selected within the Project area. S-04 is the natural soil.

Table 142: Soil Quality Sampling Station Coordinates

Number of Monitoring Station	Station Location	Coordinates (deg/min/s)
S-01	700 meters south of the Angor-Hairaton road	N = 37°22'39,3" E = 67°15'02,4"
S-02	500 meters north of the Angor-Hairaton road	N = 37°23'20,6" E = 67°14'21,8"
S-03	600 meters from the 4P23 motor road	N = 37°21'05,3" E = 67°14'59,7"
S-04 (background observation point)	800 meters from the sanatorium of Uzbek Railways	N = 37°21'13,2" E = 67°12'40,2"



Figure 96: Locations of the Soil Quality Sampling Stations

Sampling and analysis were conducted by an accredited laboratory which is Yuksak Musaffo Tabiat LLC Company in accordance with the established state standards as specified by the corresponding regulatory, methodological and instructive documents.

Soil sampling was carried out using a sampler or manually in accordance with GOST 17.2.3.01-83 "Nature protection. Soils. General requirements for sampling". The list of methods used to detect the substances in soil and bottom sediments is presented in Table 143.

Table 143: The list of methods used to detect the substances in soil and bottom sediments

The component being defined	The name of the measurement procedure (MVI)
pH	GOST 26423-85 Soils Methods for determination of electrical conductivity, pH and dense residue of water extract
Chlorides in water extract	GOST 26425-85 Soil Methods for determination of chloride ion
Sulfates in water extract	GOST 26426-85 Soils Methods for determination of sulfate ion
Calcium in water extract	GOST 26428-85 Soils Methods for determination of calcium and magnesium in water extract
Magnesium in water extract	GOST 26428-85 Soils Methods for determination of calcium and magnesium in water extract
Nitrates	O ' z O ' U 0595: 2013 "Procedure for measuring the mass fraction of nitrates in soil by the photocolometric method"



The component being defined	The name of the measurement procedure (MVI)
Petroleum products	O ' z O ' U 0750: 2017 Methodology for measuring the mass fraction of petroleum products in soil and soil Measurement by the fluorimetric method on the fluid analyzer "Fluorat-02"
Lead	O ' z O ' U 0482: 2009 "Methodology for measuring the mass fraction of lead in water and soil by the atomic absorption method"
Cadmium	O ' z O ' U 0502: 2010 "Methodology for measuring the mass fraction of cadmium in water and soil by the atomic absorption method"
Ferrum	O ' z O ' U 0475: 2009 "Procedure for measuring the mass fraction of iron in soil by the atomic absorption method"
Copper	O ' z O ' U 0807: 2020 "Methodology for measuring the mass fraction of copper, lead, zinc and cadmium water-soluble, mobile and acid-soluble phori in soil Measurement by the atomic absorption method"
Zinc	O ' z O ' U 0807: 2020 "Methodology for measuring the mass fraction of copper, lead, zinc and cadmium water-soluble, mobile and acid-soluble phori in soil Measurement by the atomic absorption method"
Chrome ³⁺	O ' z O ' U 0510: 2010 "Methodology for measuring the mass fraction of chromium in soil by the atomic absorption method"
Chrome ⁶⁺	O ' z O ' U 07.0142: 2000 MVI of chromium mass fraction in soil Measurement by photocolometric method
Nickel	O ' z O ' U 290: 2006), "Procedure for measuring the mass fraction of copper, zinc, nickel, manganese in powder Measurement of rocks and soils by the atomic absorption method"
Manganese	O ' z O ' U 290: 2006), "Procedure for measuring the mass fraction of copper, zinc, nickel, manganese in powder Measurement of rocks and soils by the atomic absorption method"
Mercury	O ' z O ' U 0422: 2009 "Methodology for measuring the mass fraction of mercury in water and soil by the atomic absorption method"
Selenium	O ' z O ' U 0485: 2010 "Methodology for measuring the mass fraction of selenium in water and soil by the atomic absorption method"
Arsenic	O ' z O ' U 0521: 2011 "Methodology for measuring the mass fraction of arsenic in water and soil by the atomic absorption method"
Sodium	M-MVI-80-2008 "Methodology for measuring the mass fraction of elements in Measurement of soils, grounds and bottom sediments by atomic emission and atomic absorption spectrometry"



The component being defined	The name of the measurement procedure (MVI)
Potassium	M-MVI-80-2008 "Methodology for measuring the mass fraction of elements in Measurement of soils, grounds and bottom sediments by atomic emission and atomic absorption spectrometry"

Measurement of the local site (S-01, S-02, S-03) were taken by the "envelope" method 20x20 m from 4 corner points from a depth of 0-0.3 m (humus horizon) and 0.3-0.8 m (soil), and were quartered and mixed in the field. Soil Measurement were taken in special bags for sampling (see Figure 97).



Figure 97: Soil sampling from the territory of the planned construction of the Project at the observation station

The results of soil quality studies are presented in Table 144. The state of the soil was assessed by such indicators as chlorides, sulfates, nitrates, potassium, sodium, oil products, and heavy metal (lead, cadmium, copper, zinc, trivalent chromium and hexavalent chromium, nickel, cobalt, mercury, selenium and arsenic) concentrations.

Table 144: Soil Samples Analysis Result

Parameters	Unit	Soil Sampling Result			
		S - 04 (Background)	S - 01	S - 02	S - 03
pH	-	7.8	7.45	7.52	7.45
Chlorides	%	0.0029	0.0042	0.006	0.006
Sulfates	%	0.168	0.024	0.021	0.02
Calcium	%	0.01	0.018	0.025	0.014
Magnesium	%	0.008	0.015	0.017	0.012
Sodium	mg/kg	46.5	53.1	69	55



Parameters	Unit	Soil Sampling Result			
		S - 04 (Background)	S - 01	S - 02	S - 03
Nitrates	mg/kg	12	15.2	14	22.5
Humus	mg/kg	0.72	0.57	0.62	0.68
Petroleum products	mg/kg	0.082	0.09	0.06	0.138
Arsenic	mg/kg	0.107	n/d	0.515	0.981
Lead	mg/kg	9.748	41.724	5.64	6.050
Cadmium	mg/kg	2.028	1.172	1.076	1.260
Iron	mg/kg	10.332	11.811	10.185	12.092
Copper	mg/kg	10.074	11.056	7.938	8.942
Zinc	mg/kg	52.720	37.100	36.600	35.000
Chrome (3+)	mg/kg	6.644	9.532	6.640	6.990
Chrome (6+)	mg/kg	0.98	1.35	1.04	1.25
Nickel	mg/kg	19.028	16.512	13.454	13.460
Cobalt	mg/kg	6.040	4.644	3.804	4.204
Aluminum	mg/kg	3.37	3.21	2.94	2.56
Mercury	mg/kg	n/d	0.00137	n/d	n/d
Selenium	mg/kg	0.129	0.155	0.271	0.179

The assessment of soil contamination was carried out by comparing the concentrations of pollutants from the analysis of the monitored area with the corresponding soil indicators of the background site. The initial (S- 04 background) state of soils was determined on undisturbed lands.

In accordance with the analysis result;

- Soil samples are slightly alkaline, pH from 7.45 to 7.80 and contains humus in the range 0.57-0.72%.
- The concentrations of the following parameters exceed the MPC:
 - Sulphates (1.3 – 1.5 times of MPC),
 - Lead at S-01 (1.3 times of MPC)
- S-04 is considered as representative for background concentration because S-04 sampling area is undisturbed natural area. In accordance with following parameters are observed at S-01, S-02 and S-03 stations higher than analysis result of S-04 station (background concentration);
 - Chlorides (1.5-2.5 times higher than background),
 - Calcium and magnesium (1.2-1.8 times higher than background),



- Petroleum products at S-03 (1.7 times higher than background),
 - Chromium (3+) at S-02 (1.4 times higher than background),
 - Chromium (6+) at S-02 (1.4 times higher than background) and at S-03 (1.3 times higher than background),
 - Selenium (1.2-2.1 times higher than background)
 - The content of heavy metals cadmium, copper, zinc, nickel, cobalt does not exceed background values.
- Mercury is present only in sample S-01 in the amount of 0.00137 mg/kg, which is below the MPC (2.1 mg/kg),

Arsenic is present in samples S-02, S-03 and S-04 (background) in amounts below the MPC and is absent in sample S-01.

10.2.8.2 Sediment Quality Survey

In addition to soil quality survey, sediment sampling activities were conducted in order to determine the baseline sediment quality conditions of the Uchkizil Reservoir and the river to the west of the project area. Sediment Measurement were taken at 2 local points (SD-01 and SD-02,) between July 9 and July 16, 2021 (see Table 145). Sediment sampling stations are presented in Figure 98.

Table 145: Sediment Quality Sampling Station Coordinates

Number of Monitoring Station	Station Location	Coordinates (deg/min/s)
BS-01	Uchkizil Reservoir	N = 37°22'26,7" E = 67°14'48,2"
BS-02	Zang Canal	N = 37°22'40,2" E = 67°14'32,0"

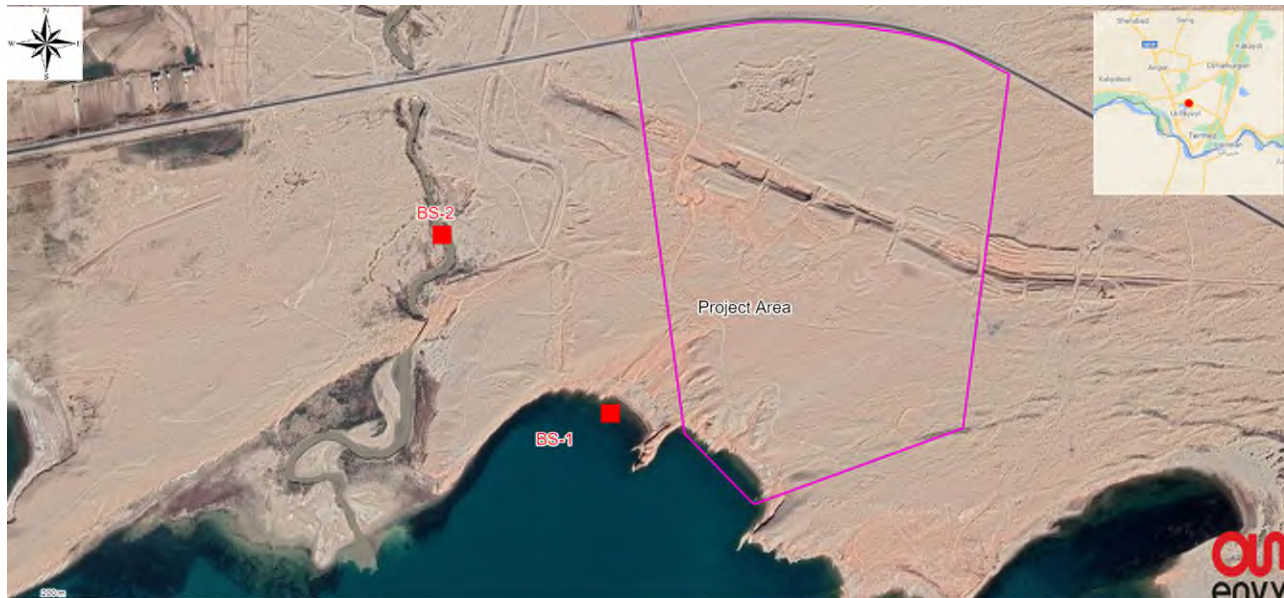


Figure 98: Locations of the Sediment Quality Sampling Stations

Sampling of bottom sediments was carried out in accordance with GOST 17.1.5.01-80 "Nature protection. Hydrosphere. General Requirements for Sampling of Bottom Sediments of Water Bodies for Analysis for Contamination". The list of methods used to detect the substances in soil and bottom sediments is presented in Table 143.



Figure 99: Sampling of bottom sediments

Bottom sediments were collected for determination of baseline pollution from the surface layer

The state of bottom sediments of the Uchkizil Reservoir was assessed by such ingredients as pH, humus, chlorides, sulfates, nitrates, calcium, magnesium, potassium, sodium, heavy



metals (lead, cadmium, iron, copper, zinc, manganese, trivalent chromium, nickel, mercury, arsenic). The results of bottom sediment studies are presented in Table 146.

Bottom sediments have a slightly alkaline reaction, pH from 7.95 to 8.58 and contain humus in an amount of 0.53-0.74%. The results of chemical analyzes showed that the content of sulfates is 1.2-1.3 times higher than the MPC. The content of heavy metals of lead, manganese, mercury, and arsenic does not exceed the MPC standards

Table 146: Bottom Sediment Measurement Analysis Result

Parameters	Unit	Bottom Sediment Sampling Result		
		BS - 01	BS - 02	
Chemical Analysis	pH	-	7.95	8.58
	Humus	%	0.53	0.74
	Chlorides	%	0.0042	0.0049
	Sulfates	%	0.019	0.021
	Calcium	%	0.01	0.011
	Magnesium	%	0.0072	0.0084
	Sodium	mg/kg	244.625	79.375
	Potassium	mg/kg	55.250	26.615
	Nitrates	mg/kg	7.5	10.8
	Lead	mg/kg	17.708	7.278
Heavy Metals	Cadmium	mg/kg	1.178	1.810
	Iron	mg/kg	14.674	14.315
	Copper	mg/kg	16.39	16.870
	Zinc	mg/kg	60,120	47,840
	Chrome (3+)	mg/kg	538.040	433.400
	Nickel	mg/kg	7.568	14.221
	Mercury	mg/kg	23.604	25.252
	Arsenic	mg/kg	0.0193	0.00337

10.3 Potential Impacts, Mitigation, Management & Residual Impacts

The most significant impact on soil, sediment, and groundwater will be caused during the construction phase of the Project; therefore, the construction works will be planned to minimize the adverse impacts to the possible extent. Moreover, the construction technique is



also significant in reducing the time taken to construct the Project and consequently, the environmental disturbance.

Environmentally, the major activity that should be considered regarding the construction activities is the excavation. Following commencement of the construction activities, a detailed excavation plan must be developed that provides excavation and backfill for the entire site. The plan should include requirements for equipment methods, soil stabilization, dewatering, rock removal, if any, and backfill. It should also include the economic disposal of spoil materials.

The materials arising from excavation will be used for backfilling, road construction, land levelling and elevation adjustment to the extent possible.

For the purpose of final storage of surplus excavation materials stemming from excavation works, which cannot be used within the scope of the project, a surplus material storage area will be selected. For storage of the surplus excavation material, storage will be made in a stepwise manner to prevent landslide and pouring of materials. Bevel angles of steps will be arranged in an inclined manner to assure the stability of materials to the extent possible. Surplus material will be stored according to the structure of the material and mitigated against wind and rain erosion.

Due to rainfall in the region, the potential for soil erosion at the worksites will largely be confined to episodic intense rainfall events resulting in surface water run-off. In this respect, necessary precautionary actions will be taken such as rainwater collection channels and pools.

On-site refueling of the heavy-duty earthmovers will be conducted via a specially designed stationary refueling area with impermeable concrete standing, The bottom of the refueling area will be sloped to the rear side and possible leakages will flow to the side of the area where they could be collected and removed without reaching the soil.

Site contamination will be prevented with appropriately designed storage options and adoption of strict fueling and spill control procedures, as well as appropriate spill response measures. Floors of hazardous material storage areas will be leak-proof and equipped with a drainage system. Moreover, appropriate storm water management procedures will be applied to ensure that contaminants are not mobilized into the wider environment. Domestic and industrial wastewater during the site preparation & construction phases will be treated in accordance with the standards specified in the Uzbekistan legislation.

There is a risk of contamination groundwater where fuel or lubricant spillage occurs. Therefore, adsorbent materials with adequate amount and characteristics will be made available for oil leakage that may be caused by earthmovers and vehicles during excavation, filling, transportation operations carried out in the field so that any possible contamination of the soil.

The adoption of good on-site working and storage practices and the implementation of suitable control measures, on-site training, and the emergency preparedness will ensure that the potential contamination is avoided.



10.3.1 Construction Phase

In the process of organizing production, the impact on soils is due to the processes of removal, movement, compaction of soils during the construction of foundations and installation of equipment. In the process of soil compaction, their physical and mechanical properties will change. The nature of the impact is local, irreversible. The impact is weak.

Soil contamination during construction work is possible with the spill of oil products used as fuel for mobile vehicles and construction equipment. However, the pollution will be minor and localized. Due to poor solubility, oil products will have a low migration capacity and will not pose a hazard to groundwater. The likelihood of a fire occurring due to fuel spills is also low. In general, during the construction period, soils and groundwater contaminated with oil products will have a minor risk to the environment and personnel safety.

The presence and use of such dangerous and hazardous chemicals increase the probability of accidental spills or releases of minor quantities of these materials into the receiving hydrological environments. Further, site preparation activities and associated construction of infrastructure can result in increased sediment loads in reservoir.

To further minimize the impact on the environment of soils contaminated with oil products, it is recommended to collect contaminated soil layers in a specially provided container with subsequent disposal.

The potential impacts on the soil, bedrock and groundwater during the site preparation and construction phases and measures to be applied are presented in Table 147. As seen from the table, the impacts of the activities on soil, bedrock, and groundwater will vary between minor and moderate assuming that good soil and hazardous waste management are applied on site.

Table 147: Impacts Significance of the Soil, Sediment and Groundwater and Mitigation Measures during Construction Phase

Potential Impacts	Receptor	Sensitivity of Receptor	Magnitude of Impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
Temporary disturbance on soil, and ground water from excavation works	Soil Quality, Groundwater Quality in neighboring farms	Medium	Medium	Moderate	The impact of existing access routes across the site from and to the different communities and farms will be assessed and an alternative route provided before the commencement of construction activities. The alternative routes provided by the company will be marked in local languages and easy-to-read signs to prevent local communities from wandering into construction areas. Project activities will be only done in the project area, not beyond the border to avoid any increase in the footprint of the project.	Minor
Risks of contamination on soil, and ground water	Soil Quality, Groundwater Quality in neighboring farms	Medium	Medium	Moderate	Any leaks/damage to the soil and groundwater will be prevented through appropriately designed storage options. Strict fueling and spill control procedures will develop as well as emergency clean-up procedures. The quantities of hazardous substances will limit at site to reduce the risk of spillage. Areas where spillage of soil contaminants occurs will be excavated (to the depth of contamination) and suitably rehabilitated. If any other minor spillage occurs, the spillage will be cleaned immediately and the contaminated area will be rehabilitated. All contaminated material will be suitably disposed of.	Minor
Accidents	Soil Quality, Groundwater Quality in Neighboring farms	Medium	Medium	Moderate	The Contractor will develop a "Training Plan" for the personnel on fueling and spill control procedures as in line with the Environmental & Social Management System. The contaminated soil and treat as hazardous waste will remove, promptly.	Minor



10.3.2 Operational Phase

The key contamination regarding the soil, bedrock, and groundwater is associated with the potential leakage and spills during the plant operations and the storage of hazardous materials in the plant.

Site contamination will be prevented with appropriately designed storage options and the adoption of strict spill control procedures, as well as appropriate spill response measures. Floors of hazardous material storage areas will be leak-proof and equipped with a drainage system. Moreover, appropriate stormwater management procedures will be applied to ensure that contaminants are not mobilized into the wider environment. Domestic and industrial wastewater during the site preparation & construction phases will be treated in accordance with the standards specified in the Uzbekistan legislation.

The areas, where the maintenance-repairs of vehicles will be made and all the areas that have the risk to pollute groundwater and soil due to any spillage and scattering from tanks of chemicals, grease, etc. will be covered with an impermeable floor. Therefore, adsorbent materials with adequate amounts and characteristics will be made available for oil leakage.

The adoption of good on-site working and storage practices and the implementation of suitable control measures, on-site training, and emergency preparedness will ensure that the potential contamination is avoided.

The potential impacts on the soil, sediment, and groundwater during the operation phase and measures to be applied are presented in Table 148. As seen from the table, the impacts of the activities on soil, bedrock, and groundwater will be minor assuming that good hazardous waste and chemical management are applied at the plant.



Table 148: Impacts Significance of the Soil, Sediment and Groundwater and Mitigation Measures during Operation Phase

Potential Impacts	Receptor	Sensitivity of Receptor	Magnitude of Impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
Risks of contamination on soil, and ground water	Soil Quality, Groundwater Quality in neighboring farms	Medium	Medium	Moderate	Any leaks/damage to the soil and groundwater will be prevented through appropriately designed storage options. Strict fueling and spill control procedures will develop as well as emergency clean-up procedures. The quantities of hazardous substances will limit at site to reduce the risk of spillage	Minor
Accidents	Soil Quality, Groundwater Quality in neighboring farms	Medium	Medium	Moderate	The Contractor will develop a "Training Plan" for the personnel on fueling and spill control procedures as in line with the Environmental & Social Management System. The Contractor will include handling of soil and ground water contamination in case of accidents to Emergency Preparedness and Response Plan. The contaminated soil and treat as hazardous waste will remove, promptly.	Minor



10.4 Cumulative Impacts

All potential impacts on soil, sediment, and groundwater during the construction and operation phase are presented in Section 10.3. The summary of cumulative impacts on soil, sediment, and groundwater is presented in Table 149.

Table 149: Cumulative impacts on soil, sediment and groundwater

Environmental and Social Aspects	Construction Phase	Operation Phase
Cumulative Impacts	<p>There are no known development projects in the vicinity of the Project Area.</p> <p>If any simultaneous activity is planned in the region, there will be very limited expected cumulative effects since impacts will be localized and limited within each Project areas.</p> <p>Also, in the event of a major leak/spill could the groundwater is highly likely to become contaminated.</p>	<p>There are currently no plans for any project activity in the vicinity of the site.</p> <p>However, should this change in the future, it could pose potential contamination risks to soil, groundwater and also the sediment of the Zang Canal and Uchkizil Reservoir due to effluents.</p>

10.5 Monitoring

The monitoring requirements for soil, sediment, and groundwater for the construction, commissioning and operation phases of the Project are presented in brief in Table 157.

Table 150: Summary of Soil, Sediment, Groundwater Monitoring

Monitoring Activity	Parameters	Duration	Location
Construction Phase			
Soil and Sediment Quality	Baseline section of this ESIA contains the analysis parameters (chemical and heavy metals) of the soil and sediment.	Annually	Monitoring should be conducted at predetermined sampling site.
Contaminated Land	Any soils around the sites that appear to be contaminated by leaked oil, hydrocarbons and other potentially hazardous or chemical pollution sources	Daily Visual Check	All the project area and access road to Project area.
Groundwater Quality	Baseline section of the this ESIA, contains the analysis parameters	Quarterly	Monitoring should be conducted on location



Monitoring Activity	Parameters	Duration	Location
	of the groundwater (chemical and heavy metals).		where baseline studies have been carried out. If necessary, new location will be selected.
Commissioning & Operation			
Soil and Sediment Quality	Any soils around the sites that appear to be contaminated by leaked oil, hydrocarbons and other potentially hazardous or chemical pollution sources.	Daily Visual Check	All the project area and access road to Project area.
	Baseline section of this ESIA contains the analysis parameters (chemical and heavy metals) of the soil and sediment.	Annually	Monitoring should be conducted at predetermined sampling site.
Groundwater Quality	Baseline section of the this ESIA, contains the analysis parameters of the groundwater.	Quarterly	Monitoring should be conducted on location where baseline studies have been carried out. If necessary, new location will be selected.



11. SOLID WASTE & WASTEWATER MANAGEMENT

11.1 STANDARDS AND REGULATORY REQUIREMENTS

11.1.1 National Requirements

The project will comply with the Law on Waste No.362-II (dated, 5 April 2002 and modified 4 January 2011) that regulates solid waste treatment procedures and defines the authority of various institutions involved in solid waste management. The law also provides rules for the transport of solid waste. Regulation Document on Order of endorsement and approval of projects of wastes disposal and limits for its disposal (RH 84.3.22:2006) shall also apply.

The project will comply with the provisions approved by the SCEEP; the Ministry of Health No. 2438 dated March 20, 2013, for hazardous waste specifically for placement of hazardous chemicals and hazardous waste in special landfills, their protection, transport, and disposal.

Hazardous wastes that are transported must undergo environmental certification and be transported by special vehicles for disposal. The SCEEP and the Ministry of Health also provide approvals i.e., "proper performance of work" for hazardous waste generated. The transportation and disposal of hazardous waste is under the purview of the State organization "Qishloqxujalikkimyo" (Agricultural Chemicals).

11.1.2 Lenders' Requirements

Basel Convention on the Control of Transboundary Movements of Hazardous Wastes and Their Disposal.

Solid Waste

IFC EHS Guidelines on Waste Management covers hazardous and non-hazardous waste management. According to this guide, hazardous wastes should always be segregated from non-hazardous wastes. If generation of hazardous waste can not be prevented through the implementation of the above general waste management practices, its management should focus on the prevention of harm to health, safety, and the environment, according to the following additional principles:

- Understanding potential impacts and risks associated with the management of any generated hazardous waste during its complete life cycle,
- Ensuring that contractors handling, treating, and disposing of hazardous waste are reputable and legitimate enterprises, licensed by the relevant regulatory agencies and following good international industry practice for the waste being handled,
- Ensuring compliance with applicable local and international regulations.

For waste storage, transportation, treatment, disposal and monitoring processes, the requirements in IFC EHS Guidelines on Waste Management shall be followed, as minimum.



Wastewater

The World Bank General EHS Guidelines (2007) establish general requirements for direct or indirect discharge of process wastewater, wastewater from utility operations or storm water to the environment.

"Projects with the potential to generate process wastewater, sanitary (domestic) sewage, or storm water should incorporate the necessary precautions to avoid, minimize, and control adverse impacts to human health, safety, or the environment".

However, wastewater effluent pollutant limits are only established for sanitary wastewater for discharge to the sanitary sewer systems. Water effluent guidelines in industrial wastewater for discharge to surface waters are established for the power sector in World Bank EHS Guidelines for Thermal Power Plants (2008) and have been presented in the Standards and Regulatory Requirements.

11.2 Local Conditions and Observations

Solid and liquid wastes may have certain characteristics depending on their chemical, physical, and biological properties. Different types of waste require different management and disposal techniques depending on the potential risk the material poses to human health or the environment. In order to categorize the different risks to these receptors, it is often useful to divide the streams into different categories that effectively correspond to the level of management and disposal required for each. Industrial or domestic wastewater streams can contribute to a number of environmental problems if they are not properly handled, stored, and/or managed. These include direct contamination of water bodies, which can lead to serious environmental and public health problems.

Although there is limited information about the infrastructural conditions on waste and wastewater management in Angor and Temrez regions, according to the resolution of the Khokim of the Surkhandarya region dated February 21, 2018 No. Q-154, the removal and management of solid domestic waste from the territory of the Angor region is carried out by the Bio Texno Eko LLC, which is located with a distance of 250 m to the project area.

During the social site survey, an interview was performed with this facility representatives and it has been stated that the waste generated during the construction and operation of the proposed CCPP can be accepted by the facility. It has also been informed that the facility has an allocated area for landfill. The capacity of the enterprise is about 180,000 tons/year, and they provide services to 285,000 residents of the city of Termez, Termez and Angor districts [5][6][7]. The collected domestic waste is processed and secondary semi-products (i.e. polyethylene pipes, are produced.

In Tashkent, recent surveys show daily municipal solid waste generation at 0.55 kilograms/person/day, a rate that dramatically decreases progressively in smaller cities, towns, and rural areas. Uzbekistan is estimated to generate over 12,000 tons of municipal solid waste daily, or over 4 million tons annually. This is expected to accelerate to over 7



million tons per year by 2030, cumulatively generating from 2013 to 2030 about 100 million tons of municipal solid waste [8].

Waste transport and disposal as well as the operation of garbage containers or collection points in the capital city of Tashkent are handled by the state-owned enterprise "Makhsustrans". The state-owned enterprise "Tozakhudud" is responsible for the disposal and treatment of waste in the autonomous republic of Karakalpakstan and other regions of Uzbekistan. Since 1 August 2018, private companies have also been allowed to provide waste disposal services in Tashkent and the regions.

Outside of Tashkent, solid waste management services are basic, generally with an underfunded solid waste management services company striving to provide adequate waste collection while operating rudimentary dumpsites and dumping grounds. In rural areas, solid waste management is informal, with communities often self-funding waste collection on an ad hoc basis [8].

Regarding wastewater management system in Termez, wastewaters from the urban population, institutional and municipal establishments and industrial wastewater are discharged into the municipal sewerage system. The wastewater is collected by the gravity sewer system in the South – Western part of the city and flows under gravity through the collector sewers to the main pumping station, situated at the wastewater treatment plant.

The theoretical capacity of the existing sewerage system is 35,000 m³ /day. The current influent to the sewerage system is estimated at 15,900 m³ /day.

Urban population: 6,010 m³/day,

Institutional organizations: 6,800 m³/day, and

Industrial enterprises: 3,090 m³/day [9][8]

The existing WWTP is located 500m from the southern part of Termez city and was first put into operation in 1984. In 2020, the quantity of wastewater treated is 25,000 m³ /day and it is planned to reach the capacity of 45,000 m³ /day in 2035 [10].

11.2.1 Waste Management at the Project Area

The Contractor should subcontract a licensed and reputable waste management company for the collection, transport, and disposal of waste produced at site. Wastes at the sites and the project facilities shall be segregated and collected at the temporary waste storage areas. There should be waste collection and segregation area in the project area depending on the number of project personnel and the anticipated volume of waste.

The waste storage area shall have separate storage segments for prime recyclables (scrap metals, tires, plastic, wooden material), and separate segment for other hazardous waste including waste oils, oil filters etc. Special care should be taken to ensure that liquid wastes are kept in a segment with secondary containment. Proper waste segregation will be maintained at all times. Environmental labelling including visual communication elements shall be applied to the area/on the containers where appropriate.



Solid waste generated during the project is expected to come from various activities such as accommodation, canteens, vehicle maintenance, clinics, and construction works. The possible wastes generated can be found in the list of Table 151.

Table 151: List of waste types

Waste Type	Phase	Amount	Source, Characterization, and Management
Medical Wastes	Construction + Operation	0.03 t/year	The construction camp is expected to have a clinic expected to generate medical waste. All medical wastes will be treated as hazardous waste, collected, transported, and removed separately from domestic wastes. Medical wastes will be collected in specially coded containers in the clinic and also they will be stored in the designated area in a safe place.
Domestic Wastes (Solid wastes)	Construction + Operation	1296 tones /year	The construction camp will provide accommodation and other basic needs for workers during construction phase. Administration Buildings will provide daily working conditions for the employers during operation phase. Domestic solid waste will be collected in closed containers. The domestic solid waste generated will have to be taken to the waste area daily by the site responsible. These solid wastes should be taken to the nearest landfill approved by the municipality.



Waste Type	Phase	Amount	Source, Characterization, and Management
Waste Oils	Construction + Operation	28.5 tones /year	<p>The maintenance process of the vehicles to be used during project phases will be carried within the facilities located in the project area.</p> <p>Waste oil shall be collected in a closed temporary waste storage area with a leak-proof floor and covered with a shelter constructed nearest location to the maintenance facility and/or also in a waste storage area. The oil collected would be given to a licensed waste oil recovery company. Additionally, waste vegetative oil will occur in the cafeterias of the campsites within the scope of the project. These wastes will be collected and stored separately from other wastes and stored in segregated segments in the waste storage area until disposal by a waste contractor.</p> <p>These segments differ from others with a structure (secondary containment) to avoid spilling and leakage, soil pollution accordingly.</p>
Oil filters	Construction + Operation	0.2 tones /year	<p>The maintenance process of the vehicles to be used during Project phases will be carried out within the facilities located in the Project area. Waste oil filters shall be collected in waste bins with secondary containment and transferred to the waste storage area for final disposal by a third-party sub-contractor. Air filters also will be collected in waste air filter bins and then transferred to the waste storage area for final disposal by a third-party sub-contractor.</p>
Waste Tyres	Construction + Operation	1.22 tones /year	<p>The maintenance process of the vehicles to be used during Project phases will be carried within the facilities located in the project area. If there is a need to change the tires of these vehicles and machines, the end-of-life tires that come out would be sent to tires distribution companies or to authorized third-party companies. Until disposal, waste will be stored in the waste storage area in the designated segment.</p>
Batteries, Accumulators, Tonners, Cartridges	Construction + Operation	0.675 tones /year	<p>Waste batteries will be stored in collection points located in office areas and will be delivered to third-party subcontractors. Waste accumulators (vehicle batteries) will be stored in the temporary storage areas until final disposal. Tonners and cartridges</p>



Waste Type	Phase	Amount	Source, Characterization, and Management
			will be stored in separated bins in storage areas.
Recyclable Wastes (Paper, Plastics, Cardboard, Metal Scraps)	Construction + Operation	87.5 tones /year	<p>Paper and card waste from offices and domestic type sources at the main construction camp will be segregated, if practicable and sent for recycling by third party contractor. Separately collected recyclable wastes will be taken to the waste storage areas and be ready for transfer to recyclers.</p> <p>Recyclable wastes mainly resulting from construction activities (metal scraps, plastics, pipes etc.) will be collected in designated areas in construction sites and transferred to the waste storage area located in project area. Recyclable wastes will be stored in waste storage area until taken by third party subcontractors.</p>
Spoiled soil	Construction	NA	The spoil soil shall be dumped in dumping areas located along the Project site.
Domestic Sewage	Construction Operation	32 m ³ /day 8 m ³ /day	This includes wastes from the bathrooms, toilets etc. This waste shall be collected and treated in the wastewater treatment plant at the time.
Concrete Batch plants	Construction		Concrete wash out pits will be used to allow sediments to settle and water will be re-used for dust control activities. If water is not able to re-use, acidic chemicals will be added to balance pH into the range for discharge standards and will be discharged to the environment. Daily pH Control shall be undertaken to ensure compliance to discharge standards.
Residual sludge from waste water treatment	Construction+ Operation	20 tones /year	Different chemicals will be added to water for corrosion prevention, so probably this kind of waste can be classified as a hazardous waste. Also existence of heavy metals in wastewater with significant concentrations can strengthen this hypothesis.
Wastewater from the operational processes	Operation	NA	Wastewater from water treatment plant, sewage treatment plant, cooling water system, RO plant; and storm water system will be generated and treated in wastewater treatment plant of the project and discharged to Uchkizil Reservoir.
Wastewater from test and	Construction	NA	Wastewater from hydrotesting, acid cleaning and boiler steam blowing will be generated



Waste Type	Phase	Amount	Source, Characterization, and Management
commissioning processes			and treated in waste water treatment plant of the project and discharged to Uchkizil Reservoir.

Waste can exhibit certain characteristics according to the process stream from which it is generated and any pre-treatment processes that are undertaken. Different types of waste require different management and disposal techniques according to the potential risk that the material poses to human health or the environment. For this Project, waste has been classified into three main categories as presented in Table 152.

Table 152: Waste characterization

Waste Classification	Description
Domestic Waste	Household, commercial, agricultural, governmental, industrial and institutional wastes, which have chemical and physical characteristics similar to those of household such as garbage, paper, cardboard, plastic, cans, etc. Disposal of such waste can generally be routed to municipal recycling or disposal facilities
Industrial waste	Non-hazardous wastes that have physical and chemical characteristics that are different from domestic wastes such as construction waste, glass, scrap metal, wood, used containers, tires etc. This waste generally poses little risk to the environment and can be disposed to normal municipal facilities after waste minimisation options are exhausted and before obtaining approval
Hazardous waste	Simply defined, a hazardous waste is a waste with properties that make it dangerous or capable of having a harmful effect on human health or the environment. Hazardous waste is generated from many sources, ranging from industrial manufacturing process wastes to batteries and may come in many forms, including liquids, solids gases, and sludge. Hazardous wastes has flammable, corrosive, reactive, toxic, or radioactive properties according to USEPA.

11.2.2 Waste Management Hierarchy

Waste hierarchy is a tool used in the evaluation of processes that protect the environment alongside resource and energy consumption to most favorable to least favorable actions. The hierarchy establishes preferred program priorities based on sustainability. To be sustainable, waste management cannot be solved only with technical end-of-pipe solutions and an integrated approach is necessary.

The waste management hierarchy indicates an order of preference for action to reduce and manage waste, and is usually presented diagrammatically in the form of a pyramid. The hierarchy captures the progression of a material or product through successive stages of waste management, and represents the latter part of the life-cycle for each product.

The aim of the waste hierarchy is to extract the maximum practical benefits from products and to generate the minimum amount of waste. The proper application of the waste hierarchy



can have several benefits. It can help prevent emissions of greenhouse gases, reduces pollutants, save energy, conserves resources, create jobs and stimulate the development of green technologies. Waste hierarchy, which reflects mitigation orders can be seen in Figure 100.

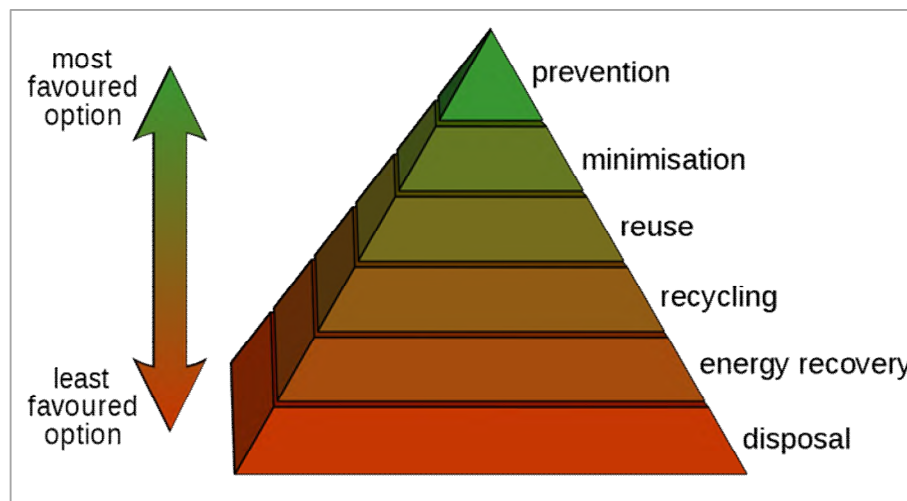


Figure 100: Waste hierarchy

11.2.2.1 Minimisation

A waste minimization philosophy will be implemented for the construction work. Whenever feasible, project personnel shall review the potential to reduce the volumes of wastes generated during construction. This may be accomplished by applying source reduction techniques to minimize waste (e.g., do not over - excavate contaminated soil). The following source reduction strategies and practices shall be followed:

- Review major waste streams for potential for source reduction. A plan should be developed for at least one waste stream to reduce the total annual volume of that waste.
- Waste shall only be treated by using acceptable technologies.
- Materials shall be purchased in quantities that can be used within a short period of time and inventories shall be rotated to minimize out - of - date inventory.
- Whenever possible, materials used in large quantities should be purchased in reusable or returnable containers to minimize packaging waste
- Alternative materials or products should be used that are non - hazardous or less hazardous
- Waste will be properly stored to avoid accidental releases to the soil, water or air
- Collection and segregation of waste according to its type, whether it is re-usable, recyclable, non-hazardous or hazardous waste.



11.2.2.2 Waste Re-use

Reuse of waste means any operation by which products or components that are not waste are used again for the same purpose for which they were conceived. Reuse of materials that are in good condition should be considered (e.g. used clothes, wood pallets).

11.2.2.3 Waste Recycling

Recycling is the process of converting waste materials into new materials and objects. Recycling can prevent the waste of potentially useful materials and reduce the consumption of fresh raw materials, thereby reducing energy usage, air pollution (from incineration), and water pollution (from landfilling).

11.2.2.4 Segregation and Sorting

All waste produced at site should be sorted out, if possible, at the place where they were produced. Waste must be properly transported to the Management Areas to be segregated and sorted. During the transport, all mitigation measures will be taken to prevent and minimize likely environmental impacts.

11.2.2.5 Disposal

Before the amount of waste stored in the waste storage area reaches the maximum temporary storage capacity, the disposal/reuse process must start. Send the disposal to an authorized operator.

The Project Management will subcontract the waste management companies in charge of collecting, transporting, and disposing of the waste produced at site.

11.2.3 Hazardous Waste

Simply defined, hazardous waste is a waste with properties that make it dangerous or capable of having a harmful effect on human health or the environment. Hazardous waste is generated from many sources, ranging from industrial manufacturing process wastes to batteries, and may come in many forms, including liquids, solids, gases, and sludge. Any waste with flammable, corrosive, reactive, toxic, or radioactive properties expected as hazardous waste

Cradle to Grave principle for hazardous wastes can be seen in Figure 101.

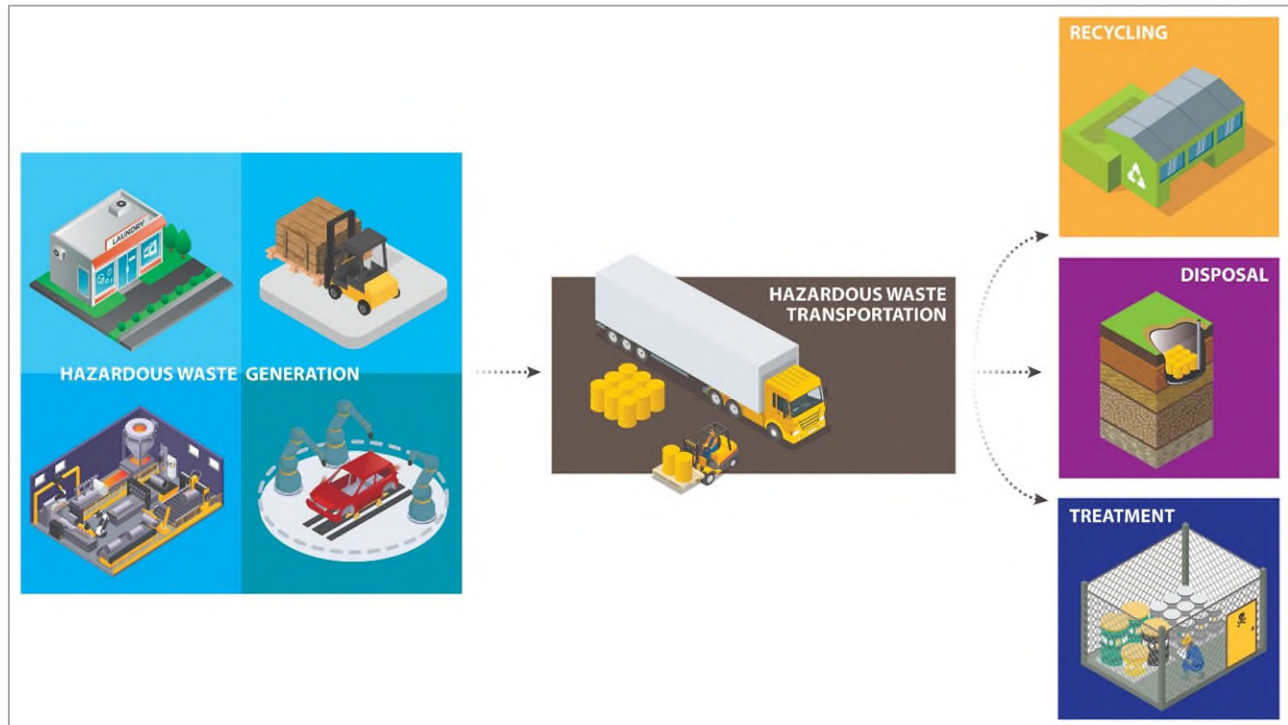


Figure 101: Cradle to Grave Principle for hazardous wastes

11.2.3.1 Hazardous Waste Generation

All hazardous waste sources must be determined if the waste is hazardous and the project must oversee the ultimate fate of the waste. Furthermore, the project must ensure and fully document that the hazardous waste that they produce is properly identified, managed, and treated prior to recycling or disposal.

The types of hazardous wastes that will be generated during the development of the project, their quantity and sources are presented in Table 153.

Table 153: List of Hazardous Wastes

Waste Type	Phase	Amount	Source, Characterization, and Management
Cinders of electrodes	Construction	1.3 t / year	Sent to "Vtorchermet" facility located in Surkhandarya region
Worn out overalls	Construction + Operation	0.780 t / year	The workwear consists of a shirt, mitten, jacket, and trousers will be generated as hazardous waste. They are leased to specialized enterprises for the processing of such types of waste.
Sludge from cleaning waste heat boilers	Operation	20.0 t / year	It is originated from cleaning waste heat boilers and leased to specialized enterprises for the processing of such types of waste.



Waste Type	Phase	Amount	Source, Characterization, and Management
Waste fuels and lubricants	Operation	28.5630 t / year	It is originated from turbine oil, compressor oil, engine oil and transformer oil and leased to specialized enterprises for the processing of such types of waste.
Dry matter of water preparation	Operation	480.0 t / year	It is originated from water preparation processes and leased to specialized enterprises for the processing of such types of waste.
Waste filter material	Operation	0.0024 t / year	It is originated from operational activities and leased to specialized enterprises for the processing of such types of waste.
Waste cartridge filters VPU	Operation	0.168 t / year	It is originated from operational activities and leased to specialized enterprises for the processing of such types of waste.
Spent cation exchanger	Operation	25.0 t / year	It is originated from operational activities and leased to specialized enterprises for the processing of such types of waste.
Waste insulation and lining	Operation	484.0 t / year	It is originated from waste management activities and leased to specialized enterprises for the processing of such types of waste.
Captured oil products	Operation	0.097596 t / year	It is originated from wastewater treatment plant and leased to specialized enterprises for the processing of such types of waste.
Wastewater treatment sludge	Operation	3.90384 t / year	It is originated from wastewater treatment processes and leased to specialized enterprises for the processing of such types of waste.
Waste ferrous metals	Operation	87,224 t / year	It is originated from operational processes and leased to specialized enterprises for the processing of such types of waste.
Waste non-ferrous metals	Operation	0.32706 t / year	It is originated from operational processes and leased to specialized enterprises for the processing of such types of waste.
Used batteries	Construction+ Operation	0.675 t / year	It is originated from constructional and operational activities and leased to specialized enterprises for the processing of such types of waste.
Waste tires	Construction + Operation	1.22 t / year	It is originated from vehicles and leased to specialized enterprises for the processing of such types of waste.
Rags	Operation	0.091 t / year	It is originated from operational processes and leased to specialized enterprises for the processing of such types of waste.
Abrasive metal dust	Operation	0.0011725 t / year	It is originated from operational processes and leased to specialized enterprises for the processing of such types of waste.



Waste Type	Phase	Amount	Source, Characterization, and Management
PE bags for reagents	Operation	2.7 t / year	It is originated from operational processes and leased to specialized enterprises for the processing of such types of waste.
Waste energy saving LED bulbs	Operation	0.04964 t / year	It is originated from lighting activities and leased to specialized enterprises for the processing of such types of waste.
Waste from the first-aid post	Construction + Operation	0.03 t / year	It is originated from medical activities and leased to specialized enterprises for the processing of such types of waste.

11.2.3.2 Hazardous Waste Transportation

After the project produces hazardous waste, authorized transporters may transport the waste to a facility that can recycle, treat, store or dispose of the waste. Since such transporters are moving regulated wastes on public roads, highways, rails, and waterways according to Uzbekistan regulations.

Also, following recommendations shall be followed from World Bank EHS Guidelines for hazardous material transportations:

- Ensure that all waste containers designated for off-site shipment are secure, and labelled with the contents and associated hazards.
- Ensure that the waste is properly loaded on the transport vehicles before leaving the site and that these are accompanied by a shipping paper that describes the load and its associated hazards,
- Mention that the contractor should ensure that the company that is transporting hazardous waste has all the permits necessary for this action and that these permits will be reviewed on a regular basis.

11.2.3.3 Hazardous Waste Recycling, Treatment, Storage, and Disposal

Many hazardous wastes can be recycled safely and effectively, while other wastes will be treated and disposed of in landfills or incinerators.

Recycling hazardous waste has a variety of benefits including reducing the consumption of raw materials and the volume of waste materials that must be treated and disposed of. However, improper storage of those materials might cause spills, leaks, fires, and contamination of soil and drinking water.

Treatment Storage and Disposal Facilities might provide temporary storage and final treatment or disposal for hazardous wastes. Since they manage large volumes of waste and conduct activities that may present a higher degree of risk, Treatment Storage and Disposal



Facilities are stringently regulated by government organizations. The Treatment Storage and Disposal Facilities requirements establish generic facility management standards, specific provisions governing hazardous waste management units, and additional precautions designed to protect soil, groundwater, and air resources.

11.3 Potential Impacts, Mitigation, Management & Residual Impacts

11.3.1 Construction Phase

11.3.1.1 Non-Hazardous Waste

During construction, waste will be generated during earthworks, construction of the fences, paths and buildings.

Typical construction wastes include concrete, asphalt, scrap steel, glass, plastic, wood, packaging materials and domestic waste from construction workers (i.e. relating to food consumption). Concrete may be found in two forms on the construction site; structural elements containing reinforced concrete, while foundations (such as surface level concrete slabs) have mass non-reinforced concrete.

Non-Hazardous waste generated from construction activities at the Project site will include the following:

- The project shall develop and implement a Project-specific Waste Management Plan in line with committed mitigation measures in this ESIA report and the provisions of the ESMP.
- Domestic solid wastes to be segregated and identified from the other waste streams into separate waste containers/skips clearly to facilitate recycling.
- Waste containers/skips should be clearly labelled and placed in designated waste storage locations. Labels will be waterproof, securely attached, and written in English and other languages as required such as Uzbek and Russian.
- For litter (food waste, domestic waste), an adequate number of covered bins should be strategically placed throughout the site at locations where construction workers and staff consume food. These will be regularly collected and taken to the main waste storage area.
- Food waste must be stored within a sealed metal or plastic skip or bin to prevent pests from gaining access.
- On-going training should be provided to all staff on the importance of the need to avoid littering.
- Heavy waste may be contained within an open skip, provided that segregation occurs effectively enough to remove all lightweight material that could be blown away.
- Waste generated during construction will only be transported off-site for disposal by an appropriately licensed waste contractor.



- Only licensed waste transporters and waste management facilities will be engaged.
- Develop and maintain a waste inventory to document and track domestic solid wastes generated, segregated, reused and consignments
- Completed waste manifests are required to show the chain of custody of the waste generated on-site, its transportation and treatment/disposal. All records will be maintained on-site.
- Mandatory training program for employees to increase their awareness of waste management protocols including proper handling and storage of waste, and emergency response and contingency plans.
- Contractor will identify the closest recycling companies in Uchkizil, Navshahar, Kaftarhana or Talashkan in order to promote the recycling of waste especially packaging materials, wood and metal waste etc.
- Disposal of any type of waste to the canal or lake is strictly prohibited

11.3.1.2 Hazardous Wastes

Hazardous waste generated from construction activities at the Project site will include the following;

- Develop and maintain a hazardous waste inventory to document and track hazardous wastes generated, segregated, reused and consignments.
- Segregate and identify hazardous waste from the other waste streams into separate signed and labelled waste containers/skips.
- Store hazardous waste in allocated impervious hard standing areas in sealed containers stored with impermeable bases, sufficient containment and separation capacity, sun/rain shelter, separate drainage system, good ventilation and equipped with spill kits & spill response procedures. This area must be placed away from any sources of ignition.
- The hazardous waste storage area should be constructed away from the drainage system. A rain shelter will also be provided to avoid any potential instance of runoff or leakage of runoff.
- Waste containers should be marked with appropriate warning labels to accurately describe their contents and detailed safety precautions. Labels will be waterproof, securely attached, and written in English and other languages as required such as Russian and Uzbek. Wherever possible, chemicals will be kept in their original container.
- Keep hazardous waste storage areas away from any ignition sources or fire hazards.
- Disposal of hazardous waste to the canal or Lake is strictly prohibited.
- Used face masks shall be stored in designated bins and disposed off as medical waste.
- Any generated medical waste (i.e. from on-site clinics) shall be stored in appropriate medical waste containers.
- All medical waste shall only be handled by trained personnel.



- Removal of any medical or hazardous waste from the site for appropriate treatment, disposal/incineration shall only be conducted by a licensed contractor.
- Training programmes for employers shall be conducted that will be involved in the on-site management of hazardous materials in the management activities related to hazardous materials impact, including proper handling of hazardous waste, personal protective elements, and compatibility among different types of hazardous waste.

11.3.1.3 Excavation Soil and Contaminated Soils

- In-situ testing of soil to ensure it is not contaminated and can be reused or disposed of into land.
- Training –Contractor staff to be able to identify signs of potential contamination (smell of hydrocarbon, staining).

Contaminated Soil Management Plan should be prepared regarding what to do in case of soil contamination. When contamination is found, precautions should be taken according to the contaminated soil management plan and necessary actions should be taken for disposal.

11.3.1.4 Sanitary Wastewater

Wastewater generated from construction activities at the project site will include the following:

- Contractor to develop and implement a project specific Wastewater Management Plan and Wastewater Treatment Plant Operation Procedure following committed mitigations measures in this ESIA report and provisions of the ESMP.
- Sanitary wastewater tanks to be properly maintained and inspected to ensure tanks do not overflow.
- Site inspections will be carried out regularly by the EPC contractor to ensure that all wastewater generated is properly managed, and no leakages or spill occurs. In the event of a spill or overflow, immediate action will be taken per spill containment procedures and clean up procedures.
- Engage a municipality approved waste contractor for the periodic removal of the tanks.
- Sanitary wastewater tanks should be placed in allocated impervious hard standing areas with bonding capacity to hold 110% volume of the maximum volume stored.
- In common with the IFC EHS Guidelines, an effort will be made in training construction personnel to minimise water consumption for ablutions and to ensure an understanding of water resource and wastewater issues.

11.3.1.5 Process Wastewater During Test and Commissioning Phase

Contractor will develop the following procedures before the start of the commissioning stage:

- Hydrotesting Procedure;
- Acid Cleaning Procedure; and
- Boiler Steam Blowing Procedure



Household wastewater generated during construction is planned to be directed to a temporarily installed storage tank (a waterproof cesspool) with subsequent removal to the nearest treatment facilities in the city of Termez. The EPC Contractor will also seek other options such as establishment of package (small-scale) wastewater treatment plant in accordance with the requirements set in the national legislation.

Table 154: Impacts Significance of the waste management during - Construction Phase

Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Potential Impact Significance (without impact mitigation measures)	Mitigation and Management Measures	Significance of Residual Impacts
Non-Hazardous Wastes	Uchkizil Reservoir, aquatic life, flora, and fauna	High	Low	Moderate	<p>The project must prepare and implement a waste management plan in line with commitments given in ESIA, ESMP, and local EIA. All the mitigation measures defined in the above-mentioned plans shall be covered in the procedure.</p> <p>Domestic solid wastes must be segregated and segregated from the other waste streams into separate waste containers/bins clearly to facilitate recycling.</p> <p>Waste containers/bins should be labeled in the local language and English and placed in designated waste storage locations. Labels must be waterproof, securely attached, and written in English and other languages as required such as Uzbek and Russian.</p> <p>An adequate number of dustbins, the waste containers should be placed along the construction site for litter (food waste, domestic waste) to avoid project personnel to litter. The wastes from the containers will be regularly collected and taken to the waste storage area.</p> <p>Food waste must be stored in sealed metal or plastic containers to avoid pests and avian species accumulated in the waste area.</p> <p>On-going training shall be conducted on the project personnel. Including staff to avoid littering and impacts of wastes on the environment. Plastic pollution awareness training should be developed too.</p> <p>All wastes generated during the construction phase has to be transported off the site only for disposal by licensed waste contractors</p> <p>If possible, wood waste produced from construction activities and packaging of cargoes shall be donated to the nearby schools or public/community houses for firewood if not contaminated and safe to do.</p> <p>Only licensed waste transporters and waste management facilities will be engaged.</p> <p>The Contractor will maintain copies of the waste management licenses on site.</p> <p>Develop and maintain a waste inventory to document and track domestic solid wastes generated, segregated, reused, and consignments</p> <p>Completed waste transportations and disposals are required to show the chain of custody of the waste generated on-site, its transportation, and treatment/disposal. All records will be stored on HSE teams.</p> <p>Mandatory training program for employees to increase their awareness of waste management protocols including proper handling, segregation, and storage of waste, and emergency response and contingency plans.</p> <p>The contractor will identify the closest recycling companies in Uchkizil, Navshahar, Kaftarhana, or Talashkan in order to promote the recycling of waste especially packaging materials, wood, and metal waste, etc.</p> <p>Disposal of any kind of waste to the canal or lake is strictly prohibited</p>	Minor



Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Potential Impact Significance (without impact mitigation measures)	Mitigation and Management Measures	Significance of Residual Impacts
Hazardous Wastes	Uchkizil Reservoir, Aquatic life, flora, and fauna	High	Medium	Major	<p>A hazardous waste inventory shall be developed which includes hazardous waste generation sources, segregation, reuse, and consignments</p> <p>Hazardous wastes must be collected in separate containers than nonhazardous waste. Hazardous waste bins should be signed and labeled.</p> <p>Hazardous wastes must be stored on an impermeable surface that has bunds nearby to avoid and spillage to contaminate the soil. In the temporary waste storage area sufficient containment, separation, sun/rain shelter must be provided. The hazardous waste storage must have spill kits and fire extinguishers ready at all times.</p> <p>The hazardous waste storage area should be constructed away from the drainage system. A rain shelter will also be provided to avoid any potential instances of runoff or leakage of runoff.</p> <p>Hazardous waste bins should be labeled to describe their content. The label should be in Uzbek, English, and Russian and should be securely attached and be waterproof. Wherever possible, chemicals will be kept in their original container.</p> <p>Hazardous waste storage areas must be away from fire sources to avoid fire risk.</p> <p>Disposal of hazardous waste to the canal or lake is strictly prohibited.</p> <p>Used face masks shall be stored in designated bins and disposed of off-as medical waste.</p> <p>Any kind of medical waste (i.e. from on-site clinics) must be stored in appropriate medical waste containers.</p> <p>All medical waste shall only be handled by trained personnel.</p> <p>Removal of any medical or hazardous waste from the site for appropriate treatment, disposal/incineration shall only be conducted by a licensed contractor</p> <p>Training programmes for employers shall be conducted that will be involved in the on-site management of hazardous materials in the management activities related to hazardous materials impact, including proper handling of hazardous waste, personal protective elements, and compatibility among different types of hazardous waste.</p>	Moderate
Excavation Soil and Contaminated Soils	Uchkizil Reservoir, Aquatic life, flora, and fauna	Medium	Medium	Moderate	<p>In-situ testing of soil to ensure it is not contaminated and can be reused or disposed of into land.</p> <p>Appropriate training should be conducted on the chemical handling personnel and staff. After training, the personnel should be able to identify signs of a potential contamination incident. A contaminated soil management plan should be developed in order to appropriate handling treatment and disposal of contaminated soil.</p>	Minor



Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Potential Impact Significance (without impact mitigation measures)	Mitigation and Management Measures	Significance of Residual Impacts
Sanitary Wastewater	Uchkizil Reservoir, Aquatic life, flora, and fauna	High	Medium	Major	<p>The contractor should develop and implement a Project Specific Wastewater Management Plan. The wastewater management plan should cover every mitigation measure defined in this ESIA and other associated documents such as ESMP, ESAP, etc.</p> <p>Wastewater tanks should be free of leakage and overflow at all times. Regular checks should be done to ensure there is no overflow or leakage.</p> <p>Site inspections should be carried out regularly by the contractor to ensure that all wastewater generated is properly managed, and no leakages or spills occur. In the event of a spill or overflow, immediate action will be taken per spill containment procedures and clean-up procedures.</p> <p>For the removal of wastewaters, the municipality-approved waste contractor should be hired.</p> <p>Sanitary wastewater tanks should be placed on impermeable surfaces. The area should have secondary containment (bunds) and secondary containment should be %110 of the tank volume.</p> <p>In common with the IFC EHS Guidelines, an effort will be made in training construction personnel to minimise water consumption for ablutions and to ensure an understanding of water resource and wastewater issues.</p>	Moderate
Process Wastewater During Test and Commissioning Phase	Uchkizil Reservoir, Aquatic life, flora, and fauna	Moderate	Moderate	Moderate	<p>The contractor must develop procedures for the following processes prior to the start of the test and commissioning phase;</p> <p>Hydrotesting Procedure</p> <p>Acid Cleaning Procedure; and</p> <p>Boiler Steam Blowing Procedure</p> <p>The procedures should include the disposal of wastewaters.</p>	Minor



11.3.2 Operation Phase

11.3.2.1 Non-hazardous Wastes

The operation of the proposed Project will generate small amounts of non-hazardous domestic waste from the operation of the administration facilities and from activities of the employees.

This waste can be classified as both recyclable and non-recyclable. Recyclable waste includes paper, tin cans, plastics, cartons, rubber, and glass, while non-recyclables will consist mainly of food residues and other organic waste. Other solid non-hazardous waste generated during operation will be landscaping waste and uncontaminated replacement parts and packaging.

Non-Hazardous waste generated from construction activities at the Project site will include the following:

- Waste and Management Plan in line with committed mitigation measures in this ESIA report and the provisions of the ESMP.
- Domestic solid wastes to be segregated and identified from the other waste streams into separate waste containers/skips clearly to facilitate recycling.
- Waste containers/skips should be clearly labelled and placed in designated waste storage locations. Labels will be waterproof, securely attached, and written in English and other languages as required such as Russian and Uzbek.
- For litter (food waste, domestic waste), an adequate number of covered bins should be strategically placed throughout the site at locations where construction workers and staff consume food. These will be regularly collected and taken to the main waste storage area.
- Food waste must be stored within a sealed metal or plastic skip or bin, to prevent pests from gaining access.
- Heavy waste may be contained within an open skip, provided that segregation occurs effectively enough to remove all lightweight material that could be blown away.
- Paper cardboard, metal cans, plastic, glass to be collected for recycling by a Uchkizil, Navshahar, Kaftarhana or Talashkan approved waste contractor.
- Waste generated during construction will only be transported off-site for disposal by an appropriately licensed waste contractor.
- Only licensed waste transporters and waste management facilities will be engaged.
- Develop and maintain a waste inventory to document and track domestic solid wastes generated, segregated, reused and consignments
- Completed waste manifests are required to show the chain of custody of the waste generated on-site, its transportation and treatment/disposal. All records will be maintained on-site.



11.3.2.2 Hazardous Wastes

This fraction of waste can potentially cause significant adverse impacts on human health and the environment if improperly managed. Examples of likely hazardous waste streams that may arise during the operation of the Project include the following:

- Develop and maintain a hazardous waste inventory to document and track hazardous wastes generated, segregated, reused and consignments.
- Segregate and identify hazardous waste from the other waste streams into separate waste containers/skips signed and labelled.
- Store hazardous waste in allocated impervious hard standing areas in sealed containers stored with impermeable bases, sufficient containment and separation capacity, sun/rain shelter, separate drainage system, good ventilation and equipped with spill kits & spill response procedures. This area must be placed away from any sources of ignition.
- Waste containers will be marked with appropriate warning labels to accurately describe their contents and detailed safety precautions. Labels will be waterproof, securely attached, and written in English and other languages as required such as Uzbek and Russian. Wherever possible, chemicals will be kept in their original container.
- Used face masks shall be stored in designated bins and disposed of as medical waste.
- Training programmes for employers shall be conducted that will be involved in the on-site management of hazardous materials in the management activities related to hazardous materials impact, including proper handling of hazardous waste, personal protective elements, and compatibility among different types of hazardous waste.

11.3.2.3 Sanitary Wastewater

Wastewater generated from operation activities at the project site will include the following:

- Sanitary wastewater will be treated at the onsite and must meet the discharge standards before being discharged into the reservoir or for landscaping.
- Periodic testing of the treated waste water shall be conducted and the results logged.

11.3.2.4 Process Wastewater

- Conduct regular checking and monitoring of water quality and discharges from:
 - Water treatment plant
 - Sewage Treatment Plant;
 - Cooling water system;
 - RO plant; and
 - Storm water system
- Sludge from treatment systems will be disposed in accordance with IFC/WB and Uzbek regulations.
- Maintain storm-water handling systems and routinely monitor effluents.

Provisions for the containment of the first flush of storm water will be considered to ensure that the initial runoff from rainfall events does not lead to contamination of the receiving canal



waters. Impacts relating to storm water contamination can also be reduced via good housekeeping practices on site during operation. Such good practices include road sweeping, effective cleanup of liquid spills, appropriate covering of stockpiles & equipment and good waste management practices.

Table 155: Impacts Significance of the waste management during Operation Phase

Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Potential Impact Significance (without impact mitigation measures)	Mitigation and Management Measures	Significance of Residual Impacts
Non- hazardous wastes	Uchkizil Reservoir, Aquatic life, flora, and fauna	Moderate	Moderate	Moderate	<p>The project must prepare and implement a waste management plan in line with commitments given in ESIA, ESMP, and local EIA. All the mitigation measures defined in the above-mentioned plans shall be covered in the procedure.</p> <p>Domestic solid wastes must be segregated and segregated from the other waste streams into separate waste containers/bins clearly to facilitate recycling.</p> <p>Waste containers/bins should be labelled in local language and in English and placed in designated waste storage locations. Labels must be waterproof, securely attached, and written in English and other languages as required such as Uzbek and Russian.</p> <p>Food waste must be stored in sealed metal or plastic containers to avoid pests and avian species accumulated in the waste area.</p> <p>A training shall be conducted on the project personnel, including staff to avoid littering and impacts of wastes to the environment. Plastic pollution awareness training should be developed too.</p> <p>All wastes generated during the operation phase has to be transported off the site only for disposal by licensed waste contractors</p> <p>Only licensed waste transporters and waste management facilities will be engaged.</p> <p>The Contractor will maintain copies of the waste management licenses in the HSE office</p> <p>Develop and maintain a waste inventory to document and track domestic solid wastes generated, segregated, reused, and consignments</p> <p>Completed waste transportations and disposals are required to show the chain of custody of the waste generated on-site, its transportation, and treatment/disposal. All records will be stored on HSE teams.</p> <p>Mandatory training program for employees to increase their awareness of waste management protocols including proper handling, segregation, and storage of waste, and emergency response and contingency plans.</p> <p>The contractor will identify the closest recycling companies in Uchkizil, Navshahar, Kaftarhana, or Talashkan in order to promote the recycling of waste especially packaging materials, wood, and metal waste, etc.</p> <p>Disposal of any type of waste to the canal or lake is strictly prohibited.</p>	Minor



Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Potential Impact Significance (without impact mitigation measures)	Mitigation and Management Measures	Significance of Residual Impacts
Hazardous Waste	Uchkizil Reservoir, Aquatic life, flora, and fauna	High	High	Major	<p>A hazardous waste inventory shall be developed which includes hazardous waste generation sources, segregation, reuse, and consignments</p> <p>Hazardous wastes must be collected in separate containers than non-hazardous waste. Hazardous waste bins should be signed and labeled.</p> <p>To avoid any further spillage and soil contamination, prior to disposal, hazardous wastes must be stored on an impermeable surface. In the temporary waste storage area sufficient containment, separation, sun/rain shelter must be provided. The hazardous waste storage must have spill kits and fire extinguishers ready at all times.</p> <p>The hazardous waste storage area should be constructed away from the drainage system. A rain shelter will also be provided to avoid any potential instances of runoff or leakage of runoff.</p> <p>Hazardous waste bins should be labeled to describe their content. The label should be in Uzbek, English, and Russian and should be securely attached and be waterproof. Wherever possible, chemicals will be kept in their original container.</p> <p>Hazardous waste storage areas must be away from fire sources to avoid fire risk.</p> <p>Disposal of hazardous waste to the canal or lake is strictly prohibited.</p> <p>Waste facemasks shall be stored in designated bins and disposed of off-as medical waste.</p> <p>Any kind of medical waste (i.e. form on-site clinics) must be stored in appropriate medical waste containers.</p> <p>All medical waste shall only be handled by trained personnel.</p> <p>Subsequent to removal of medical wastes from the site, disposal or incineration process shall only be conducted by licensed contractors.</p> <p>Training programmes for employers shall be conducted that will be involved in the on-site management of hazardous materials in the management activities related to hazardous materials impact, including proper handling of hazardous waste, personal protective elements, and compatibility among different types of hazardous waste.</p>	Moderate
Sanitary Wastewater	Uchkizil Reservoir, Aquatic life, flora and fauna	Medium	Medium	Moderate	<p>The effluent of the sanitary wastewater treatment plant must meet the criteria defined in the permit obtained from Uzbekistan authorities.</p> <p>Regular wastewater analysis should be done at least quarterly to ensure that the treatment plant working properly.</p>	Minor
Process Wastewater	Uchkizil Reservoir, Aquatic life, flora and fauna	Medium	Medium	Moderate	<p>The project should conduct regular checks and should monitor water quality and discharges from the following structures:</p> <ul style="list-style-type: none"> Water treatment plant Sewage Treatment Plant; Cooling water system; RO plant; and Storm water system <p>Sludge from treatment systems will be disposed of according to requirements defined in IFC/WB and Uzbek regulations.</p> <p>Storm water handling systems should be regularly checked.</p> <p>Measures should be taken containment of initial storm water runoff to ensure that initial storm event runoff does not result in pollution of the receiving water body. Storm water pollution impacts can also be reduced through good on-site housekeeping practices during operations. These good practices include sweeping roads, effectively cleaning up spills, adequately covering stockpiles and equipment, and good waste management.</p>	Minor



11.4 Cumulative Impacts

The purpose of a cumulative impact assessment is to determine how the potential impacts of a proposed development might combine cumulatively, with the potential impacts of other projects or human activities as well as natural stressors such as droughts or extreme climatic events. Summary of Cumulative Impacts of Solid waste and waste water is presented in Table 156.

Table 156: Summary of Cumulative Impacts of Solid Waste and Wastewater

Environmental and Social Aspects	Construction	Operation
Solid Waste and Wastewater		
Cumulative Impacts	Methane generation from biodegradable organic waste will occur from landfill disposal, which is a greenhouse gas and cause a cumulative impact together with the other Projects.	Methane generation from biodegradable organic waste will occur from landfill disposal, which is a greenhouse gas and cause a cumulative impact together with the other Projects.

11.5 Monitoring

Considering the best international practices, a monitoring plan is developed for solid waste and wastewater management. During the preparation of monitoring plan the following actions presented by the World Bank EHS Guidelines are considered:

- Regular visual inspection of all waste storage collection and storage areas for evidence of accidental releases, and to verify that wastes are properly labelled and stored.
- When significant quantities of hazardous wastes are generated and stored on site include:
 - Inspection of vessels for leaks, drips or other indication of loss.
 - Identification of cracks, corrosion, or damage to tanks, protective equipment, or floors, verification of locks, emergency valves and other safety devices for easy operation.
 - Checking the operability of emergency systems.
 - Documenting results of testing of integrity, emissions, or monitoring stations (air, soil vapor, or groundwater if Agreed)
 - Documenting any changes to the storage facility, and any significant changes in the quantity of materials in storage.
- Regular audits of waste segregation and collection practices



- Tracking of waste generation trends by type and amount of waste generated, preferably by facility departments.
- Keeping manifests or other records that document the amount of waste generated and its destination
- Periodic auditing of third-party treatment and disposal services including re-use and recycling facilities when significant quantities of hazardous wastes are managed by third parties.

The monitoring plan on solid waste and wastewater management is presented in Table 157.

Table 157: Summary of Solid Waste and Wastewater Management Monitoring

Monitoring Activity	Parameters	Duration	Location
Construction, Commissioning & Operation Phases			
Visual Inspection	Any accidental releases, labelling and proper storage Inspection of vessels for leaks, drips or other indication of loss. Identification of cracks, corrosion, or damage to tanks, protective equipment, or floors, verification of locks, emergency valves and other safety devices for easy operation. Checking the operability of emergency systems.	Daily	Waste Storage Collection and Storage Areas
Documentation	The results of testing of integrity, emissions, or monitoring stations (air, soil vapor, or groundwater if Agreed) The any changes to the storage facility, and any significant changes in the quantity of materials in storage. Waste generation trends by type and amount of waste generated, preferably by facility departments Manifests or other records that document the amount of waste generated and its destination	In case of necessity	Waste Storage Collection and Storage Areas



Monitoring Activity	Parameters	Duration	Location
Auditing	Waste segregation and collection practices	Weekly	Waste Storage Collection and Storage Areas
	Third-party treatment, and disposal services including re-use and recycling facilities when significant quantities of hazardous wastes are managed by third parties	Annually	



12. TRAFFIC AND TRANSPORTATION

12.1 Standards and Regulatory Requirements

12.1.1 National Requirements

The relevant law related with traffic and transportation in Uzbekistan is given below:

- Law "On Traffic Safety", No: 818-I, dated August 19, 1999 (as amended on December 29, 2015).

Law "On Traffic Safety" came into force defining a priority of protection of citizens' lives and health, their rights, and interests, as well as the environment and the basic principles of the traffic safety provision.

12.1.2 Lenders Requirements

The traffic and transport issues will be assessed in line with IFC PS-1 (Assessment and Management of Environmental and Social Risks and Impacts) and PS-4 (Community Health, Safety and Security).

12.2 Observation and Baseline Condition

12.2.1 General view

Uzbekistan has the highest road density in Central Asia, with 41 km of roads per 100 km² area. The total size of the road network is 185,000 km, of which 42,700 km are common-use public roads. Common use roads are functionally divided into international roads - 3,981 km, national roads - 14,100 km, and regional roads - 24,614 km. For the most part, Uzbekistan has achieved basic road connectivity and only a few remote regions lack all-weather road access. About 95% of the network is paved and less than 5% is gravel and earth surfaced. At the end of 2017, nearly two-thirds of the common-use roads were assessed as being in good or excellent condition. This assessment is based on biannual visual inspections, which are highly subjective and may not be based on a consistently applied metric. Much road deterioration is due to aging infrastructure, which needs both structural and safety upgrades. Lastly, Uzbekistan has 83 cars per 1,000 people in 2018.

At the province level, the transport infrastructure of Surkhandarya is fairly developed. The length of railways crossing the territory of the region is 372.5 km. There are more than 10 railway stations in the region. Railway route (or line) Taguzar - Boysun – Kumkurgan connects the south of Uzbekistan with the center of the country and Kazakhstan. There is the main passageway running between Termez and Tashkent. There is 2,844 km of automobile roads in the region, including international and national. There is also Termez Cargo Center is a large logistical terminal, located in the Termez district of the region in close proximity to the border with Afghanistan. This terminal provides transport and logistical services, including



customs checks, loading and offloading, goods storage at warehouses of the terminal, as well as the processing of transit cargo for intermodal transportation (rail - truck) to and from Afghanistan highways.

Transportation part of two districts is going to describe the sector by analyzing public-private vehicle share, public transport provision, number of private vehicles per 1,000 populations, and the conditions of roads.

According to the Khokimiyat of Angor district, there are 2,149 vehicles in 2020 to serve the local population, including private vehicles and vehicles of legal entities and/or enterprises. Of these, 75% of transport is private, 25% belongs to enterprises. There are 7,657 vehicles in the Termez district to serve the local population. Of these, 90% of transport is private, and 10% belongs to enterprises (see Figure 152).

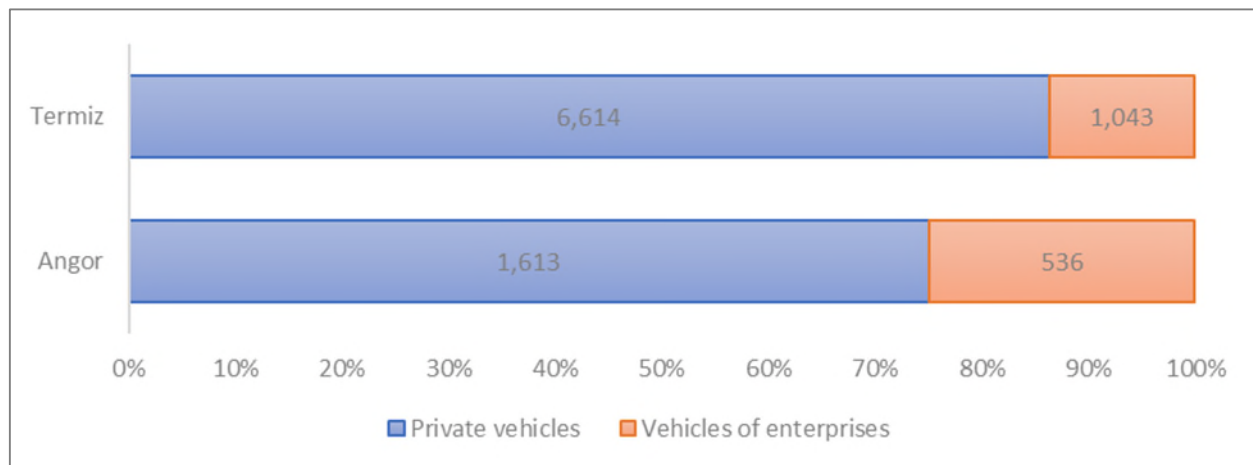


Figure 102: Private vehicles and vehicles of enterprises distribution in Termez and Angor districts

Another indicator is the number of people per vehicle, which is used as public transport (taxi, bus, minibus). The public transport system in both Termez and Angor districts is operated by private organizations. According to the data of the Khokimiyat of Angor region, there are 11 working enterprises with a total of 356 vehicles to serve the local population. Most of them are light vehicles (taxi services with a maximum capacity of 7 passengers) in the amount of 348 units. In addition, there are 6 buses and 2 minibuses. Overall, there are 379 people per unit of transport, with the calculation of the total population of the district being 134,700 people.

In the Termez district, there are only 2 engaged enterprises with a total of 48 transport vehicles to serve the local population. Most of them are automobiles (taxi services) in the amount of 40 units. The number of buses is 8 units of minibuses. This complicates the maintenance of transport by most of the population, since there are 1,650 people per unit of transport, with the calculation of the total population of the district being 79,200 thousand people.

However, the number of people per private car could explain the significant difference between the ratios of public transport. In Angor per 1,000 people own 11 private cars, while



in Termez, it is 83. Therefore, people in Termez depend less on public transport in their daily needs, while the Angor population mostly depends on public vehicles.

Another important public asset to know about the social condition is road infrastructure. Society relies on a good road system as the basis to access jobs, health care, education, and social connections. The total length of internal roads in Angor district is 604.3 km of which only 28 km of the road was repaired in 2020 and 379.6 km of the road requires further repair. In the Termez district, the total length of internal roads is 716.2 km, of which only 9.5 km of the road were repaired in 2020 and 274 km of the road require further repair. It can be concluded that in Angor 30% while in Termez 60% of internal roads require repair. As conclusion, the roads, which need repair prevails the roads with good conditions. Public transport is more used by the Angor population than Termez. Understandably, population in Angor owns fewer private cars comparing to Termez even though its population is more than Termez at 60%. It should be noted that these roads are within the city centers and hence not be used during the project construction activities for abnormal load transportation.

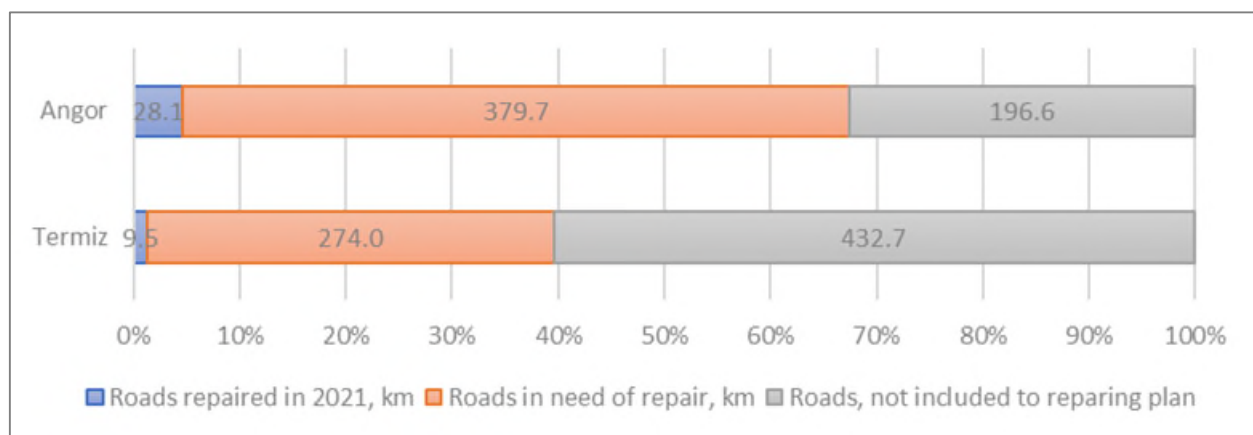


Figure 103: Total condition of roads in Termez and Angor districts in 2020

12.2.2 Project Site Observations

The main highways connecting the city of Termez with other settlements of Uzbekistan and Tajikistan are M41 "Termez - Jarkurgan - Denau - Dushanbe" and M39 "the Big Uzbek Highway".

The M39 Highway connecting Tashkent and Termez, is a 4-laned road in some 300 km of its length, although poorly maintained and without carriageway separation in most of its length. M39 Highway has state significance in the I technical category, has an asphalt concrete surface with a roadbed width of 18 m and a carriageway width of 12 m. The project location is access to M39 at a distance of 500 meters and to M41 at a distance of 14.5 km.

In addition to the above roads, there are regional roads, of which the 4P100 road, which has the IV technical category, with a roadbed width of 9-10 m and a carriageway width of 6-7 m.



The closest road nearby to the project area is Babamurk Sarmez – Kaftarkhana Road. These two villages are not very populous. The traffic load between the two cities is not expected to be high.



Figure 104: Babamurk Sarmez – Kaftarkhana

As can be seen from the photo given below, the main road passing north of the project area is a two-lane road and is already partially damaged. It is recommended that the EPC Contractor will develop a Logistics and Traffic Management Plan and outline the baseline of the existing road conditions. In addition, the Logistics and Traffic Management Plan should include proposed repair requirements for roads.

Furthermore, there is the main railway line Kagan-Termez-Dushanbe at a distance of 7 km from the south of the Project Area. Railway passenger and cargo transportation is carried out by the Termez I station at a distance of 14 km from the south of the Project Area.

Moreover, Termez International Airport is the nearest airport at a distance of 10.7 km from the southeast of the Project area, which accesses by M39 highway from the project area. The main transportation network around the Project is presented in Figure 105.

In addition, the Amudarya is used for river transport (at a distance of 10 km), which is based in a large port near the southern borders of Termez city.

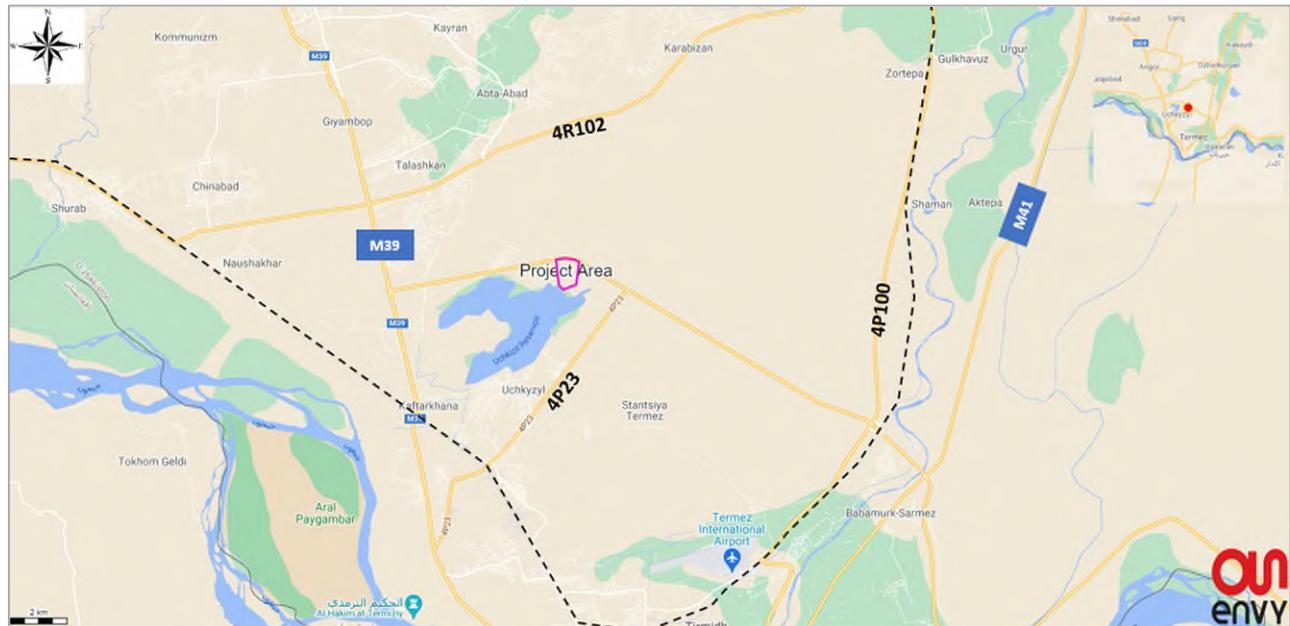


Figure 105: Transportation network around the Project area

12.3 Sensitive Receptors

The potential sensitive receptors are local livestock farmers, Residents of Uchkizil, Kaftarkhana, Kattakum, and other village' road users, and drivers in local roads and highways.

12.4 Potential Impacts, Mitigation, Management & Residual Impact

12.4.1 Construction Phase

The majority of the components needed for the construction of the facility are the ones that cannot be assembled in the project area. So that sophisticated pieces of equipment of the project shall be transported to the construction site in their built form. These sophisticated pieces of equipment are very likely to be transported to the site by special vehicles and oversize or haul containers. It is expected that a significant portion of the materials will arrive by road, but that an amount of equipment may also require shipping, prior to final delivery by road and/or railway.

Where materials and equipment are shipped, they will go via different international airports/highways/railways and will then require road hauling to the site via the national/international highway and/or railway network. The exact route the construction vehicles will take to reach the site is not known, however, all vehicles will eventually need to use the local road to the north of the Project site in order to enter via the site access point.



The Contractor will be required to get necessary permits from relevant national and international authorities and obey the restrictions identified in the permits to transport equipment and machinery across borders.

The existing road north of the site is used by local communities to access between Babamurk-Sarmez and Kaftarkhana villages. The construction activities will increase traffic load temporarily. It is anticipated that there will be no accommodation facility in the project area during the construction activities. The workforce will be expected to be accommodated in nearby cities and will be transferred by shuttle buses to the construction area. The maximum workforce will be around 2,050 during the peak construction activities. Assuming that shuttle buses have a capacity of 40 people, it is anticipated that additional 50 shuttle buses will be in the traffic during the shift hour changes. The Project will not create any additional load on the existing public transportation.

Construction activities are expected to increase Heavy-Goods Vehicle (HGVs) movement within the project region. The volume of the HGV will be dependent on phases of construction and the demand for natural resources. The main factors that will affect the number of vehicles on the roads will be related to material usage manpower needs and waste generation. Where alternative routes are available, roads through settlements will be avoided. Local people and, if necessary, local authorities will be informed about transportation routes and timetables.

During the construction activities, deliveries to the site should be scheduled during non-peak hours and the following measures shall be applied;

- All construction vehicles should adhere to national speed limits and onsite speed limits;
- In the event of an emergency, the emergency services should be contacted immediately;
- The Project should raise awareness amongst the local population to explain the benefits of the Project;
- A complaint procedure should be developed which will outline a communication process between the local population with the Company to raise issues /complaints as well as a procedure for closing out complaints and undertaking corrective action;
- Toolbox Talks should be provided on safe driving practices on public roads and onsite;
- In the case of vehicle accidents, a vehicle accident report should be provided with causes and corrective actions to prevent further accidents from occurring.
- Where appropriate (e.g. during daylight hours early in the day), traffic will be scheduled to avoid rush hours on the local road network. Program information and planned traffic jams will be notified in advance to all interested parties, including authorities, local communities and nearby businesses.
- Police escort will be provided at all critical locations (eg pinch points), such as areas where traffic needs to be stopped or areas where traffic flow needs to be reversed.
- Trucks and trailers used for off-site transportation will have a gross weight within the allowable load to protect roads from damage.
- Deliveries by vehicles carrying hazardous materials and waste will be carefully planned to avoid risks to the environment, local communities and Project personnel.



- Construction contractors need to arrange buses/services for Project personnel transportation to reduce external traffic

It is recommended that the EPC Contractor will prepare a detailed Traffic Management Plan, and a dedicated training programme will be delivered covering the following aspects but not limited to;

- Raising the importance of the safety aspects for all drivers (belt use, speed limits, mirror use, etc.),
- Enhancing driving skills and having a mandatory requirement of driving license,
- Setting limits for trip duration and ensuring rotation of drivers to avoid risks caused by overtiredness.
- Assessment of the dangerous routes in advance to avoid accident risks.
- Use of speed control devices on trucks, and remote monitoring of driver actions.
- Traffic diversion and traffic control management including setting up of traffic signages near the construction site.

The project's northern border, which is neighbor to the road, will be the most vulnerable part in terms of accident risk. As a result of the Project's development has the potential to result in road traffic accidents affecting humans and livestock.

The potential impacts caused by traffic and transportation during the construction phase and mitigation measures are presented in Table 158. Mitigation measures will further reduce the impacts and therefore residual impacts will be minor or moderate on the environment.



Table 158: Impacts Significance of the Traffic and Transportation during - Construction Phase

Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Potential Impact Significance (without impact mitigation measures)	Mitigation and Management Measures	Significance of Residual Impacts
Loss of trials/tracks within the project site	Local livestock farmers	Medium	Medium	Moderate	<p>The impact of existing access routes across the site from and to the different communities and farms will be assessed and an alternative route provided before the commencement of construction activities.</p> <p>The alternative routes provided by the company will be marked in local languages and easy-to-read signs to prevent local communities from wandering into construction areas.</p> <p>Project activities will be only done in the project area, not beyond the border to avoid any increase in the footprint of the project.</p>	Minor
Safety of Residents of nearby villages and farmers	Residents of Uchkizil, Kaftarkhana, and other villages which uses the Uchkizil Reservoir for watering their animals	High	High	Major	<p>All activities related to traffic and transportation within the scope of the Project will be carried out in accordance with the provisions of the Law "On Traffic Safety".</p> <p>Prior to project equipment and machinery transportation, a traffic survey/study shall be done which includes necessary oversize haulage permits, local and international regulations along the path from origin to the project area.</p> <p>A Traffic Management Plan shall be developed. The plan must confirm the designated access routes, site entrance points, speed limits, waiting, parking areas and map out accident and traffic hotspots for project access vehicles etc. Construction traffic management to limit impacts on local communities, personnel and other road users should be outlined in the plan.</p>	Moderate
Increase in vehicle flow on the local roads and M39 Highway	Road users, drivers in local roads and highways	Medium	Medium	Moderate	<p>Necessary information and baseline data should be obtained from the local police force prior to the development of traffic management plan.</p> <p>Proper signage on the service road and project access road shall be ensured all the time</p> <p>Buses will be used to transport laborers and carpooling among staff is encouraged (social distancing due to COVID-19 should be considered).</p> <p>Route directions and speeds limit will be placed along the access road to the project site.</p> <p>Delivery of construction materials will be coordinated to reduce congestion on local roads and to reduce the waiting time for drivers.</p> <p>Where applicable the Contractor will obtain the relevant permits to transport heavy loads and oversize cargos into the project site and adhere to the requirements outlined in the permit (i.e. delivery routes and timings).</p> <p>Where applicable, the Contractor will notify the local communities on the delivery of wide/heavy loads and how it could potentially impact their road use.</p> <p>Heavy-duty vehicle drivers will be competent and legally authorized to operate such vehicles in Uzbekistan and across borders where applicable.</p> <p>No construction vehicles will be allowed to use the access roads leading to communities near the Project site and will remain within the designated routes.</p> <p>The contractor will train its personnel on traffic safety. If possible, Uchkizil traffic police will prepare and conduct the training.</p> <p>Every traffic accident and incident will be recorded and investigated. Corrective actions will be followed and implemented. The local police department will be involved in the process.</p> <p>A grievance mechanism will be established to allow local communities to make complaints relating to Project drivers.</p> <p>In case, any livestock is injured or dies by project vehicles, compensation will be done. Prices of livestock will be identified by the local market and community leaders.</p> <p>Transportation of any unauthorized personnel or goods by project drivers will be banned and will be announced on the project notice board.</p>	Minor



12.4.2 Operational Phase

During the operation phase, impacts on transportation infrastructure will not be as high as the construction phase. The operation of the Project will not require continuous delivery of materials or other equipment.

During the operation phase of the project, the main traffic source will be due to the daily commute of the personnel. It is anticipated that the personnel will live in nearby towns and will use shuttle buses. The operations will be in shift and the impact on the traffic will be limited to shuttle buses. There will be car-parking area at the project site and car journeys can be expected for the personnel who may not prefer shuttle buses and guests visiting the project area.

In regards to road safety within the Power Plant area, there will be a limited number of vehicle movements during the operational phase. Clear walkways will be constructed and personnel will be trained on health and safety aspects regarding internal road safety. All personnel will be equipped with high-visibility jackets.

During the operation stage, it is not expected a large number of HGVs will be used. Chemical delivery, waste transportation, and occasional maintenance will be the other sources of traffic during the operation. None of these is expected to create significant negative impacts on the local roads. Hence, additional road movement during the operation stage will not have adverse impacts on local people. There are potential safety risks associated with the transport of chemicals during the operation phase, other hazardous materials, and the removal of hazardous wastes. Risks derived from hazmat transport are spillages (to land, drains, waterways) chemical fumes, fire, or direct exposure to local communities (or other road users). The resulting magnitude of impacts will depend on the type of exposure and sensitivity of receptors but can potentially be of high significance. Although such risks will primarily be under the responsibility of suppliers and service providers, it will be necessary for the project to engage with the selected suppliers to ensure that processes are in place for effective responses to be made in the event of emergencies and to attempt to reduce the likelihood of such events from occurring. The Project Company will contractually require traffic safety analysis from the suppliers.

The operational activities of the project are not expected to increase the existing number of movements on the local road network. Besides, it is not anticipated that abnormal loads on the roads will be required during the operation stage.

All potential impacts caused by traffic and transportation during the operation phase and mitigation measures are presented in Table 158. Mitigation measures will further reduce the impacts and therefore residual impacts will be minor or moderate on the environment.

12.5 Cumulative Impacts

The purpose of a cumulative impact assessment of traffic and transportation is to determine how the potential impacts of the proposed project might combine cumulatively, with the potential impacts of other projects. All potential impacts caused by traffic and transportation



during the construction and operation phase are presented in Section 12.4. The summary of cumulative impacts of traffic and transportation is presented in Table 159.

Table 159: Summary of Cumulative Impacts of Traffic and Transportation

Environmental and Social Aspects	Construction Phase	Operation Phase
Cumulative Impacts	<p>There are no known development projects in the vicinity of the Project Area.</p> <p>In the case of another project and/or development in the same region at the same period, it is expected that the traffic increase on the local roads and the related safety problems will increase during the arrival of the construction materials and workers to the site.</p>	<p>If there exists a new development that will contribute to the traffic in the near region. Therefore, the Traffic Management Plan will be revised accordingly. Additionally, the transportation of hazardous materials and the commuter hours of the employees will be revised within this scope.</p>

12.6 Monitoring

Standard daily monitoring of on-road incidents or any complaint from the local communities will be conducted in accordance with national requirements.



13. ARCHAEOLOGY AND CULTURAL HERITAGE

13.1 Standards and Regulatory Requirements

13.1.1 National Requirements

The main legislation related to protection of archaeology and cultural heritage in Uzbekistan are given below:

- Law "On the Protection and Use of Objects of Archaeological Heritage", No. 229 dated October 13, 2009, (as amended on April 18, 2018),
- Law "On the Protection and Use of Cultural Heritage" No. 269 dated August 30, 2001 (as amended on April 18, 2018),
- Decree of the Cabinet of Ministries of the RUz "On measures on further development protection and usage the cultural heritages" No.269. dated 29 July,2002

The purpose of *Law "On the Protection and Use of Objects of Archaeological Heritage"*, shall be to regulate relations in the sphere of protection and use of the objects of archaeological heritage. Objects of archaeological heritage shall be considered those inserted in State register of objects of cultural heritage. The state shall have exclusive right of ownership of the objects of archaeological heritage. State protection, conservation and management of the objects of archaeological heritage shall be carried out in accordance with the legislation on protection and conservation of the objects of cultural heritage. Objects of archaeological heritage shall be subject to compulsory state registration.

Law "On the Protection and Use of Cultural Heritage" regulate the protection and use of cultural and archaeological objects; but these relate more explicitly to State measures for preservation, excavation, and use of objects of cultural heritage. The Law on the Protection and Use of Cultural Heritage is directed primarily at preservation and management of important elements of the built environment, but also addresses protection of historical, archaeological, aesthetic, ethnological, or anthropological territories, as well as natural landscapes connected with historical event. Official permission from the Ministry of Culture of the RUz should be received prior to starting rehabilitation works.

According to *Resolution of the Cabinet of Ministries of the RUz "On measures on further development protection and usage, the historical heritages"* for artifacts/findings nonregistered yet which could be evaluated as cultural heritage, a full procedure on registration needs to be implemented.

13.1.2 Lender Requirements

IFC, PS8, Cultural Heritage state that "the importance of cultural heritage for current and future generations. Consistent with the Convention Concerning the Protection of the World Cultural and Natural Heritage, this Performance Standard aims to ensure that clients protect



cultural heritage in the course of their project activities. In addition, the requirements of this Performance Standard on a project's use of cultural heritage are based in part on standards set by the Convention on Biological Diversity."

According to Performance Standard 8, cultural heritage means "tangible cultural heritage types such as movable or immovable object, property, area, building or group of structures of archaeological (prehistoric), paleontological, historical, cultural, artistic and religious value, sacred settlement, Intangible cultural types that bear sacred values such as rocks, lakes and waterfalls, which are recommended to be used for commercial purposes such as cultural knowledge, innovation and practices that reveal unique natural features or tangible objects and traditional lifestyles of communities".

For tangible cultural heritage items, applicable laws that fulfill the legislative obligations of the country where the project is located must be followed. With this law, cultural heritages must be determined and protected by the practices accepted in the world for the protection, finding, research and certification of cultural heritages by authorized institutions.

It seeks to protect the adverse impacts of project activities and support their preservation and promote equitable sharing of benefits from the use of cultural heritage. Therefore, the project will be assessed in line with (Assessment and Management of Environmental and Social Risks and Impacts) and PS8 (Cultural Heritage).

13.2 Observations and Baseline Conditions

As depending on the desktop studies and field survey, no archaeological, cultural heritage and historical monuments were identified or encountered within the borders and within 5 km radius of the Project area.

On 13th July 2021, UzAssystem sent a request letter to the Ministry of Culture of the RUz requesting information regarding any archaeological or cultural sites near or within the proposed Project Site. In official response of Ministry dated 28 June 2021 (see Attachment D), the archaeological and cultural sites in the region were listed and it was observed that there were no officially known archaeological or cultural artifacts/findings in the project area or within 5 km of areas.

The archaeological sites in the vicinity of the project area are shown in Figure 106.

In addition, during the site survey conducted in July 2022, face-to-face interviews were performed with Department of Cultural Heritage of Surkhandarya Region and Termiz Archaeological Museum. Conclusion of the meetings are summarized below:

- List of immovable cultural heritage assets and archaeological areas have been gathered by their location, coordinates, historical backgrounds, types, etc.
- There are no archaeological and cultural assets within the Project area.
- There are also no cultural heritage assets under UNESCO world cultural heritage. However, they given requesting to UNECO to add cultural heritage object list (Fayyaztapa and Karatapa) it is the object of budism.

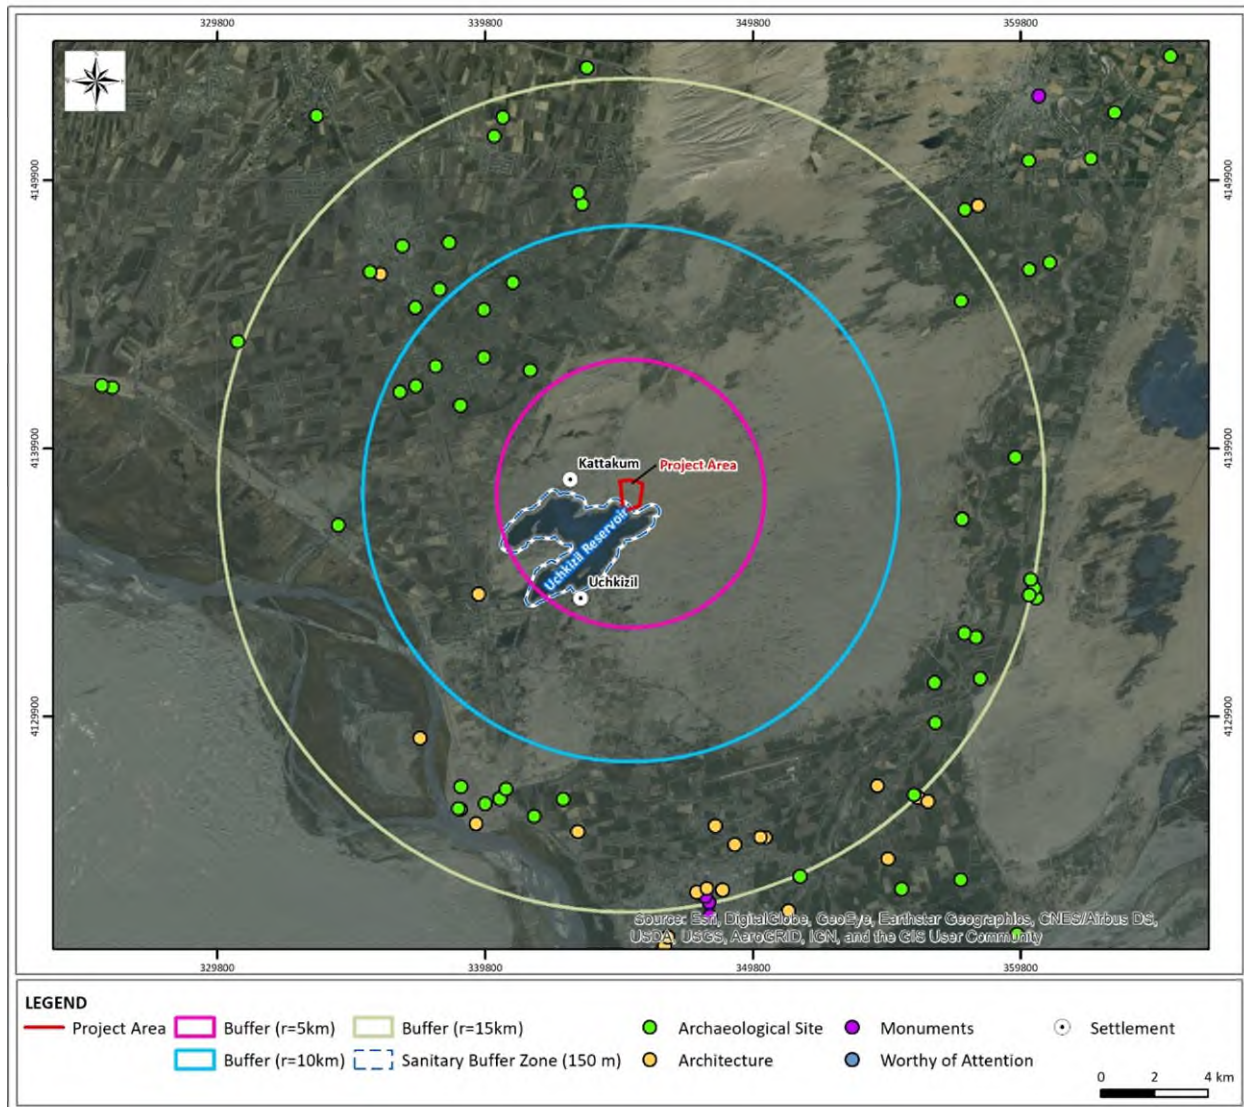


Figure 106 Archaeological Sites within 5 km radius of the Project area

Besides, during the stakeholder consultation meetings, no information/concerns are issued from the local people regarding the archaeological sites.

The Chance Finds Procedure is developed and will be provided to all contractor and subcontractor personnel, as part of the induction training (to be given at the time of employment) and refreshments will be done through toolbox talks throughout the construction phase. The Chance Finds Procedure is presented in Attachment G.



13.2.1 Sensitive Receptor

There are not officially known archaeological or cultural artifacts/findings in the project site or its immediate surroundings. Therefore, the only potential receptors are unknown buried artifacts/findings.

13.3 Potential Impacts, Mitigation, Management & Residual Impact

13.3.1 Construction Phase

Although there are no observed archaeological remains or cultural heritage that will affect or be affected by the future Project activities, there is still some probability that archaeological or cultural artifacts/findings can be unearthed at any time during the construction period. For that reason, a "Chance Find Procedure" will be prepared for the area to be reserved for construction activities. This procedure should be prepared and applied during the site preparation and construction periods of the Project by construction contractors.

The main intention of the procedure is to point out that it is beholden of all parties on the construction site to cease all works immediately and inform the relevant authorities, and the proposed steps will be taken under the supervision of the authorities.

The training of the project workers will include the "project requirements, protection of cultural and archaeological heritage, laws and legislations related with the archaeological and historical monuments and chance find procedure". Such kind of training should be included within the "Induction Trainings" of the construction contractors.

The impacts of the Project activities on the buried archaeological and cultural artifacts/findings and measures to be applied during site preparation and construction phases are presented in Table 160.

As seen from the table, the impact of the future Project activities on the cultural environment will be minor, upon implementation of the "Chance Find Procedure" during site preparation and construction activities, because, there are no archaeological and historical remains at the site.

13.3.2 Operational Phase

Although there are no archaeological remains or cultural heritage that will affect or be affected by the future Project operation activities. If buried archaeological or cultural artifacts/findings were found in the Project Area, they would have been disturbed and removed during the construction phase. If all necessary mitigation measures are implemented, no permanent impact is expected on the environment. Therefore, it is foreseen that the impact of the operation on cultural heritage will be insignificant.



13.4 Monitoring

Standard daily and regular monitoring will be conducted for buried archaeological or cultural artifacts/findings in compliance with the "Chance Find Procedure" during the site preparation and construction periods.



Table 160: Significance Impacts on Archaeological and Cultural Artifacts/Findings during the Construction Phase of the Project; and Mitigation and Management Measures

Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Potential Impact Significance (without impact mitigation measures)	Mitigation and Management Measures	Significance of Residual Impacts
Damage on buried archaeological and cultural artifacts/findings	Archaeological and cultural artifacts/findings	Low	High	Moderate	<p>The Contractor will develop a "Chance Find Procedure" as in line with the Environmental & Social Management System.</p> <p>The Contractor will develop "Cultural Environment Management Plan (including regular monitoring)" to be applied during site preparation and construction works in line with the Environmental & Social Management System.</p> <p>The Contractor will develop a "Training Program" for the workers regarding the archaeological and historical monuments as in line with the Environmental & Social Management System.</p> <p>Contractors and/or subcontractors and other personnel at the construction site will be informed/trained about the archaeological site and historical artifacts/findings before the construction, excavation, and land arrangement works are started. This briefing will ensure the personnel to be informed when findings are found.</p> <p>The work (Excavation and others) shall be suspended immediately, a local administration (Khokimiyat) shall be informed, and the works shall be continued under the supervision of an organization that will be appointed by the authorities.</p>	Minor

14. LANDSCAPE AND VISUAL AMENITY

14.1 Standards and Regulatory Requirements

There are no well-recognized legislations on visual impact assessment (VIA) studies across the world and RUz, either. However, there are some guidelines established and widely used. One of which is and the most commonly used one is the "Scottish Natural Heritage Environmental Impact Assessment Handbook". The VIA work within the scope of this project was performed in parallel to "Guidelines for Landscape and Visual Impact Assessment 3rd Edition" [14].

14.2 Observations and Baseline Conditions

In the European Landscape Convention definition, 'Landscape' means an area, as perceived by people, whose visual features and character are the result of the action and interaction of natural and/or human factors. All landscapes combine natural components (such as geology, soils and watercourses) and human influences (such as settlement and land use) with cultural perceptions (such as history, social associations and aesthetic values).

Visual impact can be defined as any alteration in landforms, water bodies, or vegetation, or any introduction of structures or other man-made visual elements, that negatively or positively affect the visual characteristics or quality of a landscape and the visual experience of people viewing the landscape through the introduction of visual contrasts (opposition of different forms, lines, colors, textures in a landscape) in the basic elements of form, line, color, and texture. They cover the impacts on specific views and on the general visual amenity experienced by people and the potential visual impact is primarily originated from changes in visual characteristics in the view field.

Baseline conditions represent the existing scenic conditions of the Project area independent from the Project. The first step in any landscape or visual impact assessment is to identify the existing landscape and visual source in the vicinity of the Project that is the baseline visual conditions.

The Project area is located in the very south of the RUz close to the border between Uzbekistan and Afghanistan (the distance to the State border is 14 km) in the Surkhandarya intermountain area (Surkhan-Sherabad valley), inclined from north to south, to the floodplain of the Amudarya river. Like other intermountain valleys of Central Asia, the Surkhan-Sherabad Valley is a densely populated ancient agricultural oasis. Most of the valley is occupied by cultural landscapes (mainly agricultural landscape and residential landscape). Based on the field studies and satellite views, the areas of natural landscapes preserved in the central part of the valley on the Kattakum sandy massif and on the Khaudaktau Upland are intensively used by the local population for grazing, including the project area.

There are no green spaces (woody and herbaceous vegetation) on the construction site of the Project. Arboreal plantations (from decorative – thuja, pine, mulberry, from fruit-flavored, and stone fruits - apple, apricot, walnut, almond), as well as grapes are found on the territory of the nearest village "Uchkizil". In 1.2 km to the north-west of the planned Project territory there is a waste recycling enterprise - "Biotechnoeco Ltd".

14.2.1 Sensitive Receptors

The nearest town is Uchkizil with a population of 3,500 which is located 2 km in the south of the area. The potential sensitive receptor is the community is identified as Kattakum Village, which is located 1 km in the west of the site.

14.3 Potential Impacts, Mitigation, Management & Residual Impact

14.3.1 Construction Phase

The sensitivity of landscape or in other words, the sensitivity of high valued landscapes depends on its inherent quality, condition, and its ability to adjust changes. The sensitivity of the ones who are exposed to visual impact is based on their location and viewing opportunity. The potential sizes of the impacts on visual amenity and on the elements composing landscape depend on the nature and intensity of changes derived from development.

The assessment of landscape sensitivity was conducted by examination of the locations for permanent facilities. Therefore, visual impacts and landscape impacts are closely connected with predicted changes in terrain, soil, and vegetative cover.

In that regard, the project sites are assessed in terms of their landscape and visual aspects to determine the areas with high landscape value that can be impacted by the project activities at the project site and its close vicinity.

However, there is no element at the project site, which is planned to be constructed at the unused (see Figure 107) flat land. Moreover, there is no natural vegetation that can be considered as visual landscape element at the Project site. There are only bushes suitable for desert vegetation in the area.

The landscape and visual impacts will be potentially resulted from the elements listed below:

- Possible changes in elements and the physical structure of landscape, and the impacts on the general landscape characteristic due to construction and operation activities at the project site;
- The impacts of landscape and visual changes on people due to construction and operation activities.

Construction activity is highly visible activity. The elements of construction may cause a significant change in the landscape in which they are conducted. On the other hand, all of these are temporary activities. The activities will become significant for a couple of months at any location.

The potential impacts on landscape and visual amenity during the construction phase and mitigation measures are presented in Table 161. Mitigation measures will further reduce the impacts and therefore residual impacts will be moderate on the environment.



Figure 107: General view of the Project area

For the terrain that will be affected by the construction activities, the interfered topography shall be reinstated as it was to the extent possible. The first activity to be performed during the landscaping studies is leveling. Subsequent to leveling, the topsoil will be spread over the terrain by establishing underground and above-ground drainage systems at required locations. Basically, the land topography will be reinstated as compliance to the natural structure of the terrain, climate of the region and the soil characteristics at the areas where construction activities are conducted and the permanent facilities are built. The most significant stage after the spreading of the topsoil is the planting process. The planting process will be carried out by the species that are specific to the area (natural plant species if possible). The detection of the species that is specific for the area, using the right planting methods, execution of good design and monitoring and maintenance programs will enhance the success of the landscaping studies.

Table 161: Significance Impacts on Landscape and Visual Amenity during the Construction Phase of the Project; and Mitigation and Management Measures

Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Potential Impact Significance (without impact mitigation measures)	Mitigation and Management Measures	Significance of Residual Impacts
Disturbance on visual view on receptors	Residential and commercial Areas in, Kattakum Village, Kaftarkhana & Uchkizil Towns	Medium	Medium	Moderate	Minimize the extent to which Project activities will be visible from various view locations; Minimize the visual contrast between the main infrastructure elements associated with the Project and the surrounding landscape in which they will be seen. The number of lights during nighttime works will be kept to a minimum, insofar as is consistent with maintaining operations and health and safety requirements. Light spill will be contained to the greatest extent possible e.g. by using directional lighting wherever possible. If required based on feedback of affected people an additional shielding might need to be installed. Regular monitoring of the affected people's feedback with regards to visual impacts will be provided.	Minor

14.3.2 Operational Phase

The objective of the landscape studies during the operation phase is to provide the visual screening of the landscape damaged during the project activities and to create an environment that has scenic value and is consistent with the natural structure.

The map showing the visibility of the study area of the Project is given in *Figure 108* which is determined as a 10 km circular area drawn from the center of the Project area. The detected 10 km study area is based upon the Project description, site visits, and good practice guidance. This map is created based on the height of the stack, which is the highest component of the planned Project. As can be seen from the figure, the planned facility stack can be seen from many regions (including from Turkmenistan and Afghanistan) due to the fact that there are not many obstacles around the project area and due to its topography. Other structures, such as power blocks, cooling towers and associated electrical transmission lines, will also be visible, although not as much as the stack's visibility (see *Figure 109- Figure 112*).

Although relatively long distances may exist between potential view locations and infrastructure within the Project area, the color contrast and reflectivity of materials and finishes will be taken into account when selecting construction materials with the aim of minimizing any potential visual impacts.

In that regard, the topsoil stripped during the excavation works will be used for landscaping activities during the operation phase, with the intention to constitute a vegetative cover, primarily at the location where it was stripped and in the vicinity.

The maintenance process is a significant phase, during when the application area should be controlled periodically; the plants that are damaged and cannot grow should be replaced. When required, maintenance works such as irrigation, fertilization, pruning, disinfection, protection against external impacts, should be carried out.

The visual screening of the newly constructed facilities will be accomplished through landscape applications. The project area will provide ongoing screening for a number of surrounding view locations resulting in a reduction or complete mitigation of visual impact.

The re-establishment of vegetation cover across disturbed areas were not conflicting with longer-term operational infrastructure will help to increase the visual absorption capability of the landscape within the Project area and reduce the overall visibility of the Project infrastructure.

The potential nighttime lighting may issue of direct light spill from floodlights or other lighting elements toward surrounding rural residential dwellings and roads. It will be minimized through compliance with UK CIBSE Lighting Guidance (or international equivalent) to avoid unnecessary light spill into dark areas.

During colder and drier periods, there may also be a visual impact linked to steam plumes from the cooling towers, which will tend to rise vertically from the cooling blocks.

There will also be a visual impact linked to steam plumes from the cooling towers during colder and drier periods.

All potential impacts on landscape and visual amenity during the operation phase and mitigation measures are presented in Table 162. Mitigation measures will further reduce the impacts and therefore residual impacts will be moderate on the environment.

During the social surveys, residents of nearby villages especially Kattakum and Uchkizil, were informed about the heights of the project units including stack (with a height of 65 m) and no negative responses were collected.



Figure 108: Project Area visibility within the 10 km radius area (Project Area can be seen from the green shaded areas)



Figure 109: View of the Project Area from the east direction

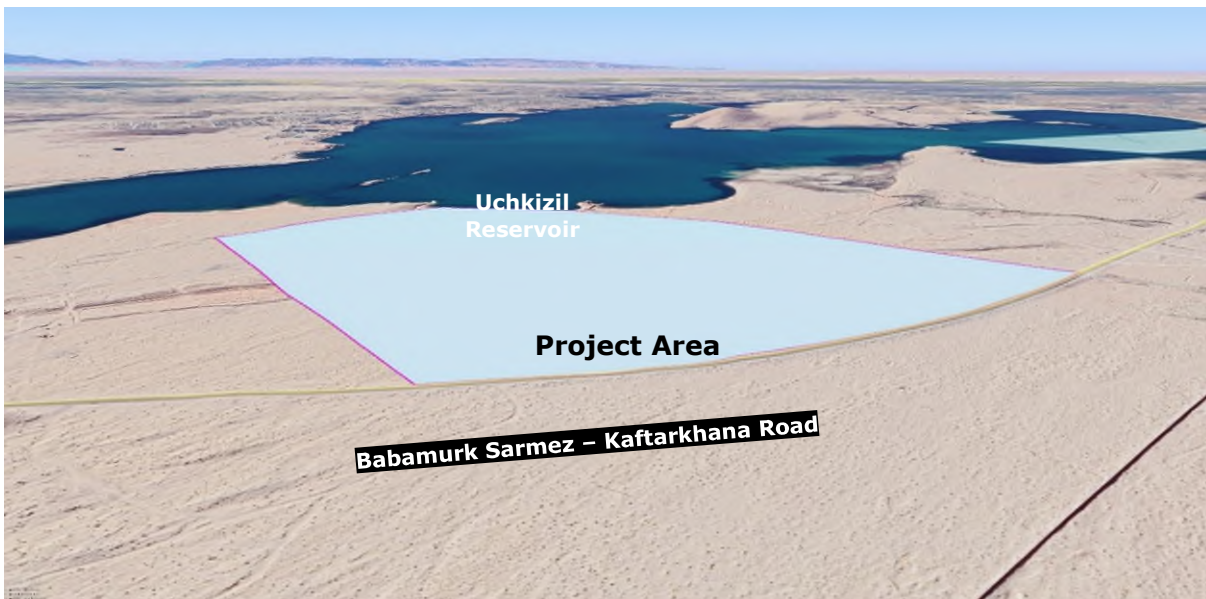


Figure 110: View of the Project Area from the north direction



Figure 111: View of the Project Area from the west direction



Figure 112: View of the Project Area from the south direction

Table 162: Significance Impacts on Landscape and Visual Amenity during the Operation Phase of the Project; and Mitigation and Management Measures

Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Potential Impact Significance (without impact mitigation measures)	Mitigation and Management Measures	Significance of Residual Impacts
Disturbance on visual view on receptors	Residential and commercial areas in, Kattakum Village, Kaftarkhana & Uchkizil Towns	Medium	Medium	Moderate	Minimize the extent to which Project activities will be visible from various view locations. Shiny building materials will be avoided Minimize the visual contrast between the main infrastructure elements associated with the Project and the surrounding landscape in which they will be seen. The number of lights during nighttime works will be kept to a minimum with the except flight corridors, insofar as is consistent with maintaining operations and health and safety requirements. Light spill will be contained to the greatest extent possible e.g. by using directional lighting wherever possible. If required based on the feedback of affected people an additional shielding might need to be installed. Regular monitoring of the affected people's feedback with regards to visual impacts will be provided.	Minor



14.4 Cumulative Impacts

All potential impacts on landscape and visual amenity during the construction and operation phase are presented in Section 14.3. The summary of cumulative impacts on landscape and visual amenity is presented in Table 163.

Table 163: Summary of Cumulative Impacts on Landscape and Visual Amenity

Environmental and Social Aspects	Construction Phase	Operation Phase
Cumulative Impacts	<p>There are no known development projects in the vicinity of the Project Area.</p> <p>If any simultaneous activity is planned in the region, the visual disturbance and dust emission that will result from the temporary construction activities on the local receptors in the region will be assessed as a cumulative effect.</p>	<p>The development of a similar industrial activity in the region will permanently change the landscape character of the Project area, which is currently dominated by predominantly agricultural areas and Uchkizil Reservoir.</p>



15. GHG EMISSIONS AND CLIMATE CHANGE

15.1 Standards and Regulations

15.1.1 National Context and Regulations

The main legislation related to climate change and green economy in Uzbekistan are given below:

- Law "On the Rational Use of Energy" No. 412-I, dated April 25, 1997 (as amended on July 14, 2020).
- Decree of the President of the RUz. "On approval of the Strategy on transition of the RUz to the "green" economy for the period 2019-2030", No. 4477, dated October 4, 2019.
- Decree of the President of the RUz, "On approval of the Concept of environmental protection of the RUz until 2030", No.5863, dated October 30, 2019.

The Law "On the Rational Use of Energy" aims:

- to ensure efficient and environmentally sound use of energy in its production and consumption;
- encourage the development and application of energy efficient technologies;
- extraction and production of less expensive petroleum products, natural gas, coal and other types of natural fuel;
- ensure accuracy and uniformity of measurements, as well as accounting for energy produced and consumed in terms of both quality and quantity;
- execution of supervision and control by the state over the efficiency of energy production and consumption, as well as over the state of energy equipment and energy supply and consumption systems.

Uzbekistan is a party to the United Nations Framework Convention on Climate Change (UNFCCC), the Kyoto Protocol and, the Paris Agreement, since November 2018. Uzbekistan submitted the Third National Communication (TNC) in 2016, includes three different emission scenarios until 2030.

This strategy aims to enable the adoption of comprehensive measures aimed at deepening structural transformations, modernization, and diversification of key sectors of the economy through a balanced socio-economic development of territories. The document lists seven goals to pursue. Among them are increasing energy efficiency, develop renewables, and transform the state's apparatus. Climate targets in this law Reduction in specific greenhouse gas emissions per unit of gross domestic product by 10% from the level of 2010 until 2030.

The Strategy has a framework character. It defines priority areas for both mitigation and adaptation. Its implementation will be ensured through measures included in sectoral plans and strategies.



The Strategy has the following priority areas:

- Increased energy efficiency in key economic sectors;
- Diversification of energy resources consumed and the development of RES;
- Climate change mitigation and adaptation, increased efficiency of the use of natural resources and conservation of natural ecosystems;
- Development of financial and other mechanisms to support green economy.

Implementation of the Strategy is to be ensured by the Intergovernmental Council to Promote and Implement Green Economy (composed of ministers and chairpersons of state committees). It is planned to prepare annual action plans for implementation of the Strategy. The Strategy does not include any assessment of costs of its implementation. Furthermore, no mechanism for reporting on implementation is envisaged by the Strategy. The Concept on Environmental Protection until 2030, adopted in October 2019, provides for a number of measures to improve the use of economic instruments in support of environmental protection. The Concept envisages reduction of the amount of controlled pollutants; ensuring the dependence of pollution charges on the volume of emissions and discharges and their level of hazard to the environment and public health; and the introduction of feed-in-tariffs for renewable energy. It is also planned to develop a mechanism for the economic valuation of biodiversity and ecosystem services.

15.1.2 Lender Requirements

Paris Convention

The Paris Agreement is the legally binding international treaty on climate change within the United Nations Framework Convention on Climate Change (UNFCCC) on climate change mitigation, adaptation, and finance. The convention is adopted by 196 parties. It was signed on 12 December 2015 and entered into force on 4 November 2016. The objective of the convention is to stabilize greenhouse gas concentrations in the atmosphere at a level that would prevent human-induced interference with the climate. The convention's long-term goal is that to sustain the global average temperature below 2 degrees Celsius and further pursuance of 1.5 degrees Celsius. Emissions should be reduced as soon as possible to achieve the balance between human-induced emissions by sources and removal of them by greenhouse gas sinks. Under the Paris Agreement, each country must do plans and programs on mitigation of global warming.

In 2018, Uzbekistan ratified the Paris Agreement and adopted a national commitment to reduce GHG emissions per unit of GDP by 10% of the 2010 level by 2030.

Intergovernmental Panel on Climate Change (IPCC)

The IPCC is the intergovernmental body of the United Nations devoted to providing information regarding the scientific basis risks of climate change impacts driven by the human interference. IPCC covers the scientific and socioeconomically information regarding the human interference on climate change with its natural, political, and economical aspects and risks and suggest adaptation and offset strategies, by assessing the published literature and making it internationally accessible.



The Intergovernmental Panel on Climate Change (IPCC) is a panel that publishes reports on climate change and greenhouse gases, stating the situation at certain times and revealing the risks. According to the IPCC, the continuous release of GHGs increases the likelihood of the severe, common and irreversible effects causing more heating in all components of climate change and causing long term alterations. The limitation of the climate change will require significant and continuous declines in the GHG emissions that is likely to limit the climate change risks along with the adaptation.

Cumulative CO₂ emissions determine the global average surface heating on a great extent in the late 21st century and beyond. Estimate of GHG emissions varies depending upon the socioeconomic development and climate policy on a wide range. (IPCC, AR5 Synthesis Report: Climate Change 2014)

When calculating the non- CO₂ GHGs, they are calculated in terms of "CO₂ equivalent" (CO₂-e) according to their contribution to increase the greenhouse effect. CO₂ equivalent of a gas is calculated using an index so-called Global Warming Potential (GWP).

Kyoto Protocol

The Kyoto Protocol is an international treaty which extended the 1992 UNFCCC that obligates state parties to reduce greenhouse gas emissions, based on the scientific agreement that (part one) global warming is occurring and (part two) that human-made CO₂ emissions are driving it. The Protocol was adopted in Kyoto, Japan, on 11 December 1997 and entered into force on 16 February 2005. There were 192 parties to the Protocol in 2020. The Kyoto Protocol implemented the objective of the UNFCCC to reduce the global warming by reducing greenhouse gas concentrations in the atmosphere to "a level that would prevent dangerous human caused intrusion with the climate system". The Kyoto Protocol applied to the six greenhouse gases. Carbon dioxide (CO₂), methane (CH₄), nitrous oxide (N₂O), hydrofluorocarbons (HFCs), perfluorocarbons (PFCs), and sulfur hexafluoride (SF₆).

The United Nations Framework Convention on Climate Change (UNFCCC)

UNFCCC is the international environmental treaty on climate change and adopted by 154 nations. It aims to stabilize the greenhouse gas concentrations up to a tolerable level that would prevent the human-induced climate threats to the ecosystem. The safety level can only be achieved within a timeframe that allows the climate adaptation and resilience. In this way, production is not threatened, and economic development will not be impeded according to the UNFCCC provisions.

International Finance Corporation/World Bank (IFC/WB)

In line with greenhouse gas and climate studies, World Bank (WB) developed a methodology, aims to enhance access to the GHG analysis, information, capacity and additional climate finance. Developing this methodology, present UNFCCC methodologies, IPCC International GHG Inventory guidelines, GEF and CDM/JI methodological frameworks, GHG Protocol Initiative Standards World Bank Environmental Department documents and methodologies applied by other international finance institutions have been utilized.

The World Bank Group agreed a Country Partnership Framework (CPF) (2016–2020) with Uzbekistan. Climate change is identified as a cross-cutting area of engagement. WBG activities for increased climate resilience focus on three areas [100];



- 1. support to agriculture to increase resilience by diversification to less water-intensive crops, introduction of water saving techniques, and modernization of irrigation systems;
- 2. ensuring all infrastructure investments, including clean and renewable energy deployment would be screened both in terms of physical resilience to likely climate change and of economic returns if climate change considerations were fully costed;
- 3. the continued promotion of the collection of better data on climate change and water flows in the Syr Darya and Amudarya basins and in support of increased consultation by riparian to manage water resources for mutual benefit.

15.2 National Context

Uzbekistan has an arid and continental climate characterized by large variations in temperature within days and between seasons. Large parts of the country (79% by area) feature flat topography either in the form of semi-desert steppes or desert zones, including desert areas in the far west that have formed as a result of the drying of the Aral Sea. The remaining south-eastern areas have a continental climate, including the area covering the largest cities of Tashkent and Samarkand, and contain high mountains forming part of the Tien-Shan and Gissar-Alai Ranges. Summers are long, hot and dry, with an average monthly temperature of 27.2°C in the hottest month (July), and with an average daily maximum of 35°C in many of the major cities. Winters are cold, with average monthly temperatures of –1°C to –3°C between December and February for the latest climatology, 1991–2020, (see Figure 113). Western areas of the country experience relatively colder winter temperatures, whereas temperatures are highest in the south, near the borders with Turkmenistan and Afghanistan. There is considerable spatial variation in precipitation levels. Many western areas receive less than 100 millimeters (mm) of precipitation per year, whereas parts of the east and south-east can receive up to 800–900 mm per year. Figure 114 shows the spatial differences of observed historical temperature and precipitation in Uzbekistan [11].

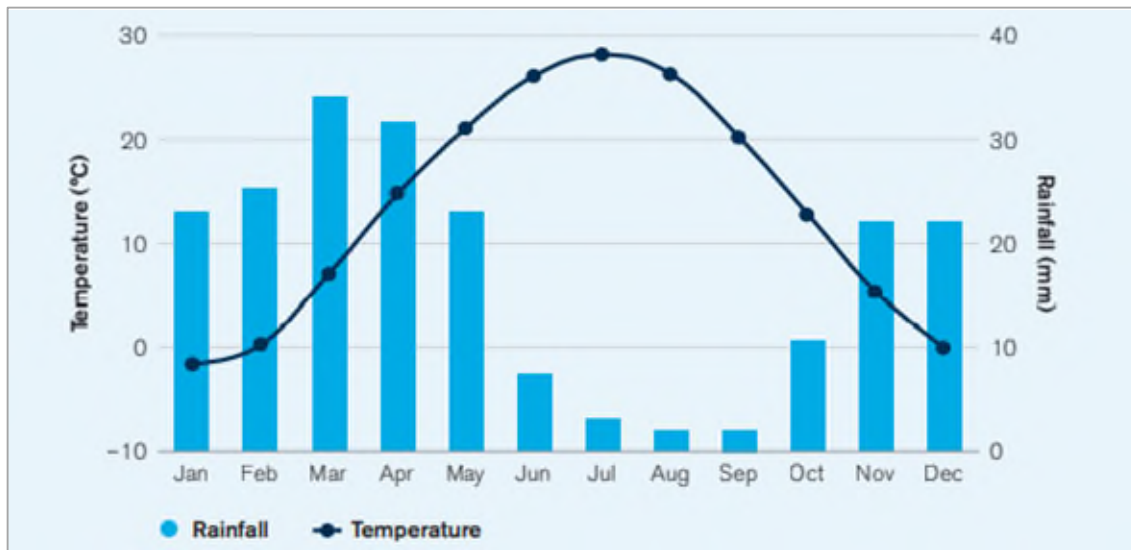


Figure 113: Average monthly temperature and rainfall in Uzbekistan, 1991–2020 [11]

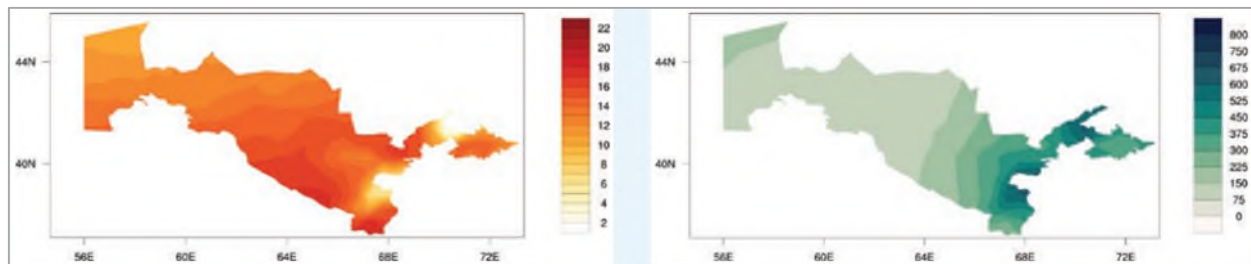


Figure 114: (Left) annual mean temperature (°C), and (right) annual mean precipitation (mm) in Uzbekistan over the period 1991–2020

Average annual air temperatures have risen steadily and significantly in Uzbekistan over the past century, albeit with notable variation from year to year. From 1950 to 2013, temperatures has rised at an average rate of 0.27°C per decade. The average annual temperature range has narrowed in Uzbekistan over the same period, with average minimum temperatures rising by 2.0°C and average maximum temperatures by 1.6°C between 1950 and 2013. The drying, or ‘desiccation’, of the Aral Sea located at Uzbekistan’s Northwestern corner has made a minor contribution to climate warming in the local vicinity. Uzbekistan’s rate of warming varied considerably by region, with the steepest rises in temperature occurring in the north and in large cities (0.30°C–0.43°C per decade), and less warming occurring in mountainous areas (0.10°C–0.14°C per decade). Warming was fastest in spring (0.39°C per decade) and autumn (0.31°C), while temperature rises were relatively modest in winter (0.13°C per decade) [11].

In contrast to the clear trend in average temperatures, average annual precipitation has not shown statistically significant changes in Uzbekistan in recent decades. A slight decrease in average annual precipitation was observed between 1950 and 2013. Observations from the Tien Shan and Gissar-Alai mountain ranges exhibit some variation between seasons, with a slight increase in winter months (December to February) being offset by slight decreases in



other months of the year. El Niño Southern Oscillation (ENSO) has a strong influence over multi-year dry and wet climate variability.

Greenhouse Gases Trends by Sector

Uzbekistan is a Non-annex-I party to the UNFCCC, and has submitted, to date, three national communications to the UNFCCC, including inventories of GHG emissions. The latest data, contained in the TNC, issued in 2016 and submitted in 2017, are updated to 2012. The inventory presented under the TNC includes data on emissions and sinks of CO₂, CH₄, N₂O and HFCs, as well as of CO, NO_x, non-methane volatile organic compounds (NMVOCs) and SO₂. A new GHG inventory will be compiled in 2020–2021. The inventory does not include data on sulfur hexafluoride (SF₆) and perfluorocarbons (PCFs) due to the lack of relevant data. According to the TNC, in 2012, GHG emissions per capita in the country were 6.9 t of CO₂-eq, while total emissions, excluding land use change and forestry (LUCF) sinks were 205.2 Mt CO₂-eq (see Table 164). In comparison with 1990, there has been a 13.7 per cent increase in overall emissions and a 21.6 per cent decrease in emissions per capita. In 2012, the energy sector accounted for 82 per cent of emissions (excluding LUCF removals) for a total of 168.1 Mt of CO₂-eq., and, as such, was the greatest contributor to the country's GHG emissions. The second biggest contribution to GHG emissions comes from the agricultural sector, accounting for 11 per cent of the emissions in 2012, followed by industrial processes and waste treatment, both accounting for slightly less than 8 per cent of the total GHG emissions of the country. Figure 115 illustrates the fluctuation and GHG emission trends by sector in Mt of CO₂-eq. The historical trend of the 22-year period from 1990 to 2012 appears substantially stable, with a gentle, steady increase in emissions, which are being consistently dominated by the energy sector.

Table 164: GHG emissions and removals by sector, 1990, 1995, 2000, 2005, 2010, 2012, Mt CO₂-eq

	1990	1995	2000	2005	2010	2012
Energy	151.2	157.9	172.4	169.2	164.1	168.1
Industrial processes	8.1	5.3	4.9	6.2	7.9	7.8
Agriculture	17	16.7	16.2	16.1	19.9	21.6
LUCF	-1.6	-1.4	-1	0.4	-3.1	-2.9
Waste	4.1	4.3	4.5	4.7	7.3	7.7
Total (including LUCF removals)	178.8	182.8	197	196.6	196.1	202.3
Total (excluding LUCF removals)	180.4	184.2	198	196.2	199.2	205.2

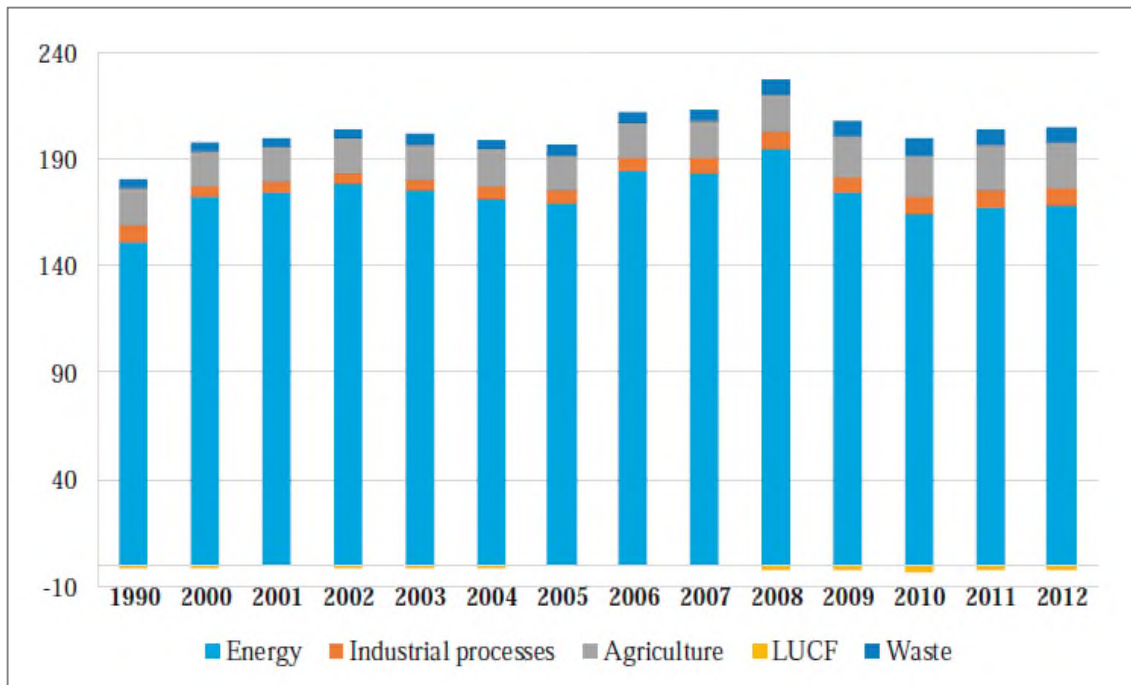


Figure 115: Total GHG emissions by sector, 1990, 2000–2012, Mt of CO₂-eq

In 2012, CO₂ emissions accounted for 51 per cent of the overall GHG emissions of the country. Historically, they have accounted for about half the total emissions since 1990 (see Figure 116). CH₄ emissions increased substantially, from 30 per cent of total emissions in 1990 to 43 per cent of total emissions in 2012 (converted to CO₂-eq.). The third most represented GHG is N₂O, accounting for 5 per cent of total emissions in 2012. In addition to this, the GHG inventory reports negligible quantities of emissions from HFCs (less than 0.1 per cent of the total emissions when converted to CO₂-eq.).

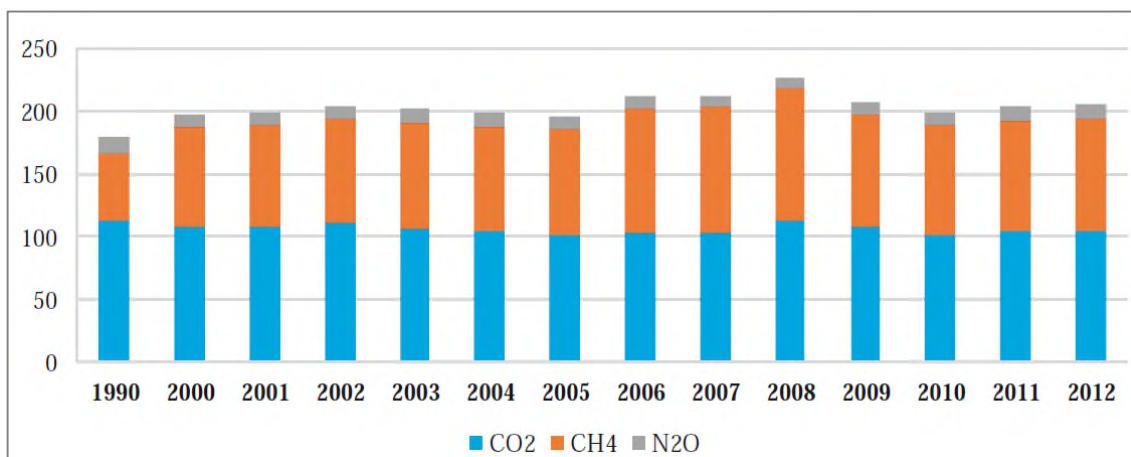


Figure 116: Total GHG emissions by gas, 1990, 2000–2012, Mt of CO₂-eq



Energy is the highest emitting sector in the country, emitting 168.1 Mt CO₂-eq. in 2012 and thus accounting for 82 per cent per cent of total GHG emissions of the country (excluding LUCF removals). The contribution of the sector to overall emissions has increased slightly over the years, with an increase of 11.2 per cent in 2012 compared with 1990.

Approximately 75–80 per cent of the electricity in Uzbekistan is produced using natural gas produced in Uzbekistan. Within the energy sector, most emissions come from fuel combustion, accounting for 58 per cent of emissions in 2012, whereas the remaining 42 per cent is due to fugitive emissions. The fuel combustion category includes fuel combustion by energy industries and by manufacturing and construction industries and fuel combustion for transport. On the other hand, the “fugitive emissions” category includes fugitive emissions due to coal mining and processing, and fugitive emissions in the oil and gas sector. It is worth noting that GHG emissions from methane leakage alone account for more than 68.237 Mt CO₂-eq. per year in 2012, with an increasing trend from 43.628 Mt CO₂-eq. per year in 1990. Methane leakage is a significant issue for the country. Even though many project interventions, including those financed under the Clean Development Mechanism (CDM), have sought to address the issue, it is a growing source of emissions in the country, with its contribution to overall emissions having increased from 22.9 per cent in 1990 to 33.2 percent in 2012 (see Figure 117).

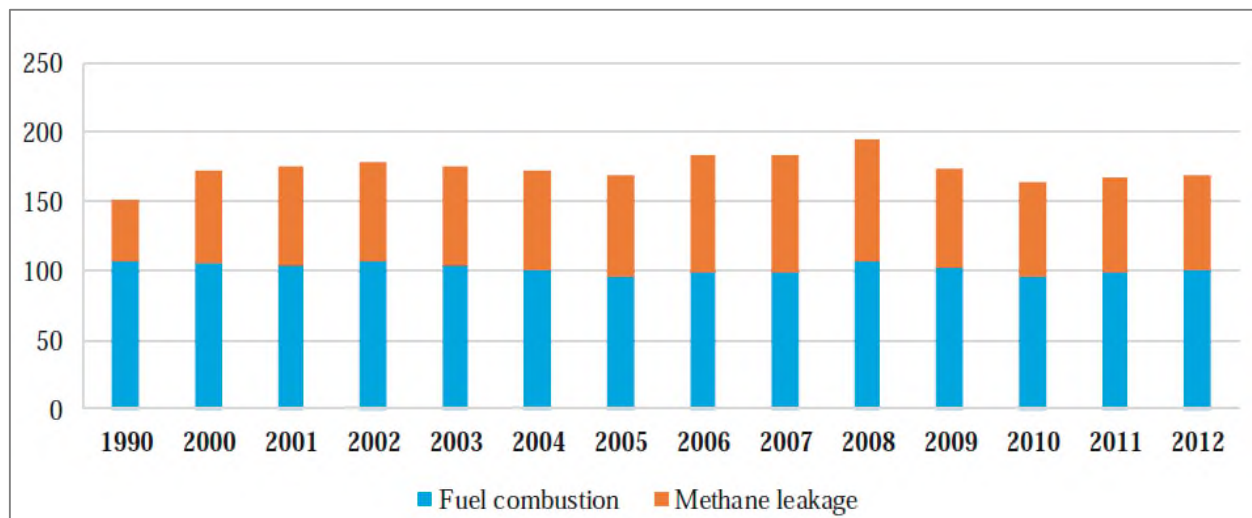


Figure 117: GHG emissions from the energy sector, 1990, 2000–2012, Mt CO₂-eq

15.3 Climate Change Impacts And Mitigation

15.3.1 GHG Emissions

During the construction and operation phases, significant amount of direct and indirect GHG gases (namely CH₄, CO₂, N₂O, SF₆, HFCs, PFCs and NF₃) are released due to earthworks, cement and steel use, maintenance activities, stationary combustion of natural gas, vehicles and equipment that works with diesel fuel. Accordingly, scope of emission has been identified in parallel to the Figure 118.

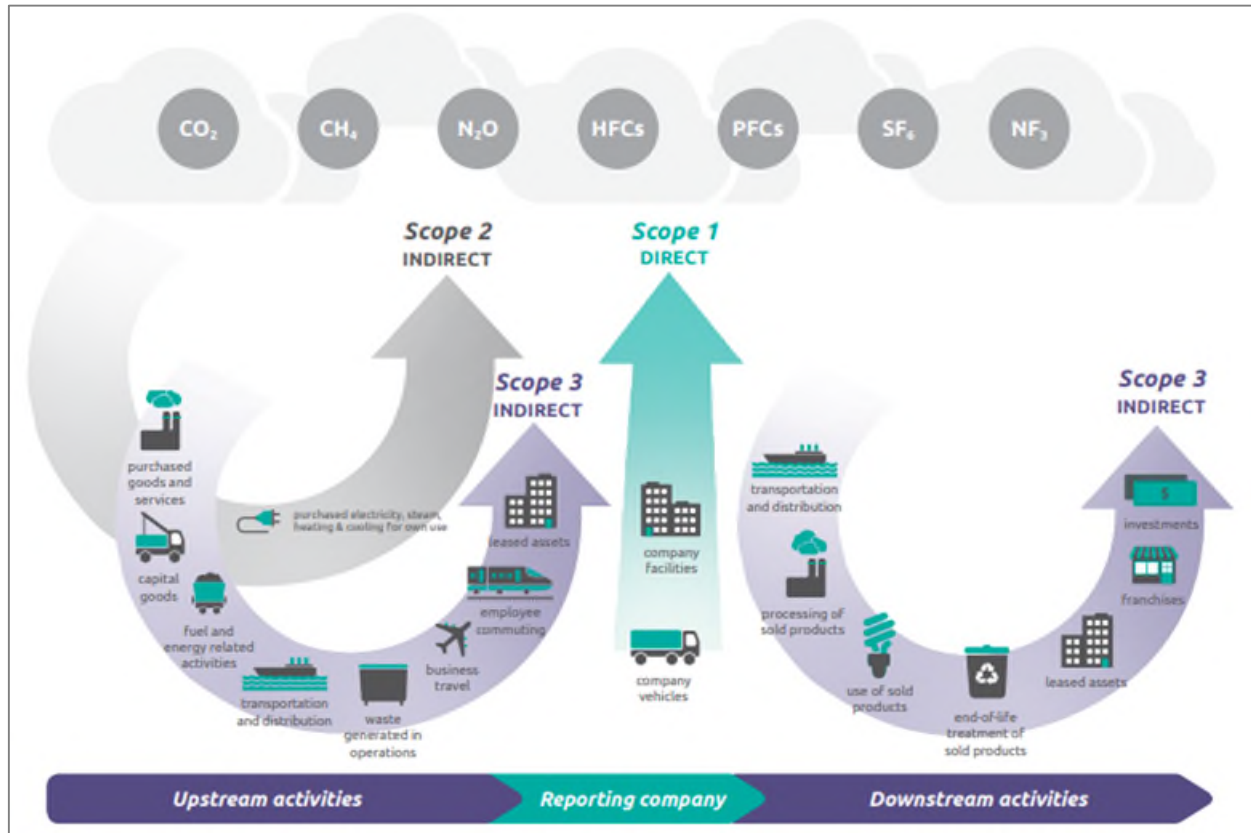


Figure 118 Illustration of Scope of Emissions

Greenhouse gases of the project through its life cycle calculated by establishing a system boundary with cradle to gate approach. Having considered only on-site emissions, all GHG emission estimations are calculated in CO2 equivalent with conversion factors of EPA by using existing data.

15.3.1.1 GHG Calculation for Construction Phase

As per the figure above, scope of emission to be generated during construction activities are classified in Table 165.

Table 165: Scope of Emissions specific to the Project Construction Phase

Type of Emission	Emission Source	Is it able to calculate?
Scope 1 Emissions (direct)	Stationary combustion sources by fuel combustion of construction vehicles	Yes, with primary and secondary data



	Fuel consumption during transportation of materials, products, waste (if any) within the site	Negligible
	Transportation of employees with company vehicles	Negligible
	Leakage from air-conditioning and refrigeration units (fugitive emissions)	Negligible
Scope 2 Emissions (indirect)	Purchased Electricity, steam, heat and cooling in the temporary offices	Yes, with primary and secondary data
	Material Supply	Not adequate information
	Flight of Staff	Not adequate information
Scope 3 Emissions (indirect)	Water Consumption	Yes, with primary and secondary data
	Waste disposal	Not adequate information
	Site access of personnels, visitors by private vehicles and site visits	Not adequate information

As defined in the above table, due to the lack of knowledge, only stationary combustion by fuel combustion and purchased electricity for the temporary offices could be calculated. The amount of emissions that will be caused by such activities are given in the following section.

GHG Calculation approach follows the IPCC Guidelines for National Greenhouse Gas Inventories - Stationary Combustion (2006)⁶ (hereinafter IPCC Guideline).

Following equation will be used to calculate GHG emissions resulted by abovementioned activities.

$$GHG \text{ Emission} = \text{Activity Data} * \text{Emission Factor (Tier 1)}$$

⁶ 2006 IPCC Guidelines for National Greenhouse Gas Inventories, Chapter 2, Stationary Combustion



GHG Emission from Stationary Combustion of Construction Vehicles

Activity Data will be calculated from total diesel fuel consumption in tons whereas emission factors will be extracted from IPCC Guideline.

During the construction phase, it is assumed that only fuel to be used for the vehicles will be diesel fuel. According to the IPCC Guideline, CH₄, N₂O and CO₂ are expected to generate due to combustion of diesel fuel.

The fuel consumption information and expected emission types are given in Table 166.

Table 166: Activity Data

Item	Value/Amount	Units
Annual Diesel Volume Use	89,790	L
Density of Diesel Oil	0.832	kg/L
Annual Diesel Volume Use	= 89,790 L * 0.832 kg/L = 76,463.4	kg
Net Calorific Value	43 (default)	TJ/Gg
Activity Data	= 76,463.4 * 10 ⁻⁶ * 43 = 3.2879262	TJ
Expected Emissions	CH ₄ , N ₂ O, CO ₂	-

Table 167: Emission Factors

CO ₂ kg CO ₂ /TJ			CH ₄ kg CH ₄ /TJ			N ₂ O kg N ₂ O/TJ		
Lower	Default	Upper	Lower	Default	Upper	Lower	Default	Upper
72600	74100	74800	1	3	10	0.2	0.6	2

GHG emission = Activity Data * Default Emission Factor, so;

- CO₂ Emission = 3.2879262 * 74100 = 243635.3314 kg CO₂
- CH₄ Emission = 3.2879262 * 3 = 9.8637786 kg CH₄
- N₂O Emission = 3.2879262 * 0.6 = 1.97275572 kg N₂O

In order to calculate CO₂-equivalent, global warming potential of the expected GHG emissions should be used which is given in the table below.



Table 168: Global Warming Potentials

Item	Global Warming Potential
CO ₂	1
CH ₄	28
N ₂ O	265

Accordingly, the expected GHG emissions in CO₂-equivalent is calculated below.

- From CO₂: 243635.3314 kg CO₂ * 1 = 243635.3314 kg CO₂ equivalent
- From CH₄: 9.8637786 kg CH₄ * 28 = 276.1858008 kg CO₂ equivalent
- From N₂O: 1.97275572 kg N₂O * 265 = 522.7802658 kg CO₂ equivalent

Annual total GHG emission generated from stationary combustion of diesel fuel is approximately **244.5 tons** of CO₂ equivalent.

GHG Emission from Purchased Electricity

In order to calculate GHG caused by electricity purchasing, electricity to be used during the construction activities should be estimated. It is expected that the the number of personnel is designated as about 2048 people, the purchased electricity can be calculated using electricity consumption per capita.

In Uzbekistan, the electric power consumption per capita is 1645 kWh in 2014⁷.

Total electricity consumption in operation phase for one year = Electric power consumption per capita x total staff number

$$= 1645 \text{ kWh/capita-year} \times 2048 \text{ staff} = 3368960 \text{ kWh/year}$$

According to the IFI 2021 Harmonized Grid Emission factor (GEF) data set⁸, the GEF Factor of Uzbekistan for electricity use is 0.467 kg CO₂ / kWh.

GHG Emission = Activity Data x Emission Factor, so;

⁷ The most recent data extracted from World Bank data base, accessible at: <https://data.worldbank.org/indicator/EG.USE.ELEC.KH.PC?locations=UZ>

⁸ Available at: https://unfccc.int/sites/default/files/resource/IFI%20Default%20Grid%20Factors%202021%20v3.1_unfccc.xlsx



CO₂ Emission from purchased electricity = 3368960 kWh x 0.467 kg CO₂/kWh = 1,573,304.32 kg CO₂/year = 1573 tons CO₂/year.

The transmission and distribution losses are ignored.

GHG Emission from Water Supply

The total water consumption during the construction is estimated as 29347.88 m³/year (please see Chapter 8), which includes preparation of concrete and cement, irrigation for dust emission, household needs, cooking, and commissioning activities.

In line with the Greenhouse Gas Emission Calculator of UNFCCC⁹, water emission factor is 0.14900 kg CO₂/m³.

GHG Emission = Activity Data x Emission Factor

CO₂ Emission = 29347.88 m³/year x 0.14900 kg CO₂/m³ = 4373 kg CO₂/year = 4.3 tons CO₂/year.

The total estimated GHG emission for construction phase is summarized in the table below.

Table 169: Summary of GHG emissions estimated for construction phase

Item	Estimated GHG in tons of CO ₂ equivalent (for 1-year activity)
Scope 1 – combustion of fuel	244.5
Scope 2 – purchased electricity	1573
Scope 3 – water supply	4.3
Annual Total	1822 tons of CO₂ equivalent

15.3.1.2 GHG Emission during the Operation Phase

Natural gas is the most effective solution in fossil fuel-based energy production due to its high efficiency in terms of being in clean fuel category and producing low greenhouse gas. Despite natural gas power plants are more environmental-friendly power plants than coal-thermal power plants, according to the IPCC guideline, stationary combustion of natural gas in the energy industries emits CH₄ and N₂O as well as CO₂.

Moreover, emissions from the use of vehicles, purchased electricity, material supply etc. are also expected during the operation phase of the Project from the delivery vehicles to the plant and those of the employees. The expected emissions are summarized in the below table.

⁹ Available at: <https://unfccc.int/documents/271269>



Table 170: Scope of Emissions specific to the Project Operation Phase

Type of Emission	Emission Source	Is it able to calculate?
Scope 1 Emissions (direct)	Stationary combustion sources by fuel combustion of operation units	Yes, with primary and secondary data
	Fuel consumption during transportation of materials, products, waste (if any) within the site	Negligible
	Transportation of employees with company vehicles	Not adequate information
	Leakage from air-conditioning and refrigeration units (fugitive emissions)	Negligible
Scope 2 Emissions (indirect)	Purchased Electricity, steam, heat and cooling in the temporary offices	Yes, with primary and secondary data (for only purchased electricity)
Scope 3 Emissions (indirect)	Material Supply	For only natural gas supply
	Flight of Staff	Not adequate information
	Water Consumption	Yes, with primary and secondary data
	Waste disposal	Not adequate information
	Site access of personnels, visitors by private vehicles and site visits	Not adequate information

GHG Emission from Stationary Combustion of Operation Units

As similar with the construction phase calculations, emission factors in IPCC guideline and yearly fuel use will be considered to estimate those GHG emissions with Tier 1 equation.



Table 171: Activity Data

Parameter	Unit	Value
Operating Time (nominal)	hours	8,000
Generated power	MWe	1,600
	GWh	12,800
Fuel use	Nm ³ /year	2,264,000,000
	Sm ³ /year	2,388,293,600
Density of natural gas	kg/Sm ³	0.72
	Gg/year	1719.6
Net Calorific Value of	TJ/Gg	48 (default)
Activity Data	TJ	82539.4

Table 172: Emission Factors of GHG

CO ₂ kg CO ₂ /TJ			CH ₄ kg CH ₄ /TJ			N ₂ O kg N ₂ O/TJ		
Lower	Default	Upper	Lower	Default	Upper	Lower	Default	Upper
54300	56100	58300	0.3	1	3	0.03	0.1	0.3

GHG emission = Activity Data * Default Emission Factor, so;

- CO₂ Emission = 82539.4 * 65100 = 4630461845 kg CO₂
- CH₄ Emission = 82539.4 * 1 = 82539.4 kg CH₄
- N₂O Emission = 82539.4 * 0.1 = 8253.942682 kg N₂O

In order to calculate CO₂-equivalent, global warming potential of the expected GHG emissions should be used which is given in the table below.

Table 173: Global Warming Potentials

Item	Global Warming Potential
CO₂	1
CH₄	28
N₂O	265

Accordingly, the expected GHG emissions in CO₂-equivalent is calculated below.

- From CO₂: 4,630,461,845 kg CO₂ * 1 = 4,630,461,845 kg CO₂ equivalent
- From CH₄: 82,539.4 kg CH₄ * 28 = 2,311,103.951 kg CO₂ equivalent
- From N₂O: 1.97275572 kg N₂O * 265 = 2,187,294.811kg CO₂ equivalent



Total GHG emission generated from operation of the plant is approximately **4.63 x10⁶ tons** of CO₂ equivalent/year for 8000 hours operation. This calculation shows the maximum amount of greenhouse gas that can occur under the worst-case conditions, and in real operating conditions, the amount of greenhouse gas to be used will be lower if the plant is stopped at various times or will not always operate at full load.

GHG Emission from Purchased Electricity

Although there is no accurate forecast for electricity consumption of the plant during operation, since the number of personnel is designated as about 300 people, the purchased electricity can be calculated using electricity consumption per capita.

Those 300 staff are expected to work 8 hours per shift and 365 days a year. In Uzbekistan, the electric power consumption per capita is 1645 kWh in 2014¹⁰.

Total electricity consumption in operation phase for one year = Electric power consumption per capita x total staff number

$$= 1645 \text{ kWh/capita-year} \times 300 \text{ staff} = 493500 \text{ kWh/year}$$

According to the IFI 2021 Harmonized Grid Emission factor (GEF) data set¹¹, the GEF Factor of Uzbekistan for electricity use is 0.467 kg CO₂ / kWh.

GHG Emission = Activity Data x Emission Factor, so;

$$\text{CO}_2 \text{ Emission from purchased electricity} = 493500 \text{ kWh} \times 0.467 \text{ kg CO}_2/\text{kWh} = 230,648.47 \text{ kg CO}_2/\text{year} = 230.6 \text{ tons CO}_2/\text{year}$$

The transmission and distribution losses are ignored.

GHG Emission from Natural Gas Supply

As mentioned above, the total natural gas consumption in the plant is estimated 2,388,293,600 Sm³/year.

¹⁰ The most recent data extracted from World Bank data base, accessible at: <https://data.worldbank.org/indicator/EG.USE.ELEC.KH.PC?locations=UZ>

¹¹ Available at: https://unfccc.int/sites/default/files/resource/IFI%20Default%20Grid%20Factors%202021%20v3.1_unfccc.xlsx



According to the Greenhouse Gas Emission Calculator of UNFCCC¹², emission factor associated with extraction, refining, and transportation of raw fuel sources to the plant for natural gas is 0.34593 kg CO₂/m³.

GHG Emission = Activity Data x Emission Factor

CO₂ Emission = 2,388,293,600 Sm³/year x 0.34593 kg CO₂/m³ = 826,182,405.05 kg CO₂/year = 826.182 tons CO₂/year.

GHG Emission from Water Supply

According to the water consumption calculations, the standard volume of water consumption during the operation of the combined cycle power plant is estimated as 600.0 thousand m³/year, which includes water consumption of gas turbines, household and drinking, kitchen, cleaning activities.

In line with the Greenhouse Gas Emission Calculator of UNFCCC¹³, water emission factor is 0.14900 kg CO₂/m³.

GHG Emission = Activity Data x Emission Factor

CO₂ Emission = 600,000 m³/year x 0.14900 kg CO₂/m³ = 89400 kg CO₂/year = 89.4 tons CO₂/year

The total estimated GHG emission for operation phase is summarized in the table below.

Item	Estimated GHG in tons of CO ₂ equivalent (for 1-year activity)
Scope 1 – combustion of fuel	4.63 x10 ⁶
Scope 2 – purchased electricity	230.6
Scope 3 – natural gas supply	826,182
Scope 3 – water supply	89.4
Annual Total	5.46 x 10 ⁶ tons of CO ₂ /year
Total Emission during operation phase (25 years)*	5.46 x 10 ⁶ x 25 = 136.5 x 10 ⁶ tons = 0.136 Gigatons

*Emissions are calculated by assuming that content and amount natural gas, purchased electricity amount and water demand will not change through the project life cycle in order to

¹² Available at: <https://unfccc.int/documents/271269>

¹³ Available at: <https://unfccc.int/documents/271269>



estimate maximum GHG emission. If technological investments will made in future through low-carbon economy, the GHG emissions may reduce accordingly.

15.3.2 Mitigation Measures

During the construction phase, major GHG emitters will be stationary combustion of diesel fuels of construction vehicles and equipments (direct), purchasing electricity and water supply (indirect). Also, there will be GHG emissions generated by material supply, waste disposal, which could not be estimated due to lack of knowledge. Emissions generated in construction phase can be mitigated by following but not limited measures:

- Do not keep open vehicles when they are not used,
- Keep GHG data of material supplied to the site,
- Develop a management plan to use resources efficiently,
- Use suppliers who guarantee their carbon footprint, and choose the suppliers who have less carbon footprint compared others,
- Use recycled materials,
- Comply waste management hierarchy: prevent at source, reuse, recycle and recover,
- Prefer local companies to supply materials,
- Prefer railways and roads to supply materials rather than airways,
- Organize trainings and workshops for site staff about resource use and waste management.

During the operation phase, stationary combustion of natural gas, purchased electricity, water consumption are the main sources of the GHG emissions. In addition, transfer of operation staff, material supply and waste transportation are other GHG emission sources which could not be estimated due to lack of knowledge. Following but not limited measures could be applied to mitigate operation-related GHG emissions:

- Follow the technological developments through Best Available Technologies to reduce fuel and water consumption,
- Install renewable energy sources to use in offices independently from local electrical grid. For instance, covering roofs with solar panels for the office buildings (after risk assessment against explosion etc.),
- Keep GHG data of material supplied to the site,
- Develop a management plan to use resources efficiently,
- Use suppliers who guarantee their carbon footprint, and choose the suppliers who have less carbon footprint compared others,
- Use recycled materials,
- Comply waste management hierarchy: prevent at source, reuse, recycle and recover,
- Prefer local companies to supply materials,
- Prefer railways and roads to supply materials rather than airways,
- Organize trainings and workshops for operation staff about resource use and waste management.



15.3.3 CO₂ Reduction Estimation

15.3.3.1 Current Average CO₂ Emission Level of TPPs in Uzbekistan

11 TPPs in Uzbekistan, including 3 CHPPs, are the main source of power generation. The capacity of modern energy efficient generating units is 2825 MW, or 25.6 per cent of aggregate TPP capacity [64].

GHG emissions decreased by 4.7% compared to the 1990 level and amounted to 144.4 mln t CO₂-e, including for the period for 12.9GW [65]. Additionally, Uzbekistan grid's carbon intensity is 506 kg/MWh [66].

15.3.3.2 Decommissioning Plan Indication

Obsolete and worn TPP assets shall be decommissioned as new generating assets are brought online. Total capacity of equipment to be decommissioned that is beyond its economic life shall reach 5900 MW by 2030.

It is seen that, there is approximately 1400 MW TPP decommissioning plan until 2024 and 5900MW existing TPP decommissioning plan until 2030. (see Table 174) [64].

In Table 174 you can find the decommissioning plants in Uzbekistan by 2024 and the total MW decommissioning by 2030.

Table 174: Existing Decommissioning Plan

Plant (TPP)	Commissioning year	Capacity (MW)	Decommissioning				Total MW by 2024	Total MW by 2030
			2021	2022	2023	2024		
Navoi	1966	50	Decom.				160	
	1967	60	Decom.					
	1971	50	Decom.					
Takhiatash	1967	100	Decom.				310	
	1968	100	Decom.					
	1974	110	Decom.					
Tashkent	1967	165		Decom.			330	
	1698	165		Decom.				
	1966	150			Decom		305	
	1967	155			Decom			
	1965	150				Decom	300	
	1965	150				Decom		
Total			480	330	305	300	1405	5900



As stated in Section 14.3.3.1 that the current CO₂ emission of the energy sector of Uzbekistan is 144 million tons per year.

With the 1400MW decommissioning to be carried out until 2024, when the calculation is made according to the current operating efficiency (506kg/MWh), it is predicted that there will be a 5.7 mln t CO₂/y emission reduction and this figure will increase to 24 mln t CO₂/y by 2030 according to the 5900MW decommissioning plan (see Table 175).

Table 175: CO₂ emissions of the current situation decommissioning plan and the Project

TPP PLANTS	POWER (MW)	CO ₂ EMISSIONS t CO ₂ /year*	CO ₂ INTENSITY kg/MWh
Current Situation of the TPP in Uzbekistan	12,900	144 mln	506
Decommissioning Plants by 2024	1,400	5,7 mln	506
Decommissioning Plants by 2030	5,900*	24 mln	506
SCE-QUVVAT 1600MW CCPP Project	1,600	4.17 mln	326

*According to datas of old TPP Projects Assumption 8000h/y

15.3.3.3 Cumulative CO₂ reduction

By 2017, GHG emissions decreased by 4.7% compared to the 1990 level and amounted to 144.4 mln t CO₂-e, including for the period. 2013-2017 by 4%. This is due to the systematic elimination of natural gas leaks in the oil and gas industry, as well as to improvement of energy efficiency in all industries [R2].

CO₂ emission comparison of the SCE-QUVVAT 1600MW CCPP Project and the existing TPPs in Uzbekistan and the TPPs to be decommissioned by 2030 is given in Table 176.

As a result; the net reduction of CO₂ emissions emerged from the project will be approximately 36% higher than compared to existing TPP facilities in Uzbekistan, which will contribute to climate change mitigation together with the decommissioning of obsolete power plants.

You can find the graph of CO₂ emission reduction with total decommissioning values until 2024 and 2030 with two scenarios (Scenario 1 and 2) in Figure 119.

- Scenario 1 = Without SCE / No Decommissioning
- Scenario 2 = SCE / Decommissioning plan activated

Considering that the annual CO₂ emission of the Project is 4.1 mln t CO₂/y, according to the total decommissioning data to be made until 2024 and until 2030 in both scenarios, it is



predicted that the CO₂ emission originating from the Project unit efficiency (%60) will reduce the annual Uzbekistan CO₂ (144mln t/y) emission. (see Table 176).

Table 176: Comparison of the current situation and the Project

TPP PLANTS	CO ₂ EMISSIONS	
	≈Decommissioning t CO ₂ /year*	≈Cumulative t CO ₂ /year
Current Situation of the TPP in Uzbekistan	-	144 mln
Decommissioning Plants by 2024 (-) SCE-QUVVAT	5,7 mln	*142,4mln
Decommissioning Plants by 2030 (-) SCE-QUVVAT	24 mln	**124,1mln

* 144-5,7+4,1(total CO₂/y emission in Uzbekistan (-) decommissioning by2024 (+) the Project CO₂ emission)

** 144-24+4,1(total CO₂/y emission in Uzbekistan (-) decommissioning by2030 (+) the Project CO₂ emission)

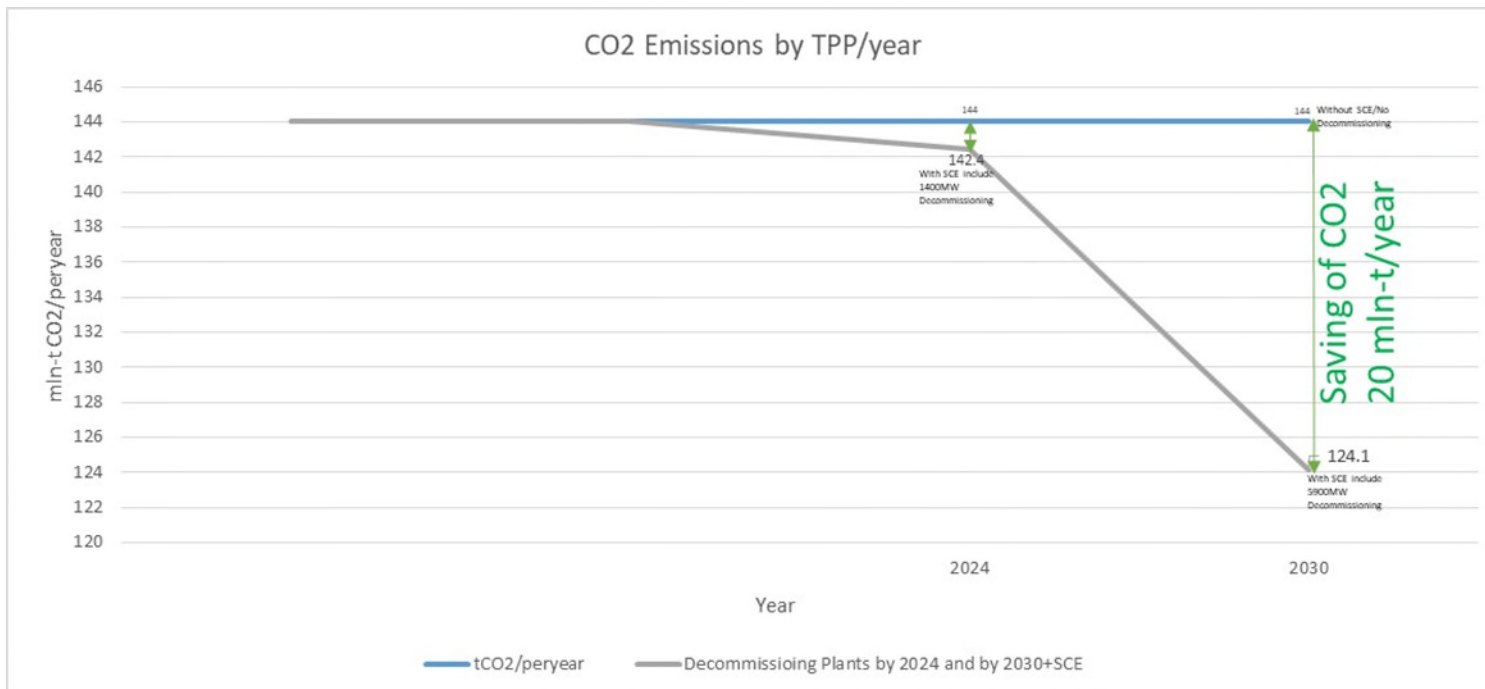


Figure 119: CO₂ Emission by TPP/year



15.4 Climate Risk Assessment

According to the Equator Principle 4, where the project combined Scope 1 (direct) and Scope 2 (indirect electricity) emissions exceed 100,000 tCO₂e, a climate risk assessment (physical and transition) is needed in line with the Climate Physical Risk and Climate Transition Risk categories of the Task Force on Climate-Related Financial Disclosure (TCFD). Since the operational GHG emissions are exceed this limit defined in the principle, the climate risk assessment of the project is developed in this chapter aligning with the TCFD requirements. This chapter aims to identify physical and transition risks caused by climate change and to develop adaptation recommendations to boost climate resilience of the Project.

15.4.1 Physical Risk Assessment

15.4.1.1 Hazard Identification

Climate change makes most countries vulnerable to several risks such as floods, heat waves, tropical cyclones, drought, decreases in food and water security, etc. Projects, therefore are under several significant climate-related risks such as physical and transitional risks.

Asian Development Bank has assessed climate change impacts on CCGTs as air temperature, water temperature, water availability, floods, heat waves, and storms, which will likely create physical risks to the project in terms of energy production efficiency, personnel safety, maintenance costs.

All of those hazard are identified in detail in the table below specific to the efficiency of CCGT, personnel safety, and maintenance and upgrade costs.

Table 177: Hazard Identification

Climate Change Parameter	Sub-Hazard	Hazard
Increased air temperature (heat waves, mean temperature and extreme temperature increases)	Increase fuel usage due to increase in turbine heat rate (Soh Young In et.al., 2022)	Reduces efficiency
	Load of the Plant may be limited by maximum condenser pressure	Increased maintenance and upgrade costs
	Increases life-cycle costs of buildings	Reduces personnel safety due to health threat
Water-related risks (water availability, drought, and water temperature)	Water Scarcity and water temperature can cause cooling water curtails.	Reduces personnel safety due to health threat and increased



Climate Change Parameter	Sub-Hazard	Hazard
		maintenance and upgrade costs
Changes to rainfall intensities and increased likelihood of flooding and flash flooding	Damage on the main and auxiliary facilities and office buildings	Reduces personnel safety due to health threat Increased maintenance and upgrade costs
Extreme Weather Events	Sudden plant downtime or repair expenses	Increased maintenance costs

The abovementioned climate change parameters that may become a risk for the project have been assessed in the Chapter 15.4.1.2 with desktop-based scenario analysis.

15.4.1.2 Scenario Analysis

TCFD recommends a scenario analysis to understand and quantify the risks using hypothetical projections. Scenario analysis is one of the milestones for making decisions and developing strategies by companies.

In order to understand which climate change parameter is a concern in Uzbekistan, the scenario analysis is performed for the Surkhandarya Region and World Bank Group's Climate Change Knowledge Portal (CCKP)¹⁴ is used as main data source. In that portal, the future climate projections have been developed with GHG emission projections, which are Representative Concentration Pathways (RCP) 2.6, RCP 4.5, RCP 6.0 and RCP 8.5 for medium and long terms by CMIP5 and CMIP6 approaches.

¹⁴ Available at: <https://climateknowledgeportal.worldbank.org/country/uzbekistan/climate-data-projections>

Surkhandarya CAPP Project (1600 MW)



UzAssystem

Draft Environmental and Social Impact Assessment Report /25/07/2022

ASE-UZA-571-REP-ESA-0001-03

EN/INT/Rev : 4

Table 178: Climate Future Scenarios in Uzbekistan, Surkhandarya Region

Climate Driver	Reference Data (2004)	Projected Data - Medians				Projected Change (%) (Reference Data – Projected Data)/Reference Data * 100			
		2040		2100		2040		2100	
		RCP 4.5	RCP 8.5	RCP 4.5	RCP 8.5	RCP 4.5	RCP 8.5	RCP 4.5	RCP 8.5
Mean Temperature, °C (chronic)	16.18	17.49	17.67	18.81	21.93	8%	9%	16%	36%
Extreme Temperature, °C (chronic)	23.25	24.64	24.80	26.09	29.40	6%	7%	12%	26%
Number of Hot Days >40°C (acute)	30.79	46.55	47.52	60.88	99.41	51%	54%	98%	223%
Number of Ice Days (Tmax<0) (acute)	3.76	2.93	2.93	1.56	0.44	-22%	-22%	-59%	-88%
Precipitation Amount, mm (chronic)	324.46	376.45	332.75	360.78	307.36	16%	3%	11%	-5%
Average Largest 5-day Cumulative Rainfall, mm (acute)	38.37	42.95	39.33	43.84	40.82	12%	3%	14%	6%
Days with Precipitation > 20 mm (acute)	0.32	0.49	0.40	0.89	1.23	53%	25%	178%	284%



Main climate drivers are colored in line with the following color scale.

Color Scale	≤0% change	≤5% change (tolerable)	≤10% change (distressing)	≤20% change (intense)	>20% ch. (very intense)
-------------	------------	------------------------	---------------------------	-----------------------	-------------------------

It is understood from the above table that the mean temperature, extreme temperature, number of hot days above 40°C, average largest 5-day cumulative rainfall and days with precipitation above 20 mm parameters will likely significantly increase. Also, decreases in number of ice days and average precipitation amount are expected.

The Climate Risk Country Profile Report of Uzbekistan has performed disaster risk rating for the climate-related natural hazards as demonstrated in the below table.

Table 179: Climate-Related Natural Hazards

Flood (0 - 10)	Tropical Cyclone (0-10)	Drought (0-10)	Vulnerability (0-10)	Overall Risk Level (0-10)	Rank (1-191) (1st is the most at risk)
6.3	0	6.6	1.9	3.1	112

According to the Global Facility for Disaster Reduction and Recovery, water scarcity is expected to increase although there is no consistent data and cyclones do not need to be considered in the projects while urban flood and river flood are must to consider in project planning.

Overall, weather conditions in the country are expected to become hotter and drier, with more frequent and more intense heatwaves, droughts and modifications in precipitations patterns leading to an increase of related extreme weather events such as heavy rains, floods and mudflows.

15.4.1.3 Physical Risk Analysis

Assystem's physical risk analysis approach depends on the vulnerability and probability analyses. Therefore, firstly vulnerability analysis is conducted by following assessment matrix considering exposure and sensitivity. For exposure, RCP8.5 scenarios are preferred to be in the safe zone while sensitivity is assessed in line with the hazard potential defined in Section 15.4.1.1. Since the decreases in number of ice days and average precipitation amount is forecasted, they are not considered.



Table 180: Vulnerability Matrix

Exposure \ Sensitivity	Low (1)	Medium (2)	High (3)
Low (1)	Low	Low	Medium
Medium (2)	Low	Medium	High
High (3)	Medium	High	Very High

Where the sensitivity represents whether the climate change parameter will affect the project operation while the exposure represents the changes in the future scenarios. Accordingly, the vulnerability assessment is completed as follows.

Table 181: Vulnerability Analysis Results

Climate Drivers	Vulnerability
Mean Temperature, °C	Medium
Extreme Temperature, °C	Medium
Number of Hot Days >40°C	High
Average Largest 5-day Cumulative Rainfall, mm	Medium
Days with Precipitation > 20 mm	Very High
Water Scarcity	High

In line with the Vulnerability Analysis, risk assessment is completed by the risk matrix given below.

Table 182: Risk Matrix

Vulnerability Probability	Low (1)	Medium (2)	High (3)	Very High (4)
Low (1)	Minor	Minor	Modarate	Major
Medium (2)	Minor	Modarate	Major	Major
High (3)	Medium	Major	Major	Major



Table 183: Risk Analysis Results

Climate Drivers	Risk in 2040	Risk in 2100
Mean Temperature, °C	Minor	Major
Extreme Temperature, °C	Minor	Modarate
Number of Hot Days >40°C	Modarate	Major
Average Largest 5-day Cumulative Rainfall, mm	Minor	Modarate
Days with Precipitation > 20 mm	Modarate	Major
Water Scarcity	Modarate	Major

15.4.1.4 Minimization of Physical Risks

Increasing the climate resilience of the project against the identified climate risks is a significant and indispensable step to ensure the sustainability of the project during its lifetime. The hazards designated in Section 15.4.1.1 and related risks that arise from those hazards could be minimized with adaptation measures. Assystem developed measures to address climate-related physical risks. Several measures are represented in the table below together with a summary of the physical risk chapter and residual impact analysis. It should be noted that technological development and best available technologies should be followed to increase adaptive capacity and increase resilience against climate change.



Table 184: Summary Table of the Climate-Related Physical Risks, Adaptation Measures and Residual Risks

Climate Drivers	Projected Impact		Hazard	Risk Magnitude		Preliminary Scoping of Adaptation Measures (Asian Development Bank, 2012) (Asian Development Bank, 2012)	Initial Assessment for Residual Risks	
	2040	2100		2040	2100		2040	2100
Mean Temperature, °C	Distressing Increase	Very Intence Increase	Increase surface water temperature which will be used in the plant, and may creates additional costs	Minor	Major	<ul style="list-style-type: none"> Use a free-cooling option (nonrefrigerated system similar with heat exchangers) Upgrade heat exchanger to improve cooling water process Increase flow rate to increase heat transfer capacity Retain the existing pump design and open the throttle Add a backup pump unit specific to dry season Revise management of coolant discharge by reducing the proportion of coolant waters entering at the water intake. Redesign the intake (the percentage of coolant waters entering the intake may be reduced by moving the intake structure further into the center of the river channel) Redesign the discharge structure Improve the discharge channel (discharge further into the center of water source to increase mixing, but these may affect other uses of the water source) Increase retention time in the discharge channel to reduce coolant water temperature 	Negligible	Modarate
Extreme Temperature, °C	Distressing Increase	Very Intence Increase	<p>Decrease in generation efficiency, increase fuel usage due to increase in turbine heat rate</p> <p>Increases heat-related illnesses of personnel</p>	Minor	Modarate	<ul style="list-style-type: none"> Build concrete-sided buildings instead of metal Build shady spots for operation units Change the shift hours in line with the cooler hours Construct resting rooms in underground/or surface with adequate ventilation at optimum temperature 	Negligible	Minor
Number of Hot Days >40°C	Very Intence Increase	Very Intence Increase	<p>Load of the Plant may be limited by maximum condenser pressure</p> <p>Increases life-cycle costs of buildings</p> <p>Increases heat-related illnesses of personnel</p> <p>Increase fuel usage due to increase in turbine heat rate</p>	Modarate	Major	<ul style="list-style-type: none"> Install inlet air cooling (evaporative coolers or regrigeration/chiller coolers) Compensate for the reduced air density by increasing the flow rate, as this can maintain the design mass flux 	Minor	Modarate



Climate Drivers	Projected Impact		Hazard	Risk Magnitude		Preliminary Scoping of Adaptation Measures (Asian Development Bank, 2012) (Asian Development Bank, 2012)	Initial Assessment for Residual Risks	
	2040	2100		2040	2100		2040	2100
Average Largest 5-day Cumulative Rainfall, mm	Tolerable	Distressing	Damage infrastructure and supply chain disruption due to floods and flash floods Sudden plant downtime or repair expenses Affect health and safety of personnel	Minor	Modarate	<ul style="list-style-type: none"> Develop and implement higher structural standards for new or renovated buildings can resist water leakages Re-schedule shift times of the personnel 	Negligible	Minor
Days with Precipitation > 20 mm	Very Intence Increase	Very Intence Increase	Damage infrastructure and supply chain disruption due to floods and flash floods, Affect health and safety of personnel	Modarate	Major	<ul style="list-style-type: none"> Reduce dependency on supply chain with storage of materials and equipment Construct shelters at high altitudes ensuring personnel safety to use in heavy precipitations 	Minor	Modarate
Water Scarcity	No consistnt projections, but it is expected to increase.		Affect availability of freshwater for cooling Affect health and safety of personnel	Modarate	Major	<ul style="list-style-type: none"> To follow technological development to reduce water consumption in the plant and make solutions to withdraw less water from source and consume less water internally (oncethrough or recirculating system) Increase volume of water treatment works and/or develop new water sources, and use treated water Install reverse osmosis system and link the system with wastewater treatment Redesign cooling facilities (water recovery from condenser and heat exchangers, reduction of evaporative losses, secondary or wastewater usage, construction of dry cooling towers) Restore/afforest/reforest land Install rainwater storage tanks to use any rainwater in the plant operation (may linked to reverse osmosis mechanism) Use sensed faucets in personnel spaces 	Minor	Modarate

15.4.2 Transition Risks

Changes in governmental policies for lower-carbon economy, change in customer behavior, supply chain disruptions, technological developments may arise due to the climate change, namely creates transition risks, and these risks may cause financial losses. This chapter aims to establish an understanding of transition risks and management strategy for addressing those risks.

15.4.2.1 Identification Transition Risks

TCFD addresses climate-related transition risks as policy and legal, technology, market and reputation risks. Considering Uzbekistan government strategies, and the project type, following risks have been identified for the project in line with the risks defined by TCFD.

Table 185: Transition Risks (Task Force on Climate-related Financial Disclosures, 2017)

Risk Group	Reminder Notes	Climate-Related Risks	Potential Financial Impacts
Policy and Legal Risks	<ul style="list-style-type: none"> As stated in Section 15.1.1, governmental strategy covers development of RES, increased efficiency of the use of natural resources, supporting green economy, which may cause carbon trading regulations, carbon taxes. Around the world, new regulatory steps may be performed in order to reduce use of fossil fuels including natural gas, and these regulations may reflect the national strategies. 	<ul style="list-style-type: none"> Increase pricing of GHG Emission Enhanced emission-reporting obligations Mandates on and regulation of existing products and services Exposure to litigation 	<ul style="list-style-type: none"> Increased operation costs Write-offs, asset impairment, and early retirement of existing assets due to policy changes Increased costs and/or reduced demand for products and services resulting from fines and judgements Closing-off the plant (additional risk specific to the project type)
Technology	<ul style="list-style-type: none"> Equipment and other technologies used in the plant may have to change in line with the lower emission technology. 	<ul style="list-style-type: none"> Substitution of existing products and services with lower emissions options Unsuccessful investment in new technologies Costs to transition to lower emissions technology 	<ul style="list-style-type: none"> Write-offs and early retirement of existing assets Reduced demand for products and services Research and development (R&D) expenditures in new and alternative technologies Capital investments in technology development Costs to adopt/deploy new practices and processes



Market	<ul style="list-style-type: none"> • New developments, regulative changes, investments etc. may reduce dependency on fossil fuel including natural gas, and depending on its availability, it may totally destroy the CCGTs in the market. • Due to extreme weather events, supply chain may disrupted and raw material costs and accessibility may affected. 	<ul style="list-style-type: none"> • Changing customer behavior • Uncertainty in market signals • Increased cost of raw materials 	<ul style="list-style-type: none"> • Reduced demand for goods and services due to shift in consumer preferences • Increased production costs due to changing input prices (e.g., energy, water) and output requirements (e.g., waste treatment) • Abrupt and unexpected shifts in energy costs • Change in revenue mix and sources, resulting in decreased revenues • Re-pricing of assets (e.g., fossil fuel reserves, land valuations, securities valuations)
Reputation	<ul style="list-style-type: none"> • Understanding of the developers, users, and lenders are under change through green approaches. These may cause adverse impacts on the project revenues, material supply, and loan opportunities for further investments in the plant. 	<ul style="list-style-type: none"> • Shifts in consumer preferences • Stigmatization of sector • Increased stakeholder concern or negative stakeholder feedback 	<ul style="list-style-type: none"> • Reduced revenue from decreased demand for goods/services • Reduced revenue from decreased production capacity (e.g., delayed planning approvals, supply chain interruptions) • Reduced revenue from negative impacts on workforce management and planning (e.g., employee attraction and retention) • Reduction in capital availability

15.4.2.2 Transition Risk Mitigation

The identified climate-related transition risks could be minimized with a well-established management strategy from bottom to top with appropriate metrics, strategies and efficient governance. TCFD recommends address the transition risks with 4 core elements showed in the Figure 120.



Figure 120 Core Elements identified by TCFD (Task Force on Climate-related Financial Disclosures, 2017)

In line with the above figure, following steps are recommended for the Project operators.

- Step 1: Designate a team that includes top of management, climate-related personnel, quality-related personnel, and finance-related personnel, and any staff deemed necessary.
- Step 2: Identify climate-related responsibilities and roles for each team member clearly.
- Step 3: Review the climate-related transition risks assessed above, revise them or add any other risks for the project.
- Step 4: Develop strategies and goals to address climate-related financial climate risks for short, medium and long term.
- Step 5: Designate metrics and targets to fulfil developed strategies and goals.
- Step 6: Decide how to monitor and oversees progress, accordingly designate a regular meeting schedule.
- Step 7: Regularly review the metrics, targets, strategies, and update them, if needed with the guidance of the management team.
- Step 8: Regularly review the team activities with KPIs.
- Step 9: Develop a report template to report all climate-related activities including improvement in metrics and targets, monitoring findings etc.

15.4.2.3 Metrics and Targets Recommendations

Following metrics and targets may applied specific to the project in line with the TCFD recommendations (Task Force on Climate-related Financial Disclosures, 2017).

Table 186: Examples for metrics and targets

Group	Climate-Related Category	Recommended Metric	Benefit
Revenues	GHG Emission	GHG estimation covering Scope 1, Scope 2 and Scope 3, MT of CO ₂ e	This target may lead to understand emission sources of the project, and in line with the findings, GHG emissions could be reduced by focusing the problematic one. Also, this ensures transparency and hence good reputation.
	Risk Adaptation & Mitigation	Expenditures for low-carbon alternatives	This step eases adaptation to the low carbon economy requests may come from governmental authorities. In addition, thanks to this step, the project will become lower-GHG emitter within CCGTs in the country, which also improves reputation.
Expenditures		Reducing in water dependency (%)	Water stress can cause shortage in water access, increase cost of supply, and affect the stakeholders' understanding for project that may create pressure on the operations. Therefore, together with technological investment, the water dependency could be decreased over the years and could be monitored in the internal reports.
	Risk Adaptation & Mitigation	Investment in low carbon alternatives	This metric will indicate the level to which future earning capacity of core business might be affected.
Assets	Risk Adaptation & Mitigation	Investment in low carbon alternatives	This metric will indicate the level to which future earning capacity of core business might be affected.

These examples can be multiplied considering project-specific financial risks born with operational activities.

16. SOCIO-ECONOMICS

16.1 Introduction

16.1.1 Purpose

The Republic of Uzbekistan (Uzbekistan) has an area of 448,978 km² and is located between the Amudarya and Syrdarya rivers. Uzbekistan has underground resources such as oil, gas, coal and uranium.

In recent years, Uzbekistan has implemented large-scale reforms to boost its energy sector [63]. The government of Uzbekistan has approved a strategy of supply electric power for ten years from 2020 until 2030 [64]. This strategy illustrates priority given by the government to the development of electric power industry, increase electricity production in order to supply population's growing demand and foster economic growth of the country. The proposed project might contribute to the strategy of supply electricity power for further ten years, which includes: (i) modernization and reconstruction of existing power plants; (ii) construction of modern ones using energy-efficient technologies. In line with these plans, an agreement between Uzbekistan government and Dutch company Stone City Energy (Investor) was signed on the construction of a new thermal power plant in Surkhandarya region on the basis of public-private partnership. It is considered to construct a CCPP in Angor District Surkhandarya region, just on the north – eastern shore of the Uchkizil water reservoir.

The project benefits include:

- Retrenchment natural resources: The project aims to save 1.1 billion cubic meters of natural.
- Improved generation efficiency: The project will achieve a minimum of 60 percent efficiency. This will improve Uzbekistan's overall energy generation efficiency.
- Reduced greenhouse gas emission: The project will reduce greenhouse gas emissions per kWh of energy generated in Uzbekistan.
- Improved energy reliability: The plant represents a major investment in baseload generation capacity in Uzbekistan.

16.1.2 Importance of Social Impact Assessment

The Social Impact Assessment (SIA) is the study where the social impacts of the industrial projects are identified and assessed. It can also be applied to policies, plans and programmes. SIA is used to forecast and prevent negative consequences, as well as to find possibilities to improve benefits for local communities and society as a whole. The involvement of impacted communities and other stakeholders in the process is one of the major concepts and practices of SIA.

As a good international practice SIA required by the International Finance Institutions (IFI's) to assess the social, economic and cultural impacts of industrial activities on local population and communities. The results of the assessment then will be converted into implementation plan over the period of the project. This is especially important for the industrial projects, whose activities frequently encroach on the pollution of water, land and air that local people depend on for their traditional livelihood activities. Thus, it helps to avoid potential negative impacts on critical natural resources, such as water and forests, as well as impacts on cultural resources. However, SIA process also helps to identify ways

that local communities could benefit from a proposed development, for example, through infrastructure development, job creation or create better live conditions for the local people.

The purpose of this Social Impact Assessment is to obtain relevant data to establish basic indicators "before" the implementation of the Project. Also, the assessment materials will serve as the basis for the development of socio-economic and gender design elements of the Project of the construction in Surkhandarya region of Uzbekistan. The Assessment will contribute to the development of a monitoring and evaluation strategy, as well as a framework for the Project impact assessment.

The main objectives of this SIA in this project prospective as follows:

- To conduct surveys that includes basic information necessary for a qualitative and quantitative assessment of the results and indicators of the Project impact;
- Assessment of baseline conditions (existing conditions) prior to the development of the Project through review of available data and conducting surveys;
- Assessment of the social impacts of the proposed project during the construction and operation phases;
- Assessment of the risks for various social groups, especially vulnerable groups (low-income families, women, children, etc.);
- Assessment of socio-economic factors and develop proposals to mitigate/eliminate negative consequences;
- Review of compliance obligations, regulations and standards that requires International Finance Institutions such as World Bank (WB), International Finance Corporation (IFC);
- To engage with key stakeholders and Project affected people to disclose Project information, study outcomes, gain lay knowledge about the local social context and seek feedback on Project.

Although the assessment results will an important part of the feasibility study of this project but it also might be used as separate document of the proposal to IFI's.

16.1.3 Scope

This part of the report presents the scope of the study, presenting the requirements of three international financial institutions on social assessment, namely World Bank, International Finance Corporation and Asian Infrastructure Investment Bank. The requirements for the social aspects of each financial institution are presented in their own documents, the so-called frameworks, which are always accompanied by environmental aspects.

World Bank Requirements on Social Assessment

The World Bank Environmental and Social Framework (ESF) displays the adherence of World Bank to sustainable development. The aim of the Bank is ending extreme poverty and promoting prosperity by means of a Bank Policy and a set of Environmental and Social Standards. It needs to be highlighted that environmental and social aspects always come together as environmental problems simultaneously are considered as the problems for society. Therefore, the general idea on the Bank's ESF is described following Environmental and Social Standards which are obligatory requirements that apply to the Borrower and projects. The Standards present the requirements for Borrowers relating to the identification and assessment of environmental and social risks and impacts associated with projects. Later, only social risks and impacts are listed to define the general idea to the requirements

of World Bank on Social Assessment. This section is described according to the World Bank's Environmental and Social Framework document [67].

The World Bank ESF encompasses:

- World Bank's Vision for Sustainable Development - aspirations of the Bank regarding environmental and social sustainability;
- World Bank Environmental and Social Policy for Investment Project Financing - the mandatory requirements that is relevant to the Bank;
- World Bank's Environmental and Social Standards - mandatory requirements that is relevant to the Borrower and projects.

As Vision for Sustainable Development and Environmental and Social Policy for Investment Project Financing are directed to the World Bank, presenting its objectives, commitments, role and responsibilities related to environmental and social sustainability, Environmental and Social Standards refer to the Borrower itself, providing guidance on how to identify environmental and social risks and impacts. Thus, Environmental and Social Standards are considered as the collection of requirements which needs to be developed by the Borrower.

The Environmental and Social Standards (ESSs) establish the requirements for Borrowers on identification and assessment of environmental and social risks and impacts associated with projects. The ten ESSs establish the standards that the Borrower and the project will meet through the project life cycle, as follows:

ESS 1:	• Assessment and Management of Environmental and Social Risks and Impacts;
ESS 2:	• Labor and Working Conditions;
ESS 3:	• Resource Efficiency and Pollution Prevention and Management;
ESS 4:	• Community Health and Safety;
ESS 5:	• Land Acquisition, Restrictions on Land Use and Involuntary Resettlement;
ESS 6:	• Biodiversity Conservation and Sustainable Management of Living Natural Resources;
ESS 7:	• Indigenous Peoples/Sub-Saharan African Historically Underserved Traditional Local Communities;
ESS 8:	• Cultural Heritage;
ESS 9:	• Financial Intermediaries;
ESS 10:	• Stakeholder Engagement and Information Disclosure.

-Environmental risks and impacts; -Social risks and impacts; -Risks and impacts of both;

The ESSs are designed to manage the risks and impacts of a project, and improve their environmental and social performance. Particularly, Standards ESS2, ESS4, ESS5, ESS7, ESS8 and ESS10 directly relate to social aspects of the project which shows its crucially in the sustainable development.

Environmental and Social Standard ESS1 relates to all projects for which Bank investment project financing is required. ESS1 establishes the importance of:

- The Borrower's existing ESF to address the risks and impacts of the project;
- An integrated environmental and social assessment to identify the risks and impacts of a project;
- Effective community engagement through disclosure of project-related information, consultation and effective feedback; and
- Management of environmental and social risks and impacts by the Borrower throughout the project life cycle.

ESS2–10 determine Borrower's duties in finding and addressing environmental and social risks and impacts that may require particular attention. Overall, these standards set objectives for prevention, minimization, reduction and mitigation of risks and impacts or establishes measures for compensation of impacts. Therefore, the clear approach that addresses to every 10 standards need to be provided in the appropriate environmental and social assessment by the Borrower.

According to the nature and scale of the project, different tools can be used for the assessment. The tools which are suggested the World Bank itself are - Environmental and social impact assessment (ESIA), Environmental and social audit, Hazard or risk assessment, Cumulative Impact Assessment, Social and conflict analysis, Environmental and social management plan (ESMP), Environmental and social management framework (ESMF), Regional ESIA, Sectoral ESIA, Strategic Environmental and Social Assessment (SESA). Moreover, project's explicit features may necessitate the Borrower to develop specific methods and tools for assessment, for example Biodiversity Action Plan, Cultural Heritage Management Plan, Indigenous Peoples Plan, Livelihood Restoration Plan, Resettlement Plan and further plans as agreed with the Bank.

Thus, Framework includes provisions on grievance redress and accountability to deal with the complaints from stakeholders and people affected by the project. A Bank-supported project is required to include a number of mechanisms for addressing concerns and grievances arising in connection with a project.

The social risks and impacts which the Bank will take into account in its due diligence are project-related and include the following:

- Threats to human security through the escalation of personal, communal or interstate conflict, crime or violence;
- Risks that project impacts fall disproportionately on individuals or groups who, because of their particular circumstances, may be disadvantaged or vulnerable;
- Any prejudice or discrimination toward individuals or groups in providing access to development resources and project benefits, particularly in the case of those who may be disadvantaged or vulnerable;
- Negative economic and social impacts relating to the involuntary taking of land or restrictions on land use;
- Risks or impacts associated with land and natural resource tenure and use, including (as relevant) potential project impacts on local land use patterns and tenurial arrangements, land access and availability, food security and land values, and any corresponding risks related to conflict or contestation over land and natural resources;
- Impacts on the health, safety and well-being of workers and project-affected communities;

- Risks to cultural heritage.

The Bank expects that application of these standards will support Borrowers to reach their goal to reduce poverty and increase prosperity which will consequently improve the environment. The standards are anticipated to:

- Support Borrowers in achieving good international practice relating to environmental and social sustainability;
- Assist Borrowers in fulfilling their national and international environmental and social obligations;
- Enhance nondiscrimination, transparency, participation, accountability and governance; and
- Enhance the sustainable development outcomes of projects through ongoing stakeholder engagement.

Performance Standards (IFC) for Social Assessment

IFC's Sustainability Framework expresses the Corporation's commitment to sustainable development by avoiding and mitigating adverse impacts and by managing risks. The Framework consists of:

- IFC's Policy on Environmental and Social Sustainability – commitment to sustainable development, roles, and responsibilities related to environmental and social sustainability;
- IFC's Access to Information Policy - commitment to transparency and good governance on its operations, and outlines the Corporation's institutional disclosure obligations regarding its investment and advisory services;
- IFC's Performance Standards - for clients, providing guidance on how to identify risks and impacts.

As Policy on Environmental and Social Sustainability and Access to Information Policy are directed towards Corporation itself, Performance Standards are directed towards clients, providing direction on risks and impacts identification. The standards are designed to assist in avoidance, mitigation, and management of risks and impacts of the project financed. Moreover, it includes stakeholder engagement and disclosure obligations of the client in relation to project-level activities. Therefore, development of Performance Standards developed by client is considered as the mandatory document for IFC financing. As IFC is the sister organization of World Bank, its Performance standards is very similar to the Environmental and Social Standards of World Bank, which has been presented earlier. The standards on Performance standards were described based on the report IFC Performance Standards on Environmental and Social Sustainability [68].

However, IFC has eight Performance Standards (PS) for establishing standards that the client is to meet throughout the life cycle:



PS 1:	•Assessment and Management of Environmental and Social Risks and Impacts;
PS 2:	•Labor and Working Conditions;
PS 3:	•Resource Efficiency and Pollution Prevention;
PS 4:	•Community Health, Safety and Security;
PS 5:	•Land Acquisition and Involuntary Resettlement;
PS 6:	•Biodiversity Conservation and Sustainable Management of Living Natural Resources;
PS 7:	•Indigenous Peoples;
PS 8:	•Cultural Heritage;

-Environmental risks and impacts; -Social risks and impacts; -Risks and impacts of both;

Specifically, Standards PS2, PS4, PS5, ESS7 and ESS8 directly relate to social aspects of the project evidencing its crucially in the sustainable development.

Similarly, to ESS1 of the World Bank, PS1 is relevant to all the projects that has environmental and social impact and establishes the importance of:

- integrated assessment of environmental and social impacts of the project;
- effective community engagement through disclosure of project-related information, consultation; and
- management of environmental and social risks and impacts by the client throughout the project life cycle.

PS2-8 establish objectives and requirements to avoid and minimize the risks and impacts of the project identified in PS1. While all relevant environmental and social risks and potential impacts are needed to be considered as part of the assessment in PS1, PS 2-8 describe potential environmental and social risks and impacts that need specific attention. As environmental or social risks and impacts are clarified, the client is ought to manage them through its Environmental and Social Management System (ESMS) coherent with PS 1.

Asian Infrastructure and Investment Bank and Environmental and Social Policy

The objective of this overarching policy is to facilitate achievement of these development outcomes, through a system that integrates sound environmental and social management into Projects. The overarching policy comprises Environmental and Social Policy (ESP), and Environmental and Social Standards (ESSs) and Environmental and Social Exclusion List. The ESP sets out mandatory requirements for the Bank and its Clients relating to identification, assessment and management of environmental and social risks and impacts associated with Projects supported by the Bank.

Environmental and Social Standards

The environmental and social standards (ESSs) set out more detailed mandatory environmental and social requirements, as described below.

Environmental and Social Standard 1 (ESS 1). The ESS 1 aims to ensure the environmental and social soundness and sustainability of Projects and to support the integration of environmental and social considerations into the Project decision-making process and implementation. ESS 1 is applicable if the Project is likely to have adverse environmental risks and impacts or social risks and impacts (or both). The scope of the environmental and social assessment and management measures are proportional to the risks and impacts of the Project. ESS 1 provides for both quality environmental and social assessment and management of risks and impacts through effective mitigation and monitoring measures during the course of Project implementation. The ESS 1 defines the detailed requirements of the environmental and social assessment to be carried out for any project to be financed by the Bank.

Environmental and Social Standard 2 (ESS 2). The ESS 2 is applicable if the Project's screening process reveals that the Project would involve Involuntary Resettlement (including Involuntary Resettlement of the recent past or foreseeable future that is directly linked to the Project). Involuntary Resettlement covers physical displacement (relocation, loss of residential land or loss of shelter) and economic displacement (loss of land or access to land and natural resources; loss of assets or access to assets, income sources or means of livelihood) as a result of: (a) involuntary acquisition of land; or (b) involuntary restrictions on land use or on access to legally designated parks and protected areas. It covers such displacement whether such losses and involuntary restrictions are full or partial, permanent or temporary. The ESS 2 defined detailed requirements of resettlement planning of the projects involving involuntary resettlement.

Environmental and Social Standard 3 (ESS 3). The ESS 3 is applicable if Indigenous Peoples are present in, or have a collective attachment to, the proposed area of the Project, and are likely to be affected by the Project. The term Indigenous Peoples is used in a generic sense to refer to a distinct, vulnerable, social and cultural group possessing the following characteristics in varying degrees: (a) self-identification as members of a distinct indigenous cultural group and recognition of this identity by others; (b) collective attachment to geographically distinct habitats or ancestral territories in the Project area and to the natural resources in these habitats and territories; (c) customary cultural, economic, social or political institutions that are separate from those of the dominant society and culture; and (d) a distinct language, often different from the official language of the country or region. In considering these characteristics, national legislation, customary law and any international conventions to which the country is a party may be considered. A group that has lost collective attachment to geographically distinct habitats or ancestral territories in the Project area because of forced severance remains eligible for coverage, as an Indigenous People, under ESS 3. The ESS 3 defines the detailed requirements of People planning, in case such groups are present in the project area and are likely to be affected by the project.

The Project triggers not only the local environmental and social laws and regulations, but also the ESP and ESS of AIIB. Under the scope of the Project, only ESS 1: Environmental and Social Assessment and Management will be applicable. Standards on Involuntary Resettlement (ESS2) and Indigenous Peoples (ESS 3) is not be triggered under the scope of the Project.

As a conclusion, safeguard policies of all the International Financial Institutions have iterative manner, and there are numerous similarities between the safeguard policies of the World Bank, IFC and AIIB. Even though the requirements were named differently (ESS – World Bank, PS – IFC, –AIIB ESP), their commitment to address to social impact and risks hold similar priorities. The main concentration of all three financial institutions is paid into - stakeholder engagement, vulnerable groups, disclose sufficient information about the risks and impacts, provisions on grievance redress and accountability, promotion of gender equality, address to climate change etc.

16.1.4 Definition of Project Impact Area

16.1.4.1 Project Area

The Project area means all areas proposed to be disturbed, altered, or used by the proposed activity or the construction of any proposed structures. This section provides wider explanation of project location at three levels: country, regional and districts respectively.

The Republic of Uzbekistan is situated between the rivers of Amudarya and Syrdarya and occupies 448,9 thousand square km. The territory borders on Kazakhstan in the north, on Kyrgyzstan and Tajikistan in the east and southeast, on Turkmenistan in the west, and on Afghanistan in the south [70].

There are 14 territorial and administrative divisions-regions in Uzbekistan. One of them is Surkhandarya Province that covers 20.1 thousand square km (4.48% of the total area of the Republic of Uzbekistan) [71]. Surkhandarya Province borders with the Republic of Tajikistan on the north and north-east, Afghanistan on the south (the border stretches along the Amudarya), and Turkmenistan on the south and west.

The Project will be constructed in Angor District of Surkhandarya Province, about 14 km from the Termez City, which is located on southeast of the Country. The project area is located on the north-eastern coast of the Uchkizil reservoir.

The relief of the project area is gently undulating, flat, with a general slope to the south, complicated by eolian forms in the form of hilly and ridge sands. The proposed location of the Project is provided in Figure 121.

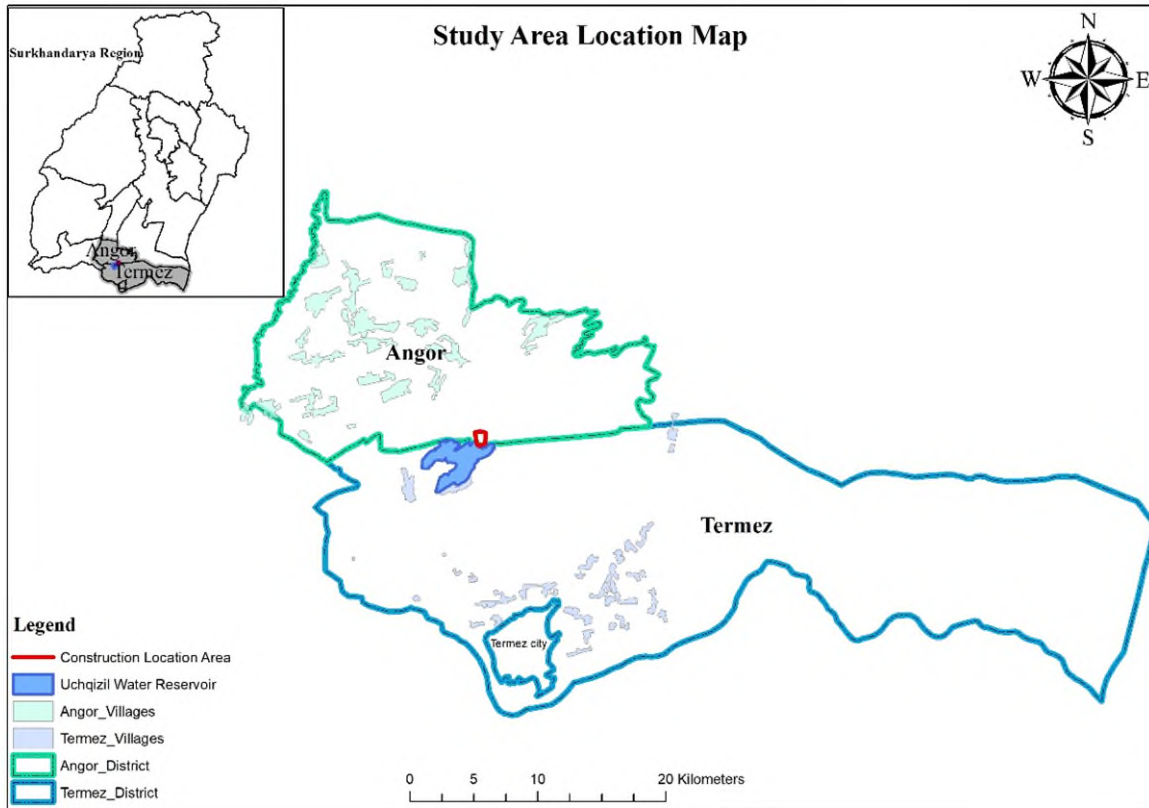


Figure 121: Project Location Map – Local Context

The Project impact area is located within Angor and partly Termez districts. Angor District has 36 settlements of which 12 towns including total 23.2 thousand households. There are 29 mahallas (settlements) and 7 towns in Termez District, which includes 19.2 thousand households. The nearest residential settlement, Uchkizil Village is located 2.0 km away from the Project, which meets the requirements of Sanitary norms and rules for the protection of atmospheric air in populated areas of the Republic of Uzbekistan [72] . Distance to the regional center - the city of Termez - 14 km (see Table 187) [72].

Table 187: Distance of the settlements and buildings from the Project

ID	Type	Distance to Project	Description
Reservoir	Hydrotechnical	0.1 km	Uchkizil Reservoir
M-39 numbered highway	Road	0.5 km	Highway between Tashkent-Termez
Canal	Hydrotechnical	0.8 km	Zang Canal

Bio Tehno Eko LLC	Industrial	0.25 km	Waste processing enterprise
Village	Residential	2.0 km	Uchkizil Village
Village	Residential	2.0 km	Kattakum Village
Railway	Road	7.0 km	Railway line Kagan-Termez-Dushanbe
City	Residential	12.0 km	Termez city

Project Impact Area

The Project impact area is defined as a place where a Project can positively and negatively affect social life, economic infrastructure and the environment.

It is considered that significant effects are unlikely to occur beyond the study area, due to the significance of effect decreasing as the distance from the Project increases. As such, it is considered selected AoI is sufficient to identify those receptors likely to be significantly affected by the Project based on previous project experience and the professional judgement of the Consultant.

There is no large community and settlement within a radius of 5 km of the Project area. Key aspects of the vicinity of the project boundary:

- uncultivated and unused lands in the north, west, and east,
- Uchkizil Reservoir in the south,
- one of the tributes of the Zang Canal that discharges into Uchkizil Reservoir in the west at a distance of 450-550 meters,
- M-39 main road in the north, northeast and,
- the main railway line Kagan-Termez-Dushanbe in the south at a distance of 7 km.

Although the AoI is selected as an area covering 5-km radius from the project area, to assess other nearby settlements such as Termez, 5-10 km buffer area is considered in this Chapter.

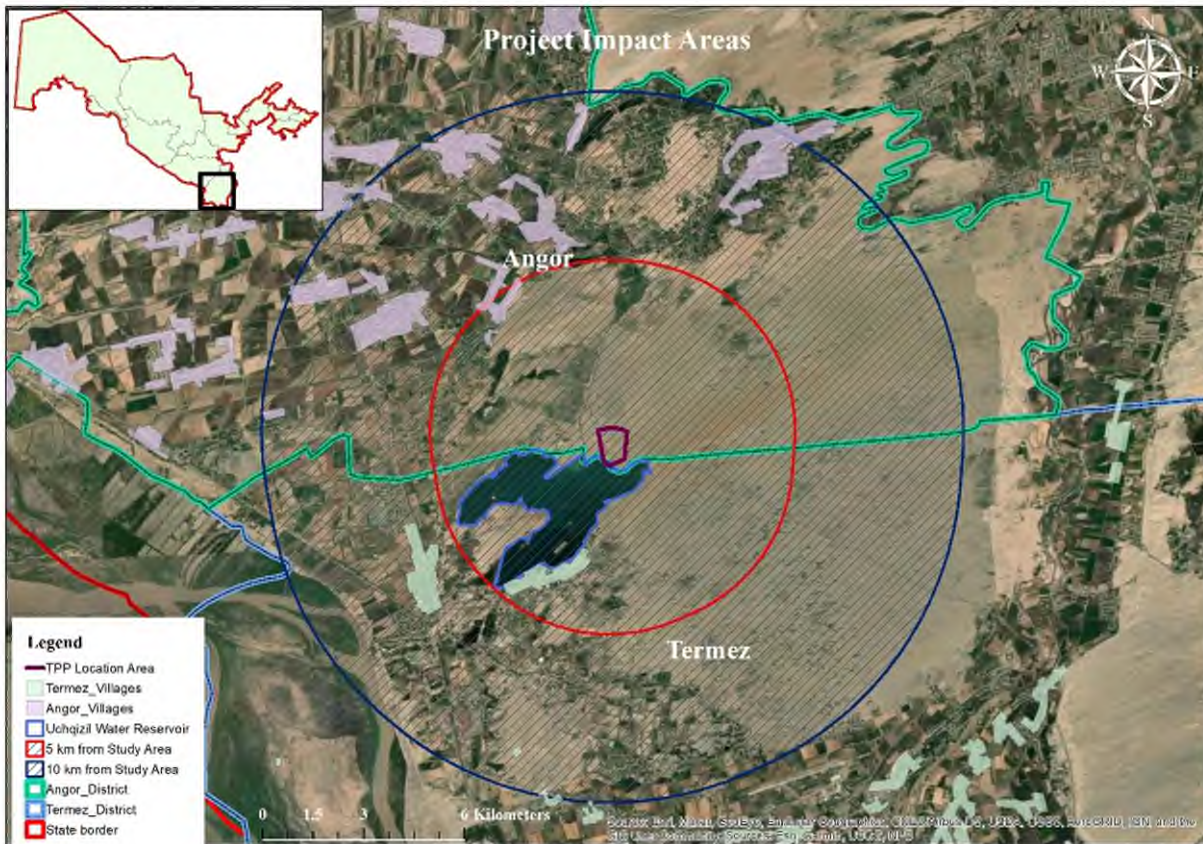


Figure 122: Project Impact Area 5 and 10 km radius

As mentioned earlier, although out of AoI, there are 16 settlements within 10 km area in Angor and Termez Districts. Name, population and households of these settlements are presented in Table 188.

Table 188. Settlements located within 10 km

No	Settlements (Mahalla)	Population	Household
1	Bahor	4,120	680
2	Dehqonbirlashuv	2,594	478
3	Ilgor	3,100	645
4	Karvon	3,708	623
5	Kattaqum	5,334	1,004
6	Kayran	4,712	792
7	Khalqobod	4,545	804
8	Madaniyat	2,650	510
9	Markaz	3,100	485
10	Namuna	3,414	556

No	Settlements (Mahalla)	Population	Household
11	Orol	4,178	725
12	Qoshtegirmon	3,631	631
13	Tallashqon	3,574	538
14	Uchkizil	4,582	894
15	Zang Gilambop	2,173	342
16	Zartepa	4,460	770
	TOTAL	59,875	10,477

16.2 BASELINE SOCIO-ECONOMIC DATA

16.2.1 Social Structure

The administrative management system in Uzbekistan is comprised of two main bodies, central and local. Local government has three pillars as regional, district and city administration. Although, the community self – governments are not a body of central public administration system but they exist and operate locally.

The system of local government has been established according to the Law on Local Public Administration, adopted on 2 September 1993. Activities and responsibilities of Local government are specified in the seven chapters and twenty articles of the law. Article 1 states that the local representative authorities at the regional, district and city levels are the local councils, whose full name in Uzbek is "Councils of People's Deputies." Another article of the Constitution of Uzbekistan presents information about local councils at all levels are headed by a chairman, or hokim (hokim is translated as deputy ruler). Regional, district and city hokims also act as the head of the local executive branch or hokimiyat. In general, the authorized state structure consists of three distinct levels: the republican level (first), province-level (second), and district-level (third).

16.2.1.1 Province level

In particular, the Surkhandara regional hokimiyat is the (second level) main authorized executive body in the region. Tasks and functions of Surkhandarya province hokimiyat are a comprehensive analysis of trends in socio-economic development of Surkhandarya province, Termez city and districts, analysis of the dynamics of the main economic indicators, monitoring and implementation of structural and institutional changes, monitoring of local budgets; Development of proposals for the integrated development of the region, the city of Termez and districts; Socio-economic development of the regions, attracting investments and introducing innovations in the province economy, effective organization of economic free and industrial zones as well as development of tourism. These and many other tasks and functions are being covered by Surkhandarya province hokimiyat on coordination of economic policies and take responsibility for implementing government programs (national – regional), projects, President's and Cabinet Ministers resolutions at the local level. In addition, in terms of the socio-economic aspect, regional hokimiyat in Surkhandarya introduces systematic monitoring of trends in socio-economic development, carries out social and economic reforms, timely identifies the causes of local challenges and makes decisions to eliminate these issues. The detailed

administrative structure of Surkhandarya's hokimiyat is given in "Annex 3 Organigram of Surkhandarya Province Hokimiyat"

16.2.1.2 District level

It should be noted that provincial Hokimiyat in Surkhandarya manages other district-type hokimiyats. Since Surkhandarya region is divided into 13 districts, hokimiyats in each district is only highest state executive body that implements the government policy within their administrative borders. They are as follows in Table 189.

Table 189: 13 districts of Surkhandarya Region

#	Name of hokimiyat
1	Denau
2	Shurchi
3	Sherobod
4	Jarkurgan
5	Saraosiyoy
6	Muzrabod
7	Qumqorgon
8	Uzun
9	Angor
10	Boysun
11	Qiziriq
12	Oltinsoy
13	Termez

As for administrative management the district based hokimiyats (third level) operate identical manner as province hokimiyats (second level). It has following functions and duties in terms of social and economic development:

Duties

- Comprehensive analysis of trends in socio-economic development of the district, monitoring of implementation of local budget and structural and institutional changes;
- Creation of an effective system for monitoring the implementation of socio-economic development programs in the regions
- Improve education, health, agriculture and construction spheres in the district
- Functions
- Development of specific measures to address social economic challenges in the district
- Implementation and monitoring programs in the field of social economic development of the district
- Organizes the hearing of the hokim's report on important issues of socio-economic development of the district

16.2.1.3 Community of self-government

In Uzbekistan local government is usually supplemented by self-government community organization as Mahalla at the third level. In current day mahalla is defined as an organization which aims to resolving local issues according interests of local people, traditions, language and ethnic background [73].

According to article 7 of the Law on Community Self-government, bodies of community self-government include citizen assemblies of villages, kishlaks as well as those of mahallas within cities, villages, kishlaks or auls [75]. It should be noted that both kishlaks and auls are rural settlements in the country and having different communities living there. For example, in Karakalpakstan almost all rural settlements have "aul" identification because of their culture and traditions while in Fergana valley use kishlak term for the description of the settlement.

However, as a result of recent socio-economic reforms in the country, mahallas became more active than before as a self-government structure [76].

In particular, according to the decree of the president of the Republic of Uzbekistan № PF-5938 of February 18, 2020 «on measures to restore the socio-spiritual environment in society, further support of the Institute of the mahalla, as well as to bring the system of working with family and women to a new level», the status of the meetings of local citizens has been set [77].

According to information collected by field survey new positions in the mahalla management system, including the positions of the chairman of the gathering of citizens on the issues of law enforcement, family, women's and socio-spiritual issues, beautification, farmland and entrepreneurship were introduced.

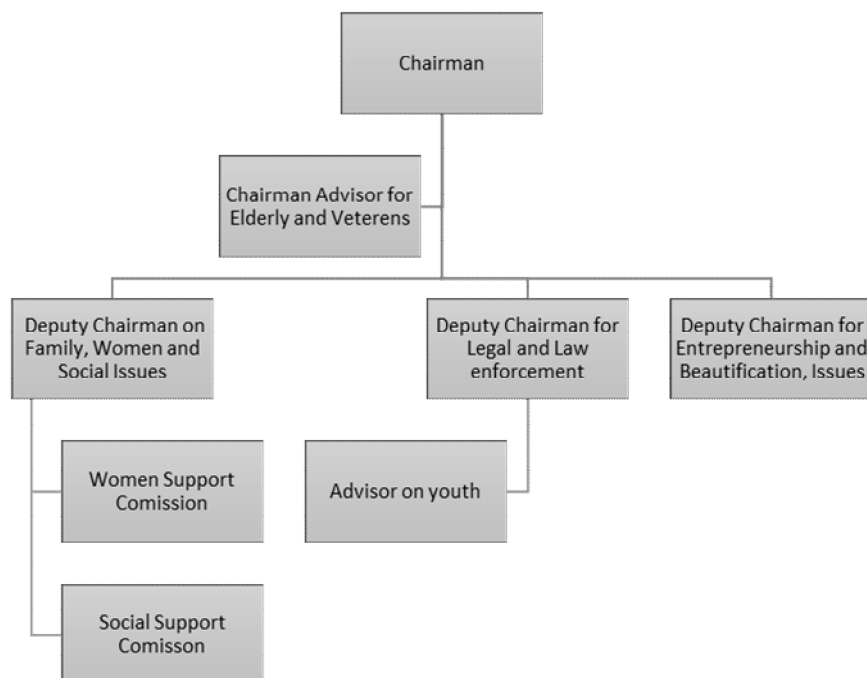


Figure 123: The typical administrative structure of Mahalla (Source: from data collected in the field)

According to field survey data, the establishment of a separate ministry in the country, which deals with the issues of mahalla and family at the state level, which has become a close assistant to the meetings of citizens in this regard, the work on supporting the mahalla system has reached a new level.

The ministry works as an important organization in the direction of taking the activities of the mahalla system, which is directly working with the people, forming as an important social institution, to a new level, increasing its status, developing the activities of the Citizens ' Assembly, supporting the family, women and the elderly, protecting their rights and legitimate interests, comprehensive support of families in need [76].

16.2.2 Demography

16.2.2.1 Past and Current Population

As of July 1, 2021, the resident population of Uzbekistan amounted to about 34,9 million people and since January 2020 has increased by 653.7 thousand people. The permanent population growth rate was 1.9% [78].

In January-July 2021, 390.7 thousand new born children were registered. At the same time, during this period, the number of deaths of citizens amounted to 79.7 thousand people.

As of April 1, 2021, the permanent population of Surkhandarya province is 2,693 thousand people (7, 2% of Republic) (see Figure 124). The population increased by 605 thousand people compared to the 2010. In particular, the urban population was 1,709.6 thousand people (36.2% of the total population), the rural population – 971.2 thousand people (63.8 %).

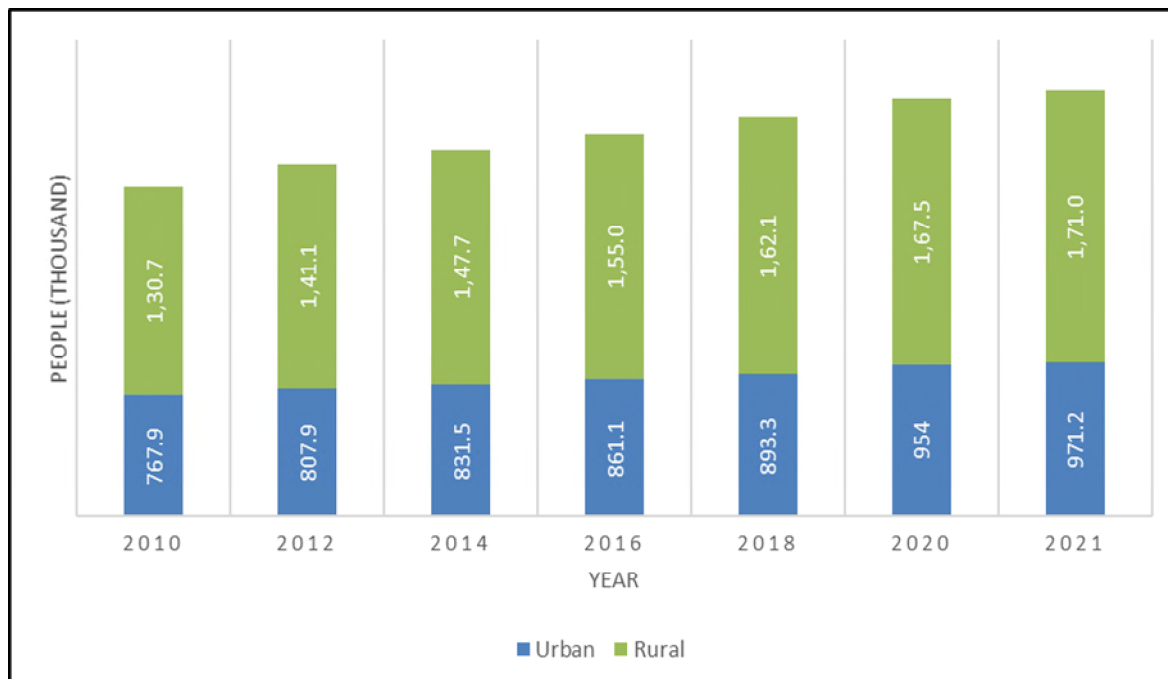


Figure 124: Dynamics of urban and rural population in Surkhandarya Province [78]

At district level, Figure 125 illustrates past and current population as well as dynamics of urban and rural population in Angor and Termez Districts. Since the project is located on the territory of the two above-mentioned districts, the demographic analysis was integrated [79].

The permanent population in Angor and Termez Districts has grown significantly from 189.2 thousand in 2010 to 230.8 thousand in 2018. In 2020, the population in the two districts slightly decreased to 209.2 thousand.

According to UzStat, at present there are 134.7 thousand (5% of the Surkhandarya region's population) people living in Angor, and 78.6 thousand people in Termez District.

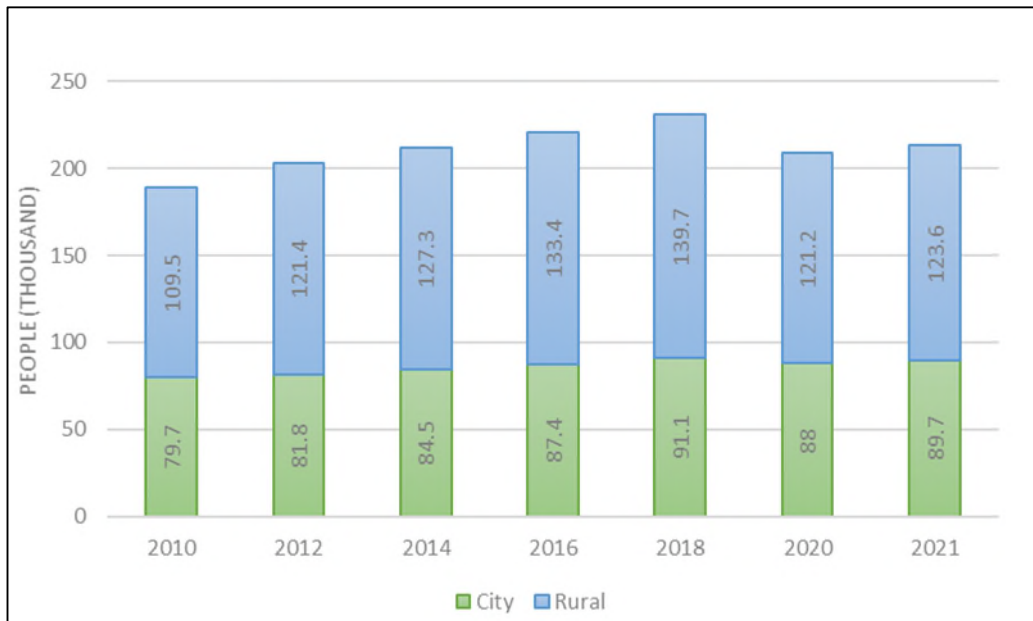


Figure 125: Dynamics of urban and rural population in Angor and Termez Districts [79]

As for January, 2021 the population density throughout the Republic of Uzbekistan amounts to 74.1 people per 1 square km.

16.2.2.2 The population density in Surkhandarya Province

The districts with highest population density are Devon, Altinsai, Angor and Kizirik [80]. Proportion of male and female citizens is almost similar with a slight excess of males (see Figure 126).

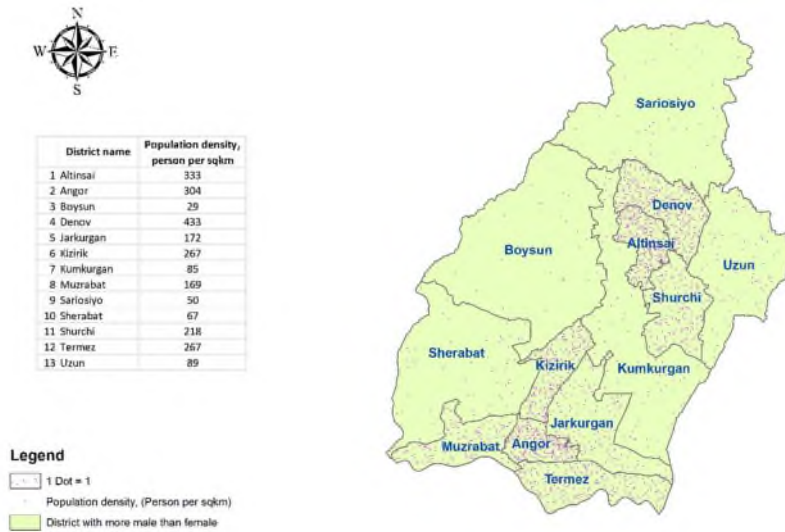


Figure 126: Population density and gender by district in Surkhandarya Province [80]

16.2.2.3 Change in Population

Internal and external migrations

According to a study of authors', Uzbekistan has a significant demographic growth and large labor force. In the context of population growth and unemployment, there is another issue - labor migration which observed during the field survey.

According to the Ministry of Labor, about 1.3 million are currently working in Russia, and about 200 thousand Uzbeks in Kazakhstan [81]. With the recent statistics of International Organization for Migration, a total number of emigrants in Uzbekistan at mid-year 2020 was 2 million and net migration rate in the 5 years prior was minus 44.3 thousand.

Due to economic difficulties in Uzbekistan, labor migration to Russia, Kazakhstan, the United Arab Emirates (UAE), Turkey, the Republic of Korea and Europe has been increasing over the last years [82].

In addition, in 2020, the number of immigrants reached 191.2 thousand people, and emigrants - 203.7 thousand people at country level. Emigrants are when people leave either district, province or country of origin, and immigrants when they arrive at their destination [78].

According to State committee of Uzbekistan on statistics in January-June 2021, the number of emigrants was 10,689 people, and the number of immigrants was 992 people from foreign countries (see Table 190). Majority of Uzbekistan residents (2,669 people) emigrated to Russia, Kazakhstan (7,013 people), Tajikistan and Kyrgyzstan. The largest share of arrivals from abroad to the Republic of Uzbekistan (in% of their total number) is accounted for by arrivals from Kazakhstan (35.9%), Tajikistan (21.6%), the Russian Federation (17.1%) and Kyrgyzstan (6.3%), the smallest - from Turkmenistan (4.0%) and other countries (15.1%) [83].

Table 190: Number of immigrants and emigrants in 2021 (January -June) [83]

Countries	Immigrants	Emigrants
AZERBAIJAN	5	21
ARMENIA	6	4
BELARUS	0	28
KAZAKHSTAN	356	7,013
KYRGYZSTAN	62	175
MOLDOVA	2	5
RUSSIA	170	2,699
TAJIKISTAN	214	233
TURKMENISTAN	40	81
UKRAINE	28	103
ISRAEL	5	77
USA	9	15
OTHERS	95	235
TOTAL	992	10,689

At the regional level in Surkhandarya Province in January 2020, the number of immigrants amounted to 8.5 thousand people, or 4.4% of the total republican and 19.5 thousand people emigrated from the region (9.5% of the total). Net migration rate is 11.06 thousand at regional level (see Figure 127). The highest net migration rate observed in Oltinsoy (- 327 people), Kumkorgan (- 340 people) and Sariosiyo (- 320 people) Districts [79].

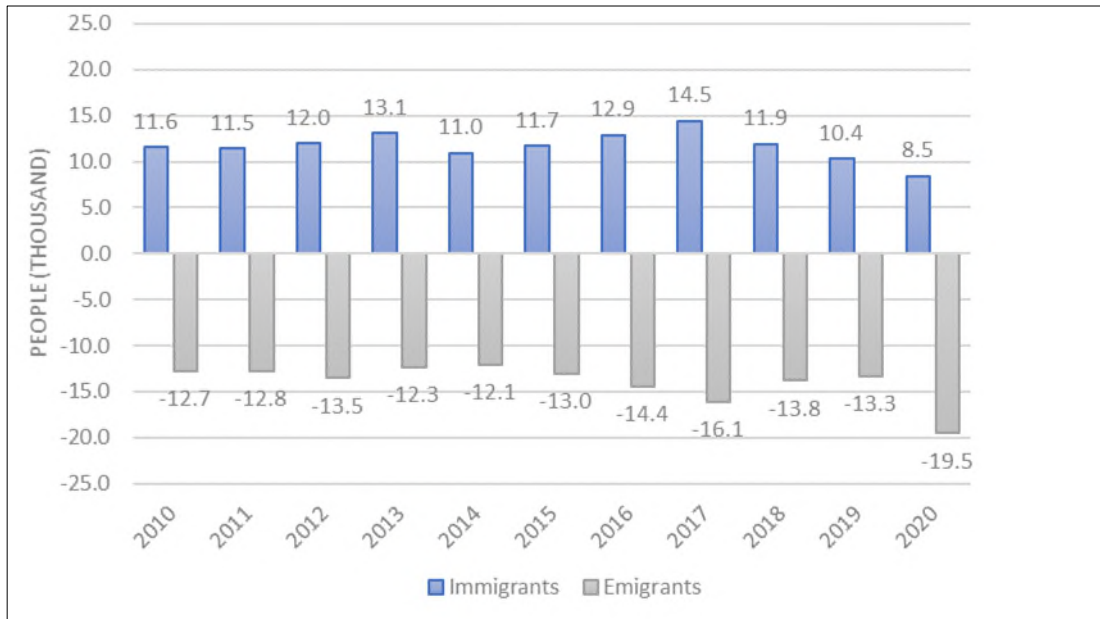


Figure 127: The number of immigrants and emigrants in Surkhandarya Province [79]

One of the positive impacts of the migration is reducing pressure on the labor market at local level as well as receipt of income from remittances (from 4.8 to 6 billion US dollars annually) [81].

The net migration level in Angor and Termez Districts is not significant among other regions. As Figure 128 shows the number of immigrated people fluctuated from 2010 (1.2 thousand people) to 2016 (1.04 thousand people). In 2017, both immigration (2.6 thousand people) and emigration (-1.6 thousand people) rates were peaked. The population that moves from these two areas between 2018 and 2020 has declined slightly. At present, the net migration rate is minus 245, or 2.2% of the total number of emigrated from the region [79]. Most of the district population moves within the region, which can be described as internal migration. According to the population, the main reason for such internal migration is the return to the hometown and the moving of the population in the process of urbanization in cities.

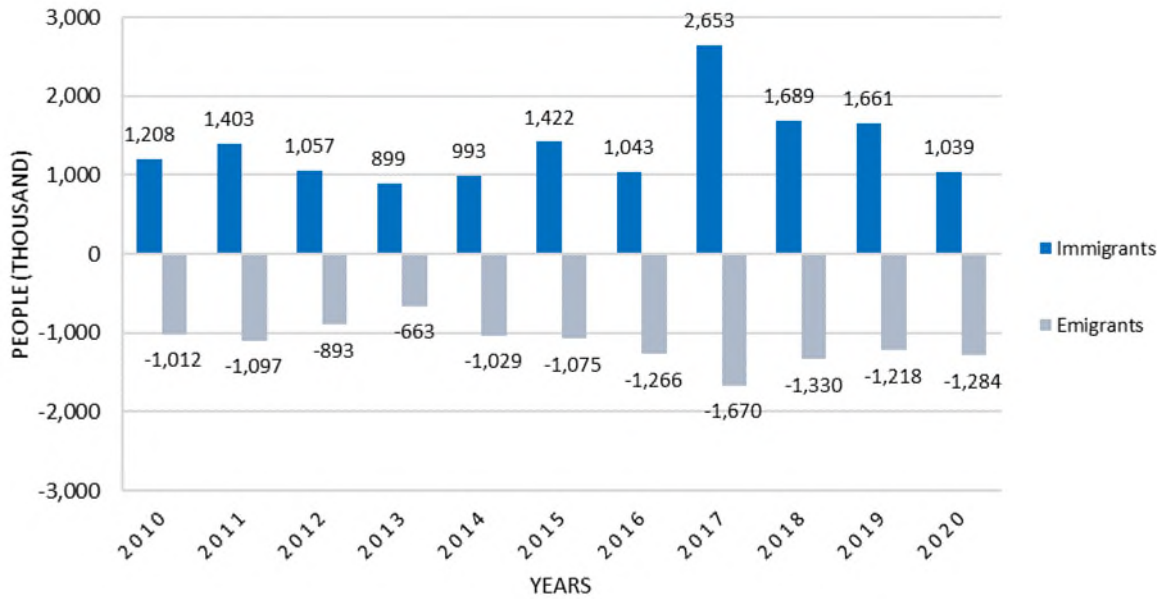


Figure 128: Number of immigrants and emigrants in Angor and Termez Districts [79]

16.2.3 Population Distribution

16.2.3.1 Distribution of Population by Age Groups and Gender

According to State Committee on Statistics, there are slightly more males in Uzbekistan -50.4 % of the population, females, respectively - 49.6% of the total number of citizens in 2021. As for 2021, in Surkhandarya Province the number of female population is 1.32 million (49.5%) and 1.35 million (50.5%) male population [78].

The age composition of the population is analyzed on the basis of an international standard four-year interval (see Figure 129). It should be emphasized that in 2020 the highest representative of the population are children from zero (0) to four (9) years [84]. About ten (10) percent of the population is between the ages of 30 and 34. The population aged 60 and over makes up only 6.8% of the total population, but this figure in developing countries ranges from 25% to 30% [85].

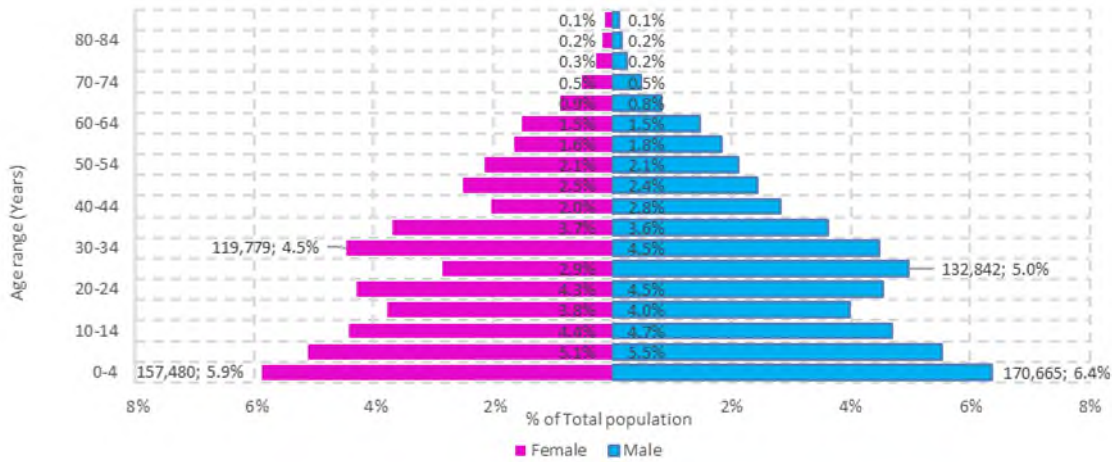


Figure 129: Disaggregation of Population by age groups and gender in Surkhandarya Province [84]

Figure 130 shows distribution of population by age groups and gender in Angor and Termez districts. Almost no difference between the number of male (50.1%) and female (49.9%) of the population. 22 thousand residents or 10.3 percent of the total population of Angor and Termez Districts aged 25 to 29 years. The largest representation of women between the ages of zero (0) to four (4) years, which amounted to 13.3 thousand people [84].

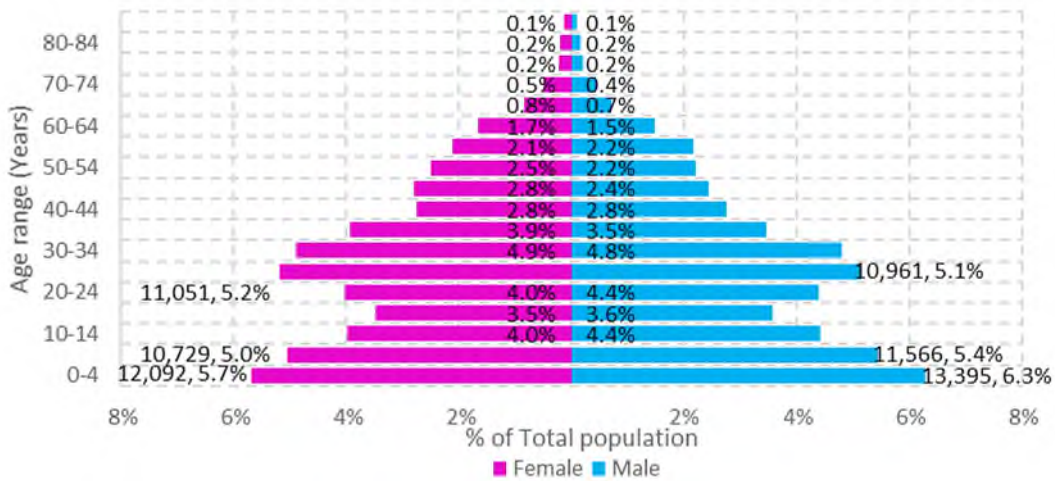


Figure 130: Disaggregation of Population by age groups and gender in Angor and Termez Districts [84]



16.2.4 Education

16.2.4.1 Education system in Uzbekistan

The education system in Uzbekistan is one of the important drivers of transformation in the country's society and economy. Although the education system at all levels is in a flux stage however the Government of Uzbekistan (GoU) is committed to improving its education system in the context of its wider reform program. For instance, the education reforms aim to expand access to preschool education while also restructuring the offerings for general secondary and secondary specialized education. The government of Uzbekistan aimed to reach 100 percent enrollment in preschool education for students aged 5–6 (or 7 depending on the birth date) by the end of this year [85]. Along with this important initiative, the GoU is reinventing General Secondary Education (GSE), wherein students will have 11 years of compulsory education and multiple pathways to enter the labor market or higher education. These reforms have significant implications for improving student learning outcomes. Starting from the 2017/18 academic year GoU has changed its requirements for general secondary education and expanded compulsory GSE from 9 to 11 years of schooling (see Figure 131). Until these changes, GSE in Uzbekistan contained nine years of compulsory education from 1 to 9 grades. However, for students who want to continue their education in academic lyceums instead of GSE schools for grades 10 and 11 the study program for academic lyceums has been condensed to two years. In other words, compulsory GSE could involve 11 years in a GSE school or 9 years in a GSE school plus 2 years in an academic lyceum. Starting from the last academic year, graduates of grade 11 can choose to continue their studies in Secondary Specialized Vocational Education (SSVE) or apply to a university. The transformation of the economy and undergoing reforms in education sector have positively impacted to the Higher Education system (HE). As a result of these measures higher education graduates with more diverse skills set and fields of study are being implemented based on labor market demand [85].

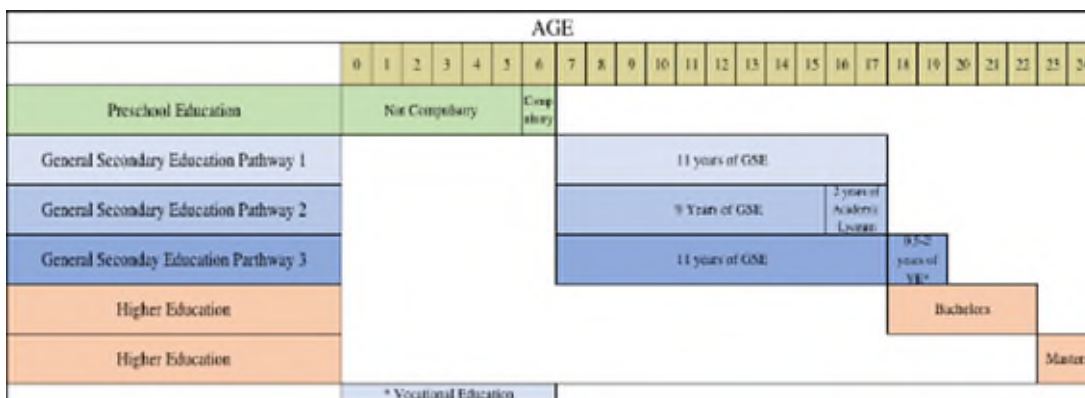


Figure 131: Education system structure [85]

Based on statistics of 2020/2021 academic year, there are 6,960 preschools, 10,090 GSEs, 1,117 SSVEs and 119 HEs operating in the country (see Table 191). Particularly, data on provincial level illustrates that only 8 percent of the total number of preschool educations in the republic falls on Surkhandarya region while proportions for GSE, SSVE and HE accounted at 9%, 3% and 6 % respectively [86].

In the case of district level, 32 preschools, 44 GSE and 5 SSVEs are operating in Angor district, while the 31 preschools, 28 GSEs and 1 SSVE in Termez district. It should be noted that there is no higher education institute in Angor district while there are two branches of higher education in Termez province [86] which makes Termez district more attractive in terms of created facilities for those who are pursuing higher education.

Table 191: Number of educational facilities in Surkhandarya [86] in comparison with Uzbekistan [87] in 2020/2021 academic year

Education facilities	Preschool	GSE	Secondary Specialized Vocational Education	Higher Education
Surkhandarya region	546	920	31	7
Angor	32	44	5	0
Termez	31	28	1	2
Total Education Entities in the Republic	6,960	10,090	1,117	119

16.2.4.2 Educational Facilities

According to data from the 2020/2021 academic year, the average student-teacher ratio in all levels of Uzbekistan's education is about 12:1, which is lower than the averages for countries such as the United Kingdom (16:1), the Netherlands (18:1), Finland (17:1), and Romania (14:1) [88]. Moreover, this ratio varies across regions, however ratio was observed in Surkhandarya region (nearly 11:1) in preschool, (nearly 9:1) in GSE and SSVE and (18:1) in higher education. As for district level, student ratio in both Angor and Termez districts' GSE and SSVE education indicates (about 12:1), while preschool sector increases this ratio up to (25:1) and (27:1) in Angor and Termez districts accordingly (see Figure 132) [89][90].

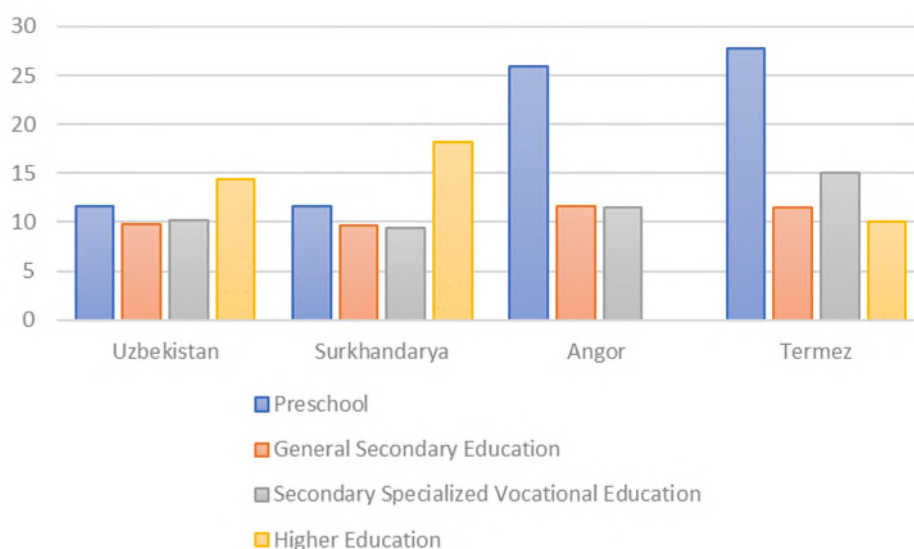




Figure 132: Student – Teacher Ratio in Education level. Source: (State Committee of the Republic of Uzbekistan on Statistics)

As it was mentioned above Uzbekistan government set up the plan to reach out 100 percent enrollment in preschool education for students aged 5–6 (or 7 depending on the birth date) by the end of this year [85]. The preschool enrollment rate in urban areas is approximately 46 percent [91], compared to 23 percent in rural areas, but substantial variation arises between regions. For example, in Tashkent City, almost 80 percent of children are enrolled in preschool, while this rate for Surkhandarya region is only 12 percent as the lowest enrollment rate in the republic. These are average figures for 2018/2019 academic year (see Figure 133).

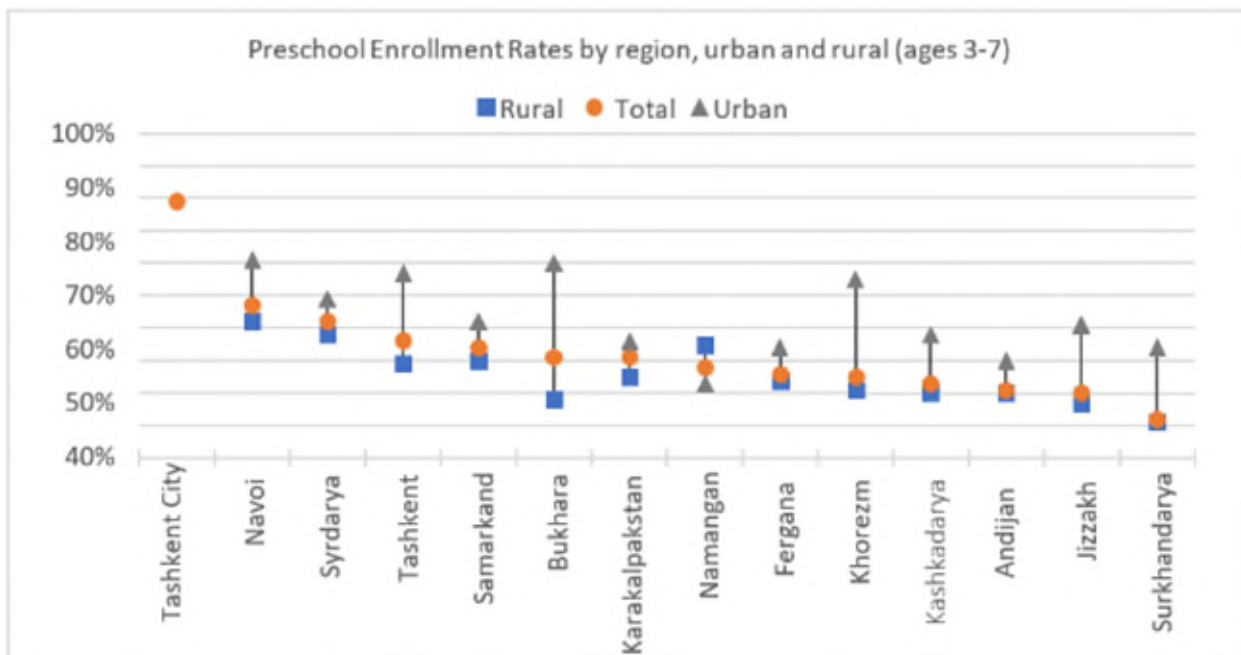


Figure 133: Preschool Enrollment Rates by region, urban and rural (ages 3-7) [85]

16.2.4.3 Distribution of Educational Facilities by Levels

Overall, education facilities in Surkhandarya province, Angor and Termez districts are evaluated as in a good condition. This delineation of the three different conditions (Excellent, Good, Unsatisfactory) contains the condition of the building and adjacent infrastructure, material and technical equipment including education materials, teachers working condition and their salaries (see Figure 134). So, Figure 134, (a) shows the status of GSEs located in Angor district in 2020/2021 academic year according to the data collected from Angor khokimiyat. An absolutely identical data was collected on conditions of GSEs in Termez district (see Figure 134 b).

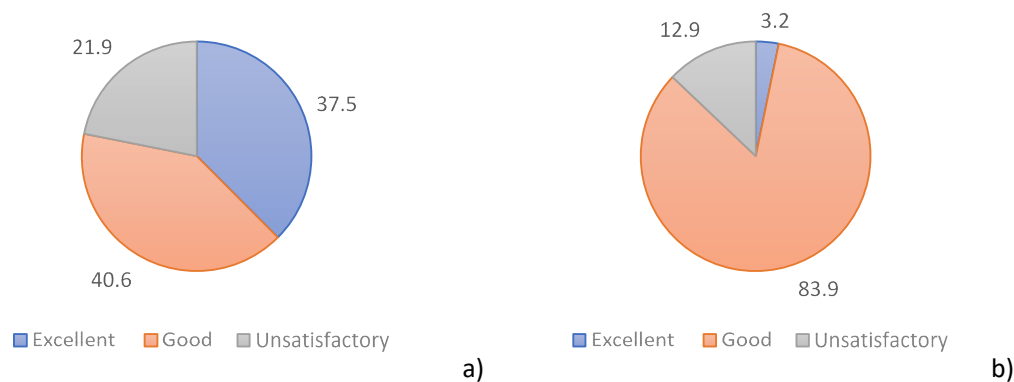


Figure 134: Condition of the GSEs in Angor (a) and Termez district (b) [89][90]

It is worth noting that secondary schools under the “good” category in Termez district almost twice more than same schools in Angor district. However, the total number of secondary schools in Angor - 44 and in Termez district - 28. Taking into account the fact that Uzbekistan has a rapidly growing young population with an average increase of 1.8 people under the age of 19 [83], this situation is expected to create additional challenges not only for the GSE, but also for the education system as a whole.

As a conclusion, the implementing by the government reforms have significant implications for improving student learning outcomes, but also pose relevant challenges for implementation and resource allocation. These challenges already appear at province and especially at the district level. Although preschool enrollment is increasing constantly in recent years, it remains at approximately 30 – 40 percent, which is low by international standards. Preschool is considered as the weakest part of the education in the selected districts because families who wish to enroll their children in public preschools must pay fees (around US\$6 to US\$28 per child per month in full-day groups), mostly to cover the costs of meals. The fees charged by nonpublic preschool education institutions are paid by families and can range from US\$175 to US\$300 per child per month [85]. Due to the high rate of unemployment and low-income source the above-mentioned pay fees are not affordable for a population of selected districts. Another issue can be related to the physical conditions of the GSEs and SSVEs in the districts. For example, based on data collected for this report it was revealed that there are not enough sports facilities for the school and college-age students in both Angor and Termez districts which potentially can negatively impact on health of students and worsen their academic performance.

16.2.5 Health

Uzbekistan has a public healthcare system and a small scaled private health sector. Cities in Uzbekistan are serviced by family polyclinics, while rural areas are serviced by rural medical centers. Pharmacies in Uzbekistan are privately owned and operated. A total of 14.8 trillion Uzbek soums (1,427 million USD, exchange rate for November 5, 2020) have been allocated from the state budget for the healthcare system in 2020. Funds allocated from the state budget in 2020 increased 1.2 times

compared to last year and 1.6 times compared to 2018. This means that 12.2% of the total state budget expenditures and 2.3% of GDP were spent on health care [92].

The health of the population is considered as one of the indicators of the standard of living of the population. Therefore, the health sector and common diseases are going to be presented in two levels: provincial (Surkhandarya) and district (Termez and Angor). The comparison of the rates is given in country, province and district level.

Between 1991 and 2020, life expectancy in Uzbekistan increased from 66.4 years to 73.4 years, while in Surkhandarya it was 73.3 on average, females - 75.5 and males -71.3 years [93]. Reported maternal mortality ratio in the same years in the country level reduced 3.5 times—from 65.3 to 18.5 per 100,000 live births, but in Surkhandarya it was 36.2 in 2020 which is the second highest rate among provinces after Syrdarya. Infant mortality reduced 3.8 times to 9.3 cases per 1,000 live births, and in the province level, it was 8.6 [94].

16.2.5.1 Most Common Diseases

Diseases of the circulatory system, mainly ischemic heart disease and cerebrovascular disease are the most common causes of death in Uzbekistan (see Figure 135 and Figure 136) [101] [102]. In country, 78% of all deaths are due to non-communicable diseases. In 2017, circulatory system diseases (69%), including ischemic heart disease, arterial hypertension and its complications (myocardial infarction, cerebral hemorrhage) took the first place in the overall standardized cause of death by sex and age. They were followed by malignant tumors (8%), diabetes (3%) and chronic respiratory diseases (3%) [102]. The changes of the causes of death in 10 years between 2009-2019 have not changed significantly [101]. Noteworthy change has been seen in decrease of tuberculosis infection (see Figure 135).

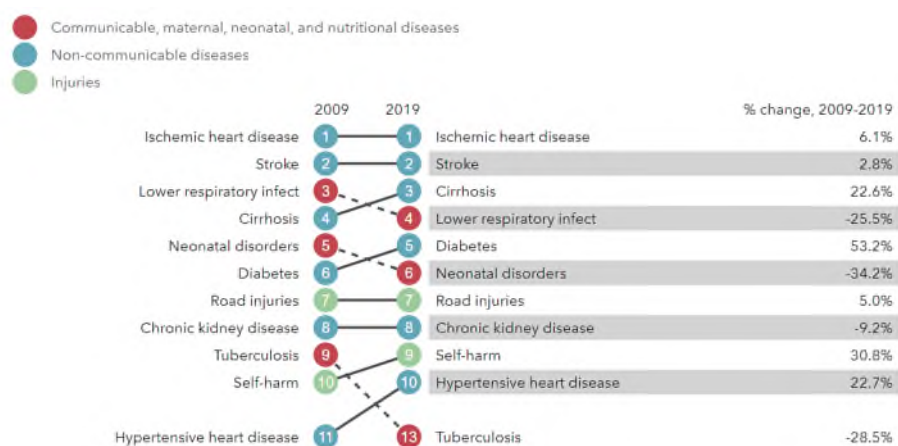


Figure 135: The causes of the most deaths in Uzbekistan [94]

What relates to the provincial level, in 2020, 11.9 thousand deaths were registered in Surkhandarya, of which 62.3% were due to diseases of the circulatory system, 5.9% due to tumors, 4.0% due to accidents, poisoning and injuries, 4.5% from digestive diseases, 7.4% from respiratory diseases, 1.5% from infectious and parasitic diseases, and 14.4% from other diseases.

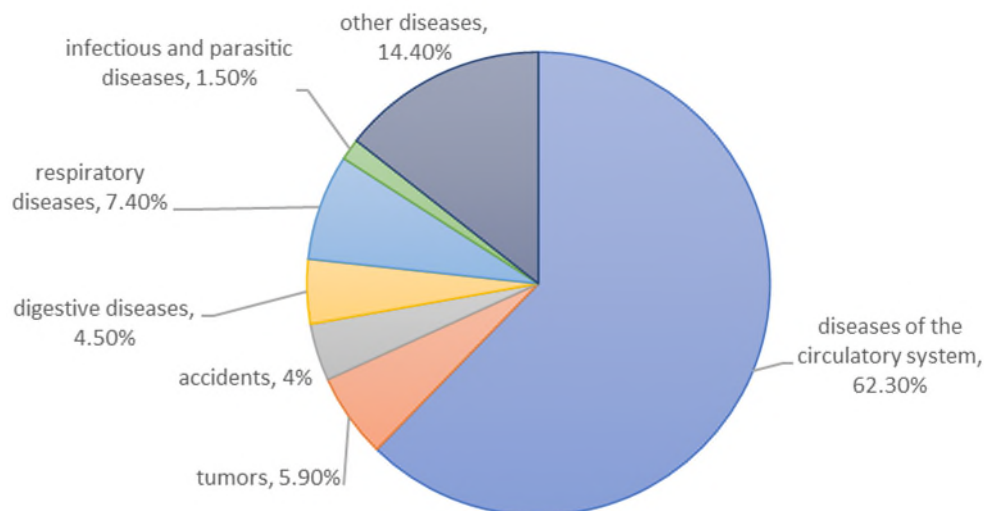


Figure 136: Distribution by main causes of death in Surkhandarya (in % of total deaths)

Diseases and morbidity rates for 10 thousand people in Angor and Termez districts are provided in Table 192. According to the statistical data, the most common diseases in the districts where study area is located are diseases of the stomach and intestines (182.1 infected per 10,000 population) and iodine deficiency (80.75 infected per 10,000 population) [89][90].

Table 192: Diseases and morbidity rates for 10 thousand people in Angor and Termez districts [89][90]

Name of the disease	Termez	Angor	Average
Infectious diseases:			
- Acquired Immune Deficiency Syndrome (AIDS)	8.9	9.4	9.15
- jaundice	0	175.8	87.9
- flu	0	0	0
- measles	0.09	0	0.045
- chickenpox	0	0	0
- others	0	0	00
Non-communicable diseases:			
- diabetes mellitus	43.7	6.5	25.1
- iodine deficiency	129.7	31.8	80.75
- diseases of the stomach and intestines	26.6	337.6	182.1
Other illnesses	1,609.8	0	804.9

The common diseases in the area can be seen in detail in the example of Angor district. Here the most common diseases are diseases of blood and blood-forming organs, respiratory diseases, diseases of nervous system and circulatory diseases. The total number of registered diseases for 2018, 2019 and 2020 with average comparison can be found in the Figure 137 [103].

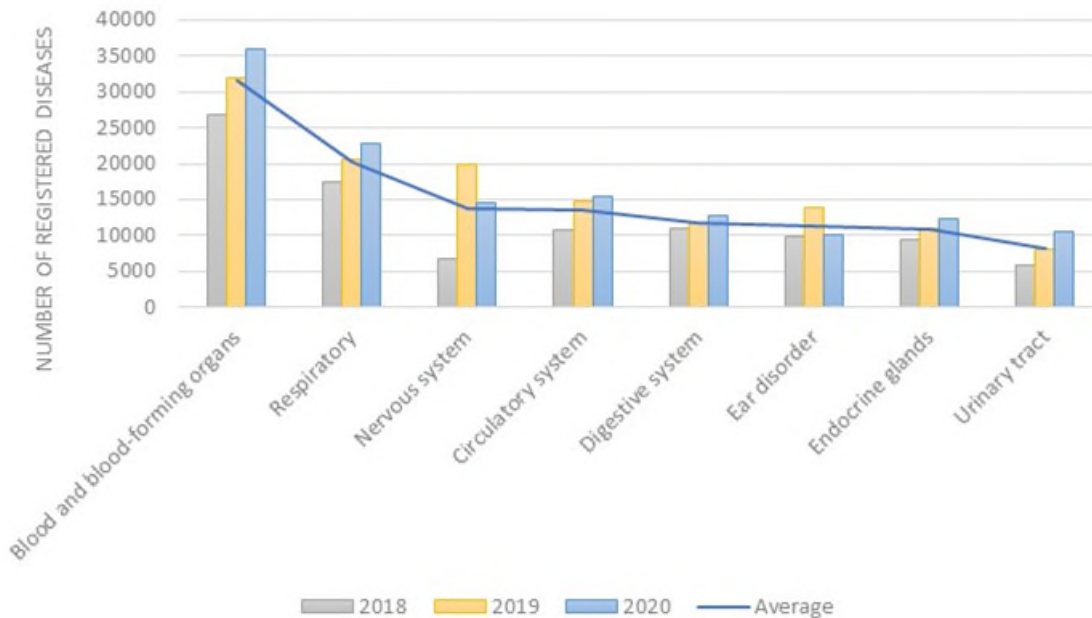


Figure 137: The total number of registered diseases for 2018, 2019 and 2020 with average comparison in Angor district [102]

The number of registered deaths of children under 1 year of age was 0.6 thousand, of which 58.1% were perinatal cases, 22.3% were respiratory diseases, and 14.0% were congenital anomalies and 5.6% died from other diseases.

16.2.5.2 Disabilities and Elderly

Based on the statistics of 1 January, 2014, the number of people with disabilities in Uzbekistan 16 years old or more were 581,869, which was approximately 2% of the whole population. A ratio of male and female was rather unbalanced, in other words, male was 60% and female was 40%. Regarding the disability group, more than 70% of people with disabilities belong to Group 2, while Groups 1, the most severe group, is only less than 10% [104].

In the district level, in the study area which includes Termez and Angor districts, the number of people with disabilities was 4,378, which was approximately 2% of the whole population. Regarding the disability group, Group 1 was 14%, Group 2 - 76.5%, Group 3 - 9.4% [89][90].

Table 193: Disabled people in Angor and Termez [89][90]

	Termez	Angor
Total number of disabled people, person	2,007	2,371
Share of disabled people from the district population, %	2.5	1.8
including by disability group:		
- Number of group I disabled people	289	326
- Number of group II disabled people	1,508	1,843
- Number of group III disabled people	210	202
Number of children with disabilities, person	352	402
Share of children with disabilities from the total number of children in the district, %	0.8	0.9

Under current law of Uzbekistan which is Law of the Republic of Uzbekistan "on state pension of citizens" 03.09.1993, N 938-XII, the right to an old-age pension is granted to men at the age of 60 and at least 25 years of service, and to women at the age of 55 and at least 20 years. As of February 1, 2021, 3 million 845 thousand 462 people in the country will receive pensions and benefits.

Therefore, in this assessment, people who reached their pension age according to the law of Uzbekistan are taken as elder person (see Table 194). According to the statistics, total 3,724,594 people have reached pension age, and ratio of males and females are 36% to 64% respectively. The share of elder people from total population in Uzbekistan is 11%.

Both in provincial and district level, shares of elder people in the total population showed almost the same amount – 9%.

Table 194: Elder population according to their gender, and share in total population in 2021 [83]

	Males	Females	Sum	Total population	Share of elder people
Surkhandarya region	87,215	147,465	234,680	2,680,800	9%
Angor	3,925	7,262	11,187	134,700	8%
Termez	2,687	4,802	7,489	79,200	9%
Total in the Republic	1,331,528	2,393,066	3,724,594	34,558,900	11%

16.2.5.3 Health Facilities

In 2019, there were about 1,205 hospitals with 153.4 thousand beds in the country, of which 57 hospitals with 8.5 thousand beds in Surkhandarya region [87]. Specifically, Termez had 7 hospitals in total with 868 beds while Angor had only one hospital with 265 beds [86](see Table 195).

Table 195: Number of hospitals and beds in country, province and district level [86] [87]

	Hospitals	Beds
Surkhandarya	57	8,500
Termez	7	868
Angor	1	265
Uzbekistan	1,205	153,400

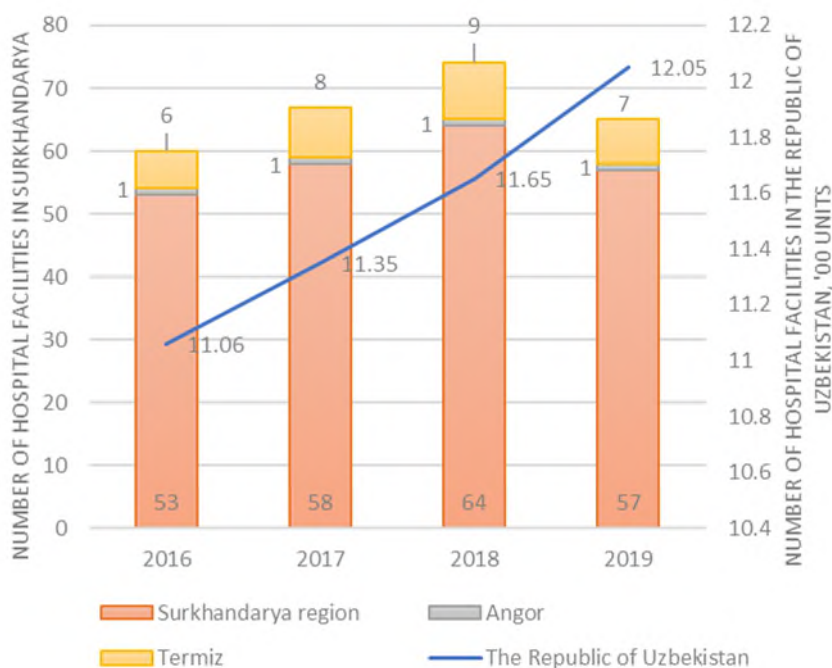


Figure 138: Number of hospital facilities in Surkhandarya in comparison with Uzbekistan in 2016-2019 [86] [87]

Table 196: Number of medical workers in the Republic of Uzbekistan by specialty, thousand people [86] [87]

	2015	2016	2017	2018	2019
Surkhandarya region	3.5	3.9	3.9	4.2	4.1
Angor	0.2	0.1	0.1	0.1	0.1
Termez	0.1	0.2	0.2	0.2	0.2
Total physicians in the Republic	83.4	84.1	85.4	89.8	91.9
Surkhandarya region	21.7	22.0	22.0	22.1	22.5
Angor	1.1	1.1	1.1	1	1
Termez	1.1	1.0	1.1	0.7	0.7
Total nurses in the Republic	336	341	348	356.7	365.7

In the country level, from 2015 to 2019, the number of physicians increased by 10% to 91,900, and nurses by 9% to 365,700 (see Table 197) [87]. Doctor-population ratio is another important indicator for assessing the health care sector. World Health Organization standard for doctor-population ratio is 1:1000. In terms of population ratios, physicians made 27.6 per 10,000, and nurses 109.9 per 10,000 people.

In the province level, the number of physicians was 4,100 and nurses 22,500 [87]; population ratio, 15.9 physicians for 10,000 people and 87.6 per 10,000 were serving in 2019.

In the case of district level, 25.2 physicians and 88.4 nurses are serving for 10,000 people in Termez district, while only 7.4 physicians and 74.2 nurses are serving for 10,000 people in Angor district [86].

According to the passport of both districts, developed and provided by related Hokimiyats [89][90], Termez district does not have any ambulance transports, while Angor has 10 vehicles. However, Angor district owned 86% of total calls of ambulance. Nevertheless, 96% of deaths from calls for emergency medical care happened in Angor district (see Table 197).

Table 197: Districts' Ambulance Service in Termez and Angor districts in 2021 [89][90]

	Termez	Angor	Total
Number of workers and employees of ambulance service, which of	97	115	212
Medical doctors	23	19	42
Nurses	74	96	170
Number of ambulance transports	-	10	10
hence, need repair	-	3	3
Distance from ambulance to the farthest village in the district, km	70	25-30	25-70

	Termez	Angor	Total
The number of ambulance appeals during 2020	57,020	370,189	427,209
hence, by phone call	54,233	34,425	88,658
Deaths from calls for emergency medical care	2	63	65
hence, death of children	-	-	0

As a conclusion, health sector in district level needs improvement. The common diseases in country, province and district level are diseases of blood and blood-forming organs, respiratory diseases, diseases of nervous system and circulatory diseases. In the district level, the number of people with disabilities was 4,378 which is 2% of total population. As World Health Organization standard for doctor-population ratio is 1:1,000, Angor district does not follow the requirement having 0.7: 1,000, while Termez does 2.5: 1,000. The ambulance service has a need on high performance vehicles with speed capacity.

16.2.6 Social Services

Surkhandarya has wide range of cultural facilities, including cultural organizations and centers, study courses, theatres, worship areas, cultural heritage sites and museums (see Table 198). Particularly, 123 cultural organizations and centers have been functioning in 2021 which has 1,720 courses with more than 20 thousand participants [34]. The main purpose of the centers are:

- Further develop national culture in the Republic of Uzbekistan,
- Improve the quality of cultural services to the population,
- Meet their cultural needs and ensure meaningful leisure,
- The formation of exemplary programs embodying national values,
- Traditions and customs of creative communities,
- Preservation and development of art,
- Organization of various clubs, studios, courses, hobby clubs, amateur art groups and
- Creation of favorable conditions for their activity.

There also two theaters and two museums have been functioning in the province. Most interesting part is that the province has 561 cultural heritage sites which explains the area's importance in social development history [105].

Table 198: The list of cultural facilities in Surkhandarya province [105]

Cultural Facilities and Participants	#
1 C**ultural organizations and centers	123
2 Number of courses	1,720
3 Number of participants	20,554
4 Number of theatres	2

Cultural Facilities and Participants	#
5 Number of cultural heritage sites	561
6 Number of cultural and recreational parks	17
7 Number of museums	2
8 Visits to museums	15,378
9 Number of children's music schools	22

16.2.6.1 Public Institutions and Social Services

In Termez and Angor districts there are also cultural and educational institutions like the library which is also called as information resource center, museum and recreational park. However, cinemas and theaters are absent in both districts (see Table 199) [89][90]. The international publications indicated the roles of theaters and cinemas in community development and their benefits to human well-being. However, any standard for assessing social life conditions based on cultural institutions are lacking for implementing in the study area.

Table 199: Cultural and educational institutions of the district in Angor and Termez districts [89][90]

	Termez	Angor
Number of information resource centers	1	1
Annual visit to the library by person	8,500	45,808
Number of museums (branches)	1	-
Number of theatres	-	-
Number of cinemas	-	-
Number of cultural and recreational parks in the district	1	1

16.2.6.2 Worship Areas

The U.S. government estimates that 88% of Uzbekistan's population is Muslim, while the Ministry of Foreign Affairs estimates 93-94% of the population is Muslim [106]. Statistics provided by Termez khokimiyat [90] showed that the area, where 39,900 residents out of 79,200 are men (only men in Islam pray in mosques), owns only one mosque with a capacity of 3,000 people. There are 3 mosques in Angor with a population of 134,700 people, of whom 67,400 are male, where 3,500 people can simultaneously worship (see Table 200) [89].

Table 200: Religious institutions in Angor and Termez districts [89][90]

	Termez	Angor
Total number of religious institutions	1	3
hence, mosques	1	3
Average daily attendance at mosques	400	200
including the number of people performing the Eid prayer in the mosque	3,000	3,500

16.2.6.3 Recreational and Touristic Sites and Areas

According to data provided by khokimiyats of districts, Termez is considered as one of Central Asia's oldest towns, and district has many historical and archeological monuments. The cultural areas depict experience of the area of Zoroastrianism, Buddhism and Islam. Some of the cultural heritage areas belong to the history of I-V centuries. Among these places is the Fayaztepa Buddhist building which is also included to United Nations Educational, Scientific, and Cultural Organization (UNESCO).



Figure 139: The mausoleum of At-Tirmidhi

Most famous place of Termez for both local and international visitors is Mausoleum of Khoja Abu Isa Muhammad Imam Termezi (see Figure 139).

Angor district also has 20 historical, archeological monuments which belong to I-XIII centuries. Some of the oldest relate to Kushan Empire including remains of fortress and warehouse (I-IV centuries). According to the status of these historical heritages, the objects have protection symbols. However, the roads to the monuments are in need of repair [89][90].

16.2.6.4 Leisure Facilities and Sports Facilities

The social development of the area can be witnessed by the presence of sport and leisure facilities. Termez district has 56 sport facilities, including 26 stadiums and 30 gyms, while Angor has two - one stadium and one gym. The number of sport courses and participants are consequently significantly higher in Termez district (see Table 201) [89][90]. Some facilities like swimming pools, tennis and

basketball courts are absent in the area. The percentage of population who are engaged in sport activities are 11% or 8,742 people in Termez, and 0.7% or 1,042 in Angor.

Table 201: Sports and health facilities in Angor and Termez districts in 2021 [89][90]

Type of facility	Termez	Angor
Total sports facilities:	56	2
- Stadiums	26	1
- Gyms	30	1
Number of sports courses	247	14
The number of participants in them	8,742	1,042
Swimming pools	0	0
Tennis courts	0	0
Small football fields with artificial turf	14	0
Children and youth sports schools	1	1
The number of trainees in them	976	1,042

The impacts of sport facilities and sport schools can be seen in the achievements of youth. Total 105 youth has participated till present in different regional (Championship of Uzbekistan among juniors and girls), national (Uzbekistan Cup, Championship of Uzbekistan) and international contests. The leading sport types are national wrestling, sambo and box. The achievements of district athletes can be assessed by their participation at the Asian championships, namely 10th Asian Championship in Pune, Republic of India and the 18th Asian Games are held in Jakarta and Palembang, Indonesia [89][90].

The existence of courses that mostly focus on wrestling makes wrestling a prominent sport. The lack of swimming pools, tennis courts and basketball courts may be the reason for the uncertain progress of other sports in the region.

Presence of leisure facilities which included ecotourism facilities and health facilities is another indicator which is included in the assessment. In the coast of Qizilsuv reservoir where the Project is going to be constructed, two facilities are located in the side of Termez district (exact location of Project is in the side of Angor district). They are "Termez Marvaridi" recreation area and "Termez Marvaridi" Sanatorium [89][90]. The sanatorium occupies a vast area of 7.5 hectares and can simultaneously accommodate 160 people.

Table 202: Ecotourism facilities, health facilities, other specific items in Angor and Termez districts [89][90]

	Termez	Angor
Recreation Area	"Termez Marvaridi" recreation area	-
Sanatorium	"Termez Marvaridi" Sanatorium	-
Children's camps	-	-

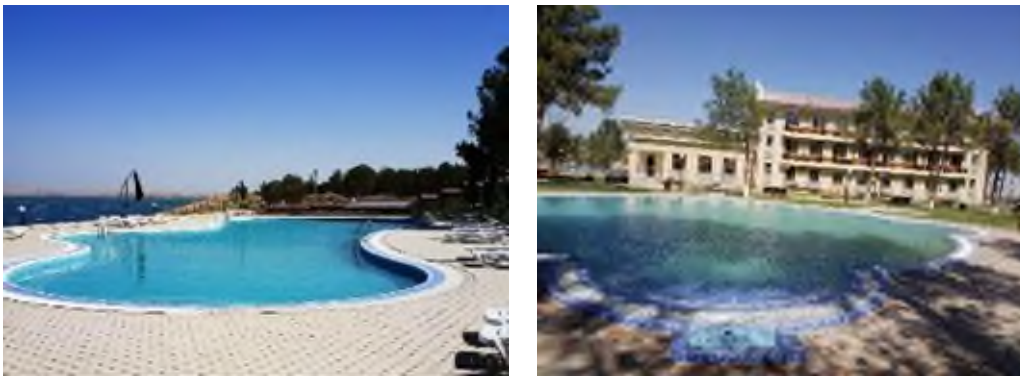


Figure 140: "Termez Marvaridi" Sanatorium

As a conclusion of social services part, Surkhandarya has wide range of cultural facilities, including cultural organizations and centers, theatres, worship areas, cultural heritage sites and museums. In the district level, Termez and Angor districts have numerous cultural heritage sites which has an ancient historical background. However, cultural institutions, in the way that cinema and theaters are absent in the area. Finally, sport facilities are focusing more individual sport types like wrestling and boxing rather than team sports such as basketball and football.

16.2.7 General Economic Structure and Sectors

As for December 2020, in Surkhandarya region, annual gross regional product (GRP) amounted to 24,003.6 billion soums increased by 14% compared to 2010 and higher than 4.4% from 2019. Growth circumstances of GRP were growth rates in agriculture, forestry and fisheries - 105.6% (share in the GRP structure - 50.4%), industry - 113.9% (7.8%), construction - 107.1% (8.8%). GDP of the region exceeded \$1.3 billion and makes up 4% of Uzbekistan's total GDP (see Figure 141) [78].

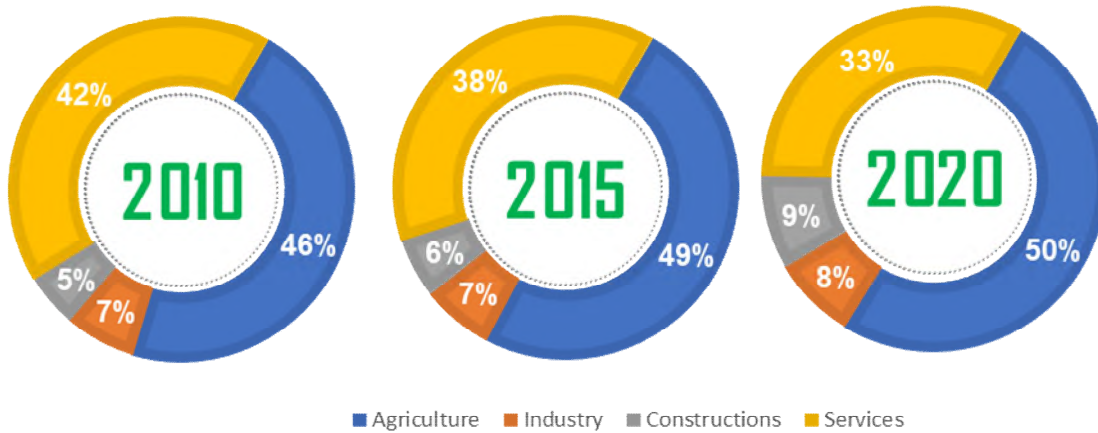


Figure 141: Composition of Surkhandarya's GDP by Sector from 2010 to 2020 [78]

Overall, Figure 142 demonstrates the changes in the GRP composition by the sectors of economy (agriculture, industry, constructions and services) in the period 2010 – 2020 in Surkhandarya Province.

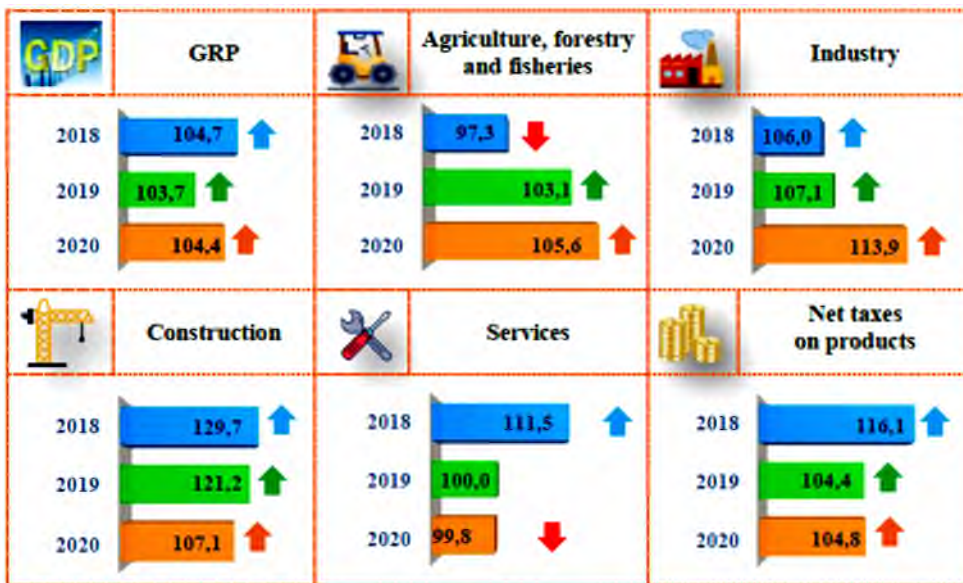


Figure 142: GRP growth rates for 2018-2020 in % to the previous year [78]

In 2020, compared to 2015, the share of agriculture increased to 50%, while the construction sector rose dramatically to 9%. GRP per capita amounted to 9,040.6 thousand soums in 2020 and increased by 2.2% compared to 2019. Services in the region declined last year due to COVID-19 restrictions, but the industry sector continues to grow (see Figure 143).

The region is one of the most agriculturally developed regions and provides over 9% of total agricultural production of the country.

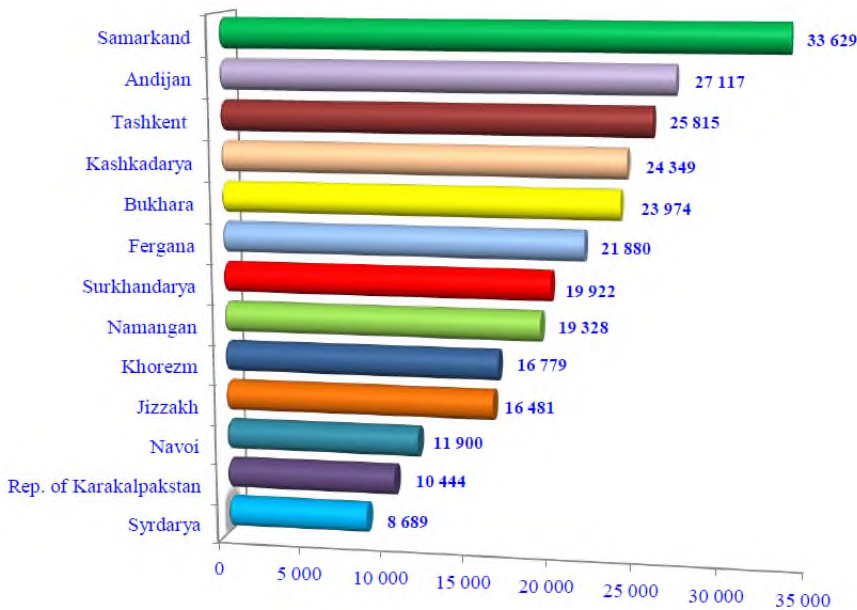


Figure 143: The volume of products (services) in agriculture, forestry and fisheries by region, forestry and fisheries by region in 2020, billion soums [78]

16.2.7.1 Agriculture

Agriculture is an important sector of Uzbekistan's economy, the share of agriculture in GDP is about 25.5% and employing about 27% of the labor force.

Over the past five years, the agricultural sector in Uzbekistan has developed dramatically in the context of elimination of quotas and price controls in 2020-2021. At the moment about 70 % of sown area was allocated to cotton and winter wheat. However, most of the farmers already shifted from state ordered crops to higher-value fruit and vegetable cultivation.

Despite of this, cotton and wheat crops occupied over 63 percent of total sown area in Surkhandarya Province. There are 101.8 thousand croplands in Termez region, of which 76.2% are cotton and wheat. Cotton and wheat were less spread in Angor District, occupying less than 10 percent of sown land (see Table 203).

Since the main source of income is agriculture, it is very important to have land for farming in rural areas. As for statistics, on average in Uzbekistan there is 0.23 hectares of sown area per one rural resident. In the Surkhadarya region, with the highest rural population density, one person can have access to 0.15 hectares of land.

Table 203: Selected indicators of agriculture in 2020.

	Total sown area, 1,000 ha	Total population, 1,000 persons	Share of rural population, %	Share of cotton & wheat in sown area, %	Sown area per rural inhabitant, ha/capita
Uzbekistan	3,373.0	34,900.0	49.3	70.0%	0.20
Surkhandarya Province	255.0	2,693.0	63.8	65.5%	0.15
Angor District	155.3	134.6	51.0	9.8%	0.23
Termez District	10,183	78.6	69.7	76.2%	0.19

Large number of orchards, melons cultivated areas, vineyards and pastures in household land plots provides indication of the value of agriculture as one of the important practices and livelihoods of local residents of the region. In general, the Figure 144 shows the capacity of agricultural production in Surkhandarya Province in 2020.

Surkhandarya region annually agricultural produces about one million tons of vegetables on the Uzbek market, which is 10% of the total production. The dry and hot climatic conditions of the region will make it possible to produce 307.5 thousand tons of the melon per year, in other words 14% of the total melon yield (see Figure 144).

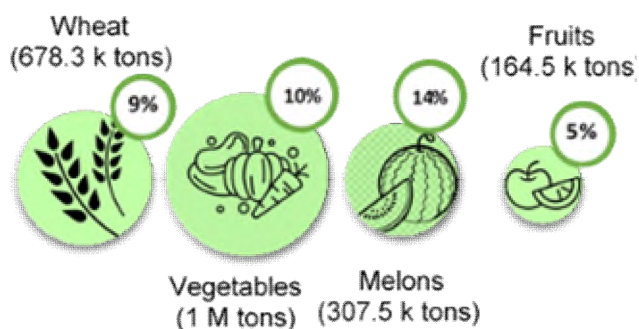


Figure 144: The volume of agricultural production in Surkhandarya Province in 2020 [78]

16.2.7.2 Husbandry

In Termez and Angor districts there are 134 farms which are involved in animal breeding and / or animal product production. Two animal farms are taking more than 80% of the total farms (see Figure 145). They conduct fishery activities within 71 fish farms, and cattle breeding within 39 cattle farms or 53% and 29% of 134 farms, respectively. Consequently, the land for the development of these two types of activity takes on the largest share: 1,572.9 ha for fish farming and 2,520.5 ha for cattle breeding [89][90].

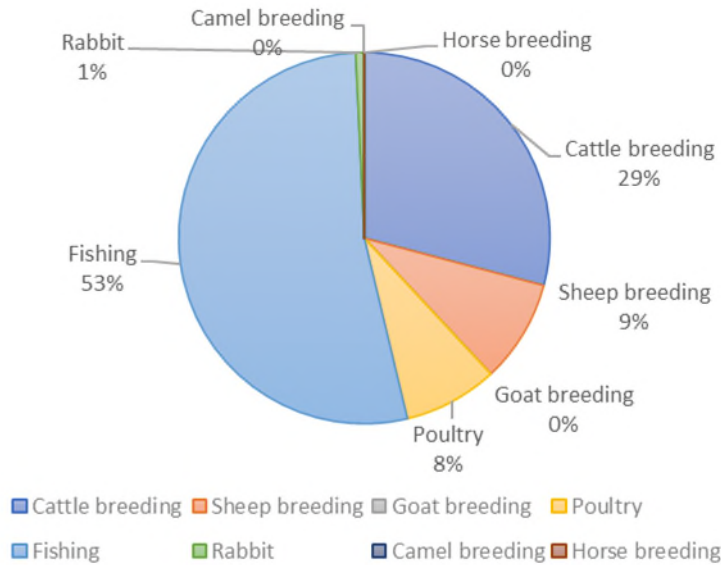


Figure 145: Share of farms depending on the livestock type [89][90]

As far as labor resources are concerned, nearly 700 people were employed in livestock sector in 2020 in two districts. As it is seen from Figure 146, poultry farming is the leading activity for job provision to locals with 289 employees, whereas cattle breeding and fish farming become other important employers in the sector. However, the animal farms of rabbit, camel, goat and horse breeding are lacking in both districts – Termez and Angor (see Figure 146) [89][90].

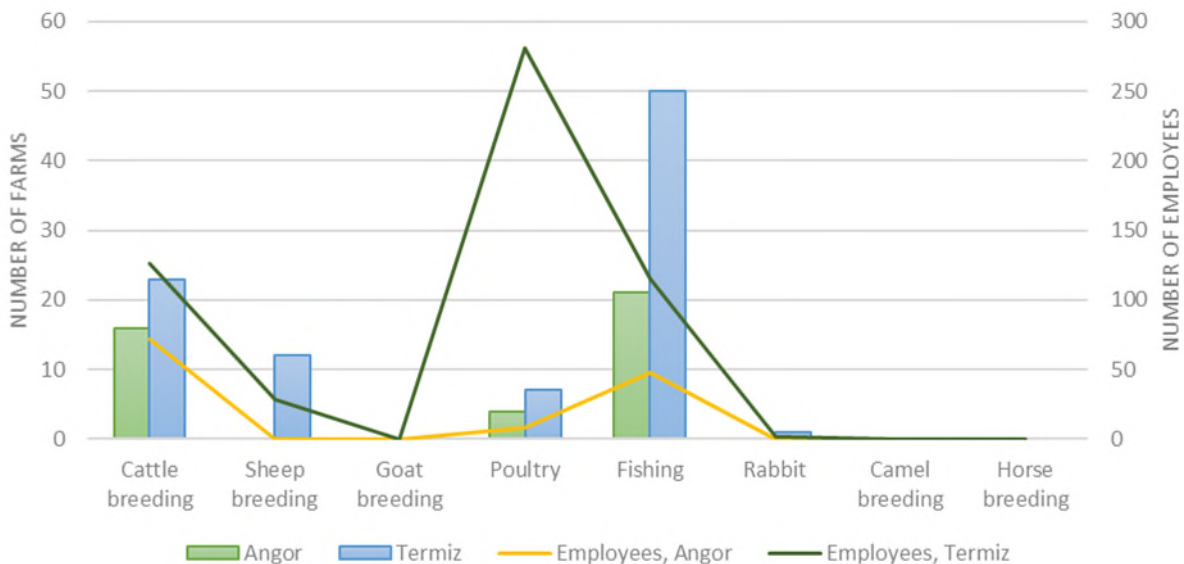


Figure 146: Livestock sector in Angor and Termez districts [89][90]

There are more than 86,000 heads of cattle, which provided 17,000 tons of meat and 81,000 tons of milk in 2020 in both districts. The poultry with 713,000 heads supplied with more than 120,000 thousand eggs, about 121 tons of animal fiber was received from 130,000 heads of sheep and 31,000 heads of goat (see Table 204 and Table 205) [89][90].

Table 204: The number of livestock heads [89][90]

	Termez	Angor	Total
Cattle	46,428	39,662	86,090
Sheep	83,043	46,650	129,693
Goats	-	31,110	31,110
Horses	119	195	314
Poultry	479,300	233,600	713,000

Table 205: Livestock production in Termez and Angor [89][90]

Type of product	Unit	Termez	Angor	Total
Meat (live weight)	tons	7,945	9,257.3	17,202.3
Milk	tons	40,014	41,269.4	81,283.4
Eggs	thousand pcs	98,644	21,481.4	120,125.4
Animal fiber	tons	76.4	44.6	121
Fish	tons	899.7	275.1	1,174.8

As it has been mentioned earlier in this husbandry part, fishery is the foremost practiced form of farming in Termez and Angor with 71 farms. The sector is involving 163 employees. The area of fish ponds is either artificial pool or natural water. Both districts are highly dependent on natural water reservoirs – 78% of fish ponds in Termez and in Angor whole fish farms are located in natural water reservoirs. As it has been stated in international papers, the environmental impact of the hydroelectric may affect to fishery and aquatic biodiversity. Therefore, there is a possibility of planned construction to have an impact to the fishery sector which are grown in natural water reserves.

Table 206: Fishery farms in Termez and Angor districts in 2020

	Termez	Angor	Total
Number of fish farms	50	21	71
Number of employees in fishery	115	48	163
Fish pond area (ha)	1,351	269	1,620
artificial pools	290	-	290
natural water	1,061	269	1,330
Grown fish (tons)	1,178	275	1,453
in artificial pools	848	-	848
in natural water	80	275	355

As a summary of husbandry part, livestock is important part of sustaining the study area. There, three types of livestock farming are widely practiced and also employs the most labor share in Termez and Angor districts, namely fishery, cattle breeding and poultry. Most importantly, the impact of planned project to the fishing industry in the area needs to be focused specifically as fishery mostly depends on natural water reserve.

16.2.7.3 Industry and Commercial

Uzbekistan is the main producer of machinery and heavy equipment in Central Asia. The republic manufactures machines and equipment for cotton cultivation, harvesting, and processing and for use in the textile industry, irrigation, and road construction. This emphasis on making machinery also makes ferrous and nonferrous metallurgy important. In 2020, Uzbekistan produced industrial products worth 367.1 trillion soums, the share of the processing industry was 83.0% (304.7 trillion soums).

As demonstrated in Figure 147 the volume of products manufactured by mining and quarrying enterprises in January-December 2020 amounted to 33.0 trillion soums, or 9.0% of the total industry. Water, electricity, gas, steam supply, sewerage and the country's industries include crude oil and natural gas productions amounted to 2.2 trillion soums (0.6% of the total industry).

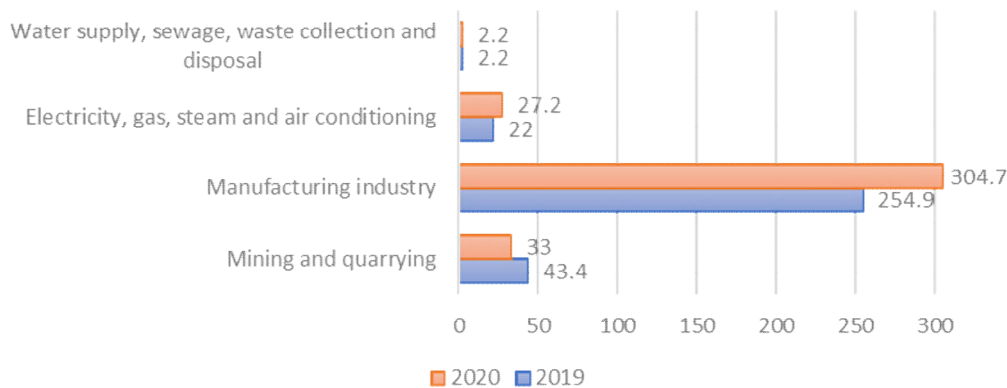


Figure 147: The share of value added to the industry of Uzbekistan from 2019 to 2020

Table 207 shows the indicators of industrial production in Angor and Termez Districts and its share at the regional level in 2020. The volume of industrial production of Surkhandarya Province is 5.5 trillion UZS, which is only 1.5% of the republican production volume. As for 2020, enterprises of Angor district produced industrial products amounted 123.6 billion soums (2.2 % of the regional total) and 151.8 billion soums respectively, in Termez district.

Table 207: Industrial production in Angor and Termez Districts in 2020.

	Industrial production (billion soums)	Share at the republican/ regional level
Surkhandarya Province	5,515.9	1.5% (republican)
Angor District	123.6	2.2% (regional)
Termez District	151.8	2.8% (regional)

In the structure of production in the region, the largest share falls on manufacturing enterprises (89%) – 4,929.3 billion soums. Water supply, sewerage, waste collection and disposal sector made very minor share (1.4 %) in the industry (see Figure 148) [78].

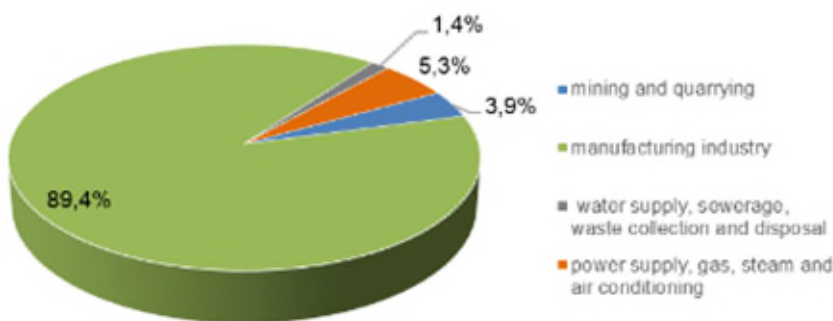


Figure 148: Composition of industrial production in Surkhandarya Province in 2020

Region has well developed textile industry (cotton ginning and consumption, textiles), food industry (food products and beverages), construction materials industry and flour-milling industry (see Figure 149) [107].

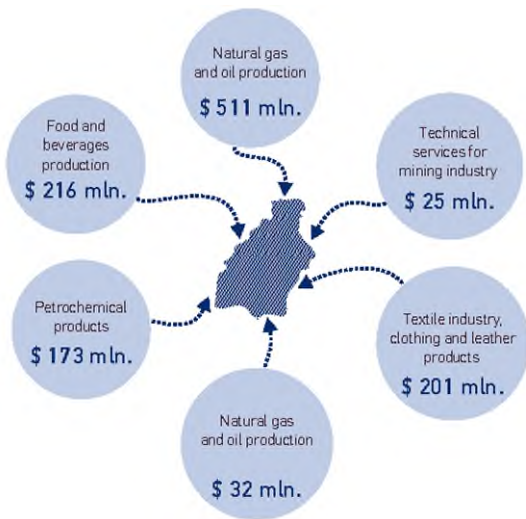


Figure 149: Production capacity of Surkhandarya region by the sectors of industry in 2020 [107]

According to United Nations Development Programme (UNDP) [107], the volume of industrial output in Surkhandarya region reached \$289 million. The biggest industry is natural gas and oil production with the 511 million USD (see Figure 149). Two of three largest coal deposits of the country are located in Surkhandarya region. These are coal strip mines Shargun and Baysun, from which high-quality coal is extracted.

There are 49 joint ventures and foreign enterprises in Angor and Termez [89][90]. Afghanistan is the leading country with the largest number of foreign companies at the district level. 32 enterprises or 65% of the total are joint ventures or foreign enterprises of Afghanistan. In addition, Russia, Turkey, Kazakhstan and China also own by 2 businesses in the area. According to the directions, 13 companies are engaged in fruit and vegetable growing, production of building materials - 10 companies, retail and 6 companies are engaged in wholesale trade in food and clothing. Similarly, livestock related organizations are also owned by 6 international companies (see Figure 150).

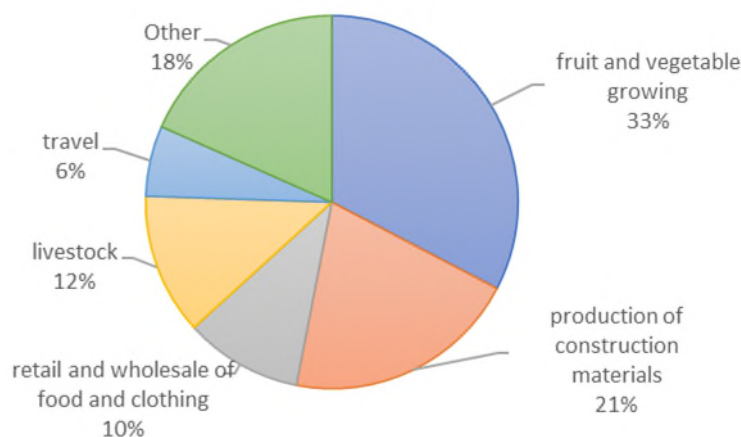


Figure 150: International companies functioning in Termez and Angor in 2020 according to their directions [89][90]

Consumer goods has special place in the livelihood. In general, Figure 151 illustrates the changes of consumer goods from 2010 to 2020 in Angor and Termez Districts and its comparison with the regional level [89][90]. The products made in the region have grown significantly 160.5 per capita to 1,589.7 per capita over the past decade (between 2010 and 2020).

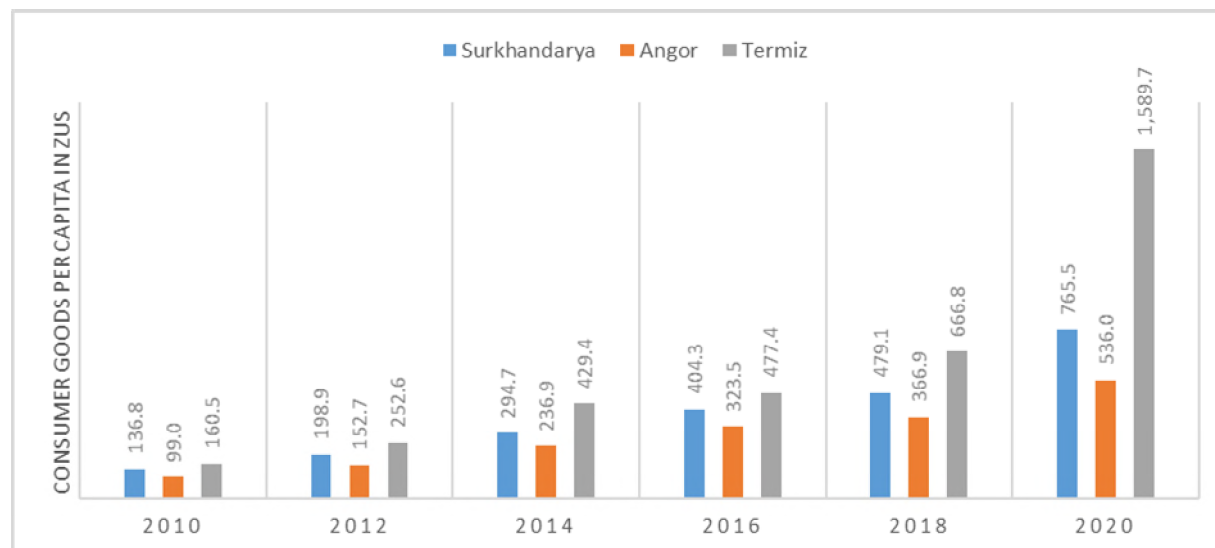


Figure 151: Consumer goods per capita in Angor and Termez Districts and its comparison with regional level [89][90]

16.2.7.4 Transportation and Logistics

Uzbekistan has the highest road density in Central Asia, with 41 km of roads per 100 km² area. The total size of the road network is 185,000 km, of which 42,700 km are common use public roads. Common use roads are functionally divided into international roads - 3,981 km, national roads - 14,100 km, and regional roads - 24,614 km. For the most part, Uzbekistan has achieved basic road connectivity and only a few remote regions lack all-weather road access. About 95% of the network is paved and less than 5% is gravel and earth surfaced. At the end of 2017, nearly two-thirds of the common use roads were assessed as being in good or excellent condition. This assessment is based on biannual visual inspections, which are highly subjective and may not be based on a consistently applied metric. Much road deterioration is due to aging infrastructure, which needs both structural and safety upgrades. Lastly, Uzbekistan has 83 cars per 1,000 people in 2018 [108].

In the province level, transport infrastructure of Surkhandarya is fairly developed. Length of railways crossing the territory of the region is 372.5 km. There are more than 10 railway stations in the region. Railway route (or line) Taguzar - Boysun – Kumkurgan connects the south of Uzbekistan with the center of the country and Kazakhstan. There is the main passageway running between Termez and Tashkent. There are 2,844 km of automobile roads in the region, including international and national. There is also Termez Cargo Center is large logistical terminal, located in Termez district of the region at the close proximity to the border with Afghanistan. This terminal provides transport and logistical services, including customs checks, loading and offloading, goods storage at warehouses of the terminal, as well as processing of transit cargo for intermodal transportation (rail - truck) to and from Afghanistan highways [107].

Transportation part of two districts is going to describe the sector by analyzing public-private vehicles share, public transport provision, number of private vehicles per 1,000 population and the conditions of roads.

According to the Khokimiyat of Angor district, there are 2,149 vehicles in 2020 to serve the local population, including private vehicles and vehicles of legal entities and/or enterprises. Of these, 75% of transport is private, 25% belongs to enterprises [89]. There are 7,657 vehicles in Termez district to serve the local population. Of these, 90% of transport is private, and 10% belongs to enterprises (see Figure 152) [90].

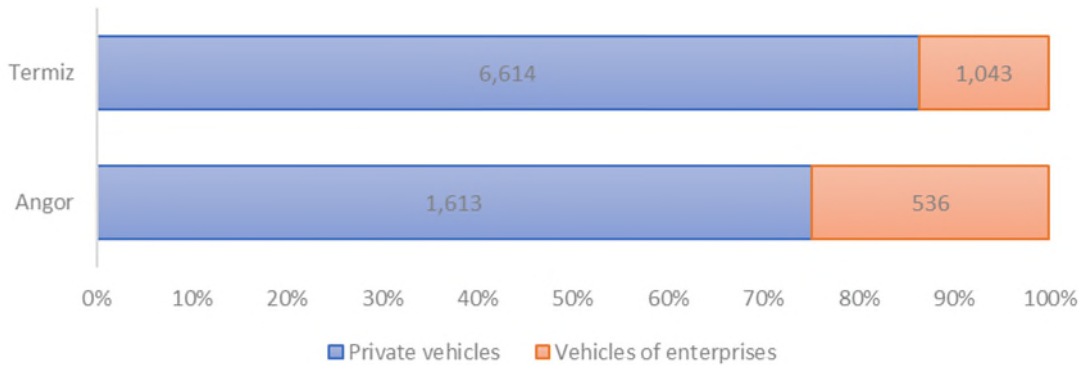


Figure 152: Private vehicles and vehicles of enterprises distribution in Termez and Angor districts [89] [90]

Another interesting indicator is the number of people per vehicle which is used as a public transport (taxi, bus, minibus). Public transport system in both Termez and Angor districts is operated by private organizations. According to the data of the Khokimiyat of Angor region, there are 11 working enterprises with a total of 368 vehicles to serve the local population. Most of them are light vehicles (taxi services with maximum capacity of 7 passengers) in the amount of 348 units. Also, there are 6 buses and 2 minibuses. Overall, there are 366 people per unit of transport, with the calculation of the total population of the district being 134,700 people.

In Termez district, there are only 2 engaged enterprises with a total of 48 transport vehicles to serve the local population. Most of them are automobiles (taxi services) in the amount of 40 units. The number of buses is 8 units of minibuses. This complicates the maintenance of transport by most of the population, since there are 1,650 people per unit of transport, with the calculation of the total population of the district being 79,200 thousand people.

However, number of people per private car could explain the significant difference between the ratios of public transport. In Angor per 1,000 people own 11 private cars, while in Termez, it is 83. Therefore, people in Termez depend less on public transports in their daily needs, while Angor population mostly depend on public vehicles.

Another important public asset to know about the social condition is road infrastructure. A society relies on a good road system as the basis to access jobs, health care, education and social connections. The total length of internal roads in Angor district is 604.3 km of which only 28 km of the road was repaired in 2020 and 379.6 km of the road requires further repair. In Termez district, the total length of internal roads is 716.2 km, of which only 9.5 km of the road were repaired in 2020 and 274 km of the road requires further repair. It can be concluded that in Angor 30% while in Termez 60% of internal roads require repair (see Figure 153).

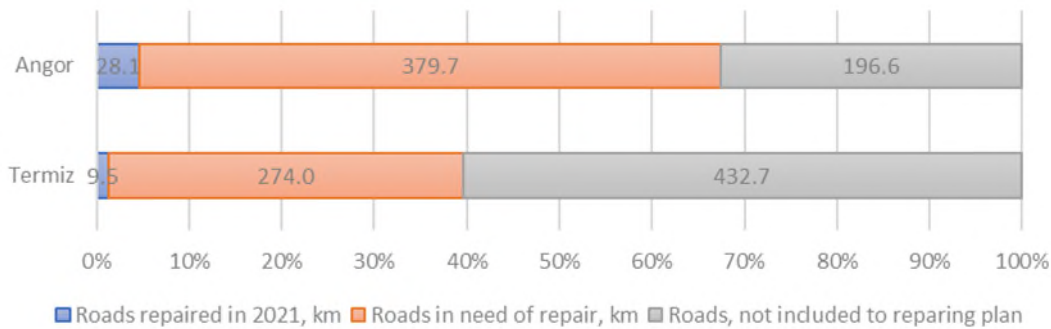


Figure 153: Total condition of roads in Termez and Angor districts in 2020 [89][90]

As a conclusion, the roads which need repair prevails the roads with good conditions. Public transport is more used by Angor population than Termez. Understandably, population in Angor owns fewer private car (11 : 1,000) comparing to Termez (83 : 1,000) even though its population is more than Termez for 60%.

16.2.7.5 Electricity and Energy

Electricity

Uzbekistan is capable of meeting its energy needs from its own energy resources. The total installed capacity of power plants in Uzbekistan is more than 14,000 MW.

Uzbekistan's plans for energy are aimed at increasing the share of renewable energy sources by 2030. Within 10 years, the government plans to implement the major investment projects to increase electricity generating capacity. It includes the construction of new power units with total capacity of about 27 GW for a total of about 35 billion U.S..

In accordance with a Resolution of the President of the Republic of Uzbekistan PP-4477 of 4 October 2019 on the strategy for further development and reform of the electricity sector of the Republic of Uzbekistan, the Ministry is developing a programme for the development of generating facilities for the period up to 2030 (see Table 208). Uzbekistan generated 61.6 terawatt hours (TWh) of electricity in 2019, mostly from natural gas (>85%).

Table 208: Uzbekistan generating capacity targets to 2030 [109]

Indicator	Forecast generating capacity increase (MW)					Share of electricity generation (%)	
	2019	2020	2021	2022	2023-30	2018	2030
Traditional energy	1,050	1,807	1,777	2,259.4	10,910.2	90	75
Including capacity withdrawal	-	1,060	320	740	4,280	-	-
Total renewable energy sources	24.1	119.8	504.5	542.2	7,387.6	10	25
Total	1,074.1	886.8	1,961.5	2,061.6	14,017.8	100	100
- hydropower	24.1	119.8	204.5	42.2	1,487.6	10	11.2
- solar power	-	-	300	400	4,300	-	8.8
- wind power	-	-	-	100	1,600	-	5

Energy

Uzbekistan is one of the world's largest natural gas producers, annually producing around 60 billion cubic meters (bcm) (see Figure 154). In 2019, production totaled 60.4 billion cubic meters (bcm) [78].

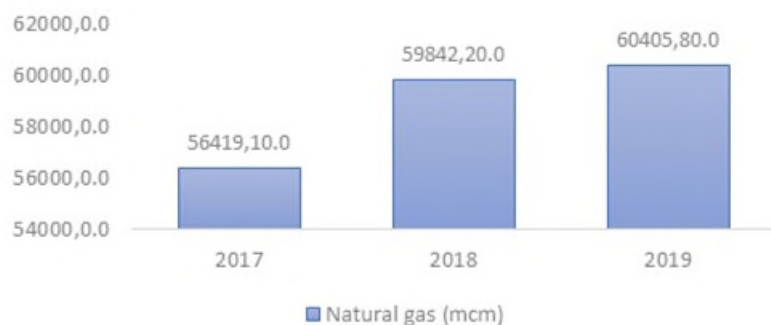


Figure 154: Natural gas production in million cubic meter in Uzbekistan, 2017-2019 [78]

In 2019, gas condensate production amounted to 2.1 million tones (Mt) – equal to three times the conventional oil production in the same year. Conventional oil production peaked in the early 2000s and has since declined steadily [78].

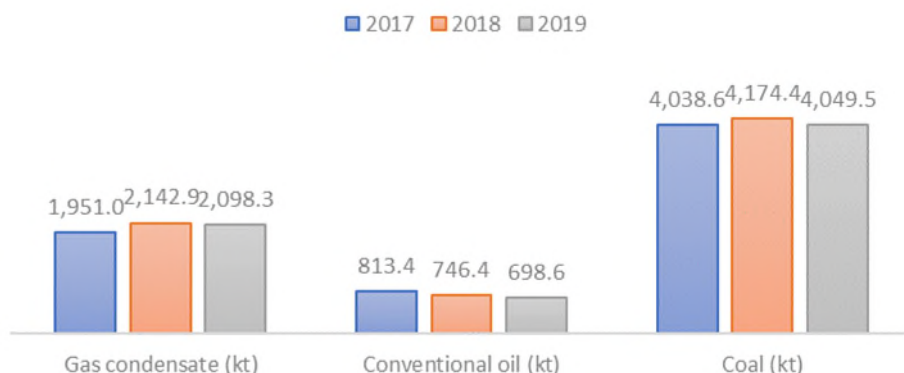


Figure 155: Uzbekistan energy production in kiloton, 2017-2019 [110]

Uzbekistan's most important export destinations for energy commodities are China, Russia and Kazakhstan. Since the early 2000s, Uzbekistan has been exporting 10-15 bcm of natural gas annually. The relevant values are as follows: 15 bcm in 2018: 8 bcm to China; 4.5 bcm to Russia; 2.5 bcm to Kazakhstan; and 500-550 mcm to other Central Asian countries [110].

The following table describes supply rate of Termez and Angor districts in electricity, gas, drinking water and sewage system, in district level.

Table 209: Level of provision of the population with electricity, natural gas and drinking water supply [89][90]

	Termez	Angor
With electricity (%)	100	100
per capita electricity consumption (1 kW per day)		3-4
With natural gas (%)	100%	100%
per capita natural gas consumption (m³ per day)	1.5 m ³	1.45 m ³
- in summer (normally)	1 m ³	0.05/0.04
- in winter (normally)	4 m ³	1.6/0.9
With drinking water supply (%)	71%	11%

According to the data provided by hokimiyats, both districts are entirely supplied with electricity. However, in Angor 48% of the electric power transformers and 42% of power lines require repair. In Termez, the situation is better requiring repair of 25% and 20% of transformer and power lines respectively (see Table 210).

Table 210: Power supply condition in Termez and Angor [89][90]

	Termez		Angor	
	Total	Requires repair	Total	Requires repair
Electric Power Transformer	244	63	263	126
Power line length, km	735.2	150.1	992.92	424.3

Having 29 mahallas with total 27,062 households of Termez District, 11 of them or 6,490 households has been supplied with gas supply system [90]. However, 20,572 households of all mahallas where gas has not been supplied (72% of total households), limited number of liquefied gas cylinders have been provided. In Angor district, there are 37 mahallas with 23,344 households, out of which 2 mahallas with 1,255 households were entirely, 2 others with 1,021 were partly supplied with gas [89]. Overall, 35 mahallas or 21,068 households (90% of total households) use liquefied gas cylinders for their everyday chores including cooking, to warm the water for washing dishes or having a bath.

Table 209 has been provided by Angor and Termez Hokimiyats, and it shows that provision with gas is 100% in both Angor and Termez. Knowing the fact that has been provided in above paragraph which is also taken from the khokimats' passports, Districts with 100% meant provision with gas no matter if it is from gas supply system or liquefied gas cylinders.

Access to the drinking water, 71% of the population or 56,300 people have drinking water supply for daily use. While in Angor it is only 11% with 15,466 people while rest of the population consume water from springs, boreholes (except wells), rivers, streams and canals. Neither of the districts have sewerage supply system [89][90]

16.2.8 Income sources

According to data of State statistics in 2020, the gross domestic product (hereinafter - GDP) of the Republic of Uzbekistan amounted to 580,203.2 billion soums [13]. When calculated in US dollars at the average exchange rate for the reporting period (average exchange rate for 2020 – 10,055.8 soums), nominal GDP amounted to 57,698.5 million US dollars. In 2020, GDP per capita amounted to 16,949.1 thousand soums (in the equivalent – 1,685.5 USD).

The gross value added of the Uzbek economy is fairly evenly divided among (a) agriculture, (b) industry, and (c) services (see Figure 156). Agriculture was dominant in the GDP since the independence of the country (see Figure 156).

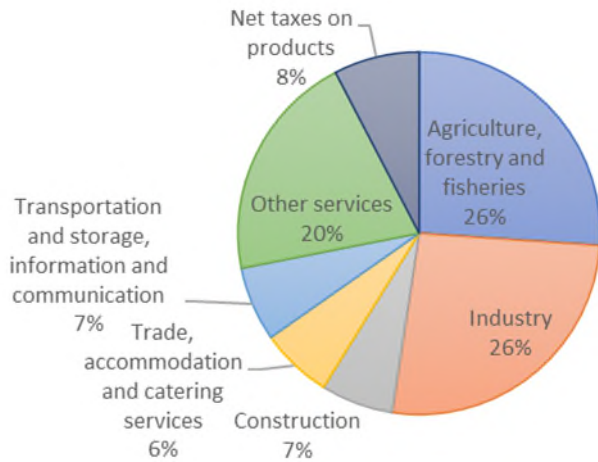


Figure 156: GDP by sectors of Uzbekistan in 2020 [78]

There has been a structural shift in non-agricultural production, whose share of GDP was 32.4% in 2018 versus 50.0% in 1993–1995. The share of services increased from 28.1% in 1993 to 35.6% in 2018, while that of manufacturing grew from 17.1% to 26.3% over the same period (see Figure 157).

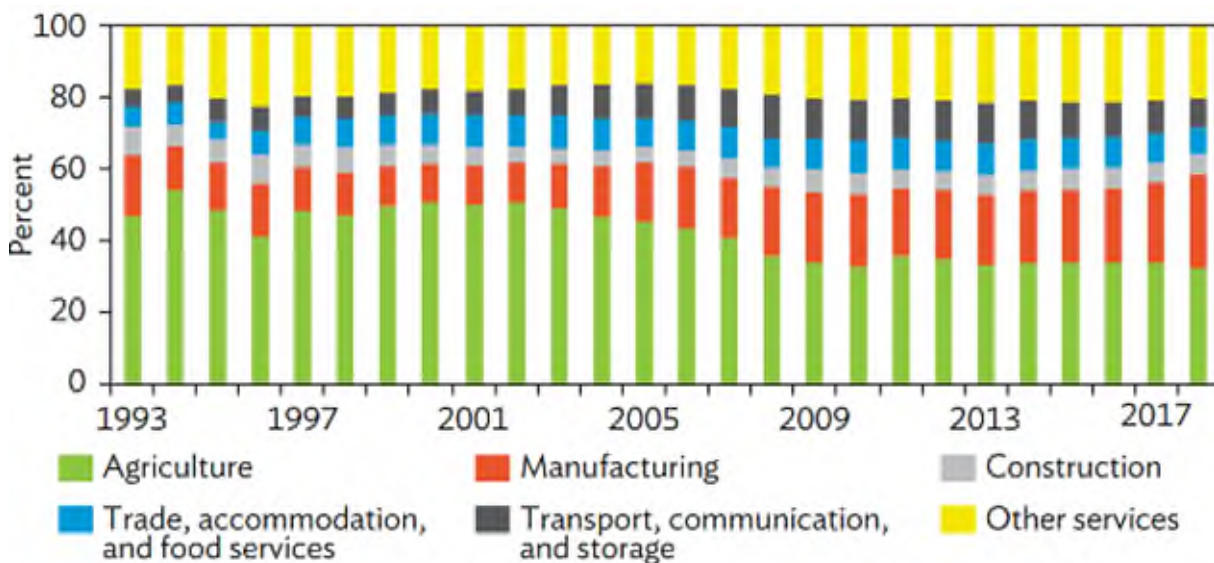


Figure 157: Asian Development Bank (ADB) Statistical Data Base System

In terms of income levels, Uzbekistan has remained in the lower-middle income group since 2001 (having briefly been classified as a low-income country during 1998–2000).

Poverty in country level in 2012 was 20% in average country level. However, it was higher than the national average in several Uzbekistan's provinces, especially in the remote and sparsely populated rural provinces including Surkhandarya, where most households are employed in agriculture, and few receive remittances.

In the province level, the gross regional product (hereinafter - GRP) of Surkhandarya amounted to 16 949.1 billion soums in 2021 [78]. In US dollars at the average exchange rate for the reporting period (average exchange rate for 2020 – 10,055.8 soums), nominal GDP amounted to 1,685 million US dollars. In 2020, GDP per capita amounted to 9 040,6 thousand soums (in the equivalent – 899 USD).

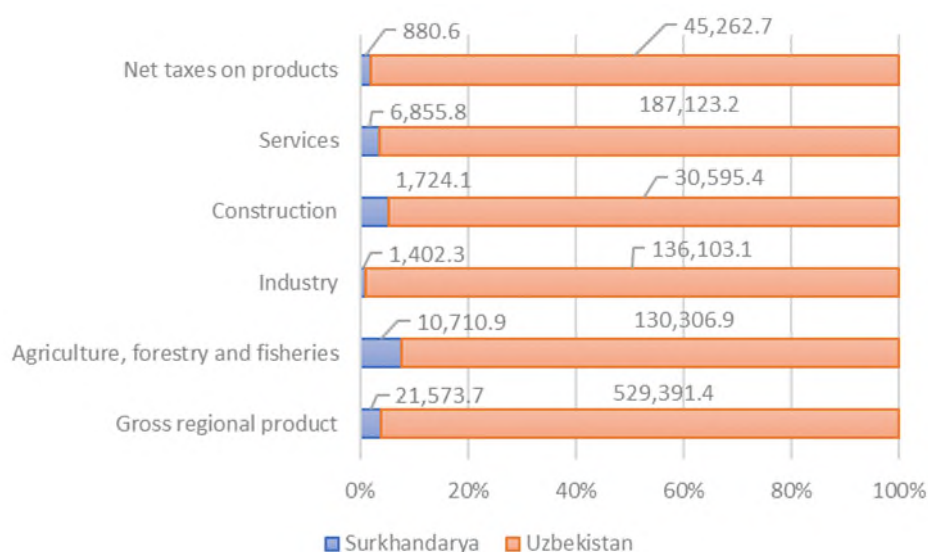


Figure 158: Share of GRP of Surkhandarya by sectors in GDP of Uzbekistan in 2019, in billion UZS [78]

From the comparison of Figure 158 and Table 211, it can be roughly concluded that Angor and Termez together contribute to 15% of its economy. In Termez, foreign trade turnover in 2020 was 44 million US dollars, of which exports – 19.5 million US dollars, imports – 24.5 million US dollars. In Angor, foreign trade turnover in 2020 was 19.5 million US dollars, of which exports - 14.2 million US dollars, import - 5.3 million US dollars.

Table 211: Key macroeconomic indicators in Termez and Angor districts in 2021 [89][90]

	Angor 2020 (billion UZS)	Termez 2020 (billion UZS)
Industrial products	123.6	112.0
Consumer goods	71.5	39.1
Gross agricultural output	1,105.7	478.5
Investments in fixed assets	255.6	381.3
Construction works	187.1	258.6
Retail turnover	533	137.9

	Angor 2020 (billion UZS)	Termez 2020 (billion UZS)
Services	257.9	198.1
Foreign trade turnover (million USD)	19.5	44
Export (million USD)	14.2	19.5
Import (million USD)	5.3	24.5

Uzbekistan's economic growth has been supported by the expansion of private sector businesses, and accelerated by government efforts to transition to a market-based economy. Such private sector development is critical for a smooth shift from state-driven to private-sector-led economic growth in which small business entities play a key role. In Termez, small business entities – 1,901 (including: 686 farms). In Angor, number of small businesses – 1,317 (including: 288 farms). Specifically, these SMEs importance in the economy of the districts could be explained in the numbers, for example, 92% of all industry products and 85% of agriculture products were produced by them in 2020 [89][90].

Table 212: SMEs operating in Angor and Termez districts in 2020 [89][90]

Type of SME	Angor	Termez
in agriculture	393	376
in the forestry	9	
in the industry	213	265
in construction	143	228
in trade	334	398
in the service of transportation and storage	21	67
in the service of living and eating	73	126
information and communication	8	
provision of health and social services	18	
in others	281	116
Total SMEs	1,493	1,576

According to Table 212 one can draw a conclusion about the sources of income of the districts. 'Agriculture' is the dominant income sector in both districts, which is followed by sector 'services'. Summing up, Angor region is more focused on agriculture compared to Termez, while the former is less industrialized than the latter.

16.2.9 Labor Force

16.2.9.1 Labor Force Indicators

Generally, there are three key indicators of market activities. The first indicator is unemployment rate which is probably the best-known labor market measure. Moreover, this rate is useful for the underutilization of the labor market. It usually indicates the inability of economy to create the new job opportunities for those people who want to work but are not doing so, even though they are available for employment and actively seeking work. The second indicator is labor force participation which represents the relative amount of the labor resource available for the production of goods and services [111]. Another key indicator is the employment-to-population ratio. According to the International Labor Organization (ILO) the employment – to – Population ratio as proportion of a country's working-age population that is employed. A high ratio means that a large proportion of a country's population is employed, while a low ratio means that a large share of the population is not involved directly in market-related activities, because they are either unemployed or (more likely) out of the labor force altogether [112].

16.2.9.2 Unemployment rate

Uzbekistan was one of only three economies in the Europe and Central Asia (ECA) region that had a positive economic growth in 2020. Despite the global impact of the COVID-19 crisis, reforms implemented in the economy supported growth in 2020. According to the data retrieved from Ministry of Employment and Labor relations the unemployment rate in Uzbekistan remained unchanged at 10.50 percent in the first quarter of 2021 from 10.50 percent in the fourth quarter of 2020 [113]. For the same period in 2019, the unemployment rate was 9.1 percent. The total number of people who is seeking for job is 1.9 million (the unemployment rate for ages 16-30 is 20.1%, and the unemployment rate for women is 17.4%). The positive trend in unemployment during the last year occurred due to spread of COVID -19 infection and measures that the GoU took against virus.

In regard to Surkhandarya province unemployment rate was 11.1 percent in the fourth quarter of 2020 [49]. Moreover, the total number of unemployed people in the region estimated to 3,100 individuals. But this figure is slightly better in Termez district with 10.6 percent while this this rate in Angor district was 11.2 percent accordingly (see Figure 159).

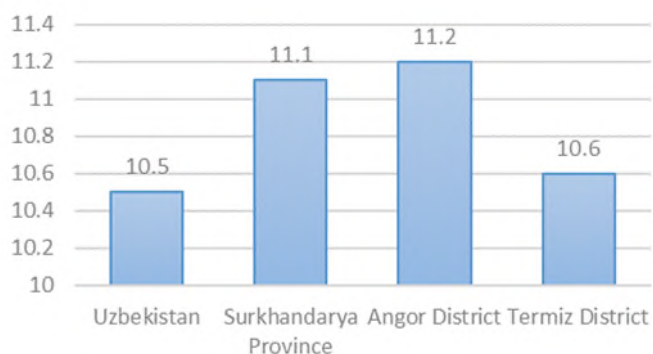


Figure 159: Unemployment rate in Uzbekistan, Surkhandarya province and Angor, Termez districts [114][115]

16.2.9.3 Labor force participation rate

As labor force participation rate measures the number of people who actively seeking for job or those who already employed, it omits the part of population that 16 or older. For example, the employment to population ratio is depend on working age population which according to international standards all person aged 15 or older but this value differs in Uzbekistan where working age population starts from 16 aged population. This rate especially interesting to the government and investors to analyze and anticipate the potential labor force to the planned programs and projects in the field of industry, service and business. Therefore, industrialization projects tend to increase participation by creating employment opportunities in labor markets that attract people to leave household production roles or employment in the informal economy. This is particularly important to the developing countries as Uzbekistan to increase its labor participation rate.

Based on statistics from 2020, labor force participation rate in Uzbekistan was 85.5 percent. For comparison, this value for Kazakhstan was 69.2 percent while Kyrgyzstan has 53 percent [116]. However, the world average in 2020 based on 181 countries is 60.32 percent. When it comes to the province level, Surkhandarya had 70 percent while Angor and Termez districts 86 and 82 percent respectively (see Figure 160) [114] [115]. The high labor participation rate in Uzbekistan can be as a result of reform in education sector because more educated population most likely remain employed.

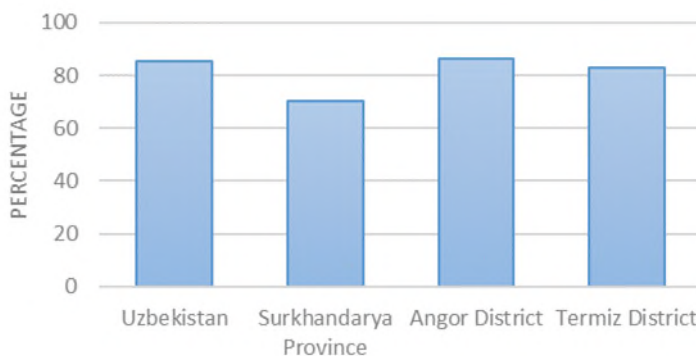


Figure 160: Labor force participation rate in 2020 in Surkhandarya province and Angor, Termez districts [114] [115]

16.2.9.4 Employment to population ratio

The employment to population ratio or in other words the percent of population which is currently employed in Uzbekistan is accounted around 77.1 percent. Since employment to population ratio is depend on working age population which according to international standards all person aged 15 or older. However, this value differs in Uzbekistan where working age population starts from 16 aged population. Based on available statistical data, about 77 percent of working aged population is employed or 14,926,300 individuals out of 19,277,600 have a job (see Figure 161). For comparison, Iceland's country employment rate was at 83.8 percent in 2020 the highest of any OECD country [117]. Despite high employment to population ratio within country the value for Surkhandarya province was at 64.4 percent. Relatively high unemployment rate within the province has affected to the province population ratio with 1,104,100-person total and from them 122,000 individuals unemployed.

In regard to district level, the percentage of employment in Angor and in Termez in 2020 was 74.9 and 77.5, respectively. Again, the unemployment rate in relation to the working-age population is about 11 percent in Angor district and same relation for Termez is 10.5 percent.

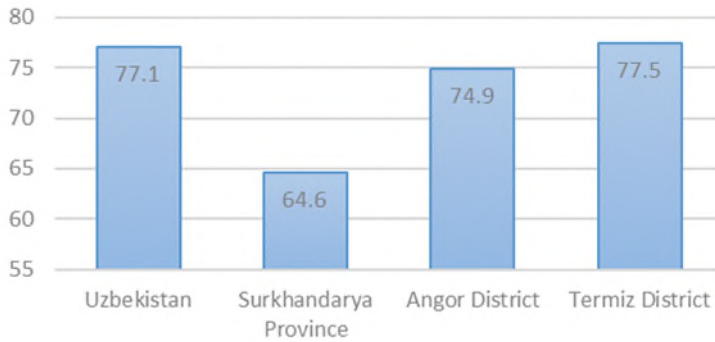


Figure 161: Employment to population ratio in 2020 in Surkhandarya province and Angor, Termez districts [114] [115]

Although, the given above figures and numbers seem positive in employment point of view but it should be noted that the reliability for those numbers and figures is the subject to the scrutiny review.

In the project districts, the unemployment rate is quite high, on average 11% of the workable population, for Angor district this figure is 11.2%. And in Termez district, the unemployment rate is 10.6%. Moreover, unemployment among women is 13.2%. It is worth to noting that an acute shortage of jobs, informal employment, low wages from one hand and bad working and labor conditions on the other hand forces rural area forces to become migrant worker in other countries.

The level of official employment is especially low among women, in Surkhandarya province only 7% of women have jobs in enterprises and organizations of the non-agricultural sector. There are also very few entrepreneurs among the employed population. The problems of high unemployment are relevant for both regions. In all areas, female unemployment prevails. Another negative feature of the labor market of these areas is the high level of the economically inactive population, especially among women. In Surkhandarya province, every fifth woman did not work and did not look for a job. Perhaps some of these women stopped looking for a job, because they lost hope of finding a job.

16.3 Additional Social Site Survey

As mentioned earlier, there were some limitations regarding the social site survey conducted in July 2021 (see 16.4.1.5). During the site surveys, the household survey ratio was 22 % of the targeted sampling size. Besides, focus groups were not defined well hence focus group discussions were not performed in line with international standards and practices. In addition, vulnerable and disadvantaged were not adequately identified during the site survey.

Gender roles and differences, information on ethnicity and religious affiliation, and disaggregated gender baseline data are not properly collected. It should be noted that as described in Section 3, indigenous people are scoped-out of this study.



Therefore, additional social site survey is being performed in July-August 2022 to collect the missing data listed above and elaborate the social baseline of the project area. In addition, although the first site survey findings revealed that there are no legal or informal users within the project area, additional investigations will be conducted to demonstrate this situation.

It should be noted during the stakeholder consultation meetings and household questionnaires, no objections or major concerns regarding the project execution are arised. Feedback are collected and relevant mitigative measures are already addressed in this ESIA Report.

Results and their analyses of the additional social site survey including focus group discussion meetings will be presented in the Final ESIA Report. On the other hand, if outcomes of the additional social site survey will bring the necessity to define additional mitigation measures, these measures will be addressed in the Final ESIA Report. The questionnaires regarding the additional social site survey is presented in Attachment E.

Additional social site survey is constituted of household survey, local administrator survey, interviews with governmental institutions and focus group discussion. All of the interviews and surveys was conducted face to face and neither online meeting nor interview by phone were needed. Details and results of the surveys were given in the below sections.

16.3.1 Household survey

The household survey was conducted on mahalla level which was located within 0-10 km Project impact area. The residents of the area are the stakeholders of the Project as Project Affected Persons (PAPs). There were 16 mahallas and 4 of them were affiliated to Termez and the remaining parts were in Angor District.

For effective implementation of the household questionnaire, 1 interviewer training and 1 pilot study were conducted before starting the household survey. In accordance with the general condition of the interviewers and pilot survey results, a household questionnaire was revised, once more.

The Household survey started on the 29th of July and ended on the 1th of August, 2022. During the household survey, 7 interviewers and 1 field coordinator worked in the field. The average age of the household survey team is 29.5 and the gender distribution is equal between males and females. The total number of completed household questionnaires is 412. 115 of them have been completed within 4 mahallas of Termiz district.

One of the main limitations of the household survey was taking photographs. Most of the respondents gave permission to take photographs neither themselves nor their homes. Another limitation was related to impossible conditions for conducting the survey without permission of local authorities, who were the deputies of khokim in the mahalla level. In addition, high temperatures and wind-storm are forced to interrupt and/or delay.

As a preliminary evaluation of the household survey, the main expectations were related to employment opportunities. Some of the concerns were caused by less acknowledgment of the Project's technical details, which was related to possibility of pollution in air and water. Questions were especially on kick-off date of the Project and the number of salaries, which will be paid to the local workers by the company.

16.3.2 Local Administrator survey

The local administrator survey (which can be also said as the mahalla reis survey) was conducted on the mahalla level with mahalla reis. Mahalla reis are Project's stakeholders as in the interest group. The mahalla reis survey started on the 29th of July and ended on the 4th of August, 2022. The survey was conducted only by the team leader.

The total number of completed mahalla reis questionnaires is 16. 4 of them were in Termiz and the remaining 12 were in Angor district.

One of the main limitations of the survey was related to getting appointments for interviews. Because mahalla reis had more than one responsibility at the same time and most of the mahalla reis had to be joined zoom meetings with khokimiyat's staff. The other was related to taking photographs after completion of the interview. None of the mahalla reis did accept taking photographs.

According to the general evaluation of the mahalla reis survey results, they have intensive expectations about the employment of unemployed young people who were living adjacent to the Project area. Similarly, they demanded also the installation of small ateliers within the boundaries of their mahallas. As a result, none of them had a negative opinion about the Project and they support to kick-off of the Project as soon as possible.

16.3.3 Interviews with Governmental Institutions

Between 27th of July and 3rd of August, 2022 25 interviews were realized by Assystem Envoy supervisor, while household survey and local administrator survey were conducting. At the beginning of 2nd week of August, the planned 4 stakeholder interviews with governmental institutions and non-governmental organization will be tried to complete at the same week.

According to preliminary desktop studies, governmental institutions have been defined within interest group. During the interviews, needed to additional interviews with other interest group such as local administrators and businesses. For example, 2 additional interviews were conducted with mahalla reis of Kattaqum and Uchkizil, which are the nearest settlements to the Project area border. The in-depth interviews with mahalla reis were conducted by unstructured questions. The main aim of the in-depth interviews was to collect detail information about general socio-economic conditions, vulnerable groups and opinions about the Project. In addition, 3 in-depth interviews were also conducted with a farm owner, an owner of fishery area and the owner of the facility which is the nearest facility to the Project area. As an in-depth interview was conducted with an archaeologist who was the staff of Termiz Archaeological Museum. The remain parts of all the interviews were conducted with responsible departments of the governmental institutions such as education, health, labour, agriculture, irrigation, municipal affairs, cadastre, cultural heritage etc. Distribution of the realized interviews by stakeholder categorization, number and interview techniques are listed in below;

- Interest Group/ Governmental Institutions_ 17 semi-structured interviews with governmental institutions
- Interest group / Local Administrators_ 2 in-depth interviews with mahalla reis,
- Interest Group/ Governmental Institutions_3 in-depth interviews with responsible staff of governmental institutions,
- Interest group /Business Owners_3 in-depth interviews with business owners

Furthermore, there is no non-governmental organization (NGO) within Angor. The detailed field survey will be conducted to reach representatives of NGOs in Termez, if any.

There is only one limitation of the survey was related to getting appointments for interviews, similar to mahalla reis survey. All of the interest group have positive opinion about the Project due to the need of the region both to additional power supply and employment opportunities. They also wanted to get support to Project owner, if they will demand. As a summary, basic socio-economic problems are caused by unemployment of people who are in working age separation. Therefore, their expectations were clustered on local employment demand for both unskilled and semi-skilled workers.

1. Focus Group Discussion

At first, focus group discussion will be targeted to access to Project's stakeholders as in vulnerable group. The identification of vulnerable groups can be varied and differentiated in accordance with socio economic conditions of the region. In this case, identification of vulnerable groups revised according to the preliminary results of the other surveys including household, mahalla reis and governmental institutions. Consequently, the vulnerable groups and their details are given in below;

Number of Planned FGDs	Vulnerable Group	Gender	Age	Livelihood Activity	Location
1	Women	Female	Between 18-45 ages	No criteria	Termiz
2	Unemployed people young people	Male and Female	Between 18-45 ages	Unemployed and/or engaged in daily /seasonal works	Termiz and Angor
2	Fishermen	Male or Female	Between 18-70 ages	<ul style="list-style-type: none"> Engaged in any type of fishery activity (angling / boat fishing/net fishing/aquaculture production in artificial and/or natural pool) Conducting fishery activity for any purpose (domestic /trade /recreation, etc) Fishermen and/or fish facility owner and/or worker in a fish facility 	Termiz and Angor
2	People engaged in Agriculture and/or in Husbandry	Male and Female	Between 18-70 ages	<ul style="list-style-type: none"> Engaged in any type of agriculture and/or husbandry activity Conducting agricultural and/or husbandry activity for any purpose (domestic /trade /recreation, etc) Domestic producer /Facility owner /worker in 	Termiz and Angor

Number of Planned FGDs	Vulnerable Group	Gender	Age	Livelihood Activity	Location
				a facility / daily or seasonal worker	
7	Total				

Out of this table 1 FGD has been realized in Angor. Demographic profile of the attendances to FGD is given in below.

Demographic Profile of the Attendances to FGD			
#	Age	Mahalla	Occupation
1	49	Angor /District Centre	Deputy Khokim of Women Issue in Angor Khokimiyat
2	42	Angor /Ozbekistan	Responsible of Mahalla Women Issue
3	33	Angor / Zang Gilombo	Housekeeping
4	28	Angor / Zartepa	Farmer at household level/ Unemployed
5	43	Angor /Ozbekistan	Farmer at household level/ Unemployed
6	38	Angor /Navroz	Temporarily Cooker
7	34	Angor / Dehqonittifoq	Temporarily Cooker (3days in a week)
8	30	Angor /Ozbekistan	Farmer at household level/ Unemployed
9	45	Angor /Navroz	Farmer at household level/ Unemployed
10	39	Angor /Zartepa	Deputy Khokim of Women Issue in Zartepa
11	33	Angor /Zang Gilambop	Deputy Khokim of Women Issue in Zang Gilambop
12	39	Angor /Kattaqum	Farmer at household level/ Unemployed
13	38	Angor /Kattaqum	Deputy Khokim of Women Issue in Kattaqum

Many of notes recorded during the FGD, however main topics are grouped in below;

- Opinions_Positive,
- Expectations_Employment in daily shifts / Salary_Minimum not defined. 2.000.000 is average
- Concerns_ None
- Suggestions_Improvement on training areas within MonoCentre

- Questions_Existence of protection border surrounded Project Area

16.4 SOCIAL IMPACT ASSESSMENT

16.4.1 General Social Aspect

This chapter of the study describes the methodology of the baseline socio-economic study, including the methods of sampling, data collection, data types, research approaches used, and data collection time period.

Based on the goals and objectives of the study, the study focuses on:

- Data acquisition to assess socio-economic characteristics of the project located area and households affected by the project;
- Establishment of baseline indicators for the project of construction of the Project;
- Data acquisition to identify community's thoughts and attitudes about the Project;
- Assessment of the stakeholder engagement and information disclosure of the stakeholders about the project organization in the area;
- Analysis of the data for identification of adverse social impacts and risks for various social groups, including vulnerable groups;
- Analysis of the data to propose mitigation measures for adverse impacts and risks for various social groups, including vulnerable groups in order to avoid or reduce the impact;
- Development of grievance redress mechanism.

16.4.1.1 Methodology of the study

Initially, the preliminary phase of the study was carried out in selected areas (Angor and Termez) to collect preliminary information and conduct pilot interviews. The collected information was utilized to develop study tools, refine the questionnaire, identify focus group mahallas, make a sampling, evaluate possible challenges during the field work and identify the ways to overcome them.

. The study tools (questionnaires) have been developed based on the selected methods of collecting information:

- For quantitative survey technique, two questionnaires were developed: for households and for local authorities (in mahalla level). Consequently, the questionnaires were tested as a pilot study.
- For qualitative survey technique, list of questions for focus group discussions (FGD) has been developed.

16.4.1.2 Data Type and Sources

In order to conduct socio-economic assessment of the project, the primary and secondary data are used (see Figure 162). Primary data is the data that is acquired by experts straight from sources by using different data collection methods while secondary data is the data that has already been collected by other parties that are readily available for consultants to utilize in the study. In this study, secondary data was obtained from various sources. Such data include official state statistics, district and province passports prepared by khokimyats and local authority management organizations, including mahallas. The list of secondary data collected and used included the following data:

- Size of population, households and gender distribution in three levels: province, district and mahalla (State statistics, local authorities);
- Social and public utilities infrastructure (State statistics, data from Ministries of Health, local authorities);
- Labor resources, employment rate, labor migration (State statistics).

Along with state statistical data, existing literature including journal articles, web-articles and legislative databases (lex.uz; norm.uz) were used.

Primary data is the outcome of questionnaires, stakeholder meetings and focus group discussions. There 3 questionnaires are developed to primary data collection: household questionnaire, local authority questionnaire, focus group meeting questionnaire (see *Annex 1. Questionnaire forms in Attachment E*).

Household and local authority questionnaires inquire mostly quantitative information about demography, economic conditions, educational levels, health, agriculture and stockbreeding, transportation, infrastructure and communication at the regional (districts) and local level (impact area: 0 – 10 km).

Particularly, baseline conditions of the impact area and region covers information about:

- Population structure (Population numbers, distribution, changes in years, religion, ethnicity, etc.)
- Economic structure (Economic indicators, activities, etc.)
- Access to Social Services (Health, transportation, education, etc. services)

Focus group meeting questionnaire inquire the answers to the questions about:

- Stakeholder engagement in the project;
- Disclosure of information;
- Revealing the positive/negative impacts of the project;
- Stakeholders' grievances related to the project;
- Benefits and problems of the area and the project;
- Expectations of the stakeholders from the project and their suggestions.

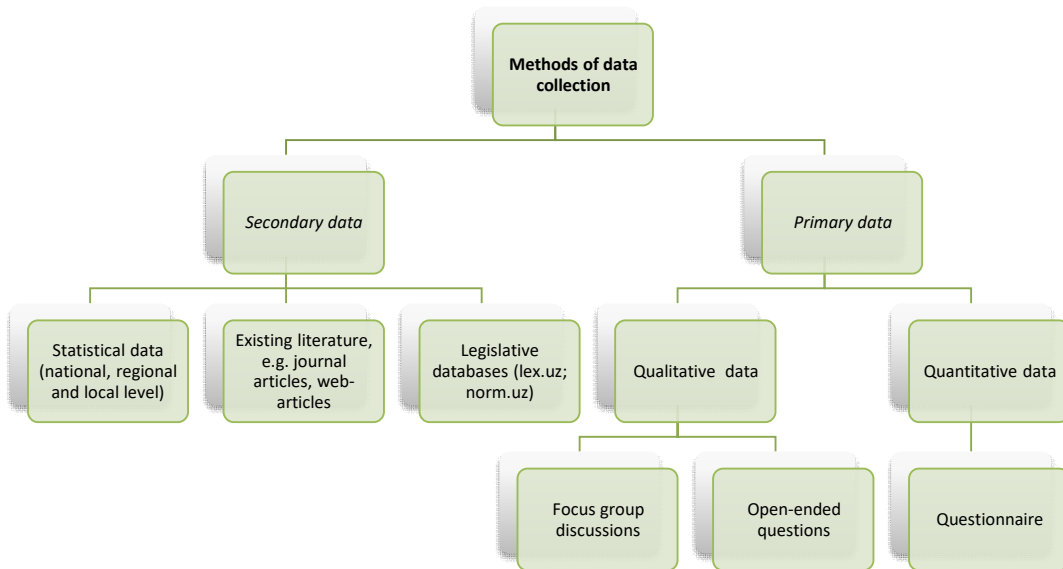


Figure 162: Data collection methodology of the social impact assessment of the project

16.4.1.3 Sampling

The sample size of the household survey was designed in such a way, so as to ensure representativeness of the data obtained for the project districts. The calculation of simple random sampling size was carried out according to the formula:

$$n = \frac{z^2 N \delta^2}{\Delta^2 N + Z^2 \delta^2}$$

where: n - is sampling size

N - is general totality

Z - is a confidence level

Δ - is margin of sampling error

δ - is general totality dispersion with normal distribution and relevant for study purposes.

Table 213: Determining sample size for the Socio-economic assessment

General totality	N	10,477
Confidence level	Z	1.96
Margin of sampling error	Δ	0.05
General totality dispersion	δ	0.5
Sample size	n	370

To conclude about the socio-economic condition of the study area, 370 survey was required to carry out in 95% confidence level with 5% margin of error. However, due to Covid-19 restrictions targeted sampling size couldn't be reached and 83 household questionnaires were surveyed. Details regarding the limitations are elaborated in Section 16.4.1.5.

When the data collection from households was finished, the results were discussed in the focus group discussion. The reason was cross checking the reliability of the survey results despite the few households inclusion.

What relates to the local authority questionnaire, out of 16 mahalla heads, 8 were interviewed in person. However, so called passports of all 16 makhallas were received from district khokimyats. The document included up to date information which was asked in the local authority questionnaire.


The general totality (number of households) was calculated according to state statistics and Mahallas.

In Uzbekistan, there is no a full list of households at the country, regional, or district level. The household lists are compiled by local self-governments - mahalla committees. From 8 mahalla heads, questionnaire on local authorities were carried out. Primarily, the purpose of the visit was explained and their willingness to participate in the survey was asked.

The households were selected directly in the mahalla committees, together with the head of mahallas. Accordingly, all household surveys were conducted in presence of mahalla representatives. By doing this, building trusts from respondents was achieved which reflected on collection of responses.

The households were selected from the updated list of households in the mahallas. Household heads or members the most informed on family and community problems and decision makers were selected as respondents. In each selected household, one respondent was interviewed at home by specially trained interviewers. The interviews were conducted face to face.

In total, 83 households were surveyed, including 57 households in Angor and 26 in Termez districts (see Figure 163).

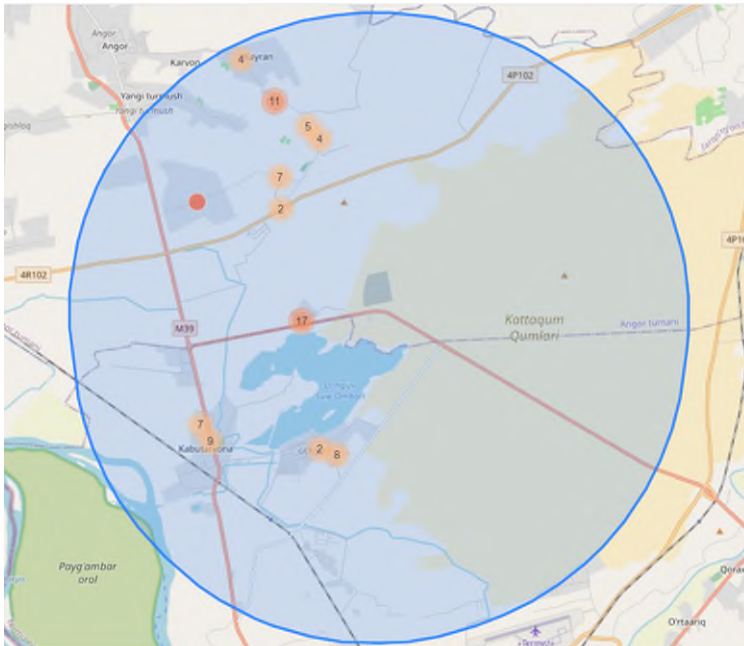

Location Map of Surveyed Sides



Surveyed side in Kayran mahalla, Angor



Surveyed side in Uchkizil mahalla, Termez

Figure 163: Map of surveyed households' location within 10 km of Project, retrieved from Kobo Toolbox


It should be noted that due to the limitations described in Section 16.4.1.5, focus group discussion meetings couldn't be performed in line with international requirements. During the qualitative phase, 2 consultation meetings were conducted with stakeholders, one in Termez district and one in Angor district.

The first consultation meeting was performed on 28 July 2021 (morning) in Termez with the participation of 24 people, mostly men. The second one was held on the same day's afternoon in Angor with the participation of 37 people.

16.4.1.4 Data collection and analysis procedures

In total, 4 specialists were involved in the field survey and to moderate and organize consultation meetings.

The results were recorded to Kobo Toolbox software which enabled to collect and store data offline, and being handy in challenging environments and demanding contexts. The software enabled creation of automatic database together with basic analysis, figures and maps (see Figure 164).

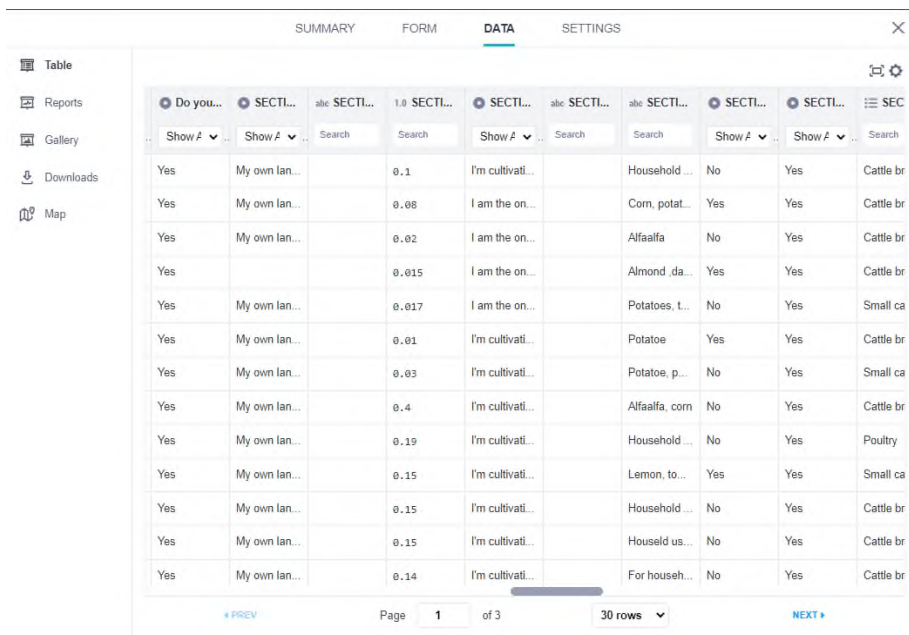

Do you...	SECTI...	I am the on...	Household ...	SECTI...	SECTI...	SECTI...	SECTI...	SECTI...
Yes	My own lan...	0.1	I'm cultivati...	Household ...	No	Yes	Cattle br	
Yes	My own lan...	0.08	I am the on...	Corn, potat...	Yes	Yes	Cattle br	
Yes	My own lan...	0.02	I am the on...	Alfaalfa	No	Yes	Cattle br	
Yes		0.015	I am the on...	Almond ,da...	Yes	Yes	Cattle br	
Yes	My own lan...	0.017	I am the on...	Potatoes, t...	No	Yes	Small ca	
Yes	My own lan...	0.01	I'm cultivati...	Potatoe	Yes	Yes	Cattle br	
Yes	My own lan...	0.03	I'm cultivati...	Potatoe, p...	No	Yes	Small ca	
Yes	My own lan...	0.4	I'm cultivati...	Alfaalfa, corn	No	Yes	Cattle br	
Yes	My own lan...	0.19	I'm cultivati...	Household ...	No	Yes	Poultry	
Yes	My own lan...	0.15	I'm cultivati...	Lemon, to...	Yes	Yes	Small ca	
Yes	My own lan...	0.15	I'm cultivati...	Household ...	No	Yes	Cattle br	
Yes	My own lan...	0.15	I'm cultivati...	Houseld us...	No	Yes	Cattle br	
Yes	My own lan...	0.14	I'm cultivati...	For househ...	No	Yes	Cattle br	

Figure 164: KoBo Toolbox database of the survey

The database of the survey which was developed through interviews was exported to XLSForms for using in MS Excel. Consequently, data cleaning was done for a standard statistical processing.

During the consultation meetings, the social impacts of the project have been identified through discussions.

Social impact of the project can be defined as the impact of an activity on a community and the well-being of individuals and households. As the purpose of the impact assessment is to identify and assess the potential social impacts associated with a project, impacts could be positive and negative. Types of social impacts include:

- Impacts on culture and ability to access cultural resources
- Impacts on communities' physical safety, exposure to hazards or risks, and access to and control over resources
- Impacts on communities' quality of life including liveability and aesthetics, as well as the condition of their environment (for example, air quality, noise levels, and access to water)
- Impacts on communities' access to, and quality of, infrastructure, services and facilities
- Impacts on communities' physical and mental health and well-being, as well as their social, cultural and economic well-being
- Changes to livelihoods, for example, whether peoples' jobs, properties or businesses are affected, or whether they experience advantage/disadvantage.

Here the impacts have been identified, and list of questions were asked in order to clarify the stakeholders' expectations on the project. Questions asked included following points:

- Defining the impacts of the project, clarifying if they are positive and/or negative
- Awareness about the project
- Main issues in the area, their prioritization

- Expectations from the project

16.4.1.5 Limitations

Limitations of the study are the characteristics of design and methodology that impacted or influenced the interpretation of the findings from the research. In the socio-economic study which was conducted in Angor and Termez districts of Surkhandarya province, several limitations were worth to be mentioned.

Sample size and access. Conducting a social survey in Termez and Angora districts from the calculated number of sample size of the households was accompanied by some challenges. Specifically, due to circumstances of COVID-19, some residents in these areas were worry of contact and risk of contracting or, in some cases, even infecting others with COVID-19 and refused to participate in a social survey and even refused to give contact numbers for a telephone survey.

Conducting online survey was also impossible due to the limited usage of an Internet network in this area. Also, the current situation of Termez region on the border with Afghanistan can be attributed to the difficulties in conducting a social survey. At the time of the survey, local law enforcement agencies were working to ensure the protection of borders and keep calm in the border area, which limited the actions when conducting the survey in settlements.

Lack of available and/or reliable data. Data related difficulties are always seen in the research. However, in this study collection of data was not difficult as before the survey, the communication with province and district hokimiyats were made to obtain data. However, reliability of them was under a doubt, as different sources indicated dissimilar statistical numbers. For eliminating this issue, the dissimilar data was verified by crosschecking with the relative authorities.

When conducting the social survey, a number of minor nuances were observed, precisely:

- some tenants did not always give proper information due to possible fear or reputation when their personal data including name was asked to be provided. They claimed that there were no problems in the area and that everything was enough for a comfortable life while others have described existing problems.
- gender specificities were observed. The survey responsiveness was different according to the gender of both interviewer and interviewee. Particularly, when the survey was conducted by a male interviewer in a male interviewee, the responses were quick and short and were not disclosed. Expressing a situation by answering income-related questions and revealing their illnesses may seem like a complaint to another man. Consequently, this could create a stereotype for those who considered themselves to be a dominant and powerful member of a cultured society. On the contrast, when a female interviewer conducted a survey in men, the opposite was observed, they opened more and openly discussed existing problems. Moreover, women respondents were more emotionally expressive both for gender interviewers.

16.4.2 Evaluation of the Field Survey Findings

16.4.2.1 Demography

In total, there are 36 mahallas in Angor and 29 mahallas in Termez district. Within the area of 10 km radius covers 16 mahallas from Angor and partly Termez districts. As Figure 165 demonstrates, the total number of population is 59.8 thousand and an average 3,742 people live in each settlement. According to the collected data during the survey, an average number of households is 654. The

largest number of households is located in the Kattaqum settlement (1,004 households), and the lowest - 342 households in the Zang Gilambop mahalla.

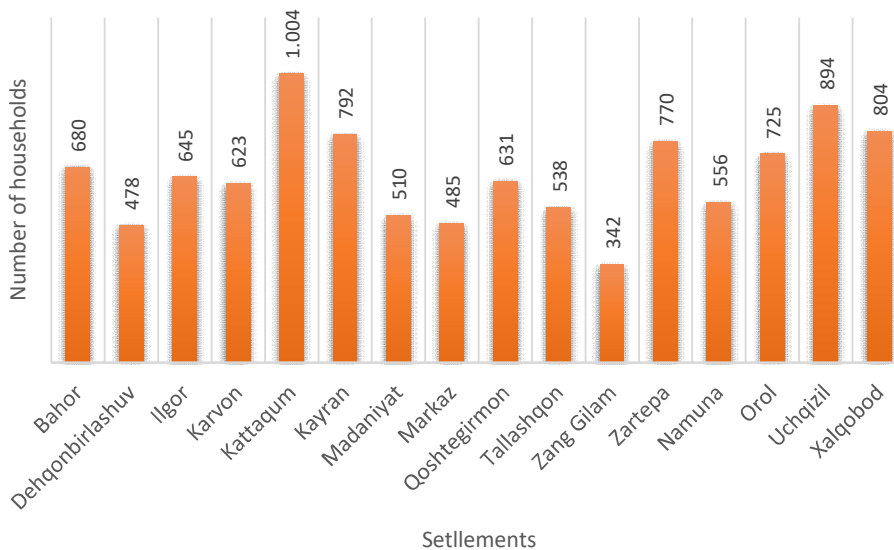


Figure 165: The number of households per settlement

As of July 2021, the total population living within 10 km radius area is about 59.8 thousand people or 2.2% of the province. 51 % of household members are men, and accordingly 49 % are women. This gender distribution is close to the gender structure of the households of the surveyed areas.

Furthermore, research team asked local authority officials about the age distribution of the households in their settlement. Overall, the results of the question are presented in Figure 166. Age disaggregation of the households was carried out on the basis of data from local authorities (so called "passports of mahallas").

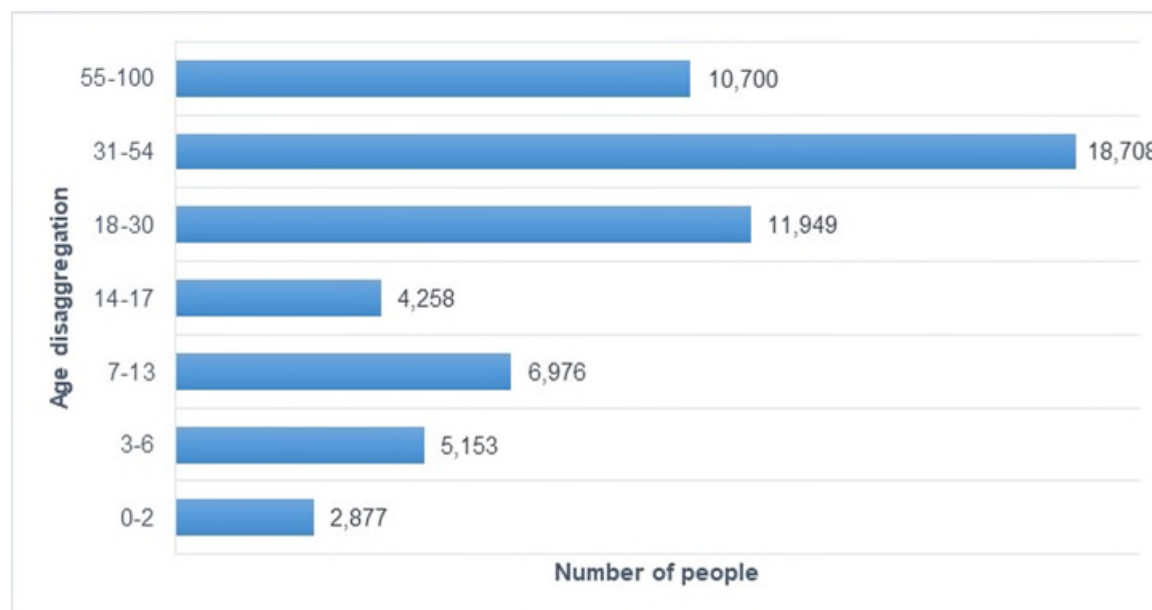


Figure 166: Age distribution of the households

The majority of the population in surveyed households, or 18.7 thousand people (30.9%), are middle-aged. Infants (0-2) in the project covered area are amounted to 2.8 thousand, or only 2.7% of the total. About 20 % of the total population in surveyed households are young generation under 18-30 age (see Figure 166).

Regarding the question "How has the settlement's population changed in last 5 years?", all 100% of the respondents answered that the population is increasing. Two factors were indicated as the reason, the first is a significant increase in the birth rate and another factor is an internal movements of people within the districts.

The results of a socio-economic study are based on an interview of residents of households in Angor and Termez districts. Primarily, the survey analyzed the socio-demographic characteristics of household members participating in the interview. Totally 83 households were interviewed, including 57 households in Angor and the remaining 26 are in Termez District. Specifically, the household survey covered the data on 474 people covered in households in both selected districts (see Table 214).

Table 214: Number of households and population covered in households

	Total	Angor	Termez
Number of households interviewed	83	57	26
Number of population covered in households	472	326	146

Out of 472 total surveyed households there are 239 (50.6%) of household members are men and accordingly, 233 of them (49.4%) are women. This gender distribution is close to the gender structure of the households of the surveyed areas. It should be pointed out that the expert group who conducted

a household survey among residents of Angor and Termez districts, stroked to approach men and women representatives equally without any exclusion and by referring to gender equality. In addition, 47 men and 36 women participated and represented their households during the survey (see Table 215).

Table 215: Covered residents by gender disaggregation in numbers and percentages

	Total	Male	%	Female	%
Household	83	47	57	36	43
Population covered in households	472	239	50.6	233	49.4

The average age of the surveyed households is 45.6 with the youngest respondent at the age of 19 and the oldest survey participant in 75 years old.

Table 216: Main Values

Mean (%)	Median (%)	Mode (%)
45.6	45.00	40.00

The survey showed that the average number of permanent residents in each household is around 5 persons whereas the total number of residents who live temporarily is 27 individuals or 6 percent of the total number of covered households in this survey (see Figure 167). It is worth noting that the majority of people who live temporarily are migrant workers. They usually leave their homes during the construction period in countries such as the Russian Federation, Kazakhstan and other countries.

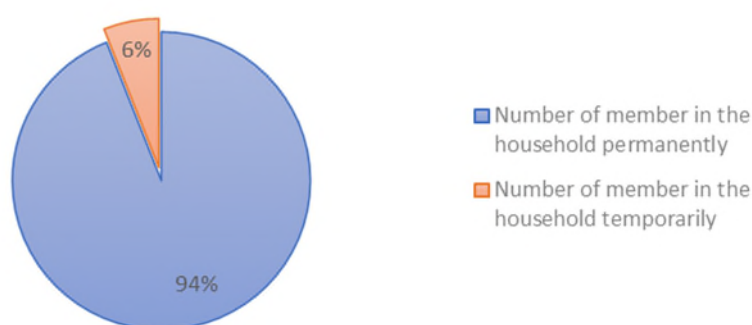


Figure 167: Comparison of permanent and temporary residents

Table 217: Numbers of permanent and temporary residents in detail including percentages

	#	%
Permanent	444	94
Temporarily	28	6
TOTAL	472	100

16.4.2.2 Economic Conditions and Income Sources

According to the results of local authority survey, 24.3 thousand people (41.5% of the total) are employed and 3.2 thousand people (only 5,5%) are recognized as unemployed. There are about 5.7 thousand pensioners, representing 10% of the population. As shown in Figure 168, there are about 865 residents with disabilities and 420 students, which is the lowest indicator of all (0.7%). The remaining 58.9% of the population is considered others, which includes children below working age, housewives, seasonal workers and self-employed in agriculture.

It should be noted that the number of unemployed people is calculated based on the definition set out in the Law "On employment of the population", adopted on August 7, 2020. According to Article 3 of the aforementioned law, unemployment is the presence on the labor market of an unclaimed part of the able-bodied labor force. But, according to World Bank unemployment refers to the share of the labor force that is without work but available for and seeking employment. If the provided data were calculated based on international standards, then the unemployment rate in the impact area would be significantly higher than the current value.

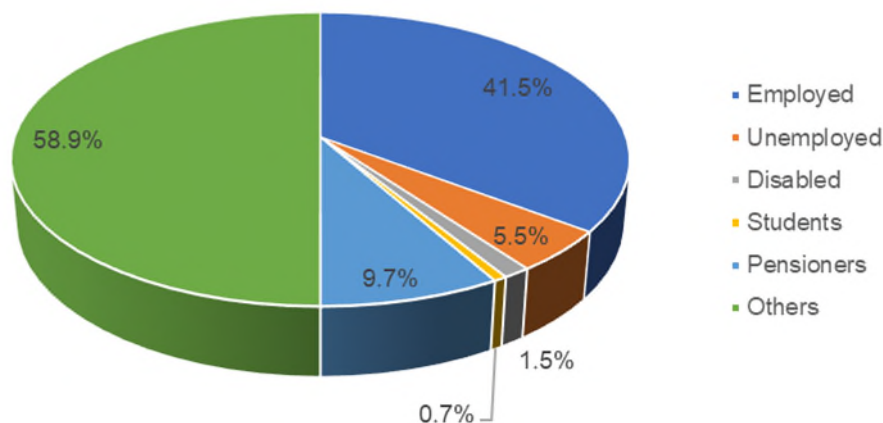


Figure 168: Employment status of the population in the impact area

The highest number of unemployed people (283 people) was in the Kattaqum settlement and the lowest rate (117 people out of 2,242 population) was observed in the Zang Gilambop mahalla of Angor district (see Figure 169).

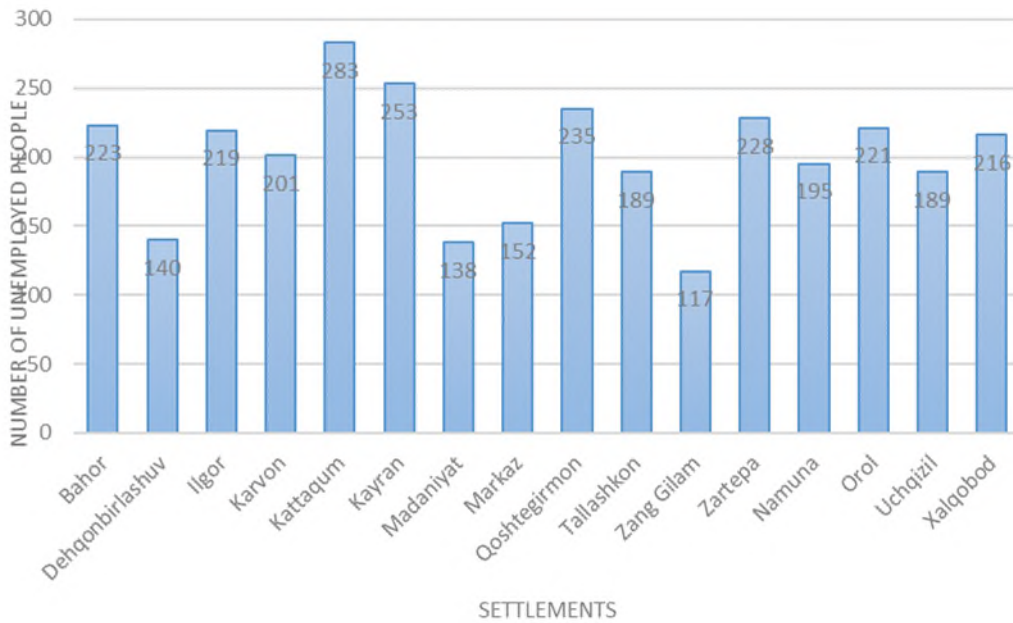


Figure 169: Distribution the number of unemployed people by the settlements

During the survey, the question was asked about primary and secondary income source of regular income owners.

The representatives of the local authorities, in particular the heads of the mahallas, answered this question on the basis of the information contained in the passport of their settlement. In total, 11 respondents answered correctly, in the remaining 5 settlements there was no data on this indicator.

According to the survey results, in each mahalla, on average 249.5 people have a regular and 156.4 secondary sources of income. Most people (on average 100 people) receive income from livestock and poultry farming. However, on average, only 3.5 people are engaged in craftsmanship (see Table 218).

But there is an opportunity to develop craftsmanship, since Surkhandarya is one of the most ancient places in Uzbekistan for tourists. The main reason of earning the low income is the lack of a manufacturing industry in this area. The construction of a thermal power plant can help create more jobs as well as increase the income of local residents.

Table 218: Status of regular income owners (number of people n=11)

	Regular income owners	Secondary income source	Entrepreneurship	Craftsmanship	Tradesmen	Stockbreeding, poultry and beekeeping	Others
Total	2,744	1,720	187	38	238	1,106	151
Mean (n=11)	249.5	156.4	17.0	3.5	21.6	100.5	13.7

Questions related to the general economic conditions from the one hand and primary, secondary income sources from another were asked. These data were collected to all working age population among 83 households in Angor and Termez districts. The collected information gives a solid overview on economic conditions of the households living there and their income sources. In order to understand how many labor force is available out of 472 individuals, the labor force participation indicator was calculated. As per calculation results, 362 persons were in the age of 16 and elder and can be considered as potential labor force of households surveyed in selected areas.

To the question "Do you have any income source", 57 percent of the interviewees stated "No" whereas 43 percent informed that they have income source (see Figure 170). The result shows that slightly more than half of the surveyed people have no income source which can be referred to the unemployment rate and lack of suitable job opportunities in the area.

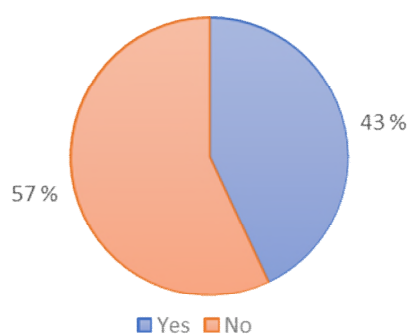


Figure 170: Does he/she have any income source

Table 219: The number and percentage of the population with/without any income sources

	#	%
Population with income source	204	43
Population with no income source	268	57

When asked about how many people from a household have a regular income, the seven of them stated that they have not a single household member who has regular income. 34 households out of total 83 households emphasized that they have one household member who has a regular income among 83 surveyed households (see Figure 171).



Figure 171: Number of members with regular income

Table 220: The numbers and percentages of people with regular income

Item	#	%
1 member	34	41.0
2 members	23	27.7
3 members	8	9.6
4 members	9	10.8
5 members	2	2.4
Household with no regular income	7	8.4
TOTAL	83	100

As for the primary income sources, the majority of respondents or 78 individuals (21% of potential labor force of 362), indicated that they work for state organizations and private sector from where get regular salary. The second most popular income source was a pension: 53 persons receive money as a fact of retirement. Moreover, 34 out of 83 household respondents stated that they have not regular or seasonal employment and 13 respondents work in agriculture sector while only 9 and 5 people have income sources from trade and obtained state assistance respectfully (see Figure 172).

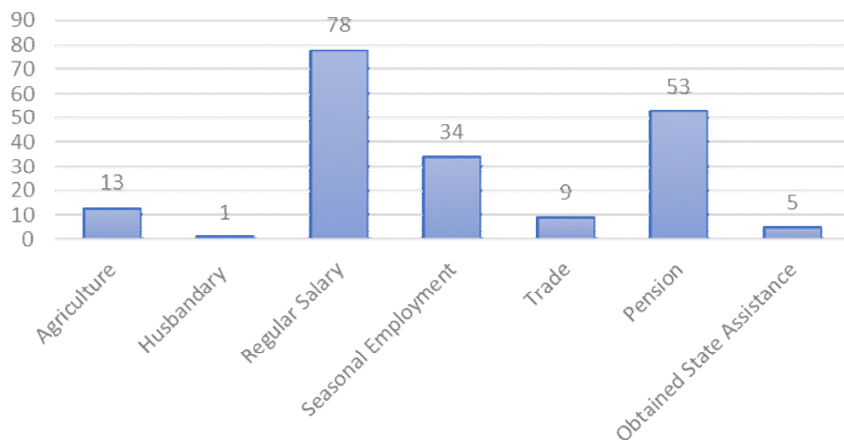


Figure 172: What is his / her primary income source

Overall, more than 86 % of the surveyed households have no secondary income source while 14 % are involved in agriculture, husbandry, seasonal employment and trade sectors to earn additional profit (see Figure 173, a). Based on survey results, households in selected districts have willingness to have an additional source of income but they have not such opportunity at this stage. Those who have secondary income are mostly practicing agriculture in their own courtyard where agricultural products are planted for selling in the local bazaars. However, the next and the most popular secondary income source was husbandry with 23 people engaged. Seasonal employment and trade have the least share with 6 and 2 people respectively.

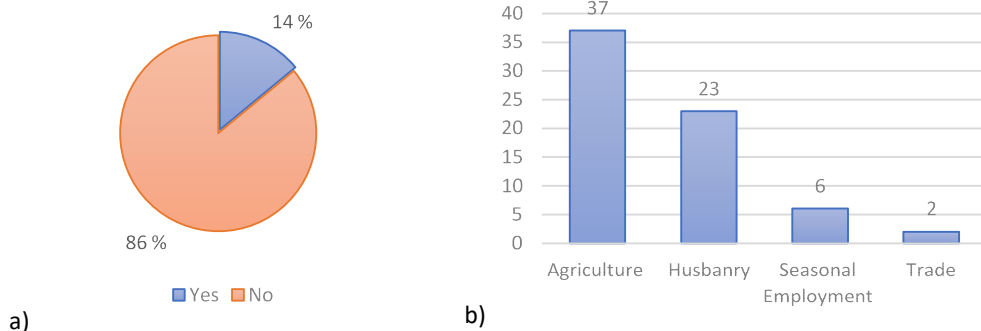


Figure 173: Percentage of people with secondary income (a) and the field and number of engaged people (b)

60 respondents or 16.5 % of surveyed households indicated that they are officially unemployed and have registered in state organizations to seek a job based on their professional and personal skills. This number is higher than the data provided by the hokimiyats on local unemployment rate.

On the other hand, the survey shows that 41 respondents are housewife and they also have no income source but they expressed their readiness to be employed if there are any opportunity for this. However, from 472 people who were covered in the survey, 176 people are either children or student with zero income source (see Figure 174).

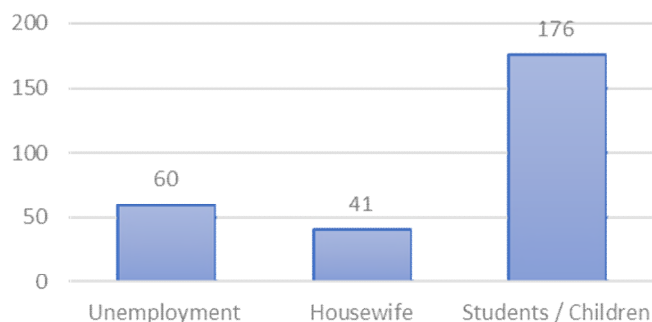


Figure 174: No income source households

16.4.2.3 Literacy, Educational Status and Being Student

According to the data collected from district hokimiyats there are 21 preschools and 21 GSE schools operating in the selected area (Angor and Termez districts). Table 221 describes the number of educational institutions located in mahallas which are within 10 km radius from the planned Project location. It should be noted that big settlements with a relatively bigger number of populations such as Kattaqum, Tallashqon, Kayran and Bobur have double more educational institutions rather than others (see Table 221). Another interesting fact is that all secondary school institutions cover almost 100 percent of the total school-age population. However, the situation with preschool education is different due to high birth and low enrollment rate. These and other reasons lead to preschool education system does not work well although the GoU aimed to reach 100 percent enrolment. The most of interviewees expressed their wish to have enough kindergartens for the locals in surveyed mahallas.

Table 221: Number of educational institutions in selected mahallas [24, 25]

Number of educational institutions in mahallas in Angor district	Preschool	General Secondary School
Bahor	1	2
Dehqonbirlashuv		1
Ilgor	2	1
Karvon		1
Kattaqum	2	4
Kayran	2	2
Madaniyat	2	1
Markaz	1	1
Qoshtegirmon	1	1
Tallashqon	2	2
Zang Gilambop	1	1
Zartepa	1	1
Total	15	18

Number of educational institutions in mahallas in Angor district	Preschool	General Secondary School
Namuna	1	0
Orol	1	1
Uchkizil	3	1
Khalqobod	1	1
Total	5	3

Based on information received from the survey, the school located in Qoshtegirmon mahalla has the highest number of student while the lowest number in Karvon with 221 total pupils. According to the local officials (head of mahalla) even though school-age population is constantly increasing and it makes tension to the enrolment to the school another big issue still being not addressed which is a small number of the teacher in the rural areas.

Concerning secondary school facilities, the interviewers were asked to evaluate in three different conditions (Excellent, Good, Unsatisfactory) contains the condition of the building and adjacent infrastructure, material and technical equipment including education materials, teachers working condition and their salaries (see Table 222). The survey shows that from the eighth surveyed settlements five have been assessed as "good", two as "excellent" and only one as "unsatisfactory". The majority of respondents highlighted that schools need well-equipped sports centers so that the young generation could have an opportunity to participate in sports competitions.

Table 222: Number of students and school condition in surveyed mahallas

Number of educational institutions in mahallas in Angor district	Total number of students	GSE Condition (Excellent, Good, Unsatisfactory)
Dehqonbirlashuv	443	Good
Karvon	221	Excellent
Kattaqum	631	Excellent
Madaniyat	557	Unsatisfactory
Markaz	535	Good
Qoshtegirmon	770	Good
Tallashqon	364	Good
Khalqobod (Termez district)	631	Good

The largest group in terms of education is people with secondary school education. Specifically, 50.4% of the total number of household members of working age have secondary school education. The proportion of household members with specialized vocational education (college, lyceum, vocational school, specialized vocational school, technical school) is 24.6% while household members at working age with a bachelor degree is only 7.8% (see Figure 175).

Also, survey results revealed that 50 of them (10.6%) are children who are under the school age who go to preschools. Although, the birth rate in selected areas is not negative, such a small number approves the fact that preschool education as a whole and its availability is a huge pending issue for local education system authorities. Thus, children who have no access to preschool or due to other



reasons cannot afford it classified as "other "category. Only one person responded that he has graduated his master's degree and now working as a teacher in secondary school.

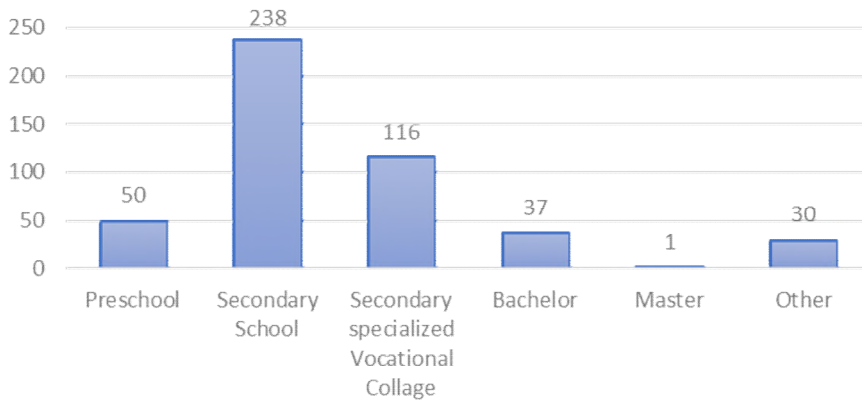


Figure 175: Educational level of surveyed household members

16.4.2.4 Health

There is large network of medical facilities, single-disease hospitals and rural primary health care clinics in Uzbekistan. The country is heavily dependent on hospitals for health care services and there is a limited capacity to deliver services at community level and to ensure access for vulnerable people contributed to serious health and financial inequities.

Local authorities highlighted that most of rural people go to the rural primary care unit so called qishloq vrachlik punkti. About 60% of the 16 mahallas have local hospitals, and the remaining 40% travel 5-7 km to reach the neighboring settlement hospital.

40% respondents claimed that most common primary disease is tension at community level. Climate change and stressful life are cited as reasons in the survey. In addition, hormonal diseases are common among the rural population, which was approved by 25% of respondents (see Figure 176).

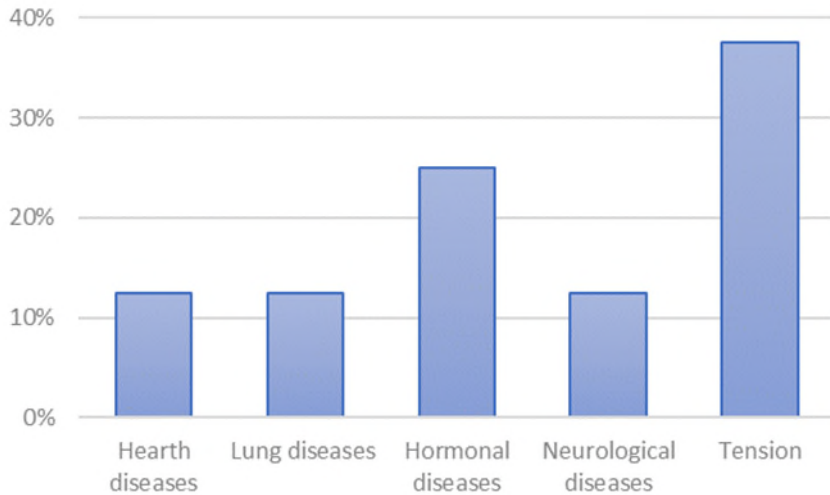


Figure 176: Most common primary disease in the settlement

Figure 177 illustrates most common secondary diseases in the project impacted area. According to 50% of respondents, kidney disease is most common in settlements due to inferior drinking water. The dry and hot climatic conditions of Surkhandarya region put pressure on the elderly and lead to age-related diseases (25% answers). The rest of the mahalla representatives cited diabetes and cancer as a secondary disease in their village.

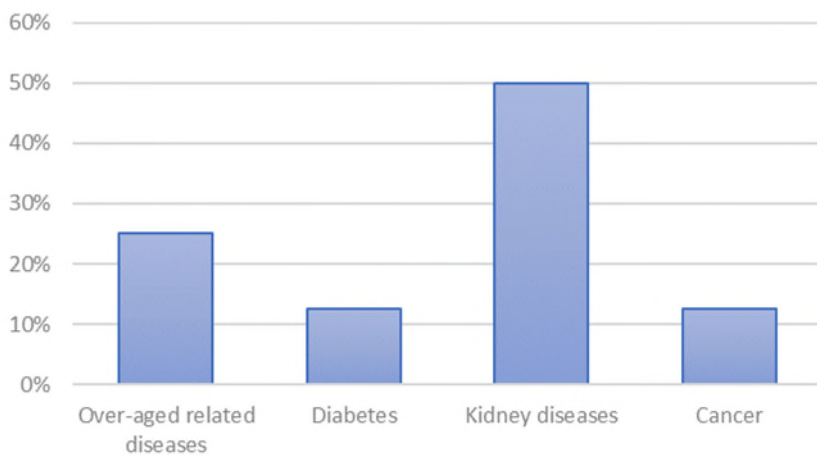


Figure 177: Most common secondary diseases in the settlements

Out of 472 surveyed people 71 had different illnesses while 18 of them were suffering simultaneously from more than one disease (see Figure 178).

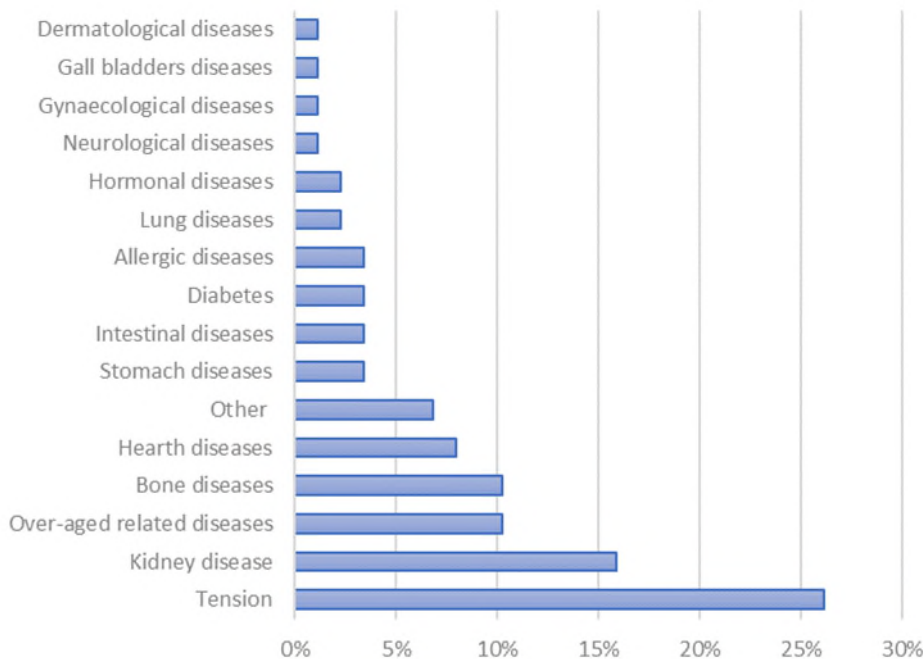


Figure 178: What is the primary chronic disease of his /her

Most respondents were suffering from the heart related issues, which was also mentioned in the socio-economic baseline of the area. Tension and heart diseases are leading in the responses. However, the people who were having problems with tension are mostly over-aged people. What is very frequent and individual for the area was having high frequency of kidney diseases in the residents with different age groups. The youngest persons among the surveyed with kidney illness was 8 and 13, with middle aged 26 and 28 and as old as 82. One of the respondents said that kidney diseases are mostly common in Surkhandarya due to the lack to drinking water in an acceptable quality.

Coming to the disability, 18 disabled people were among 472 people. This number is higher than the data provided by the hokimiyats. Share of disabled people from the district population on average, in Termez it was 2.5% of total population, while in Angor it was 1.8%. However, from 472 people who were covered in the survey, 18 disabled people means to have 3.8% of total households which is almost twice higher than the statistics.

Mental disability is the most frequent illness in the area having about 40% of the total disability. Then physically handicapped disability is second most frequent type. Hearing together with speech handicapped disability and visual handicapped disability had the same number of people (see Figure 179). At the finalization of the survey, additional face to face interview with the doctor of village medical center was conducted to find out the reason behind of frequency of mental disability among other disabilities. The doctor told that mental illnesses are frequent as people let consanguineous marriage to take place. "Relative marriage is linked with an amplified risk of genetic disorders in their offspring" – said the doctor.

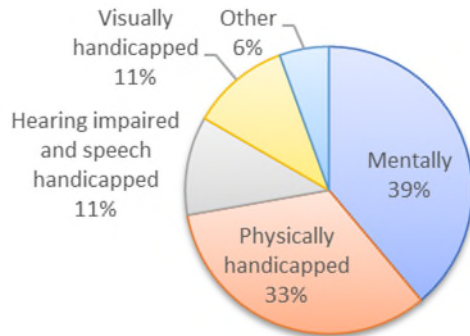


Figure 179: Type of disability

16.4.2.5 Migration and other movements

Another interesting fact is that among the respondents, a small proportion of emigrants was identified. Only 3 respondents emigrated from close-by cities as Termez and Angor whereas others 5 respondents moved from neighbor settlements (Mahallas). Remaining residents argued that they live the place where they were born and "have no plans to immigrate to somewhere else" – said one of the resident.

There are several reasons why did they emigrate from settlements A to B. The majority of respondents changed their permanent living place due to the following reasons:

- Returning to the hometown;
- Seeking better job opportunities;
- Other.

16.4.2.6 Agricultural Areas and Products

Out of 83 households, 63 are practicing agriculture. 62 told that the land is their own property and they are the one, who are cultivating the land of their family and sharing the income, while only one person worked as a seasonal worker in somebody's land and paid land rent for cultivation. On average people own 0.14 ha land, however, some people are selling their agricultural products while some are consuming the products for their own household. On average 0.19 ha land was owned by people who trade the production, while about 0.09 ha belongs to people who produce for their own use.

People cultivate different types of products on their land. They are vegetables (mostly, potato, onion, garlic, carrot, eggplant, green pepper, tomato, cabbage), fruits (especially, watermelon), cereal grains (wheat, maize), fodder (alfalfa) and legume (peanut and almond) (see Figure 180).

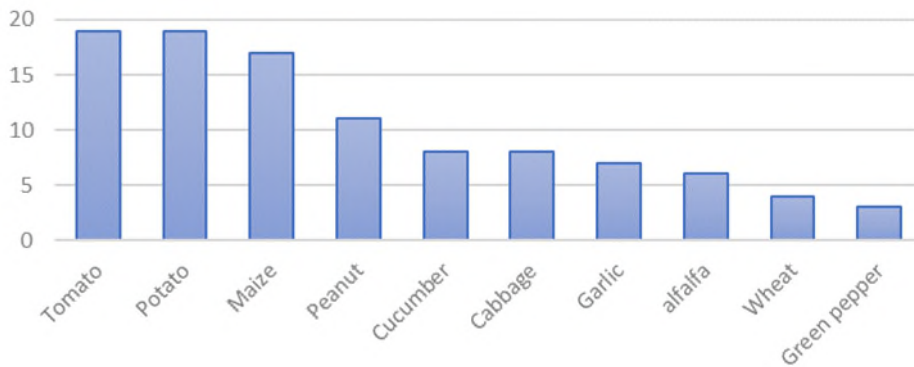


Figure 180: Most mentioned agricultural products to the question "Which products are mostly produced in the land"

People who commercialize their products mostly produce peanut, tomato, cabbage and garlic. Vegetables for everyday consumption like potato, onion, eggplant, green pepper, tomato, cucumber, etc. Households that own livestock also produce alfalfa and maize.

16.4.2.7 Husbandry

Similarly to the number of involved households in agriculture, 63 out of 83 households are practicing livestock. Solely cattle breeding (cows and bulls) is the most common livestock activity among surveyed families, while poultry; cattle & small cattle breeding (sheep and goats); and having all three at once were practiced by 10 families each (see Figure 181).

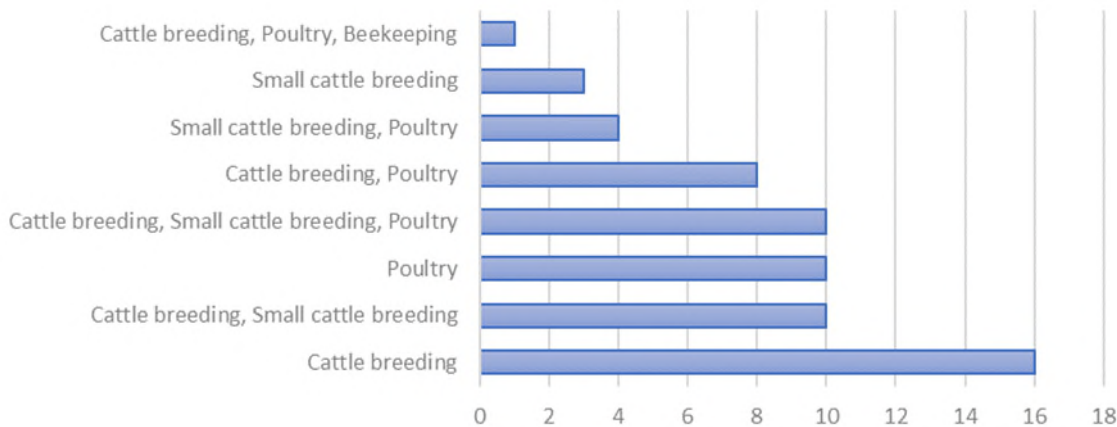


Figure 181: Livestock activities of surveyed households

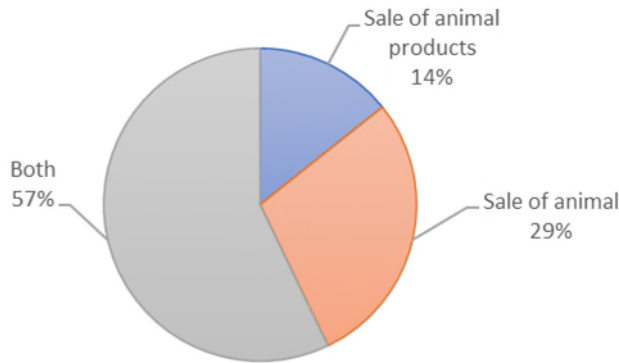


Figure 182: Type of deriving revenue from animal keeping

The number of cattle in families were on average 1-2, and 14 out of 63 families were selling the animal and animal products for earning. Specifically, 57% were selling both animal and animal products, 29% animals and 14% only animal products (see Figure 182).

16.4.2.8 General Features of the Housing

The questions related to the general features of the housing included the availability of electricity, if yes, then if its solar power, availability of water supply network and sewerage system (see Figure 183). All respondents claimed availability of electricity at their houses, confirming the statistical data of the hokimiyats. However, the interviewees stated the existence of electricity but having not constant, mostly low electric current. The reason was explained with outdated electric power transformers, power lines and also connecting the lines to transformers above than its capacity. No solar power has been used among respondents.

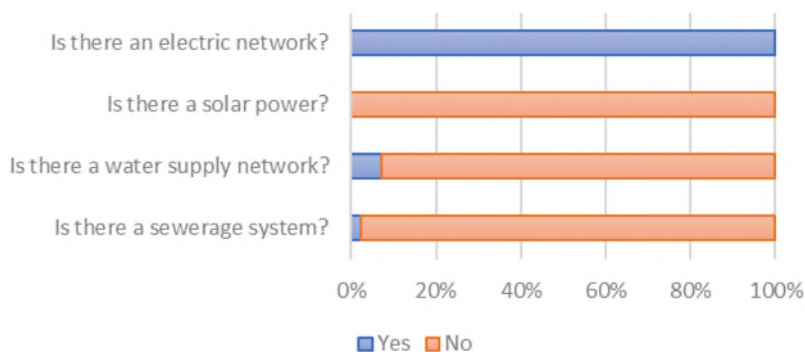


Figure 183: Questions related to the properties of the housing, such as electricity, water and sewage

Services

About the availability of water supply network, which was meant tap water from centralized water system, 7% of the respondents answered "yes" and 93% claimed the opposite (see Figure 184). The results show even lower score than the data of governmental hokimiyat on drinking water coverage.

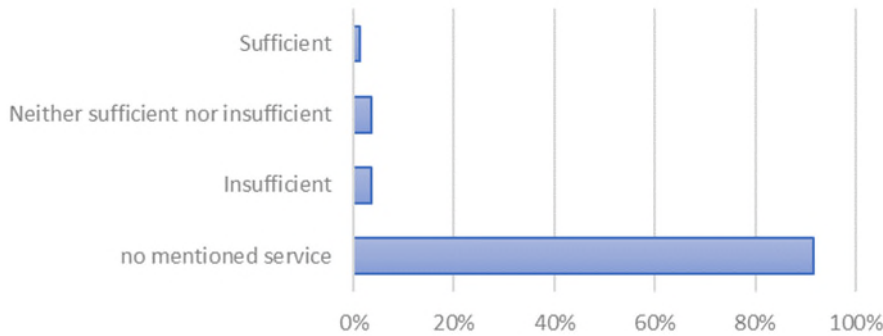


Figure 184: According to you is sufficient your drinking water supply system?

Followingly, the level of their satisfaction to drinking water supply system was asked (see Figure 184). Here, 91% people indicated that there is no drinking water supply system, while only 1 person selected "sufficient". When the source of their drinking water was asked from the respondents who indicated as "no mentioned service", they said that it is related with the financial status of the household: if household can afford, then, bottled water is used for consumption; if not, it's members consume water from rivers, streams and canals which are used for irrigation purposes. It needs to be mentioned that the respondents were vulnerable to the questions related to the drinking water, as illnesses were strictly connected to the topic.

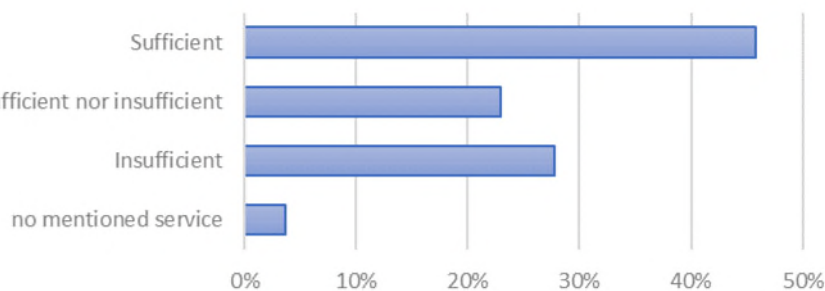


Figure 185: According to you is sufficient your irrigation water system?

Consequently, the question about sufficiency of irrigation water system was asked. Almost half expressed the abundance of irrigation water for doing agricultural activities. Another half told that irrigation water is not enough for cultivation. The respondents who answered "yes" to the question "Do you have agricultural activity?" mostly indicated sufficiency of water (see Figure 185). So, understandably water availability was reflected on involvement in agricultural activity.

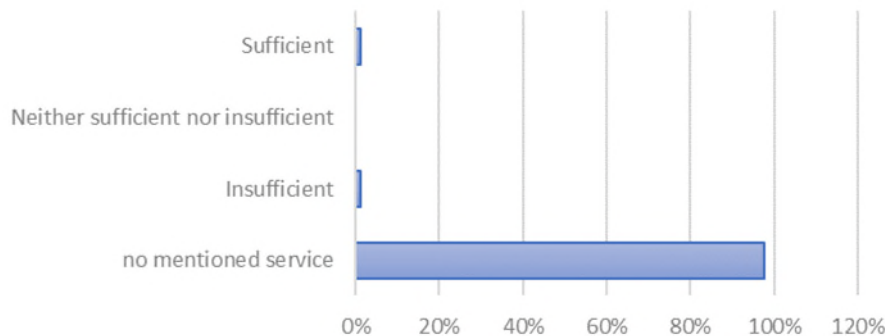


Figure 186: According to you is sufficient sewage water system?

After getting information in the district level on the sewage water system, it was clear that neither districts are covered with the system. Therefore, 98% of the respondents chose the option "no mentioned service". However, it was asked from two respondents who indicated as "sufficient" and "insufficient" to clarify the reason if the system is absent in general. Both respondents explained that they dug a sewer trench which for household use, not the centralized system (see Figure 186).

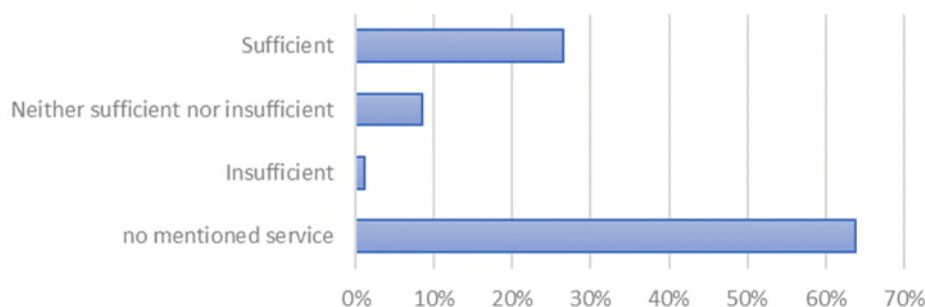


Figure 187: According to you is sufficient waste disposal system?

The respondents who claimed that waste disposal service "sufficient", reside in Termez, indicating that the district has the system. Even though there is "Bio Tehno Eko" LLC which has recently started its activity on waste management in Angor district, interviewees of Angor district said that the system is absent in their residential area (see Figure 187).

Telephone lines and internet are not available in the places according to the respondents' answers. People use only mobile telephones and cellular data for internet.

Some questions were related to roads and transport, in order to find out about the quality of services from the point of view of local residents. Almost 40% of the respondents expressed the dissatisfaction with the quality of the roads, while more than half of them said that roads are either acceptable or neutral (see Figure 188). The respondents who selected "no mentioned service" explained their choice by saying that roads were not paved with asphalt.

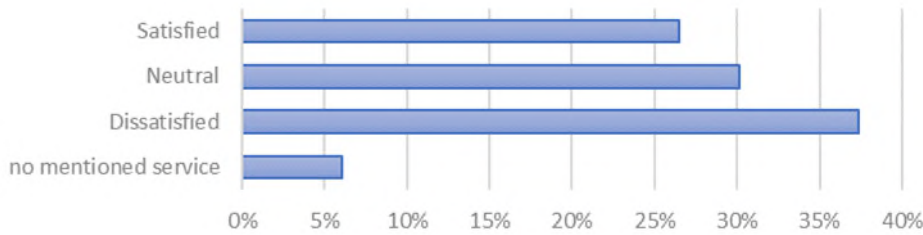


Figure 188: According to you what is the condition of the roads within the settlement?

Consequently, the public transport availability was asked by the question "According to you is sufficient transportation system?". 40% of the respondents said that there was no public transport in their residential area, and other respondents said that it was in sufficient conditions and some were even told that they never thought about it by indicating "neither sufficient nor insufficient" (see Figure 189). As it has been stated in the *Transportation and Logistics* part of the report, in district level all transportation is organized by private companies, and local "damas" cars are used as public transportation.

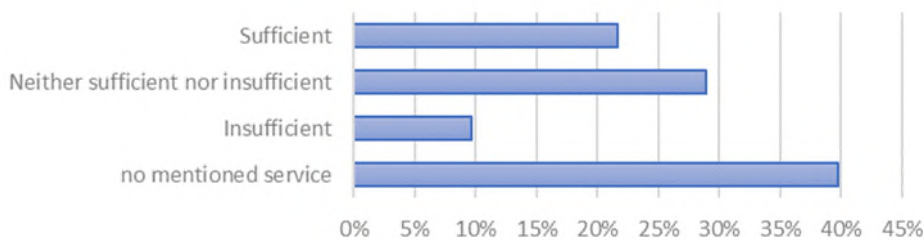


Figure 189: According to you is sufficient transportation system?

The level of educational background of respondent were provided in the LITERACY, EDUCATIONAL STATUS and BEING STUDENT part of the survey. Here, their satisfaction of educational services, particularly, quality of schools, colleges and universities in general was asked. More than 80% of the interviewees were either satisfied or neutral to the quality of schools, as it is the most common level of education (see Figure 190). Less than a fifth of people answered that the schools are not in adequate level of teaching. The reason of their response was that absence of sport facilities in the school, neither indoor or outdoor.

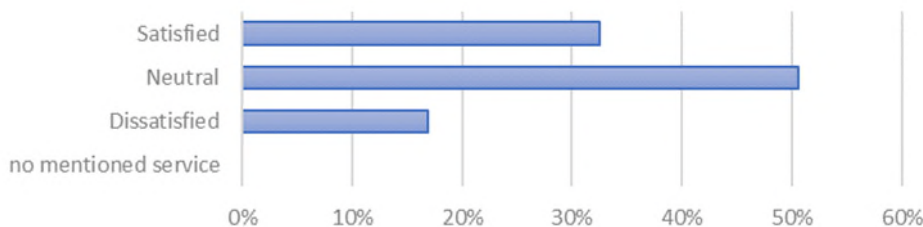


Figure 190: How satisfied are you with the educational services?

The last question related to satisfaction or sufficiency of services was related to presence of shopping services in the nearby area and their sufficiency. When the question was asked, most respondents ask about the type of shopping services – for consumer goods, apparel or drugstore. It was said that the question sought answer to general shopping service quality and additional comments were welcomed regarding for each type. More than half of the households indicated that services are sufficient in their area of residence (see Figure 191). The respondents of Angor district, especially, were inclined to answer either “insufficient” or “no mentioned service”. Quarter of them stated that it is “neither sufficient or insufficient”, saying that drugstores in rural areas are very few, and there only common medicines are on stock making people travel a long way to reach city drugstores.

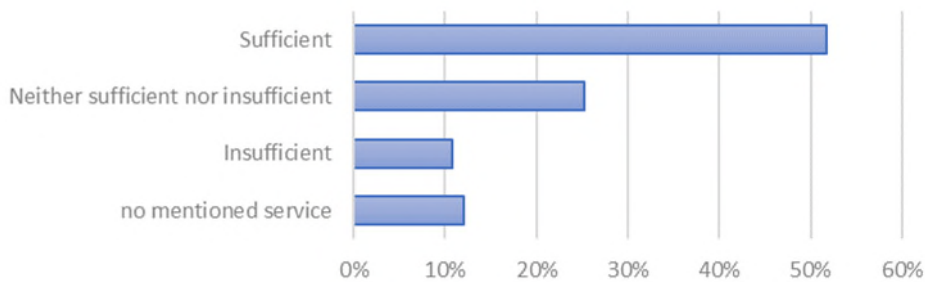


Figure 191: According to you is sufficient shopping service?

The respondents were also asked about the place that they go for shopping. 75% of the respondents who reside in mahallas of Angor district told that they visit Angor city on average once a week for doing a shopping. On the contrast, more than 60% of answerers expressed that they do not go to the city for purchasing of consumer products. Rather they buy products from the local markets. However, they both purchase clothing and medicine from the city bazaars.

Along with the question related with health service, there was a question “Where do you go for your general health problems? Please specify the name and location of the health institution.” By this, it was aimed to know the availability and accessibility of medical centers to the residents of mahallas. The responses were better to analyze in the level of mahallas, as some of the villages do not have their medical centers in their area. For instance, Kattaqum and Dehqonbirlashuv mahalla residents go to either Qoraqir outpatient center or Angor city state hospital as they do not have their own centers. Villages such as Orol, Halqobod, Markaz, Talashkon, Qoshtegirmon and Madaniyat told that they visit regularly their village medical centers. Nevertheless, all respondents said that it is about the severeness of the illness that person has. Village medical centers are mostly for giving first aid, vaccination and for consultations. Therefore, they visit city medical centers if the situation is serious.

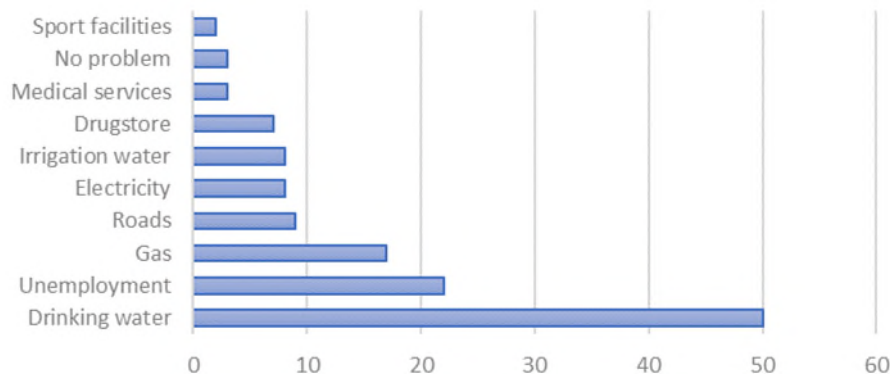


Figure 192: What is the most important problem according to your settlement where you live?

One of the last questions of the interview was "What is the most important problem according to your settlement where you live?". People started counting several challenges that they are facing in their everyday life. Recording all the answers, the frequency of each topic has been counted. The most frequent answer was the difficulty of drinking water in the area. Unemployment and lack of natural gas supply systems were another two key problems. The other problems were not paved roads, electricity blackouts due to the outdated transformers, lack of irrigation water for agricultural activities, absence of drugstores in village area with diverse medicines, inadequate quality of local medical services, and absence of sport facilities at schools (see Figure 192).

16.4.2.9 Vulnerability and Disadvantaged People

Vulnerable groups refers to people who, by virtue of gender, gender identity, sexual orientation, religion, ethnicity, indigenous status, age, disability, economic disadvantage or social status may be more adversely affected by project impacts than others. Vulnerable individuals and/or groups may also include, but not be limited to, people living below the poverty line, the landless, the elderly, women and children headed households, refugees, internally displaced people, ethnic minorities, natural resource dependent communities or other displaced persons who may not be protected through national legislation and/or public international law.

Two types of vulnerability are generally considered in such investment projects. These can be briefly called independent and dependent vulnerabilities:

Independent vulnerabilities: It includes individuals who are vulnerable in all situations, regardless of the context. These vulnerabilities are related to individual's or group's race, colour, sex, language, religion, political or other opinion, national or social origin, property, birth, or other status. What distinguishes them from other people affected by the Project-related land acquisition is that they need to be supported when involved in expropriation processes, as they need the support of others in other daily duties/routines because of physical (disability), social (gender) or economic (poverty, landless) disadvantages. Because of these disadvantages, they may be expected to experience difficulties at some stages of land acquisition and construction (such as stakeholder engagement, access to payments, livelihood activities or access to grievance mechanism).

Dependent vulnerabilities: Contextually, it refers to the disadvantageous positions created by the current project or investment. Dependent vulnerabilities can occur due to cumulative effects or indirect effects. What distinguishes them from other people affected by the Project-related land acquisition

and construction is that they are more at risk than others due to the sequences of economic losses. In other words, they face the risk of loss of livelihood and income because of high, multiple, direct, and indirect impacts of the Project.

16.4.2.10 Features of Social Infrastructure

To assess the overall characteristics of housing and social infrastructure, respondents answered questions about the availability of electricity, water supply, sewerage system, internet and telephone lines, hospital and school buildings.

As the survey showed, all mahallas has access to the electricity, while 20% of respondents stated that there is blackout once a per week or during heavy rains. Unfortunately, there is no centralized sewerage system and residential telephone line in the impact area. According to 50% of village representatives, there is access to drinking water, but this is not a centralized system (see Figure 193). People buy water for 100 soums per liter or use artesian water for household needs. 60% of the 16 mahallas have local hospitals, and the remaining 40% travel 5-7 km to reach the neighboring settlement hospital.

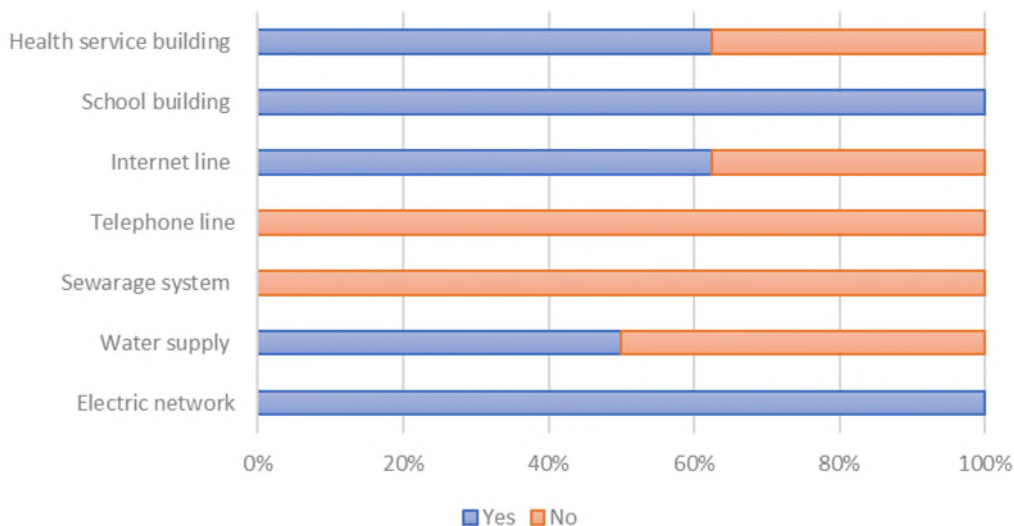


Figure 193: Question related to the housing and social infrastructure

16.4.2.11 Services

As for the quality of services, 88% of the respondents indicated that there is sufficient water for irrigation and they are satisfied with the shopping services, which is 75% of the positive answers. Unfortunately, there is no sewerage system in all settlements, and 63% of representatives of mahallas expressed dissatisfaction with the services of drinking water supply and public transport. About 40% of local government leaders found the education system, waste management and roads within the settlements to be insufficient (see Figure 194).



Infrastructure	Sufficient	Neither sufficient nor insufficient	Insufficient	No mentioned service
Shopping service	75%	25%	0%	0%
Health service	13%	50%	13%	25%
Education service	25%	38%	38%	0%
Transportation system	25%	13%	0%	63%
Access roads	25%	50%	13%	13%
Roads within the settlement	0%	63%	38%	0%
Waste disposal system	13%	13%	38%	38%
Sewage water system	0%	0%	0%	100%
Irrigation water system	88%	13%	0%	0%
Drinking water supply system	13%	13%	13%	63%

Figure 194: Quality of social and housing services

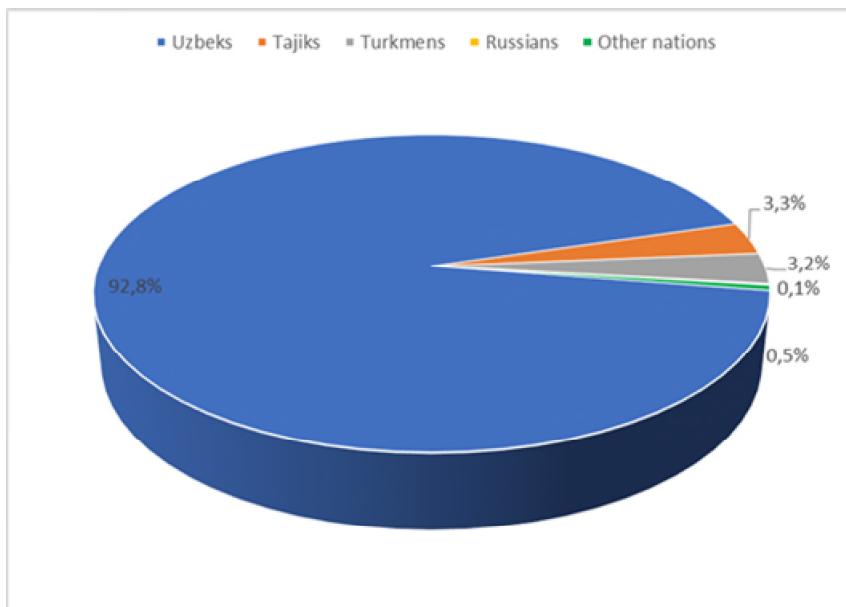


Figure 195: Distribution of population by the nationality

As Figure 195 shows that the nationality of the vast majority (92.8%) of population is Uzbek. Since Surkhandarya Province borders with Tajikistan and Turkmenistan, Tajiks make up 3.3% and Turkmen 3.2%. Number of Russians are very little in Angor and Termez districts representing only 0,1 % of the population.

16.5 POTENTIAL IMPACTS, MITIGATION, MANAGEMENT & RESIDUAL IMPACT MEASURES

16.5.1 Construction Phase

The research team identified several positive and negative impacts likely to arise during the construction of the Project. These included the following, respectively.

16.5.1.1 Employment and Economics

Employment Generation

The primary economic impact during construction is likely to result from employment creation during this phase. This Project is expected to create employment opportunities during the construction phase for unskilled and applicably skilled workers. To prevent social conflicts between local employee and expats, should be paid attention to the balance between in the employment shares.

The inhabitants of the communities closest to the project area are of mixed ethnic origin and are predominantly Muslims with their own traditions and beliefs. The influx of workers and immigrants to the Project site may introduce new habits or practices that are inconsistent with the local culture. This can lead to potential conflicts with new workers or a decline in social cohesion among local communities.

Therefore, in order to have an idea about the employment opportunities in the local area, it is necessary to keep in touch with the local authorities, local employers and employment-related institutions. Long-term consultations with the aforementioned stakeholders may be required, especially for a qualified and unskilled workforce.

The Project has the potential to encourage the spread of construction and construction support skills from expatriate workers to the local workforce. This will open up job opportunities for the unemployed in the Region and increase their chances of securing similar jobs after the completion of the Project construction phase.

It is expected that the majority of workers' contracts (especially for temporary/contract staff) will expire with the completion of the construction phase of the project.

Local Economic Development

In addition to the direct monetary increase to the families of the employed, the money paid to the workers will also stimulate the local economy with a multiplier effect, so that the money earned from the locally spent Project will recirculate within the local economy.

Additional secondary impact on the local economy is likely to arise from spending on domestic and foreign goods and services during the construction process. The nature of the development and the specialized nature of the materials required, their construction materials will be sourced locally. There is also the potential to buy food products locally to stimulate the local economy, where local people can sell vegetables and daily products to workers.

Besides, the training of employers and employees will equip potential graduates with the tools and knowledge to support the local supply chain for the utilities and chemicals sectors in Uzbekistan.

Labour Influx



The Project construction will require involvement of significant workforce (direct and contracted) Approximately 30% of the workforce is estimated to be non-qualified and 70% of will be qualified. The Contractor prioritise localisation of workforce (including subcontractors through contractual requirements) and it is anticipated that 50 % of the workforce will be national people. This policy will maximise the use of local workers and reduce the influx of non-local workers to the area.

Non-local workers will accommodate at the off-site accommodation facilities in nearby cities. Non-local workers will be transferred to the project site via shuttle buses. Therefore no adverse impacts are foreseen in the existing public transportation system.

The workers to be employed from the local will lodge in their local houses and transported to the Project site by means of shuttle buses to be arranged by the Project. It is anticipated that subcontractor will be engaged in the Project activities over approximately 24 months construction period. Duration of involvement of each subcontractor will vary depending on their work scopes, such that, part of the subcontractors will work for longer durations, whilst part of them will work for very limited durations - weeks.

The adverse risks or impacts of off-site accommodation on the nearby district centres, such as increased demands on infrastructure, services and utilities, development of illicit trade activities, inflation in local rent and other subsistence items or risk of gender-based violence and harassment (GBVH), as well as the potential benefits on the economies of the nearby settlements and district centres (e.g. rental incomes, supply of goods and materials, etc.), are anticipated to be temporary. The Contractor will arrange service busses for the personnel to be transported to the work sites from local houses including rental houses in the nearby district or neighbourhoods/villages.

16.5.1.2 Social Services

There is a poor condition on social services facilities such as educational institutions and healthcare institutions. As a result of the increasing population due to the employment opportunities provided by the construction phase, the demand for these services will increase. The growing demand for services can also put pressure on local authorities to improve existing facilities. As a result, the development of facilities and services will be a positive impact both for the local population and for immigrants from outside.

. The medical personnel and facilities to be provided on-site will meet the requirements of the applicable national legislation. Mobile schooling times will be taken into account for planning the transportation of construction materials.

Damage caused by the Project (by contractor or subcontractor) on electrical infrastructure, local water supply/irrigation infrastructure, etc. will be reinstated/repared immediately after the completion of construction activities at respective work sites in collaboration with the related authorities. Where necessary, the Contractor will enforce and monitor the corrective actions to be taken by the subcontractors.

Work sites and access routes to be used by the contractors and subcontractors will be clearly identified to avoid potential off-site impacts on local infrastructure. Project-specific SEP, including the external grievance mechanism, will be implemented to inform the mukhtars and communities about potential interruptions on local infrastructure services and collect relevant concerns and grievances for further management/resolution.

16.5.1.3 Emergency Preparedness and Response

The Emergency Preparedness and Response Plan (EPRP) will be developed as stand-alone documents separately for the construction and operation phases. The EPRPs will provide preventive measures and response strategies to manage potential incidents/accidents and to protect the community health, safety and environment against potential natural hazards, fires, or sabotage.

The EPRP will include:

- • Roles and responsibilities for emergency management
- • Identification of potential emergencies
- • Identification of existing emergency response structure and capacity along the Project route (i.e. police, fire brigades, hospitals, etc.)
- • List and location of emergency response equipment (fire extinguishers, spill response, first aid kits, etc.)
- • Use of the emergency equipment and facilities
- • Clear identification of evacuation routes
- • Procedures to respond to the identified emergencies (preventive/preparatory measures, rescue, evacuation and response measures)
- • Procedures to follow an emergency situation (recovery and assessment measures)
- • Framework for the schedule for periodic inspection, testing and maintenance of emergency equipment (e.g. rescue equipment)
- • Framework for the schedule of trainings and drills
- • Emergency contacts and communication protocols, including with communities when necessary, and procedures for interaction with the government authorities
- • Procedures for periodic review and update of emergency response plans.

Measures/systems for collaboration with the local communities and other external parties including local governmental agencies, media, etc. will be developed, where necessary. Emergency preparedness and response information will be disseminated to the potentially affected communities (e.g. emergency notification systems and evacuation procedures).

Local communities will be notified by using appropriate tools (e.g. telephone call lists, vehicle mounted speakers) in case of emergencies arising from the Project work/construction sites may pose risk on them. Where necessary, the details of the nature of the emergency, protection options, etc. will be communicated through trained community liaison officers (CLOs).

The related authorities will be cooperated both for prevention of and responding to emergencies and during emergency situations, where necessary. For fire emergencies, the procedures to be applied, including the trainings to be given to Project personnel and the measures to be taken, will be planned in coordination with the fire response units of the provinces.

In the event of a fire, wall-mounted, hand-held, suitable type fire extinguishers and special extinguishing systems in places where the fire response units cannot enter or reach quickly will be provided, and kept ready for use.

16.5.1.4 Indirect Impacts of Environmental Components

The construction works of the Project is most likely to be a noisy operation due to the moving construction machines and vehicles. This could be a potential source of disturbance in Termez and Angor districts. Therefore, noise could be negatively impact the vulnerable groups with hearing handicapped. To minimize this negative impact, the movement of heavy vehicles during the night will be avoided wherever practical.

Dust is likely to occur excavation and spreading of the topsoil during construction of the Project. There is a small possibility that may affecting the site workers and even neighbors' health. Furthermore, dust emission can negatively affect on vegetation and agriculture within the impact area. The yield loss that may occur in agricultural products due to dust may indirectly affect agricultural activities. To avoid dust based negative impact, where sand and other dusty materials are transported to the site, trucks will not be overloaded and will be appropriately covered/sheeted to avoid loses.

During construction of the Project, solid wastes such as packaging materials, plastics, scrap metal and timber could be generated. Dumping areas with the non-aesthetic condition, they can have a negative visual impact. Therefore, all wastes generated during the construction phase has to be transported off the site.

In addition, there are places for recreation on the shore of Uchkizil reservoir, including the Termez Marvaridi Recreation Area. Industrial design of the Project will interfere with the aesthetic status and landscape of the area.

Uchkizil reservoir may be sensitive to aquaculture stock when used in different ways within the Project construction. This sensitivity is related with fishery activities. Therefore, fishery as an income source of the adjacent settlements could be negatively impacted. So, domestic solid wastes must be segregated from the other waste streams into separate waste containers/bins clearly to facilitate recycling.

The plan of mitigation measures provided in Table 224, describes mitigation measures to minimizing or avoiding the negative impacts associated with the Project construction. The impacts are identified according to recent conducted study.

16.5.1.5 Land Users

Based on the first social site survey, there are no land users within the project area. Additional baseline survey will demonstrate this situation in detail.

16.5.1.6 Local Road Users

A Traffic Safety Management Procedure will be developed and implemented by all Project personnel (direct and contracted) (details are provided in Chapter). The suggestions of the PAPs (e.g. enforcement of speed limits, placing warning signs, for the management of traffic-related impacts, collected through social surveys, will be reflected in the Procedure as relevant.

Based on the additional site surveys, baseline and impact assessment will be presented.

Table 223. The plan of mitigation measures Construction Phase

Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
Employment generated by the Project	Local Communities and Businesses in Project Affected Settlements (potential for the working age group in all settlements)	Medium	Negligible	Negligible	<p>In order to enhance Project benefits around employment opportunities, the Project will adopt the policy of localisation of workforce, where possible. The Contractor will set localization targets for the employment of unskilled, semiskilled and skilled workers (direct and contracted) within the Labour Management Plan to be developed and implemented.</p> <p>Job applications will be collected from the settlements in collaboration with the local authorities.</p> <p>Project Contractor will develop and implement Subcontractor Management Plan (covering employment, procurement and supply chain aspects in line with IFC PS2).</p> <p>Project-specific SEP, including the external grievance mechanism, will be implemented.</p> <p>General job application forms will be collected from the settlements (The local employment potential of the settlements is presented in this report)</p>	Negligible
Impacts of Project-related worker influx	Project Employees and Stakeholders	High	Medium	Major	<p>Project-specific SEP, including external grievance mechanism, will be implemented. In case GBVH is reported through the external grievance mechanism, this will be investigated by trained investigators and responded in accordance with current GIIPs. Through the implementation of SEP, local women will be specially informed by qualified Project personnel/representatives about the following following:</p> <ul style="list-style-type: none"> - Project external grievance mechanism and privacy policy - Women's rights - Self-protection in cases of violence and sexual abuse - Emergency phone numbers, and - Contact information of the institutions and organisations that can be applied to <p>Contractor and subcontractor personnel (accommodating on-site and off-site) will be provided with training on Project's Social Policy and Contractor's Code of Conduct covering Project's approach to relations with the local communities, prevention of GBVH and SHA, at the time of employment (refresher training will be provided annually and as required). Trainings will cover, inter alia, the following</p> <ul style="list-style-type: none"> - Definition of violence against women in national and international documents, - Types of violence (physical, sexual, economic, emotional), and - Legal sanctions. <p>Project CLOs and Contractor's Human Resources (HR) team will be specially trained on GBVH.</p> <p>Project-specific Labour Management Plan, Camp Site Management Plan and Contractor Management Plan will be developed and implemented.</p> <p>The Contractor will develop and implement an internal audit system to check and monitor compliance of the Contractor and subcontractor implementations with the requirements of the Labour Management Plan covering the off-site accommodation aspects.</p> <p>The Contractor will develop and implement an internal audit system to check and monitor compliance of the Contractor and subcontractor implementations with the requirements of the following Project-specific documents;</p> <ul style="list-style-type: none"> - Social Policy - HR Policy - Subcontractor Management Plan 	Moderate

Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
					<ul style="list-style-type: none"> - Labour Management Plan - Internal Grievance Mechanism as part of Project SEP. Subcontractor will be contractually required to maximise use of local workforce.	
Impacts on vulnerable groups and persons	Vulnerable groups in Project Affected Sites (PAS) The list of vulnerable persons who will be identified in additional site survey	High	Medium	Major	Special mitigation/enhancement measures will be designed tailored to the needs of vulnerable groups/persons affected from the Project (vulnerable PAPs) in PASs such needs will be identified by Project CLOs through implementation of Project-specific SEP, including but not limited to the following as necessary: <ul style="list-style-type: none"> - Access to legal resources with an assistance in case of a need (i.e. transportation) when relevant to management of Project-related impacts - Assistance on acknowledging and signing official documents when relevant to management of Project-related impacts - Assistance to access compensation payments if any implementation management of Project-related impacts - Assistance to obtain personal documents - Job assistance for PAPs - Priority for job opportunity during the construction phase of the Project The deterioration that has occurred or is likely to occur in seasonal workers' housing conditions will be eliminated. The SEP will be implemented, together with the specialised to be developed for the vulnerable groups, to mitigate Project's potential adverse impacts on them and enhance Project benefits. The list of vulnerable persons will be identified through the ESIA surveys is kept in the Project database, and will be updated as necessary throughout the Project. Vulnerable persons/groups will be specially informed about the Project activities and the external grievance mechanisms in collaboration with mukhtars. Vulnerable persons/households with vulnerable members will be given priority for Project's employment and procurement benefits, where possible.	Moderate

16.5.2 Operation Phase

Completion of the Project will result in an increase in electrical energy capacity for the population of the Region. As with the construction phase, an economic impact during operation can be employment generated by the Project. However, the operational phase will require significantly less staff than the construction phase. Besides management and technical operator positions, the majority of staff will be security teams and other office-based support personnel. Such non-technical personnel will likely be locally procured. While the size of the required workforce is significantly smaller, the type of work and increasing timescales present an opportunity for greater diffusion of skills. A targeted local recruitment system and investment in the human capital of the local workforce will improve this process and ultimately increase the benefit to the local economy. The plan of mitigation measures provided in Table 224.

Table 224: The plan of mitigation measures Operation Phase

Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
Increase in electrical energy capacity	Local energy demand	Negligible	Negligible	Negligible	Completion of the Project will result in an increase in electrical energy capacity for the population of the Region	Negligible
Employment generated by the Project	Management and technical operator positions	Negligible	Negligible	Negligible	The operational phase will require significantly less staff than the construction phase. Management and technical operator positions, the majority of staff will be security teams and other office-based support personnel	Negligible

16.5.3 Cumulative Impacts

The purpose of a cumulative impact assessment is to determine how the potential impacts of a proposed development might combine cumulatively, with the potential impacts of other projects or human activities as well as natural stressors such as droughts or extreme climatic events. Summary of Cumulative Impacts of Socio& Economic, Labour & Working Conditions and Human Rights Impacts is presented in Table 225.

Table 225: Summary of Cumulative Impacts of Socio& Economic, Labour & Working Conditions and Human Rights Impacts

Environmental and Social Aspect	Construction	Operation
Socio-Economics		
Cumulative Impacts	Development of the Projects at the same time will also lead to increase in local employment.	Positive impact in terms of increase in power generation and employment opportunities.
Labour & Working Conditions		
Cumulative Impacts	Labour and working conditions during the construction phase are expected to be Project specific and therefore cumulative impacts are not expected to be significant.	Project related impacts with regards to worker conditions and worker conditions (occupational health and safety) would mainly be those associated with operation and will depend on conditions within each Project site as well as depending on Project-specific operational activities.
Human Rights Impacts		
Cumulative Impacts	Human rights impact during construction are expected to be Project-specific and therefore cumulative impacts are not expected.	Human rights impact during operations are expected to be Project-specific and therefore cumulative impacts are not expected.

17. STAKEHOLDER ENGAGEMENT

Stakeholder engagement to be implemented in the construction and operation phase of the Project is described and the Stakeholder Engagement Plan (SEP – including the external and internal grievance mechanisms) developed as part of the ESIA process in line with the requirements of EP4 (2020) and IFC PSs (2012) as a stand-alone document and planned to be implemented throughout Project is summarised in the following sections.

17.1 Regulations and Requirements

17.1.1 National Requirements

Article 29 of the Law on Environmental Protection states ensuring stakeholder participation is crucial for improving the efficiency of environmental monitoring in the implementation of state and other environmental programs. Uzbekistan, public hearings as part of the EIA is regulated by Appendix 3 of Decree of the Cabinet of Ministers No 541 dated September 07, 2020. According to the Decree all objects divided in four categories and public hearings are mandatory for categories I and II (almost similar to World Bank A and B categories). There are no requirements for public hearing or EIA disclosure for Category III and IV projects

There are two non-mandatory mechanisms for public participation in the EIA assessment procedure which include the public hearings. The law allows for independent expert groups to organise public environmental review (PER) but the findings are non-mandatory. However, there are no provisions for public hearings.

In line with Uzbekistan National Requirements, the Project belongs to facilities of the Category-I of environmental impact.

17.1.2 International Requirements

17.1.2.1 AIIB Environmental and Social Policy

Environmental and Social Policy

The objective of this overarching policy is to facilitate achievement of these development outcomes, through a system that integrates sound environmental and social management into Projects. The overarching policy comprises Environmental and Social Policy (ESP), and Environmental and Social Standards (ESSs) and Environmental and Social Exclusion List. The ESP sets out mandatory requirements for the Bank and its Clients relating to identification, assessment and management of environmental and social risks and impacts associated with Projects supported by the Bank.

AIIB requires disclosure of environmental and social information in accordance with ESS 1. According the AIIB, the consultation covers Project design, mitigation and monitoring measures, sharing of development benefits and opportunities on a Project-specific basis, and implementation issues. The AIIB requires the Client to engage in meaningful consultation with stakeholders during the Project's preparation and implementation, in a manner commensurate with the risks to and impacts on those affected by the Project.

- Consultation is required for each Category A Project, and it is normally more elaborate than consultation for a Category B Project.
- Consultation for each Category B Project is undertaken in a manner proportional to the Project's risks and impacts.
- For each Project with (a) significant adverse environmental and social impacts, (b) Involuntary Resettlement or (c) impacts on Indigenous Peoples, the AIIB may participate in consultation activities to understand the concerns of the affected people and to require the Client to address these concerns in the Project's design and ESMP or ESMPF (as applicable) or other Bank-approved documentation.
- The AIIB requires the Client to include a record of the consultations and list of participants in the environmental and social assessment documentation.

The AIIB requires the Client to establish, in accordance with the ESP and applicable ESSs, a suitable Project-level GRM to receive and facilitate resolution of the concerns and complaints of people who believe they have been adversely affected by the Project's environmental or social impacts, and to inform Project-affected people of its availability.

According to the AIIB, the GRM is scaled to the risks and impacts of the Project. The GRM: (a) may utilize existing formal or informal complaint-handling mechanisms, provided that they are properly designed and implemented, and deemed by the Bank to be suitable for the Project (these may be supplemented, as needed, with Project-specific arrangements); (b) is developed in such a manner that it does not impede access to other judicial or administrative remedies that might be available under law or through existing arbitration or mediation procedures; (c) is designed to address affected people's concerns and complaints promptly, including gender-related concerns and complaints relating to GBV, using an understandable and transparent process that is gender sensitive, culturally appropriate and readily accessible to all affected people; (d) includes provisions: (i) to protect complainants from retaliation, grant them confidentiality and enable them to remain anonymous, if requested; and (ii) to protect those who defend the rights of complainants to make such complaints; (e) provides for maintenance of a publicly accessible case register and reports on grievance redress and outcomes, which are disclosed in accordance with the applicable ESS; and (f) is required to be operational by the time implementation of the relevant Project activities commences and for the duration of the Project.

The AIIB also requires the Client (including an FI Client) to establish or maintain a GRM for contracted Project workers under the Project to address workplace concerns, and reflect this in the tender documents for contracted Project workers. The requirements for this workplace GRM are described in ESS 1.

Environmental and Social Standard 1 (ESS 1)

The ESS 1 aims to ensure the environmental and social soundness and sustainability of Projects and to support the integration of environmental and social considerations into the Project decision-making process and implementation. ESS 1 is applicable if the Project is likely to have adverse environmental risks and impacts or social risks and impacts (or both). The scope of the environmental and social assessment and management measures are proportional to the risks and impacts of the Project. ESS 1 provides for both quality environmental and social assessment and management of risks and impacts

through effective mitigation and monitoring measures during the course of Project implementation. The ESS 1 defines the detailed requirements of the environmental and social assessment to be carried out for any project to be financed by the Bank.

The AIIB ESS1 also requires;

- Carry out meaningful consultation with Project-affected people and other stakeholders and facilitate their informed participation in the consultations
- Meaningful consultation is an interactive process to provide information and facilitate informed decision-making that: (a) begins early in the preparation stage of the Project to provide accurate information on the proposed Project, minimize misinformation and unsupported expectations, and obtain initial views on the Project; (b) is carried out on an ongoing basis throughout the implementation and life cycle of the Project; (c) is designed so that all relevant parties have a voice in consultation, including national and subnational governments, the private sector, nongovernmental organizations and people affected by the Project, including, as applicable, Indigenous Peoples; (d) provides additional support as needed so that women, elderly, young, disabled, minorities and other vulnerable groups participate; (e) provides timely disclosure of relevant and adequate information, including availability of the Project's GRMs and of the PPM or other Bank-approved IAM, which is understandable and readily accessible to the people affected by the Project and other relevant stakeholders; (f) is undertaken in an atmosphere free of intimidation or coercion; (g) is gender sensitive, inclusive, accessible, responsive and tailored to the needs of vulnerable groups; and (h) enables the consideration of relevant views of people affected by the Project and other concerned stakeholders in decision-making.
- Continue consultation with Project-affected people throughout Project implementation as necessary on issues related to environmental and social performance and implementation of the Project-level GRM.

17.1.2.2 IFC Performance Standards

All of the IFC Performance Standards include requirements for an amount of stakeholder consultation/engagement (either in the ESIA, or as part of the future ESMS) and therefore the Project will require a level of engagement. In particular, IFC Performance Standard 1 on "Social and Environmental Assessment and Management Systems" describes the stakeholder engagement requirements in more depth.

IFC Performance Standard 1 requires that Clients should identify the range of stakeholders that may be interested in their actions and consider how external communications might facilitate a dialog with all stakeholders. Where projects involve specifically identified physical elements, aspects and/or facilities that are likely to generate adverse environmental and social impacts to Affected Communities the client will identify the Affected Communities and will meet the relevant requirements described below:

The client will develop and implement a Stakeholder Engagement Plan that is scaled to the project risks and impacts and development stage, and be tailored to the characteristics and interests of the Affected Communities. Where applicable, the Stakeholder Engagement Plan will include differentiated measures to allow the effective participation of those identified as disadvantaged or vulnerable. When



the stakeholder engagement process depends substantially on community representatives, the client will make every reasonable effort to verify that such persons do in fact represent the views of Affected Communities and that they can be relied upon to faithfully communicate the results of consultations to their constituents.

In cases where the exact location of the project is not known, but it is reasonably expected to have significant impacts on local communities, the client will prepare a Stakeholder Engagement Framework, as part of its management program, outlining general principles and a strategy to identify Affected Communities and other relevant stakeholders and plan for an engagement process compatible with this Performance Standard that will be implemented once the physical location of the project is known.

Disclosure of relevant project information helps Affected Communities and other stakeholders understand the risks, impacts and opportunities of the project. The client will provide Affected Communities with access to relevant information on: (i) the purpose, nature, and scale of the project; (ii) the duration of proposed project activities; (iii) any risks to and potential impacts on such communities and relevant mitigation measures; (iv) the envisaged stakeholder engagement process; and (v) the grievance mechanism.

When Affected Communities are subject to identified risks and adverse impacts from a project, the client will undertake a process of consultation in a manner that provides the Affected Communities with opportunities to express their views on project risks, impacts and mitigation measures, and allows the client to consider and respond to them. The extent and degree of engagement required by the consultation process should be commensurate with the project's risks and adverse impacts and with the concerns raised by the Affected Communities. Effective consultation is a two-way process that should: (i) begin early in the process of identification of environmental and social risks and impacts and continue on an ongoing basis as risks and impacts arise; (ii) be based on the prior disclosure and dissemination of relevant, transparent, objective, meaningful and easily accessible information which is in a culturally appropriate local language(s) and format and is understandable to Affected Communities; (iii) focus inclusive engagement on those directly affected as opposed to those not directly affected; (iv) be free of external manipulation, interference, coercion, or intimidation; (v) enable meaningful participation, where applicable; and (vi) be documented. The client will tailor its consultation process to the language preferences of the Affected Communities, their decision-making process, and the needs of disadvantaged or vulnerable groups. If clients have already engaged in such a process, they will provide adequate documented evidence of such engagement.

For projects with potentially significant adverse impacts on Affected Communities, the client will conduct an Informed Consultation and Participation (ICP) process that will build upon the steps outlined above in Consultation and will result in the Affected Communities' informed participation. ICP involves a more in-depth exchange of views and information, and an organized and iterative consultation, leading to the client's incorporating into their decision-making process the views of the Affected Communities on matters that affect them directly, such as the proposed mitigation measures, the sharing of development benefits and opportunities, and implementation issues. The consultation process should (i) capture both men's and women's views, if necessary through separate forums or engagements, and (ii) reflect men's and women's different concerns and priorities about impacts, mitigation mechanisms, and benefits, where appropriate. The client will document the process, in particular the measures taken to avoid or minimize risks to and adverse impacts on the Affected Communities, and will inform those affected about how their concerns have been considered.

Clients will implement and maintain a procedure for external communications that includes methods to (i) receive and register external communications from the public; (ii) screen and assess the issues raised and determine how to address them; (iii) provide, track, and document responses, if any; and

(iv) adjust the management program, as appropriate. In addition, clients are encouraged to make publicly available periodic reports on their environmental and social sustainability.

As Policy on Environmental and Social Sustainability and Access to Information Policy are directed towards Corporation itself, Performance Standards are directed towards clients, providing direction on risks and impacts identification. The standards are designed to assist in avoidance, mitigation, and management of risks and impacts of the project financed.

17.1.2.3 Equator Principles

The EPs represent a framework for project financing, which is underpinned by the revised IFC Performance Standards (PS). EP₄ establishes the minimum Environmental & Social standards to be adopted by EP Financial Institution which are from IFC Performance Standards on Environmental and Social Sustainability (Performance Standards), the World Bank Group Environmental, Health and Safety Guidelines and/or the relevant host country laws, regulations and permits that pertain to environmental and social issues.

Relevant guidance notes published by the EP and applicable to the Project ESIA include the following:

- EP Guidance Note on Implementation of Human Rights Assessments Under the EP (2020)
- EP Guidance Note on Climate Change Risk Assessment (2020)
- EP Guidance Note on Biodiversity Data Sharing for EPFI Clients (2020)
- EP Guidance Note on Implementation of EP during the COVID-19 Pandemic (2020)

17.1.3 Project Stakeholders

As defined by the IFC in Stakeholder Engagement Handbook of 2007, stakeholders are persons or groups who are directly or indirectly affected by a project, as well as those who may have interests in a project and/or the ability to influence its outcome, either positively or negatively. Stakeholders may include locally affected communities or individuals and their formal and informal representatives, national or local government authorities, politicians, religious leaders, civil society organisations and groups with special interests, the academic community, or other businesses.

Among the stakeholders, disadvantaged or vulnerable groups/persons refer to those who may be more likely to be adversely affected by the project impacts and/or more limited than others in their ability to take advantage of a project's benefits.

The detailed list of Project stakeholders, identifying specific stakeholders under the following external and internal stakeholder groups together with their interest in/relevant to the Project, is presented in the Stakeholder Engagement Plan (SEP):

Stakeholder Group	Definitive Stakeholders	Specific Interest /Relevance/Influence
Project Affected People	<ul style="list-style-type: none"> • Residents of Uchkizil Mahalla (within 5 km radius of the project area) • Residents of Kattaqum Mahalla (within 5 km radius of the project area) 	- Affected/potentially affected from Project-related E&S risks and impacts that will be

	<ul style="list-style-type: none"> • Residents of Bahor Mahalla (within 10 km radius of the project area) • Residents of Dehqonbirlashuv Mahalla (within 10 km radius of the project area) • Residents of Ilgor Mahalla (within 10 km radius of the project area) • Residents of Karvon Mahalla (within 10 km radius of the project area) • Residents of Kayran Mahalla (within 10 km radius of the project area) • Residents of Khalqobod Mahalla (within 10 km radius of the project area) • Residents of Ilgor Mahalla (within 10 km radius of the project area) • Residents of Madaniyat Mahalla (within 10 km radius of the project area) • Residents of Markaz Mahalla (within 10 km radius of the project area) 	<p>managed through the Project ESMS</p> <ul style="list-style-type: none"> - Management of E&S impacts - Cooperation to maximise benefits and planning for local employment and the supply of goods and services
<p>Other interested parties</p>	<ul style="list-style-type: none"> • Termiz Khokimiyat • Angor Khokimiyat • District Health Department • Department of Cultural Heritage of Surkhandarya Region • Department of Cultural Heritage of Surkhandarya Region • Termiz Archaeological Museum • Termiz District Education Department • Termiz District Health Department • Angor District Health Department • Angor District Agriculture Department • Angor District Educational Department • Angor District Cadastre Department • Amu Surkhan Regional Inspection Department • Angor District Labour Department • Angor District Road Construction and Transportation • Angor MonoCentre Official Training Centre (Ministry of Labour) • Angor District Youth Department • Termiz District Agriculture Department • Termiz District Labour Department 	<ul style="list-style-type: none"> - Influence on Project-related permitting processes - Coordination of Project activities and processes, and stakeholder engagement activities - Management of environmental and social impacts - Emergency preparedness and coordination - Management of cumulative impacts

	<ul style="list-style-type: none"> • Termiz District Municipal Department • Termiz District Cadastre Department • Academic/educational institutions 	
Disadvantaged and vulnerable	<p>Women</p> <p>Youth</p> <p>Female headed households</p> <p>Fishermen</p> <p>People with disabilities</p> <p>People with irregular income</p>	<p>- Affected/potentially affected from Project-related E&S risks and impacts that will be managed through the Project ESMS</p> <p>- Ensuring that sensitive and disadvantaged Persons / Groups have access to sufficient information about the Project, ensuring that these persons / groups benefit equally from the benefits of the Project</p>
Local businesses, suppliers, other industrial projects	Local companies	<p>- Positively affected from potential Project benefits/opportunities</p> <p>- Supply of local goods and services related to the project</p> <p>- Coordination of infrastructure services</p> <p>- Management of cumulative impacts</p>
Local media	National and local newspapers, local magazines and TV channels	Project information sharing with stakeholders

17.1.4 Stakeholder Engagement Plan

A stand-alone SEP has been prepared as part of the ESIA process based on the comprehensive social surveys conducted by the ESIA team. The purpose of the SEP is to establish and maintain constructive dialogue between the Project and the local communities, other stakeholders and interested groups.

The Project owner will assist and collaborate with the Employer to implement the SEP throughout the construction phase of the Project. The implementation of the SEP throughout the operation phase of the Project will be under the responsibility of the Employer/Operator.

The Project SEP, inter alia:

- Identifies all stakeholders (individuals, groups or entities) directly and/or indirectly affected by the Project or have a direct or indirect influence/impact on the Project.
- Defines mechanisms and tools for appropriate engagement with each stakeholder group during the lifetime of the Project, with the ultimate aim of establishing and maintaining constructive relationship through public consultation and information disclosure.
- Establishes external and internal mechanisms that will ensure timely and appropriate implementation of actions for the management of grievances and feedback received.

17.1.5 Public Consultation Timeline

17.1.5.1 Public Hearing

In line with Uzbekistan National Requirements, the Project belongs to facilities of the I category of environmental impact, the management of the combined cycle power plant under construction together with representatives of the Angora District Khokimiyat, the Ecology and Environmental Protection Inspectorate, the Kattakum Village Community Assembly in the prescribed manner, were organized and carried out public hearings on 17th of August 2021.

During the public hearings with the participation of the population, issues of the implementation of the planned project were discussed and relevant presentations were presented on the technological process and the impact of the power plant on the environment, as well as social and economic benefits for residents of the area where the facility is located.

The main questions were about possible employment and state environmental monitoring during operation.

On the received questions satisfactory answers were given, it was explained that the state environmental monitoring will be carried out in accordance with the law, employment issues will be addressed as the start of construction

17.1.5.2 Local Authority Disclosure

The disclosures were conducted among 8 local authority representatives in Angor and Termez districts from 22 to 29 July, 2021.

Table 226: List of settlements located within 10 km of the impact area (Source: Local Authority Survey, July, 2021)

#	Settlements (Mahalla)
1	Bahor
2	Dehqonbirlashuv
3	Ilgor

#	Settlements (Mahalla)
4	Karvon
5	Kattaqum
6	Kayran
7	Madaniyat
8	Markaz
9	Qoshtegirmon
10	Tallashqon
11	Zang Gilambop
12	Zartepa
13	Namuna
14	Orol
15	Uchkizil
16	Khalqobod

According to the results of the survey, none of the respondents is aware of the project, except for the district and regional Khokimiyats. Local authorities would like to know about the negative impact of the project on the life of the population, flora and fauna. Due to the high level of unemployment, the respondents were very interested to get information about the required specialist and the number of employees (see Table 227).

Table 227: Opinions of Local Authorities on project

Questions	Answers of the respondents
Do you have any information about the Project?	<i>None of the respondents know about the project</i>
What do you want to know about the Project?	<i>Negative impacts of the project</i>
	<i>What specialists will be hired</i>
	<i>TPP operation year</i>
	<i>Job creation opportunities</i>

Questions	Answers of the respondents
Who should give the information which do you want to know?	Stone City, UzAssystem or Khokimiyat
How should given the information which do you want to know?	Via Telegram network

17.1.5.3 Public Disclosure via Focus Group Discussion

The focus group discussions were conducted as part of the socio-economic assessment of the impact area in Angor and Termez districts in Surkhandarya province.

The residents / population differentiated according to geographical location of the settlements for the study were involved in the FGD, as follows:

- 1 settlements and population within 5 km from proposed construction area,
- 2 settlements and population within 10 km from proposed construction area
- 3 settlements and population more than 10 km from proposed construction area.

All focus groups were conducted in Uzbek and lasted approximately 2 and half hours. Each focus group discussion was tape-recorded and later transcribed. Two focus group discussions were conducted at the two sides (Angor and Termez) on 28 of July, 2021. The number of participants and place of the event are given in the following Table 228.

The majority of the participants stressed out that the positive sides of the project are much more than the negative consequences of the project. Following improvements were highlighted by participants as project positive effect: no more power cut in the settlements, unemployment decrease, district GDP will increase, possibility of the development innovative business models such as greenhouse development close to the power plant etc. However, there were several negative points against power plant construction and further operation in the district. The negative sides that participants spoke up about are negative environmental consequences (micro-climate change, biodiversity change, noise from the TPP.

In general, they believe that the Project will benefit everyone. Despite listed by participants negative effects of the project, all participants supported the idea to have industry plant in the allocated place. The population of both districts believes that planned TPP would play a significant role in the development of the place they live in and in the reduction of the unemployment rate in the settlements. They hope that investors and government officials will involve local labor for the project construction and operation so that even unskilled people could get foundation training courses.

Many participants of FGD in both districts emphasized that the drinking water, natural gas supply and unemployment are the most important issues that the local population ask pay attention to.

FGD participants also believe that it is important for the government and the project investor to attract population to the discussion of actions, hold a meeting in the mahalla, a discussion with the population, informing about the results of completed stages of works.

Moreover, drinking water supply in settlements and hire as many as possible local labor for the construction and operation period are the main anticipated actions from the government and project investor.

Generally, these focus groups were well received by the participants. Many participants expressed their appreciation of having the opportunity to "learn" about the project. They also were glad to be able to vocalize their opinion on this subject.

Table 228: Focus group discussion details

Date	Location	Representatives from	Number
28.07.2021 (Morning)	Small Hall of Termez hokimiyat, Uchqizil city.	Khokiyat, district statistic department, district health department, labor and social protection, mahalla etc.	24
28.07.2021 (Afternoon)	Conference Hall at Angor hokimiyat, Angor city.	Khokiyat, district statistic department, district health department, finance and investment department, labor and social protection, mahalla etc.	37

17.1.6 ESIA Disclosure Process

The ESIA Disclosure Package of the Project includes this ESIA Report including the Environmental and Social Management Plan (ESMP), as well as stand-alone SEP and Non-technical Summary (NTS) documents.

During the 60-day ESIA disclosure period, the ESIA Disclosure Package will be published at the Project and the Lender's website. As per the relevant requirements of the international standards, NTS and SEP will be disclosed in national language by using appropriate disclosure methods. If any further comments are received during this disclosure period, comments will be registered and responded by means of methods described in SEP.

17.1.7 Grievance Mechanism

From the national legislation prospective there is a centralized complaints mechanism (online portal) for all public utility providers that was opened in 2017 by Presidential Decree No. 728 of 15/09/2017. As this online portal is intended for wide range of issues brought to government attention, it was considered more appropriate to develop a single system/approach for receiving feedback and complains from stakeholders. The following approach was used in the establishment of the Project specific grievance mechanism.

This part of the report describes grievance redress mechanism which is going to be implemented for the project for internal (construction and commissioning personnel, workers, project staff) and external parties including supply chain system.

A Grievance Redress Mechanism (GRM) is a set of measures that enable stakeholders to raise grievances to the project and seek redress when stakeholders perceive an adverse impact arising from the project activities together with recommendations and feedback. The mechanism sets out clear systematic steps for affected individuals and communities to submit complaints and feedback and simultaneously for the Project in responding to queries, feedbacks and complaints received. The



mechanism will be applied to guarantee the project is responsive to any concerns and grievances particularly from affected stakeholders and communities.

The mechanisms will seek to resolve concerns promptly, using an understandable and transparent consultative process that is culturally appropriate, and at no cost and without retribution to the external or internal party that originated the issue or concern.

The key principles of the external and internal grievance mechanism will be to:

- Ensure impartiality, confidentiality, and free of coercion or intimidation.
- Ensure resolution of concerns within the time frames specified in the Project SEP.
- Provide an understandable and transparent consultative process that is culturally appropriate and readily accessible.
- Provide the option of submitting grievances and feedback anonymously.
- Provide access at no cost and without retribution to the party that originated the issue of concern.
- Not impede access to judicial and administrative remedies

Besides the right to appeal the outcomes of the grievance process, the rights of the grievance/feedback holder includes more than only the right to appeal the outcomes of the grievance process, as indicated below:

- The grievance/feedback holder does not have to participate in the grievance and feedback mechanism and can choose to follow other remedies, including other judicial, administrative, civil, etc. remedies. The judicial or administrative remedies will be applicable as per the Government of Uzbekistan and relevant legislation.
- The grievance/feedback holder cannot be coerced to participate in the grievance management process.
- The grievance/feedback holder can choose to stop participating in the Project grievance and feedback mechanism at any time and elect to follow other remedies.

GRM will be available to construction and commissioning personnel, workers, project staff and people living or working in the areas impacted by the project activities. Any impacted or concerned person or group of people about the project activities have the right to participate in the GRM and be encouraged to use it. Moreover, the developed GRM does not replace the public mechanisms for filing complaints and resolving conflicts in the legal system of Uzbekistan, but, on the contrary, seeks to minimize its use as much as possible.

The external and internal grievance collection channels to be used during the construction and operation phase are described in Table 229. The Project Owner will review and adapt these channels, as appropriate and consistent with their internal/institutional procedures and mechanisms, within the SEP to be updated prior to start of operation phase and implemented throughout the operation phase.

Table 229. External and Internal Grievance Collection Channels for Construction and Operation Phase

Grievance Collection Channels	Explanation
Project Phone Line	+ 998 90 370 53 59
Project Web-site	www.stonecityenergy.com



Grievance Collection Channels	Explanation
Project E-mail	office@stonecityenergy.com
Official Letter Address	Tashkent, Almazar district, Sagban 30 dead-end str., 7 Uzbekistan
Grievance forms and boxes	Grievance forms and boxes will be placed in all mahallas affected from Project and at relevant work sites.
Project Owner Social Manager	Social Manager will collect grievances during stakeholder meetings, through phone calls, e-mails, etc. and manage them as per Project SEP.
EPC Contractor CLO	CLOs will collect grievances during public and individual meetings, through phone calls, e-mails, etc. and manage them as per Project SEP. Where required, CLOs will help stakeholders on how to fill in grievance forms.
Legal System	Please see Section 17.1.7.3

Besides, According to the law, affected persons can submit their grievances through the Virtual reception of the President of the Republic of Uzbekistan, which is an online portal. From February 2018, the online version is updated and presented on this online portal. All citizens of the country can use different options for their appeals.

- By calling the phone number 0-800-210-00-00 or the short number 10-00;
- By using the online portal and filling out a special request form on the website pm.gov.uz;
- By visiting the People's Reception Office. The address of the 14 People's Reception offices in each district of the Bukhara region are provided on its site.

17.1.7.1 External Grievance Redress Mechanism

The Project Owner Social Manager will engage with the PAPs to inform and integrate their feedback and suggestions to the process. The Social Manager will undertake an awareness raising process and inform the external stakeholders, including local communities, about Project's grievance and feedback collection channels.

All complaints/suggestions evaluated under the Grievance Redress Mechanism will be recorded as in the Grievance Log Form table given in SEP. Information about the complaint, the complainant and detailed information about the action taken will be recorded in this database as detailed.

The step-by-step internal and external grievance redress process to be adopted is provided in Table 230. In addition, sample forms to be used by the Social Manager for GRM are the Grievance Form that is given in SEP.

Table 230. Grievance Redress Mechanism Flowchart

Grievance Redress Mechanism	Requirement / Action
Submission of a complaint	Receiving the grievance by any communication channel explained above.

Grievance Redress Mechanism	Requirement / Action
Registration of complaint	<p>Registering/recording through making an entry in the sample grievance log table and filling of the Grievance Form. All the complaints will be registered within two (2) working days and feedback will be given to the complainant.</p> <p>If the complainant requests that this complaint be treated anonymously, this complaint will be recorded anonymously and the request will be met.</p>
Forwarding of complaint	The complaint is forwarded to relevant persons (related experts on construction/operation sites) responsible for handling the complaint in not later than three (3) working days upon receiving the complaint (except for any emergent complaint, which would be handled as appropriate).
Evaluation of a complaint	Evaluating the complaints within ten (10) working days and determining whether the complaint meets the admissibility criteria. If the complaint is not valid, providing relevant explanation to the complainant.
Response for a complaint	<p>If the complaint is valid, identifying and taking corrective measures for resolving the complaint in not later than fifteen (15) working days upon receiving. If resolving the complaint would take longer, a partial response could be provided to the complainant.</p> <p>All comments and complaints will be responded to either verbally or in writing, in accordance with the preferred method of communication specified by the complainant, if contact details of the complainant are provided.</p> <p>At this point, it should be noted that the action taken and the result of this anonymously recorded grievance should be shared on the Project Owner's website, so that anonymous complainants is informed about their complaint and the results.</p>
Recording the result of a complaint	Recording the result of the complaint in register log.
Right to Appeal	If the complaint cannot be resolved with the existing process, applicants can always apply to relevant legal institutions.

17.1.7.2 Internal Grievance Redress Mechanism (Workers)

The internal grievance mechanism will have same operational flow as External Grievance Redress Mechanism and will be made available for all construction and commissioning personnel associated with construction and commissioning activities to enable them make work related concerns. This includes all those employed by the Project Company, EPC contractor, sub-contractors, any other related contractors and project site visitors. All construction and commissioning personnel will be made aware of the grievance mechanism during their employment inductions at the project site and in employment documents.

Grievances of construction and commissioning personnel will be made in writing to the EPC Contractor via a specific grievance form. The grievance form will be made available at key locations on-site (e.g. administration block, canteen area, and office locations) as well as at any staff accommodation area. The grievance form will be available in Uzbek, Russian, English and any other languages of Project staff. Where the complainant is illiterate, the complaint can be made verbally in confidence to a manager, so that the manager will complete the grievance form on behalf of the grievant.

Grievance forms will include contact details of the complainant; however, a grievance can be raised anonymously if desired. Grievance forms will be posted in a sealed and locked 'post box', located at all key locations where grievance forms are available. The grievance box will be checked on a regular schedule several times a week. If a verbal grievance is preferred this can be specified by the complainant at the time of raising the grievance and the responsible staff will also record the grievance received and register it via the formal process.

Responses to grievances will be transparent and free of retribution. Follow-up to grievances will be completed on a grievance follow up form and signed off by the Project Owner and EPC Contractors grievance control representative. The follow up form will state all actions taken to resolve the grievance and any further dialogue that had ensued, as well as any future monitoring of the situation or other planned actions. The completed and signed off forms will be kept in a dedicated grievance mechanism folder on site, which will be made available for review to the external independent environmental and social auditors during the periodic environmental and social audits required during the construction and commissioning phase.

17.1.7.3 Management of Sexual Exploitation and Abuse/Sexual Harassment Issues

The grievance mechanism will include handling Sexual Exploitation and Abuse/Sexual Harassment (SEA/SH) complaints. The GRM that will be in place for the project workers will also be used for addressing SEA/SH related issues and will have in place mechanisms for confidential reporting, with safe and ethical documenting of SEA/SH issues.

The GRM will include a channel to receive and address confidential complaints related to SEA/SH, with special measures in place. If an employee faces SEA/SH issue s/he can either apply to a higher level superior or go directly to the national referral system of the country for dealing such cases. The content and procedures of the project's GRM will also have a reporting line on such cases in regard to SEA/SH issues and will be handled under full confidentiality and with the consent of the survivor. If the Project owner or contractor will receive a SEA/SH related grievance, these grievances will be directed to national referral systems immediately and record that this has been directed, as set out in the GRM Procedure. All details of the complainant of the sensitive case will be kept strictly confidential.

All details of the Gender-Based Violence (GBV) and Sexual Exploitation and Abuse/Sexual Harassment (SEA/SH) survivors will be kept strictly confidential in the Grievance Register Database; and

- The GRM Officer will not ask for, or record, information on more than the following related to the GBV and SEA/SH allegation:
- The nature of the complaint (what the complainant says in her/his own words without direct questioning);
- If, to the best of the survivor's knowledge, the perpetrator was associated with the project; and if possible, the age and sex of the survivor.

17.1.7.4 Grievance redress mechanism: Legal System

If after the intervention and assistance from the GRCs at both local and central levels, no solution has been reached, and if the grievance redress system fails to satisfy the complaining parties, the case will be referred to the court for resolution in accordance with the legislation of Government of Uzbekistan.

In the meantime, it should also be emphasized that the GRM Guideline does not limit the right of the complaining party to submit the case to the court of law in the first stage of grievance process.

Moreover, in the Government of Uzbekistan Complaint Handling System functions. This is another option of filing a complaint. The Law of the Republic of Uzbekistan on the Appeals of Individuals and Legal Entities was introduced on 29 October 2014 and this law replaced the earlier law on Appeal of Citizens that was introduced on 13 December 2012. This law guarantees the right to appeal and prescribes the requirements of an appeal, its form and structure. Further, the timeline for addressing the appeal, the procedure for personal hearing, need for maintaining record of appeals and procedure for second appeal are prescribed.

According to the law, affected persons can submit their grievances through the Virtual reception of the President of the Republic of Uzbekistan, which is an online portal. From February 2018, the online version is updated and presented on this online portal. All citizens of the country can use different options for their appeals.

- By calling the phone number 0-800-210-00-00 or the short number 10-00;
- By using the online portal and filling out a special request form on the website pm.gov.uz;
- By visiting the People's Reception Office. The address of the 14 People's Reception offices in each district of the Bukhara region are provided on its site.

This mechanism assures the constitutional rights of citizens to appeal to the President of the Republic of Uzbekistan. Through this system, any persons in Angor and Termez districts can send their applications, suggestions and complaints to the portal of the President of the Republic of Uzbekistan. After receiving the complaint from a district, the responsible person from online portal will provide complainant with contact details of the responsible person from related Hokimiyat. The Hokimiyat will directly request the Project Social manager of "Stone City" LLC to resolve the grievance, with an option of sending the grievance through an email. In the new version of the Virtual Reception, the complainant can indicate the mahalla in which they live when submitting the appeal. This will speed up the solution of the problem, help determine which sector is responsible for the problem resolving.

The online portal has provisions for checking the status of the grievance and further appeal if the appellant has been harassed for raising the grievance. If someone who sends a complaint is persecuted, she/he can quickly report it by pressing a special "button" on the same site. Such messages will be considered promptly and with high priority of involving law enforcement agencies.

17.1.7.5 AIIB'S Project-affected People's Mechanism

AIIB's Project-affected People's Mechanism (PPM) applies to this Project. The PPM has been established by AIIB to provide an opportunity for an independent and impartial review of submissions from Project-affected people who believe they have been or are likely to be adversely affected by AIIB's failure to implement the ESP in situations when their concerns cannot be addressed satisfactorily through the Project-level GRM or the processes of AIIB's Management. Information on AIIB's PPM is available at: <https://www.aiib.org/en/policies-strategies/operational-policies/policyon-theproject-affected-mechanism.html>.

17.1.7.6 Disclosure of the Grievance Process

Information about the grievance handling process will be disseminated through booklets and posted to the Khokimiyat. During informal meetings on the project site during the construction phase of the Project, grievance mechanism will also be presented. Information on the resolution of grievances will be summarized in the Project Environmental and Social progress reports.

17.1.7.7 Engagement Methods

The following methods will be used to inform stakeholders about the on-going stakeholder engagement process during construction and operations of the Project:

Letters, Phone calls and email - Suitable to engage interest-based stakeholders and to notify them of the engagement and disclosure mechanisms.

Posters or Notices - Signboards and Illustrative posters (info graphics) will be placed at the Project entrance gate, including direct access to the grievance mechanism.

Social Media – This may include use of messaging platforms such as Telegram, Zoom, , Facebook, , etc to communicate general information about the Project.

Local media, weekly official newspaper of Angor Khokimiyat (Angor yog'dusi gazetasi)

Data privacy must be ensured and protected if a stakeholder database is established.

Meetings with community leaders- These can be informal meetings held with community leaders so as to maintain good relations with the community and address any concerns the community might have.

Bilateral meetings - Suitable to engage impacted and interest-based stakeholders as identified, to allow these stakeholders provide their views and opinions and to notify them of the engagement and disclosure mechanisms.

Online – Useful for Interest-based Stakeholders. The engagement and disclosure mechanisms for the ESIA package during the construction and operational phases of the project will be advertised on website with a contact point provided for comment. The same will be available on the lending institution respective websites.

18. LIVELIHOOD RESTORATION

During the social site surveys conducted in 2021 and 2022, no legal and/or informal landusers are observed within the project area. Although the project does not have any impact on livelihood, a framework Livelihood Restoration Plan is presented within this ESIA Report to ensure that the Project company will follow the minimum requirements set in this plan, in case required.

18.1 Legislation – Institutional Framework & International Standards

International lenders have international standards for managing social, economic and environmental impacts, such as World Bank (WB) has Operational Policy (OP) and Environmental and Social

Standards (ESSs), Asian Infrastructure Investment Bank has Environmental and Social Policy, and International Finance Corporation (IFC) has Performance Standards (PS).

The national and local legislation of Uzbekistan and Surkhandarya region, where the project will be implemented, will bring many social, environmental and economic limitations and opportunities for the management of the impacts that will occur during and after the implementation of the project.

Conducting the analysis of national and international regulations and standards interact between the impact of the project and the people of the region can answer this question is important for the beginning of the LRP study. Because laws and standards will provide new opportunities and limitations for the direct and indirect livelihoods of the people living in the region, and will function in minimizing their grievances, if any.

During these analyses, it is important to identify any gaps and contradictions, especially between the legislation of Uzbekistan and international standards.

In order to fill the gap that will arise due to these contradictions, the proposed actions and activities should be specified.

18.2 Assessment of Existing Situation

Describing the socio-economic situations – baseline data, including demographic composition of project effected people; income & expenditure; income sources; perceptions on their livelihood; fishery & agriculture & husbandry activities of affected people; education, health, poverty, gender, natural environment, etc.

If the assessment of the existing situation is divided into two parts, regional and local, the data presented in the assessment process can be used as a more effective tool.

According to, conducted social impacted assessment surveys such as household, local authority and focus group discussion can gather information about existing situation.

18.3 Impact on Livelihoods

- Potentially Affected Assets and Values (properties, building – structures, settlement lands, agricultural lands, crops, products, forested areas, pasture lands, areas for aqua product, communal lands, roads, any kind of access, historical places, natural areas, natural resources, heritage sites, intangible assets & values, businesses.)
- Potential Impact on Livelihoods:
 - Analysis of the effects on assets and values by determining their direct and indirect relationships with the below listed livelihoods.
 - Loss of agricultural lands, products, grazing lands, forest and forest products, hunting and fishery.
 - Loss of infrastructure including transformation, sanitation, community facilities, commercial buildings, etc.
 - Businesses that will lose income
 - Employment, which includes job opportunities and loss of existing jobs

- In particular, losses of people in fisheries and aquaculture production, who will experience loss of income due to changes in water quality and quantity.
- Determining whether there will be income losses due to possible effects on livestock and agricultural production, soil and water resources, which are an important source of livelihood for the people of the region.
- Identifying disadvantaged and vulnerable groups and identifying possible impacts on them, determining whether there is a need for specific LRP action.
- Preliminary investigation of whether there will be socio-economic inequality, conflict and unfair income distribution among the people of the region due to the opportunities that the power plant will create and determining the risks.

18.4 Eligibility

Eligibility is the preparation of a set of criteria and justifications for who can (and also who cannot) benefit from compensation or support in the LRP process.

It determines the rules regarding the compensation of immovable assets when necessary. For the implementation of a transparent and fair LRP between the parties, it is important that it is prepared in detail and in a language that stakeholders can understand.

In this section, the legal responsibilities of the parties are also noted. Relevant legal articles are used as a reference when necessary. Eligibility is an issue that stakeholders may doubt and may cause disagreements. Often the locals do not carefully read the criteria on this subject or long explanations can be tiring for them. For this reason, it is important to explain the eligibility criteria to stakeholders through face-to-face meetings describing the process.

18.5 Livelihood Restoration and Community Development Programs

Various methods can be used in the application of LRP. Among these, there may be community-based LRP application for risk groups, household-based application or even support for individuals. Hybrid methods that include all of these may be functional in some cases. The method of LRP is determined during the preparatory work according to the characteristics of the target group, the size of the impact and the needs.

Community development program can be implemented as a support program other than LRP. This is an optional strategic decision. Long-term community development programs can be developed if the affected population density is high in the area and the extent of the impact is permanent. These programs may specifically target vulnerable – disadvantaged groups within the affected population. It is possible to prepare a sustainable development program for the people of the region and support it with rational development projects.

Such programs aimed at improving the living standards and livelihoods of the people of the region should include objectives that meet local needs and development and social development trends.

18.6 Principles and values

The credibility of the work increases if the project implementing institution (or partnership) specifies the principles and values to be adhered to during the implementation of the LRP as a set of priorities and shares this with the stakeholders.

18.7 Monitoring & Evaluation

In order to monitor the whole process from the beginning, a monitoring program is established according to local conditions, time and budget. The objective of monitoring is to observe whether livelihoods are successfully restored and persistence.

A component of the monitoring program can also be established as monitoring of histories of identified individuals and families, if conditions permit, and if there is sufficient time. For this, stakeholders must trust the monitoring team, and dialogue based on sincerity must be established.

Performance indicators need to be determined beforehand for monitoring. These indicators can be updated when necessary during the LRP implementation.

Quantitative indicators (economic income, productivity, etc.) are relatively easy to detect and monitor. However, the effects on satisfaction are difficult to monitor. For this, it may be a good choice to follow the story with pre-determined stakeholders.

18.8 Implementation Schedule and Budget

An implementation schedule is created, taking into account possible risks and external factors (climate, holidays, intense work schedules of stakeholders). Preparing a flexible budget in accordance with this calendar and LRP implementation program will also allow unexpected expenses to be incurred during implementation.

19. LABOUR & WORKING CONDITIONS

This Chapter provides baseline information on the labour and working conditions in Uzbekistan, explains the Contractor's approach to the management of labour and working conditions including occupational health and safety (OHS) aspects and accommodation conditions during the construction phase, sets out operation phase labour and working conditions risks and impacts, and presents management measures to be taken in the Project to ensure compliance with the applicable legislative requirements as well as international standards.

19.1 Standards and Regulatory Requirements

19.1.1 National Requirements

Uzbekistan pursues a purposive policy of creating a legal framework for the protection of human rights and freedoms in accordance with international standards (ILO, 2008). Having joined the world community, the Republic has constitutionally sealed the priority of universally accepted norms of

international law. As a fully-fledged member of the United Nations Organization, Uzbekistan accedes to international human rights acts thus assuming an obligation to comply with them and apply them in its state and legal practice.

The universal significance of international human rights acts means that its provisions should be embodied in national legislation. The Main Law of the Republic of Uzbekistan includes all the provisions of the Universal Declaration of Human Rights.

Uzbekistan has published several laws since foundation for protection of Human and worker rights. General information about these legal can be found below.

19.1.1.1 The Constitution of the Republic of Uzbekistan (December 8 1992)

Article 37 of the Constitution of Uzbekistan says that "each has the right to work, to free choice of work, fair terms of work and protection against unemployment under the law."

19.1.1.2 Labour Code of the Republic of Uzbekistan (1995 as amended in 2017)

The code treats labour legislation with due account of the interests of the employees, employers and the state and fair and safe labour conditions and the protection of the labour rights and health of the workers.

More than 30 articles of the Labour Code are directly linked with issues of occupational safety and health. They include:

- Occupational safety and health requirements (Article 211);
- Ensuring safe and healthy labour conditions (Article 212);
- Instruction and training in OSH matters (Article 215);
- Regulation of working hours in hazardous occupations for workers performing special work and workers under 18 (Articles 116, 117 and 118);
- Terms of recruiting invalids for various jobs (Article 220);
- Providing first medical aid to workers who have fallen ill at work (Article 221); and
- Registration and investigation of accidents, supervision of labour conditions (Article 222) and others.

19.1.1.3 The Law of the Republic of Uzbekistan on Occupational Safety and Health

In pursuant to Article 37 of the constitution of the Republic of Uzbekistan, the Oliy Majlis(parliament) on May 6, 1993 passed the law of the Republic of Uzbekistan on Occupational Safety and Health that laid the legal groundwork for the functioning of all the branches in managing the activities of enterprises of any form of ownership aimed at improving labour conditions and well-being at production facilities, at forming a system of socio-economic, organizational, technical, sanitary and medical preventative measures and providing the legal groundwork for occupational safety and health.

The Law on Occupational Safety in Hazardous Production Facilities passed on August 25, 2006 sets down the legal, economic and social terms of ensuring safe exploitation of hazardous production facilities and is aimed at preventing accidents and building the capacity of enterprises to liquidate their aftermath.

Under the Law of the Republic of Uzbekistan On Occupational Safety and Health, the following are the main principles of the state OSH policy:



- Priority of the life and health of the worker over the results of the enterprise activities;
- Coordination of osh activities with other areas of economic and social policy;
- Establishment of uniform osh requirements for all the enterprises irrespective of their form of ownership and management;
- Ensuring environmentally safe labour conditions and systematic control of the environment in the workplace;
- Supervision and monitoring of universal compliance with osh requirements at enterprises;
- State participation in funding osh;
- Training of osh specialists at higher and secondary specialized education institutions;
- Providing incentives for the development and introduction of safe technology and means of protecting workers;
- Wide-scale use of the achievements of science, technology and the best domestic and foreign practices in the field of osh;
- Free provision of workers with special work clothes and footwear, individual protection means and medical-preventative nutrition;
- The conduct of a tax policy that stimulates occupational safety and health at enterprises;
- Mandatory investigation and registration of each occupational accident and occupational disease case and on that basis keeping the public informed about the levels of occupational accidents and diseases;
- Social protection of the interests of the workers who have become victims of occupational accidents or diseases;
- All-around support for the activities of trade unions and other non-governmental associations, enterprises and individuals in the field of osh; and
- International cooperation in dealing with OSH problems

Supporting legislation passed pursuant to individual articles of the law include:

- Decrees of the Cabinet of Ministers of the Republic of Uzbekistan:
- No.538 of November 7, 1994 On State Management of Occupational Safety and Health;
- No.58 of February 16, 1995 On Managing Occupational Safety and Health of the Labour Ministry of the Republic of Uzbekistan;
- No. 286 of July 6, 1997 Regulations on Investigation and Registration of Occupational Accidents and Other WorkRelated Impairment of the Health of Workers and other regulations:
- Model regulations on the organization of OSH;
- Model regulations on training in and testing the knowledge of OSH;
- Regulations on the OSH officer;
- Methodological guide to rational employment of invalids;
- Lists of hazardous jobs where work of persons under 18 is prohibited and where the use of women's labour is fully or partially prohibited, etc.;
- Methodology of assessing labour conditions and workplaces in terms of labour conditions;
- Procedure of attestation of workplaces where the labour of invalids is used;

- Regulations on the development of OSH instructions, etc.

19.1.1.4 Ordinance No. 30-31 Elimination of child labour, protection of children and young persons

Ministry of Labour and Social Security and the Ministry of Health of the Republic of Uzbekistan approving the list of hazardous jobs mentioned in Article 355, for which the employment of persons under the age of eighteen years is prohibited.

19.1.1.5 Joint Decree of the Ministry of Labour and Social Protection of the Population (No. 7) and the Ministry of Healthcare (No. 1)

Dated 30 May 2001 to approve the list of occupations with unfavourable working conditions to which it is forbidden to employ persons under 18 years of age.

19.1.1.6 Decree of the Cabinet of the Ministers No. 1011 of 22 December 2017

Decree name is "On Perfection of the Methodology of Definition of Number of People in Need of Job Placement, including the Methodology for Observing Households with Regard to Employment Issues, also for the Development of Balance of Labour Resources, Employment and Job Placement of Population". It covers Employment policy, promotion of employment and employment services. The decree establishes, introduces and sets standards and procedures for;

- Form of the balance of labour resources, employment and job placement of population;
- Scheme of systematizing of information for the development of labour resources, employment and job placement;
- Scheme of organization of development of reporting and broadcasting balances of labour resources, employment and job placement;
- Methodology of calculation of unemployed people in need of job placement, also of development of the balance of labour resources, employment and job placement.

Decree of the Cabinet of the Ministers No. 965 of 5 December 2017 "On the Measures of Further Perfection of the Procedure of Establishment and Reservation of Minimum Number of Job Places for the Job Placement of Persons who are in need of Social Protection and Face Difficulties in Searching Employment and Incapable of Competing in Labour Market with Equal Conditions".

Decree No. 964 of 5 December 2017 "On the Measures for Perfection of the Activity of Self-Government Bodies Aimed at Ensuring Employment, Firstly for the Youth and Women".

19.1.1.7 International Labour Organization Labour Standards

The International Labour Organization (ILO) is devoted to promoting social justice and internationally recognized human and labour rights, pursuing its founding mission that social justice is essential to universal and lasting peace. The ILO aims to ensure that it serves the needs of working women and men by bringing together governments, employers and workers to set labour standards, develop policies and devise programmes. The very structure of the ILO, where workers and employers together have an equal voice with governments in its deliberations, shows social dialogue in action. It ensures that the views of the social partners are closely reflected in ILO labour standards, policies and programmes.

There are 19 ILO conventions and 1 protocol ratified by Uzbekistan, which will be applied:



- C029 - Forced Labour Convention, 1930 (No. 29)
- P029 - Protocol of 2014 to the Forced Labour Convention, 1930
- C047 - Forty-Hour Week Convention, 1935 (No. 47)
- C052 - Holidays with Pay Convention, 1936 (No. 52)
- C081 - Labour Inspection Convention, 1947 (No. 81)
- C087 - Freedom of Association and Protection of the Right to Organise Convention, 1948 (No. 87)
- C098 - Right to Organise and Collective Bargaining Convention, 1949 (No. 98)
- C100 - Equal Remuneration Convention, 1951 (No. 100)
- C103 - Maternity Protection Convention (Revised), 1952 (No. 103)
- C105 - Abolition of Forced Labour Convention, 1957 (No. 105)
- C111 - Discrimination (Employment and Occupation) Convention, 1958 (No. 111)
- C122 - Employment Policy Convention, 1964 (No. 122)
- C129 - Labour Inspection (Agriculture) Convention, 1969 (No. 129)
- C135 - Workers' Representatives Convention, 1971 (No. 135)
- C138 - Minimum Age Convention, 1973 (No. 138)
- C144 - Tripartite Consultation (International Labour Standards) Convention, 1976 (No. 144)
- C154 - Collective Bargaining Convention, 1981 (No. 154)
- C167 - Safety and Health in Construction Convention, 1988 (No. 167) (The Convention will enter into force for Uzbekistan on 09 Jun 2023.)
- C182 - Worst Forms of Child Labour Convention, 1999 (No. 182)
- C187 - Promotional Framework for Occupational Safety and Health Convention, 2006 (No. 187) (The Convention will enter into force for Uzbekistan on 14 Sep 2022)

19.1.2 Lenders Requirements

19.1.2.1 Equator Principles IV

Equator principles mentions about general framework on management of E&S risks of projects. EP IV refers to IFC performance standards for identification and addressing the social and economic impacts of a project. The key standard for addressing and identifying risks main regulation is;

- IFC Performance Standard 2 Labour and Working Conditions.
- IFC Performance Standards 2 has following objectives;
- To establish, maintain and improve the worker-management relationship
- To promote the fair treatment, non-discrimination and equal opportunity of workers, and compliance with national labor and employment laws
- To protect the workforce by addressing child labor and forced labor
- To promote safe and healthy working conditions, and to protect and promote the health of workers

In according to IFC PS2 there is a requirement to follow following conventions;

- ILO Convention 29 on Forced Labour;
- ILO Convention 87 on Freedom of Association and Protection of the Right to Organize;
- ILO Convention 98 on the Right to Organize and Collective Bargaining;
- ILO Convention 100 on Equal Remuneration;
- ILO Convention 105 on the Abolition of Forced Labour;
- ILO Convention 138 on Minimum Age (of Employment);
- ILO Convention 182 on the Worst Forms of Child Labour;
- ILO Convention 111 on Discrimination (Employment and Occupation);
- UN Convention on the Rights of the Child, Article 32.1; and
- UN Convention on the Protection of the Rights of all Migrant Workers and Members of their Families.

In addition to above conventions and standards, the Project will also be required to adhere to the United Nations Guiding Principles on Business and Human Rights to ensure that it complies with all applicable laws and to respect human rights

19.1.2.2 IFC Guidance on Gender Based Violence and Harassment (GBVH) in the Construction Sector and COVID-19

There is growing recognition that operators in the private, public and non-profit sector need to address gender-based violence and harassment (GBVH) more proactively. For the private sector, this is motivated by the need to prevent the physical, sexual, emotional and financial harm GBVH causes to individuals, as well as the financial, reputational and legal risks it poses to businesses and investors.

GBVH is widespread. It affects both men and women, but is most often perpetrated by men against women and girls, with more than one in three women having experienced some form of physical or sexual violence during their lifetime.¹ GBVH is not inevitable, however, and can be prevented. When it does happen, it is important that it is responded to in a responsible and effective way.

Addressing GBVH in the private sector is a relatively new and complex area. CDC, the IFC recognise the need for companies and investors to have access to practical guidance. All three organisations jointly commissioned this guidance note, which outlines emerging practices in addressing GBVH in operations and investments. These practices are drawn from recent experience in the private sector, as well as a larger body of work from the non-profit sector. The guidance provides an opportunity to engage with stakeholders to refine practices as those in the private sector collectively gain implementation experience.

Steps to manage GBVH risks derived from workforce can be seen in Figure 196.

In the context of COVID-19 pandemic, the following Interim Advice Notes published by the IFC will also be applicable to the Project:

- Tip Sheet for Company Leadership on Crisis Response: Facing the COVID-19 Pandemic
- Interim Advice for IFC Clients on Preventing and Managing Health Risks of COVID-19 in the Workplace
- Interim Advice for IFC Clients on Supporting Workers in the Context of COVID-19
- Interim Advice for IFC Clients on Developing a COVID-19 Emergency Preparedness and Response Plan (EPRP)
- Addressing Increased Reprisals Risk in the Context of COVID-19

Interim Advice for IFC and EBRD Clients on Migrant Workers and COVID-19

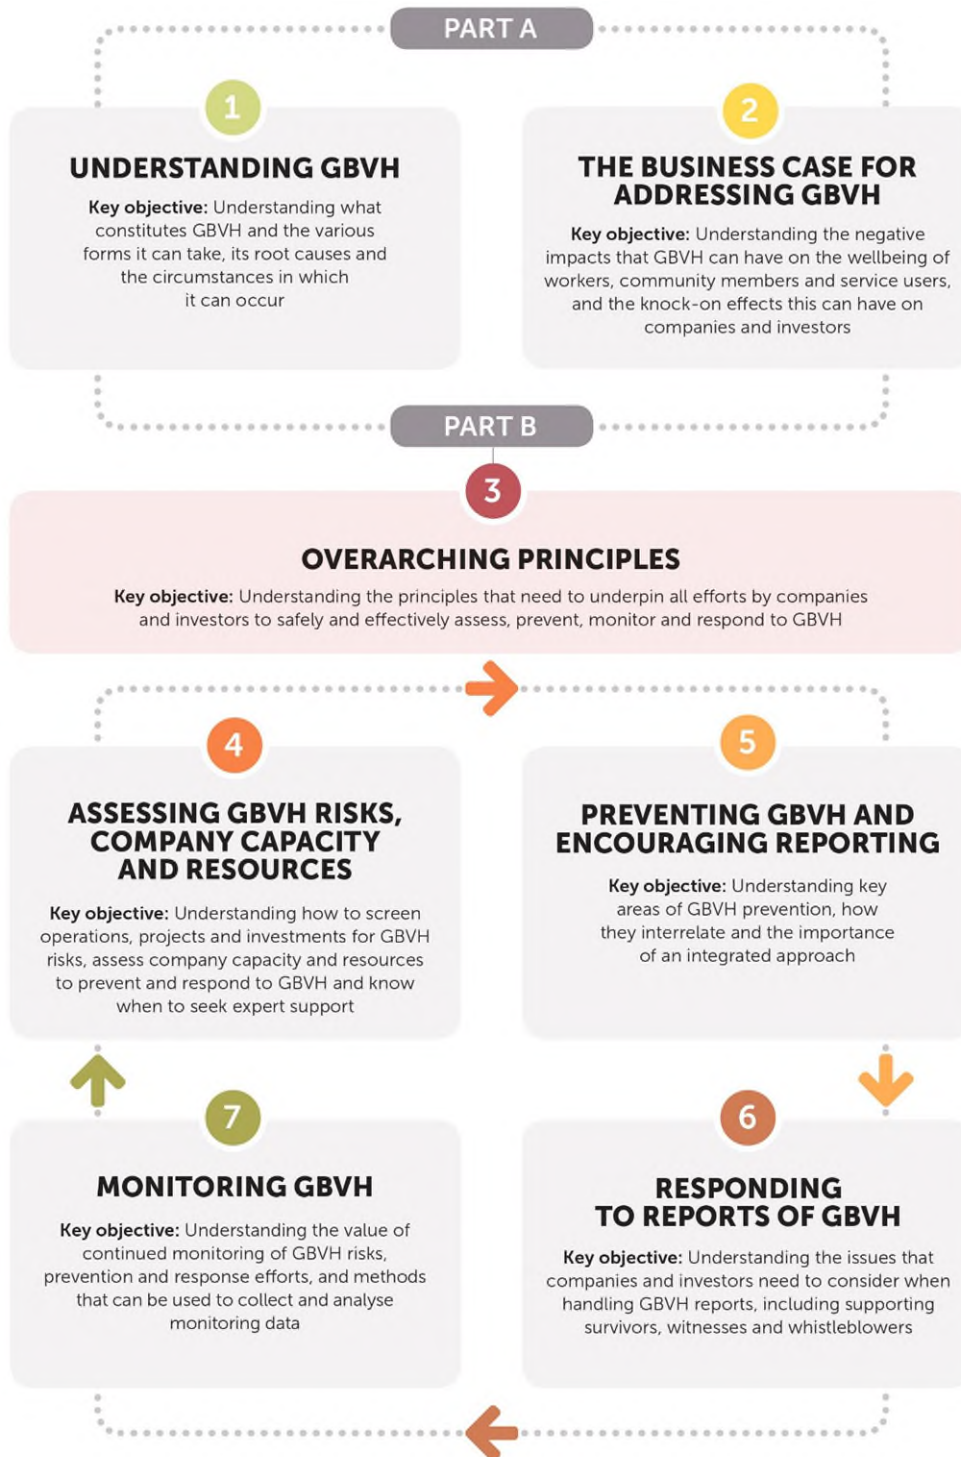


Figure 196: GBVH Risk Management Flow Scheme

The assessment, prevention, monitoring and response measures in regards to GBVH should be underpinned by the following principles:

- **Survivor Centred:** The rights of GBVH survivors need to be consistently prioritized and used as the starting point for all decisions on efforts to assess, prevent, monitor and respond to GBVH.
- **Safe:** Survivors, witnesses and those who report and seek to address GBVH can be at risk of retaliation, including threatening and violent behaviour, often from those who do not like their position of power being challenged. Companies should prioritise the safety of those who have experienced, witnessed and reported GBVH.
- **Context specific:** All measures need to be rooted in a thorough understanding of the local context. Investors and companies should understand the legal and social context and identify the support mechanisms that are in place.
- **Collaborative:** Companies should seek inputs from a range of internal and external stakeholders to increase the likelihood of broader buy-in and make GBVH prevention more effective.
- **Inclusive:** Companies should recognise the heightened risks of GBVH faced by certain groups who are subject to discrimination and marginalisation. High risk groups often include people with disabilities, single parents, migrants and ethnic minorities and sexual and gender minorities. The system should also account for illiterate or non-literate people who may not be able to access written information on GBVH reporting mechanisms.
- **Integrated:** Processes, efforts to assess, prevent, monitor and respond to GBVH needs to be integrated as much as possible into existing processes and management systems, such as occupational health safety, security management systems, environmental and social management systems (ESMS) and human resources (HR) policies and procedures.
- **Non-discriminatory:** All survivors need to be listened to and treated equally and promote diversity in the work place.
- **Well-informed:** Companies should draw on relevant expertise when developing prevention and response measures. The grievance mechanism and investigation procedures should be set up to ensure they are appropriate, relevant and safe in the local context.

According to the guidance, the benefits of addressing GBVH include:

- Improves workers' physical and emotional wellbeing and strengthens occupational health and safety.
- Avoids reputational damage, financial risks and legal liabilities for companies, investors and construction contractors.
- Builds relationships and social license to operate in communities. This can result from regular dialogue to understand and track project GBVH risks as well as the effective use of measures to prevent and respond to GBVH.
- Broadens the pool of potential workers that companies can draw upon, including women workers from nearby communities because of lower perceived risk of GBVH.

19.1.2.3 Equator Principles Guidance on Implementation of the Equator Principles During the Covid-19 Pandemic

The guidance recommends that the borrower should consider the following in the engagement of workforce and management of risks:

Engagement of Workforce

- Communicate its approach to COVID-19 management to its workforce (including contractors) and provide information and advice about the virus.
- Engagement methods should ensure the ability to provide frequent updates with a central information communication network that allows workers to access all the latest information and guidance.
- Consider the need for a 24-hr hotline.
- Design communication in a way that avoids risks of stigma associated with infection in line within available good practice.

Managing Health Risks

It is recommended that the borrower shall develop a range of actions/procedures to manage workers risks. These procedures must align with the latest guidance/requirements at national/regional levels and WHO guidelines. It should also ensure that up to date information is maintained at the Project level and liaise with national/local authorities as applicable.

Welfare and Livelihoods

Where travel restrictions lead to workers remaining on site for longer rotations, fatigue management procedures are recommended. The following measures are also recommended in instances where workforce reduction maybe required:

- Consultation with workers/representatives during the entire process of evaluating viable options.
- Options for avoiding redundancy should be considered in the first instance (e.g. paid/unpaid leave, reduced hours/pay) with retrenchment taken as the last option.
- Reduction in workforce should be undertaken incrementally where possible and regularly reviewed.

Consideration should also be given to risks posed to vulnerable workers i.e. casual workers, woman, workers with childcare issues, supply-chain workers and their needs and support provided as required.

Relevant guidance notes published by the EP and applicable to the Project ESIA include the following:

- EP Guidance Note on Implementation of Human Rights Assessments Under the EP (2020)
- EP Guidance Note on Climate Change Risk Assessment (2020)
- EP Guidance Note on Biodiversity Data Sharing for EPFI Clients (2020)
- EP Guidance Note on Implementation of EP during the COVID-19 Pandemic (2020)

19.2 Observations and Baseline Conditions

Any construction project will introduce health and safety risks associated with the use of plant, machinery and construction processes. Risks can be severe depending on the type of activities required, materials used and site condition.

Due to an influx of workers in the Project area from other regions/countries consideration will be needed to be given in relation to accommodation facilities, worker welfare, sanitary provision, health care, hygiene, food and potable water etc.

Forced labour is a general practice in the country especially on cotton industry. Uzbekistan continued to demonstrate major progress in the eradication of child labour and forced labour in the 2020 cotton harvest. As in previous years, there were only isolated cases of minors below the legal working age picking cotton. The share of people experiencing forced labour during the harvest was reduced by 33 percent compared to 2019 (ILO 2020).

- The ILO continues to find that systematic child labour is no longer used during the cotton harvest in Uzbekistan. Schoolchildren and students were not mobilized for cotton picking; however, isolated cases of child labour still occurred.
- Systematic forced labour did not occur during the 2020 cotton harvest. Reforms are implemented step-by-step and continue to have a significant positive impact; yet there are still challenges with uneven implementation in certain provinces and districts. The monitors could work unhindered and in confidentiality.
- The nation-wide share of forced pickers declined by 33 percent in 2020. The vast majority of pickers participated in the harvest voluntarily but about 4 percent were subject to direct or perceived forms of coercion. Some provinces and districts had very few or no forced labour cases in 2020.

According to the same ILO report there are cases of forced labour outside of cotton industry. In total, 106 forced labour cases were recorded in 2020 across the country covering primarily landscaping, cleaning and construction works. The trend of identifying forced labour cases outside the cotton harvest is positive and speaks to increased awareness and attention to the issue. 22 representatives of private employment agencies were brought to justice for violations of legislation on recruitment of people for work abroad in line with the articles 168 and 228 of the Penal Code.

The Uzbekistan government has already got a hotline for reporting forced labour incidents. Namangan, Jizzakh, Tashkent and Surkhandarya provinces had the most cases in the Ministry of Employment and Labour Relations (MELR) Feedback Mechanism.

Beside the above mentioned ILO report, a news channel reports that there were a large scale riot in a thermal power construction project in Qashqadarya Viloyat (state) which is neighbor of Surkhandarya region due to unpaid salaries and weak food services and accommodation (RFERL, 2020).

Common activities undertaken during construction such as the movement of heavy machinery, excavation, handling of chemicals, works undertaken at height etc. can all introduce significant risk to the health and safety for the associated work force. In particular, risks are more likely to be apparent for those who are not familiar with the type of works undertaken and/or the associated hazards.

The type of hazards attributable to a construction site will vary significantly depending on the construction methods employed and the degree of control implemented by the contractor and affiliated

sub-contractor. It is therefore of the utmost importance that the contractor and affiliated sub-contractors demonstrate consideration of health and safety risks as part of their chosen construction methods and that these risks are appropriately mitigated.

General risks expected during the construction phase are;

- Over exertion
- Slips and fallas
- Work in heights
- Struck by Objects
- Moving Machinery
- Dust
- Confined Spaces and Excavations
- Other Site Hazards (Chemicals, hazardous materials)

19.3 Potential Impacts, Mitigation, Management & Residual Impact

The risks and impacts associated with labour and working conditions in the Project's construction and operation phases are described here, encompassing both contractors and subcontractors (main and lower tier), and the mitigation measures to be taken to mitigate identified impacts.

To identify Project-related risks and impacts on labour and working conditions, the WBG General EHS Guidelines (OHS, Construction and Decommissioning for general impacts) and industry specific WBG EHS Guidelines have been considered, including the OHS risks and impacts outlined below.:

- Risks and impacts associated with labour and working conditions during the construction and operations phases (including on-site and off-site accommodation conditions of the Contractor and subcontractor personnel during the construction phase)
- OHS risks due to emergency situations (including COVID-19 pandemic related risks) during the construction and operation phases
- OHS risks and impacts associated with general and job-specific hazards during the construction and operation phases

19.3.1 Construction Phase

19.3.1.1 Health Risks Associated with Covid-19

The current COVID-19 pandemic poses potential risks to the health and safety of the workers and the development of the Project. It is expected that there will be approximately 2000 workers at the peak of the Project construction Phase. These workers will be sourced locally but will also include migrant workers from other regions of Uzbekistan and from other countries and thus heightening the risk of infection (i.e. some workers may come from regions/countries with higher COVID-19 infection cases). Such a high number of workers working in close proximity or confined spaces increases the risk of infection. Risk of exposure will also be potentially high in shared accommodation areas, canteens and transportation buses. The contractor will therefore be required to conduct a COVID-19 Construction Risk Assessment which must be regularly updated in line with national/local and WHO requirements and guidance.

19.3.1.2 Working Conditions

Labour exploitation on construction sites unfortunately has become a reality in some parts of the world. Inequalities in income, education and opportunities has led to opportunistic immoral practices with labourers and site staff suffering as a consequence of the exploitation.

To ensure the wellbeing of the staff associated with the project, the EPC and associated subcontractors will need to plan for necessary provisions relative to the requirement of the required workforce. This includes appropriate labour accommodation plans and mechanism for inspections and corrective actions.

The EPC Contractor shall adhere to good practice measures regarding worker welfare on and off site particularly in terms of sanitation facilities on site, and having adequate checks and balances regarding timely payment of salaries and having necessary redressal access in case of forced retrenchment.

Due to the ongoing COVID-19 pandemic, movement of workers to their families or home region/countries may be restricted which could leave some feeling isolated, fatigued and could lead to mental health issues if not properly addressed. In addition, some workers may be required to work from home in cases where schools are closed in order to take care of their children. In such instances, women may be more disproportionately affected than the men.

As with occupational health & safety risk, worker conditions are a defined aspect of site planning rather than a potentially environmental impact as such, its significance is not assessed further in this ESIA. Risks associated with worker welfare during construction will be managed through effective project planning, and the enforcement of fair and just treatment throughout the construction phase.

Working hours and shifts will be regulated in compliance with the requirements of the national law as summarised below:

- Single shifts are foreseen to be used throughout the project. However, additional shifts would be organized based on need, with the employees allocated to said additional shifts working within the legal limits mentioned above.
- The work week is anticipated to comprise 6 working days of 7.5 hours each for a total of 45 work hours per week, which is the legal minimum requirement for full-time labour employment as per the national Labour Law.
- As mandated by the Labour Law, Employees will have one rest day per week.
- Where needed and contingent on the employee's consent, overtime work will be regulated and compensated in accordance with the Labour Law, up to the legal upper limit of 11 hours per day.

The Project Company will have a Human Resources (HR) Policy and the following management plans developed to address management of labour, working and accommodations aspects of the Project:

- Labour Management Plan (including off-site accommodation and covering management of risks stemming from Project's supply chain)
- Subcontractor Management Plan (covering the management of risks stemming from Project's supply chain)
- Camp Site Management Plan

In addition, the Contractor will develop and implement a Project-specific HR Policy as well as Camp Site, Subcontractor and Labour Management Plans and Internal Grievance Mechanism in line with the



requirements of IFC PS2. Through compliance with the requirements of the national legislation and implementation of the HR Policy and related management plans, the potential risks and/or impacts on Project personnel associated with labour and working conditions will be managed in line with the Project Standards.

As detailed in the stand-alone Project SEP and summarised in Chapter 17, engagement with the Project workforce and collection of their feedback, concerns, grievances and suggestions for integration to the Project implementation will be provided through the following channels:

- Verbally through Project directors, managers, chiefs, H&S specialists, CLOs, etc. and subcontractors (to be conveyed to the Contract systematically)
- During monthly H&S committee meetings and other meetings with employees
- Through periodical employee satisfaction surveys

Through grievance and feedback and forms to be placed at the camp, work and accommodation sites, as appropriate

Young workers below the age of 18 require special protection and systems should be in place to ensure that a non-discriminatory but protective workplace for young workers, in which their occupational health and safety (OHS) is ensured. This includes implementing specific measures on contracting, working hours, onboarding and orientation, communication and ongoing OHS protection specifically aimed at young workers [118].

Young people under the age of 18 will not be employed in hazardous work and all work is undertaken by persons under the age of 18 will be subject to an appropriate risk assessment. If young workers are found working in hazardous tasks or processes:

- Young workers will be removed from the hazard.
- Young workers will be offered access to "low risk" work, without reducing salary or benefits.
- Health checks will be arranged and ensure any necessary treatment is provided, including for long term exposure to hazards (e.g., dust, vibration, excessive noise).
- The young worker's situation will be monitored regularly to ensure that children do not gradually shift back to high-risk activities.

It will be ensured that the HR Policy to be developed by the Project Company will cover forced labour aspects. In addition, the EPC Contractor and subcontractor personnel will be provided with training on the Project-specific HR Policy and labour aspects including forced labour at the time of employment (refresher training will be provided annually and as required). The Project Company will develop and implement an internal audit system to check and monitor compliance of the Contractor, subcontractor and -to the extent possible and through feasible methods- primary suppliers implementations with the forced labour related requirements of the following Project-specific documents:

- HR Policy
- Subcontractor Management Plan (covering management of risks stemming from Project's supply chain)
- Labour Management Plan (covering management of risks stemming from Project's supply chain)
- Internal Grievance Mechanism as part of Project SEP



In consideration of the remedies to be implemented by the EPC Contractor during the construction phase, the Project Company will establish and implement necessary mechanisms for the management of human rights impacts and risks of the Project in line with the Project Standards.

19.3.1.3 Gender Based Violence and Harassment (GBVH)

Influx in workers from outside the Project region will increase the likelihood of Gender Based Violence (GBV). The construction workers are likely to be predominantly young male coming from other regions of Uzbekistan and outside the country. These workers will be away from their families and removed from their normal social spheres. This could potentially result into peer pressure and involvement in unlawful behaviour such as harassment of local women, young girls and boys or women within the Project workforce. Such behaviour can lead to increase in exploitative sexual relationships and unwanted aggressive advances and harassment. This could also lead to disintegration of relationships in local households impacted by GBV.

During the construction phase, workers will also be vulnerable to various forms of harassment, exploitation and abuse, aggravated by traditionally male working environment. GBVH is likely to be committed by co-workers or construction supervisors and can be attributed to gender stereotypes about the sexual availability of female construction workers. In addition, income earning opportunities for women through direct employment during the construction phase or through indirect employment has the potential to increase household tensions and expose women to harassment and violence in their homes or communities.

Some of the male workers who will be transporting Project machinery and equipment and goods will also be involved in long distance travel which in some cases will be between different countries. There is a risk that they can also be involved in GBVH on the routes they use and at track stops associated with the Project even if it is outside the Project boundary.

In order to communicate the project's approach to prevention of gender-based violence and harassment (GBVH) and raise awareness among the project staff, contractor and subcontractor personnel using off-site accommodation facilities will receive special training on, among other things, the project's social policy and contractor's code of conduct. As part of internal audit system to be established and implemented by the Contractor during the construction phase, potential risks of impacts of the Project due to off-site accommodation will be monitored and managed. Through the external and internal grievance mechanisms, such risks, if any, will be continuously identified, evaluated and managed to be operated as part of Project SEP implementation.

It will be crucial to regulate labor and working conditions given the nature and size of the Project. The Project is required to provide adequate working and accommodation conditions, promote fair treatment, nondiscrimination and equal opportunities to all personnel, including both the direct workers of the Contractor and contracted workers of the subcontractors. Due to the high number of potential lower-tier subcontractors to be involved in the Project, additional management and monitoring measures are anticipated to be required to ensure that the Project Standards are consistently fulfilled by the Project subcontractors.

Off-site accommodation will be covered by the Project-Specific Labour Management Plan, which will be developed and put into effect to control any potential effects during the construction phase. Contractor and subcontractor personnel using off-site accommodation facilities will be provided with special training on, inter alia, Project's Social Policy and Contractor's Code of Conduct to communicate Project's approach to prevention of GBVH and raise awareness among the Project personnel. As part of internal audit system to be established and implemented by the Contractor during the construction phase, potential risks of impacts of the Project due to off-site accommodation will be monitored and

managed. Such risks will further be continuously monitored, evaluated and managed through the external and internal grievance mechanisms to be operated as part of Project SEP implementation.

The potential benefits on the economies of the nearby settlements and district centers (such as rental incomes, supply of goods and materials, etc.), as well as the negative risks or impacts on the nearby district centers (such as increased demands on infrastructure, services, and utilities, development of illicit trade activities, inflation in local rent and other subsistence items, or risk of gender-based violence and harassment (GBVH), are anticipated.

19.3.1.4 Employment and Procurement

The Project shall develop a Human Resources Policy, Labour and Employment Plan as well as specific recruitment policies and procedures:

Project-specific Human Resources Policy, including the below labour aspects, will be developed and implemented in line with IFC Guidance Note 2:

- Grievance mechanism
- Child Labour
- Forced Labour Workers' organisations
- Working conditions and terms of employment
- Working relationship
- Non-discrimination and equal opportunity
- Retrenchment
- OHS
- Workers engaged by third parties
- Supply chain

The Project should prioritise the recruitment of workers and procurement of goods and services from within the Districts then to national companies.

This will not apply to the provision of highly technical equipment. The Project should develop a fair and transparent employment and procurement policy and processes to avoid any potential for nepotism or favouritism. The policy should be shared with the local community members and leadership.

19.3.1.5 Occupational Health and Safety

Common activities undertaken during construction such as the movement of heavy machinery, excavation, handling of chemicals, works undertaken at height etc. can all introduce significant risk to the health and safety for the associated work force. In particular, risks are more likely to be apparent for those who are not familiar with the type of works undertaken and/or the associated hazards.

The type of hazards attributable to a construction site will vary significantly depending on the construction methods employed and the degree of control implemented by the EPC and affiliated sub-contractor. It is therefore of the utmost importance that the EPC and affiliated sub-contractors demonstrate consideration of health and safety risks as part of their chosen construction methods and that these risks are appropriately mitigated. As occupational health and safety is a risk rather than a potentially defined impact, its significance has not been assessed further in this ESIA. Health and



safety risks to the site force will be managed through effective risk assessment, development and implementation of an Occupational Health & Safety Plan.

A structured Grievance Redress Mechanism (GRM) shall be implemented at the plant level in multiple languages anonymously (online and hardcopy) so that workers have access to express their concerns. The human resources department shall be responsible for implementing the GRM for the facility.

Table 231: Impacts Significance of the Labour and Working Conditions during– Construction Phase

Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
Occupational Health and Safety	Project Employees	High	Medium	Major	<p>Workers will be provided with a safe and healthy work environment, taking into account inherent risks and specific classes of hazards associated with the project.</p> <p>The contractor will set, implement and maintain an Occupation Health and Safety (OHS) system. The risks associated with project specific locations, and processes should be assessed by competent OHS professionals in the project. Legal requirements and duty of care should be considered.</p> <p>The Contractor will be responsible for ensuring that all sub-contractors, sub-sub-contractors and suppliers comply with the OHS management system of the project. The OHS management system will be in-line with recognised international best practice and as a minimum, this plan will include:</p> <p>Means of identifying and minimising, so far as reasonably practicable, the causes of potential H&S hazards to workers.</p> <p>Provision of preventive and protective measures, including modification, substitution, or elimination of hazardous conditions or substances.</p> <p>Provision of appropriate equipment to minimise risks, and requiring and enforcing its use.</p> <p>Training of workers, and provision of appropriate incentives for them to use and comply with H&S procedures and protective equipment.</p> <p>Documentation and reporting of occupational accidents, diseases and incidents.</p> <p>Emergency prevention, preparedness and response arrangements</p>	Moderate
Risks Associated with Covid- 19	Project Employees and Stakeholders	High	Medium	Major	<p>Covid-19 construction phase risk assessment should be developed during the mobilization phase. The risk assessment should be evaluated regularly by the project management and risks and measures should be updated in line with international and national legal requirements, WHO guidelines.</p> <p>Develop a COVID-19 specific communication procedure for the workforce.</p> <p>Set up a 24/7 hotline</p> <p>Infected employee must be isolated and cared in specific rooms. Free rooms for covid infected personnel should be ready at construction camp.</p> <p>Identification of any vulnerable groups (i.e. those with pre-existing conditions) working in the Project site (for the contractor and sub contractors) and taking precautionary measures in accordance with the national and WHO guidelines.</p> <p>Providing testing for staff as required at no cost to them.</p> <p>Ensuring that social distancing measures are put in place i.e. allowing some of the office staff to work from home, working in shifts etc.</p> <p>Promotion of personal hygiene among the workers and providing training, posters remind workers to wash their hands regularly, cleaning their work areas and equipment, proper sanitation etc.</p> <p>Masks should be free for project at all times and proper PPE for health personnel should be provided at no cost.</p> <p>While designing the accommodation facilities, social distancing, proper ventilation and hygiene must be considered.</p> <p>The transportation of workers and access to the site shall be coordinated and regulated i.e. through reduced bus occupancy, temperature and PPE checks etc.</p>	Moderate

Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
Employment, non-discrimination and Equal Opportunities	Project Employees	High	Medium	Major	<p>The Contractor will provide a flexible or hybrid working regime for those workers who may prefer to work from home due to health issues, child care, home schooling etc without fear of victimisation.</p> <p>The contractor shall submit a plan showing how the terms and conditions of employment comply with national labour, social security and occupational health and safety legislation.</p> <p>The employment relationship shall be based on the principle of equal opportunity and fair treatment and shall not discriminate with respect to any aspect of the employment relationship, including recruitment, remuneration (including wages and benefits), terms and conditions of employment, including maternity/paternity leave provisions, access to training, promotion, termination of employment or retirement, and discipline.</p> <p>The contractor will not make recruitment decisions on the basis of personal characteristics such as gender, race, nationality, ethnic origin, religion or belief, disability, age or sexual orientation which are unrelated to the inherent job requirements.</p> <p>Sexual violence or harassment will not be tolerated and the Contractor will include this in the Worker Code of Conduct, which will be made available in local languages.</p> <p>The Contractor will document and communicate to all workers their terms and conditions of employment, including their entitlement to wages, hours of work, overtime rules and overtime pay, and any benefits (such as sick leave, maternity/paternity leave or holiday).</p> <p>The contractor will base the employment relationship on the principle of equal opportunity and fair treatment and will not discriminate in relation to any aspect of the employment relationship, including recruitment and hiring, remuneration (including wages and benefits), terms and conditions of employment, accommodation, access to training, promotion, termination of employment or retirement and disciplinary action.</p> <p>Special measures of protection or assistance to promote local employment opportunities or selection for a particular job based on the inherent requirements of the job which are in accordance with national law, will not be deemed discrimination.</p>	Moderate
Forced Labour and Child Labour	Minors, Project Employees and Stakeholders	Medium	High	Major	<p>The contractor will not use forced labour, which is any work or service that is not voluntarily performed and is required of a person under threat of force or punishment. This includes any type of involuntary or forced labour, such as indentured labour, debt bondage, or similar labour contracts.</p> <p>The policies and procedures of HR will be adapted to the size of the workforce required for the project. Policies and procedures shall be developed to comply with the requirements of national legislation and IFC PS 2.</p> <p>HR Policies shall include the ability of workers to join a Trade Union and ensure workers' right to collective bargaining.</p> <p>The contractor will comply with all relevant national legislation, the requirements of the lender and ILO regulations relating to the employment of minors.</p> <p>In all cases, the contractor will not employ children in a manner that is economically exploitative or that risks interfering with the child's education or harming the child's health or physical, mental, spiritual, moral or social development.</p> <p>Young people under the age of 18 will not be employed in hazardous work and all work undertaken by persons under the age of 18 will be subject to an appropriate risk assessment.</p>	Moderate

Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
Wages, Benefits and Retrenchment	Project Employees	Medium	Medium	Moderate	<p>HR Policies and procedures shall be reasonably adapted to the size of the work force required for the project. Policies and procedures shall be developed to comply with the requirements of national legislation and IFC PS 2 and shall include a code of conduct on GBVH.</p> <p>The overall wages, benefits and working conditions offered should be comparable to those offered by equivalent employers in the relevant region of the country/area and sector. Wages for all workers (skilled and unskilled) must be such as to ensure a living wage for all workers.</p> <p>If the Contractor anticipates mass layoffs related to the proposed project, the Contractor will develop a plan to mitigate the adverse effects of layoffs that complies with national laws and good industry practise and is based on the principles of non-discrimination and consultation. Without prejudice to more stringent national legislation, workers' representatives and, where appropriate, the competent authorities shall be informed of the changes in employment within a reasonable period of time so that the redundancy plan can be jointly considered with a view to mitigating the adverse effects of the redundancy on the workers concerned. The outcome of the consultations will be incorporated into the final job reduction plan.</p> <p>Where workers need to be made redundant due to the economic impact of COVID -19 this will be done in a phased manner and options to avoid redundancies will be considered, with redundancies being the last option.</p> <p>Employees/representatives will be involved in all downsizing actions, including those related to COVID -19.</p>	Minor
Sub-contractors, Suppliers, Sub-sub- contractors	Employees of Sub-contractors, Suppliers, Sub-sub- contractors	High	Medium	Major	<p>The Contractor shall establish a supply chain management system to ensure that the above measures are implemented by all subcontractors.</p> <p>Assess any high risk supply chain at risk in relation to the COVID -19 pandemic and ensure appropriate involvement of key suppliers in the supply chain.</p> <p>The Contractor will require its suppliers and subcontractors to provide GBVH training to their staff in accordance with the Code of Conduct.</p> <p>Applicants will not be required to make payments if they apply for or obtain employment under the proposed project.</p> <p>The project will ensure that recruitment processes are transparent and monitored to ensure that individuals hired declare their actual experience, geographic location, health status, and age, and that local employment requirements are met.</p> <p>The project will develop and implement a programme of worker education, training, and development to help workers access opportunities associated with the project and find employment after their contracts end.</p> <p>The Project will provide training on health and safety and quality standards required by the Project for the provision of goods and services to the Project to ensure that local businesses have the opportunity to benefit.</p> <p>The project will ensure that contracts are unbundled so that multiple small businesses can supply goods and services rather than a single large subcontractor monopolising supply.</p>	Moderate
Worker's Grievance Mechanism	Project Employees	High	Medium	Major	<p>The contractor will establish a grievance mechanism for workers to raise legitimate workplace concerns. The contractor will inform the workers about the grievance mechanism at the time of recruitment and make it easily accessible to them. The mechanism should involve an appropriate level of management and address the concerns promptly. It should use an understandable and transparent process that provides feedback to those affected without retaliation. The mechanism should not impede access to other judicial or administrative remedies available under the law or through existing</p>	Moderate

Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
					<p>arbitration procedures, nor should it replace grievance mechanisms provided for in collective agreements.</p> <p>The grievance mechanism is intended to monitor employee morale, understand how employees are affected and what concerns they have COVID -19 and address urgent matters promptly.</p> <p>The grievance mechanism provides for confidential reporting and a support system for all workers who report issues related to GBVH. The grievance mechanism also allows for verbal reporting for those who cannot write.</p>	
Human Rights	Project Employees	Medium	Medium	Moderate	<p>In addition to adhering to the national human rights requirements, the Contractor will put in place a human right's policy in line with the UN Guiding Principles on Business and Human Rights. The statement policy will:</p> <ul style="list-style-type: none"> Be approved at the most senior level of the company; Informed by relevant internal and external expertise; Stipulate the EPC's human rights expectations of personnel, local communities, sub-contractors and other suppliers directly linked to the construction of the project; Be publicly available and communicated internally and to the relevant stakeholders; Be reflected in the other policies and procedures to embed it throughout their construction phase activities. 	Minor
Gender Based Violation and Harassment	Project Employees, Local community	High	Medium	Major	<p>Workers shall be provided, as part of their employment contract, with information on the Workers' Code of Conduct in the local language, which includes provisions for reporting, investigation, termination, and disciplinary action against those who engage in gender-based violence and harassment.</p> <p>The contractor shall conduct mandatory periodic training and sensitization of the workforce on gender-based violence and harassment against members of the local community and their colleagues, especially women, and shall indicate the availability of a grievance mechanism for reporting GBVH cases.</p> <p>Educate staff on the laws and regulations that make sexual harassment and gender-based violence a criminal offence subject to prosecution.</p> <p>Ensure balanced representation of women in the HSE team who are easily approachable by the female employees.</p> <p>Provide appropriate training to project staff responsible for receiving complaints of gender-based violence on how to deal with such complaints. It is recommended that staff be trained where available.</p> <p>Female workers will be included in the grievance committee to assist female workers and host community members to voice their complaints.</p> <p>The contractor will provide safe and separate living quarters and sanitary facilities for male and female workers (lockable sanitary facilities are mandatory for women).</p> <p>The contractor will endeavour to find a suitable local workforce to minimise the need to bring in large numbers of workers from other regions or countries. This could also help the contractor to reduce the cost of providing accommodation if the majority of workers are employed locally.</p> <p>Provide opportunities for workers to return regularly to their families who may be located far from the project site.</p> <p>The Contractor will provide opportunities for workers to access entertainment opportunities outside of the host communities.</p> <p>The contractor will allow for the filing and investigation of anonymous complaints of sexual harassment by workers and members of host communities and will protect the confidentiality of complainants.</p>	Moderate



Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
					<p>The Contractor will work in close coordination with local authorities in investigating complaints of gender-based violence and harassment in host communities where project staff are involved.</p> <p>The contractor will provide targeted training (including on life skills such as leadership and decision making) and awareness raising for vulnerable workers such as women.</p>	

19.3.2 Operational Phase

19.3.2.1 Occupational Health and Safety

The risks associated with the operational phase of the project are anticipated to be significantly less than during the construction phase due to reduced site activity and requirements for heavy plant and machinery.

There will be occupational health and safety risks attributable to the operational phase associated with maintenance and inspection requirements. Maintenance and inspection will also require the use of site vehicles and activities that pose risks to human health and safety. . An Occupational Health Safety Management Plan and Standart Operation Procedures shall be prepared and be implemented during the operation period.

A structured Grievance Redress Mechanism (GRM) shall be implemented at the plant level in multiple languages anonymously (online and hardcopy) so that workers have access to express their concerns. The human resources department shall be responsible for implementing the GRM for the facility.

The severity and likelihood of risks during the operational phase will be dependent on the frequency and requirements for planned and unplanned maintenance. The operation and maintenance team will need to ensure that a robust plan is in place to appropriately manage these risks.

19.3.2.2 Health Risks Associated to Covid-19

Even though the number of workers expected during the operational phase of the Project will be much lower, the risk of COVID-19 infection cannot be ruled out. Based on the prevailing conditions, the contractor will be required to conduct a COVID-19 Operational Risk Assessment which will be regularly reviewed based on new information and guidelines/requirements provided by the national government and WHO.

19.3.2.3 Workers Conditions

No long-term accommodation requirements are anticipated for the project. However, as with construction, operational activities will need to plan for and enforce just and just and fair treatment of operation and maintenance staff (including any engaged sub-contractors) in accordance with lender requirements and relevant Uzbekistan national requirements. Allowance will also need to be made for site staff welfare facilities including sanitation, rest, recreational and medical facilities.

Even though there will be reduced workforce during the operational phase of the project, the risk of gender-based violence and harassment will remain. There will still be a limited level of interaction between the operational phase team and the host communities. As a result, measures will be put in place to ensure that exploitative sexual relationships and unwanted aggressive advances and harassment are prevented and addressed.

Table 232: Impacts Significance of the Labour and Working Conditions during – Operation Phase

Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
Occupational Health and Safety	Project Employees	High	Medium	Major	<p>Workers will be provided with a safe and healthy work environment, taking into account inherent risks and specific classes of hazards associated with the project.</p> <p>The contractor will set, implement and maintain an Occupation Health and Safety (OHS) system. The risks associated with project specific locations, and processes should be assessed by competent OHS professionals in the project. Legal requirements and duty of care should be considered.</p> <p>The Contractor will be responsible for ensuring that all sub-contractors, sub-sub-contractors and suppliers comply with the OHS management system of the project. The OHS management system will be in-line with recognised international best practice and as a minimum, this plan will include:</p> <p>Means of identifying and minimising, so far as reasonably practicable, the causes of potential H&S hazards to workers.</p> <p>Provision of preventive and protective measures, including modification, substitution, or elimination of hazardous conditions or substances.</p> <p>Provision of appropriate equipment to minimise risks, and requiring and enforcing its use.</p> <p>Training of workers, and provision of appropriate incentives for them to use and comply with H&S procedures and protective equipment.</p> <p>Documentation and reporting of occupational accidents, diseases and incidents.</p> <p>Emergency prevention, preparedness and response arrangements</p>	Moderate
Risk Associate with Covid-19	Project Employees and Stakeholders	High	Medium	Major	<p>The Contractor shall develop a COVID -19 Operational Risk Assessment at the beginning of the operational phase, which will be periodically reviewed in accordance with evolving national and WHO requirements/guidelines.</p> <p>Develop a COVID -19 specific workforce communication procedure.</p> <p>Provide a 24-hour emergency hotline.</p> <p>Isolate/care for ill and potentially infected staff and employees.</p> <p>Identify all vulnerable groups (i.e., individuals with pre-existing conditions) working on the project site and take precautions in accordance with national and WHO guidelines.</p> <p>Providing testing to employees at no additional cost to them.</p> <p>Ensuring social distancing measures i.e. allowing some of the office staff to work from home, shift work etc.</p> <p>Promoting personal hygiene among workers and providing training, posters reminding workers to wash their hands regularly, clean their work areas and equipment, proper sanitation facilities, etc.</p> <p>Provide COVID -19 PPE to all workers.</p> <p>Worker transportation and access to the site will be coordinated and regulated, e.g. reduced bus occupancy, temperature and PPE controls, etc.</p> <p>The contractor will provide a flexible working system for those workers who wish and are able to work from home for health reasons, childcare, home schooling etc without fear of harassment.</p>	Moderate

Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
					<p>Mental health issues are addressed during induction and information is provided on how to seek help from local professionals.</p> <p>There is regular review and updating of information/requirements in the ever changing situation, including a daily cheque of COVID -19 updates from WHO, national/regional health authorities etc.</p>	
Employment, Non Discrimination and Equal Opportunities	Project Employees	Medium	Medium	Moderate	<p>The contractor shall submit a plan showing how the terms and conditions of employment comply with national labour, social security and occupational health and safety legislation.</p> <p>The employment relationship shall be based on the principle of equal opportunity and fair treatment and shall not discriminate with respect to any aspect of the employment relationship, including hiring, compensation (including wages and benefits), terms and conditions of employment, including maternity/paternity leave provisions, access to training, promotion, termination of employment or retirement, and discipline.</p> <p>The Contractor shall not make hiring decisions based on personal characteristics such as gender, race, nationality, ethnic origin, religion or belief, disability, age or sexual orientation that are unrelated to the inherent job requirements.</p> <p>The Contractor shall document and notify all employees of their terms and conditions of employment, including their entitlement to wages, hours of work, overtime arrangements and overtime pay, and any benefits (such as sick leave, maternity/paternity leave or holiday).</p> <p>The Contractor will base the employment relationship on the principle of equal opportunity and fair treatment and will not discriminate in relation to any aspect of the employment relationship, including recruitment, remuneration (including wages and benefits), working conditions, accommodation, access to training, promotion, termination of employment or retirement and disciplinary action. Special protective or supportive measures to promote local employment opportunities or selection for a particular job on the basis of the requirements associated with the job, in accordance with national law, shall not be deemed to be discrimination.</p>	Minor

Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
Child Labour and Forced Labour	Minors, Project Employees and Stakeholders	High	Medium	Major	<p>The contractor will not use forced labour, which is any work or service that is not voluntarily performed and is required of a person under threat of force or punishment. This includes any type of involuntary or forced labour, such as servitude, debt bondage, or similar labour contract arrangements.</p> <p>The policies and procedures of HR shall be adapted to the size of the workforce required for the project. Policies and procedures must be developed to be consistent with the requirements of national legislation and IFC PS 2 and include a code of conduct on GBVH.</p> <p>HR policies must include the ability of workers to join a Trade Union and ensure workers' right to collective bargaining and comply with the requirements and ILO provisions related to the employment of minors.</p> <p>In all cases, the Client will not employ children in a manner that is economically exploitative or likely to be hazardous or detrimental to the child's education or harmful to the child's health or physical, mental, spiritual, moral or social development. Young people under the age of 18 will not be employed in hazardous work and all work undertaken by persons under the age of 18 will be subject to an appropriate risk assessment.</p>	Moderate
Wages Benefits and Retrenchment	Project Employees	Medium	MEdium	Moderate	<p>Wages, benefits and working conditions offered should be comparable overall to those offered by equivalent employers in the relevant region of the country/area and sector. Wages for all workers, including unskilled workers, must be sufficient to provide a living wage.</p> <p>If the contractor anticipates mass layoffs related to the proposed project, it will develop a plan to mitigate the adverse effects of layoffs that complies with national laws and good industry practise and is based on the principles of non-discrimination and consultation. Without prejudice to stricter national legislation, employee representatives and, where appropriate, the competent authorities will be informed of the changes within a reasonable period of time so that the redundancy plan can be jointly considered with a view to mitigating the adverse effects of the redundancy on the affected employees. The outcome of the consultations will be incorporated into the final job reduction plan.</p> <p>Where workers need to be made redundant due to the economic impact of COVID -19 this will be done in a phased manner and options to avoid redundancies will be considered, with redundancies being the last option.</p> <p>Employees/representatives will be involved in all downsizing actions, including those related to COVID -19.</p>	Minor

Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
Worker's Grievance Mechanism	Project Employees	High	Low	Moderate	<p>The Contractor will establish a grievance mechanism for workers to raise reasonable workplace concerns, including GBVH. The client will inform the workers about the grievance mechanism at the time of recruitment and make it easily accessible to them. The mechanism should involve an appropriate level of management and address concerns promptly. It should use an understandable and transparent process that provides feedback to those affected without retaliation. The mechanism should not impede access to other judicial or administrative remedies available under the law or through existing arbitration processes, nor should it replace grievance mechanisms provided for in collective agreements.</p> <p>The grievance mechanism should be used to monitor employee morale, understand how employees are affected and what concerns they have COVID - 19 and address urgent matters promptly.</p>	Minor
Human Rights	Project Employees	Medium	Medium	Moderate	<p>In addition to complying with national human rights requirements, the contractor will adopt a human rights policy in accordance with UN Guiding Principles on Business and Human Rights. The policy statement will:</p> <ul style="list-style-type: none"> Be approved at the highest level of the company; Be supported by relevant internal and external expertise; Set out the contractor's expectations in relation to the human rights of staff, local communities and other suppliers directly associated with the operational phase of the project; Be publicly available and communicated internally and to relevant stakeholders; Be reflected in the other policies and procedures to embed them in all operations phase activities. 	Minor
Gender Based and Harassment	Project Employees, Local community	High	Medium	Major	<p>Workers shall be provided, as part of their employment contract, with information on the Workers' Code of Conduct in the local language, which includes provisions for reporting GBVH (either in person or anonymously), the investigation process, termination, and disciplinary action against persons who commit gender-based violence and harassment.</p> <p>The contractor shall conduct mandatory periodic training and sensitization of the workforce on gender-based violence and harassment against members of the local community and their colleagues, especially women.</p> <p>Workers are educated on the laws and regulations that make sexual harassment and gender-based violence a criminal offence punishable by law. Mandatory and regular training for workers on required lawful conduct in host communities and the legal consequences for non-compliance, including dismissal.</p> <p>Contractor shall provide safe and separate living quarters and sanitary facilities for male and female workers (lockable sanitary facilities are mandatory for women).</p> <p>Provide opportunities for workers to return to their families on a regular basis. The contractor shall allow for the filing and investigation of anonymous complaints of sexual harassment by workers and host community members and protect the confidentiality of complainants.</p>	Moderate



Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
					<p>The Contractor will investigate, in close coordination with local authorities, all complaints of gender-based violence and harassment in host communities as they relate to project workers.</p> <p>The Contractor will identify local GBVH organisations that can provide support to those experiencing violence or harassment.</p>	

20. COMMUNITY HEALTH, SAFETY AND SECURITY

This Chapter presents Project's approach regarding the management of the community health and safety (CHS) management practices to ensure compliance with the relevant national legislation as well as international standards.

This Chapter is to read in conjunctions with below listed chapters of this ESIA report where relevant baseline conditions and mitigation measures to be taken to avoid/minimize potential risks and impacts of the projects are elaborated in detail.

- Chapter 6 on Air Emissions and Ambient Air Quality, which focuses on the baseline concentrations of the relevant air pollutants and the assessment of impacts of air and GHG emissions on the nearby receptors to be caused by the construction and operation activities of the Project, Chapter 7 on Noise Level, presents the background environmental noise levels and calculation/assessment of environmental noise at the nearby residential receptors to be caused by the construction and operation activities,
- Chapter 11 on Solid Waste and Wastewater Management, which covers management of hazardous and non-hazardous wastes generated during construction and operation stage
- Chapter 12 on Traffic and Transportation, which present information on the current condition of the roads and additional load that may arise due to the project activities,
- Chapter 16 on Socio-economy, which covers management of social impacts
- Chapter 19 on Labour and Working Conditions, which covers management of CHS issues and/or risks that may be sourced by Project-related accommodation arrangements, including on-site and off-site accommodation, interaction/communication between Project personnel and local communities mainly during the construction phase, and CHS risks that may be posed by the activities of the O&M workforce, etc.

It should be noted that a separate chapter is prepared regarding Stakeholder Engagement activities and a stand-alone Stakeholder Engagement Plan which is prepared in line with IFC PSs is presented in Volume 3. The SEP includes a grievance mechanism and will be an instrumental document to manage CHS related issues, risks and impacts through the whole project life.

The Project may change the community exposure to safety risks and impacts arising from construction activities and operations activities, such as equipment accidents, traffic accidents, collisions, structural failures, releases of hazardous materials, and pedestrians crossing the railway line. To minimize these potential impacts on the community, Contractor should develop and implement a Community Safety Management Program in line with the requirements of the "IFC EHS Guidelines for Thermal Power Plants", to identify, assess and manage the potential risks to Community Health, Safety and Security, during the design, construction and operations phases of the Project. Standards and Regulatory Requirements.

20.1 National Requirements

SANPIN № 0350-17

Chapter 6 "Sanitary-technical classification of production enterprises, thermal power plants, storage facilities and the sizes of the minimum sanitary protection zones (SPZ) for them". Thermal power plants having an equivalent electric capacity of 600MW or more, operating on gas or gas-oil fuel, are classified as Class II and must create a 500m health protection zone (HPZ) around each stack, according to the law.

Resolution of the Cabinet of Ministers No.555 Dated 2.07.2019:

This law states that security guards of all other legal entities' agencies, organizations and industrial facilities are allowed to use weapons under the category of "civilians". Where any entity wants to protect the life and health of the employees, property and natural resources, the special contract can only be provided by the National Guard in the Republic of Uzbekistan.

Other relevant national legislations include:

- SanPiN № 0224-07 dated 29.03.2007 "On sanitary standards for using PC, video displays and office equipment"
- SanPiN 0203-06 dated on 24.05.2006 "Sanitary standards for the microclimate of industrial premises."

20.2 Lenders Requirements

AIIB Environment and Social Policy

ESS1 requires to assess community health and safety measures applicable to the Project and the Bank requires the Client to use an ESMFP which should cover community health and safety aspects described in ESS 1

International Finance Corporation Performance Standard 4 (IFC PS4)

IFC Performance Standard 4 expects project activities, equipment and infrastructures can increase community exposure to risks and impacts related with community health and safety. And aims to safeguard local communities from potential risks associated with the Project including impacts associated with introduction of communicable disease, site access and operation, material use etc.

The key objectives of PS4 are:

- To anticipate and avoid adverse impacts on the health and safety of the Affected Community during the project life from both routine and non-routine circumstances.
- To ensure that the safeguarding of personnel and property is carried out in accordance with relevant human rights principles and in a manner that avoids or minimizes risks to the Affected Communities.

In terms of community security aspects PS4 requires companies to do the followings (IFC,2017);



- Assess the security risk their operations may have or could create for communities;
- Develop ways to manage and mitigate these risks;
- Manage private security responsibly;
- Engage with public security; and
- Consider and investigate allegations of unlawful acts by security personnel.

IFC Guidance on Gender Based Violence and Harassment (GBVH)

According to the guidance, addressing GBVH can build relationships and provide a Project with a social license to operate in communities. This can result from regular dialogue to understand and track project GBVH risks as well as the effective use of measures to prevent and respond to GBVH. In addition, it broadens the pool of potential workers that companies can draw upon, including women workers from nearby communities because of lower perceived risk of GBVH.

World Bank Good Practice Note on Addressing Sexual Exploitation and Abuse and Sexual Harassment (SEA/SH) In Investment Project Financing Involving Major Civil Works

The World Bank GPN is structured around three key steps that cover project preparation and implementation. These steps include:

- Identifying and assessing the risks of SEA/SH, including social and capacity assessments.
 - Undertaking social risk assessment of community-level risks.
 - Assess capacity and availability, safe and ethical services of survivors.
 - Review ability of the client to respond to SEA/SH risks.
 - Rate project for overall risk using several Bank tools including the SEA/SH Risk Assessment Tool.
 - Establish procedures to review and update risk assessment during the project implementation.
- Establishment of mitigation, reporting and monitoring measures.
 - Based on risks identified, identify the corresponding mitigation measures and
 - Implement actions suggested to mitigate project related risks of GBV in the project area.
 - Monitor effectiveness of the mitigation measures and adapt as appropriate.
- Project response actions for GBV cases.
 - Provide essential services for survivors.
 - Report case through the GM as appropriate keeping survivor information confidential and anonymous.
 - Document and close cases brought through the GM.

United Nations Guiding Principles on Business and Human Rights

In addition to adhering to human rights requirements under the Uzbekistan laws and lenders requirements, the project construction and operational phases will be required to adhere to the United Nations Guiding Principles on Business and Human Rights. The Guiding Principles are grounded in recognition of the role of business enterprise as specialized organs of society required to comply with all applicable laws and to respect human rights.

Equator Principles Guidance on Implementation of the Equator Principles During the Covid-19 Pandemic

The guidance recommends that the borrower should:

- Review potential risks on local communities, including direct and indirect impacts of COVID-19 and other impacts relating to worker interfaces and how any Project changes during this period might affect the community.
- Assess its mitigation approach to Project related impacts.
- Identify opportunities to support communities mitigate wider COVID-19 risks/impacts either through new initiatives or building on existing programs i.e. provision of food for vulnerable people in isolation, test kits medical facilities and equipment etc.

Voluntary Principles on Security and Human Rights

Created in 2000, the Voluntary Principles is a multi-stakeholder initiative that promotes the implementation of a set of principles that guide companies on providing security for their operations while respecting human rights.

Through the VPs Initiative, companies are better able to align their corporate policies, procedures, and internal assessments with internationally recognized human rights principles in the provision of security for their operations. In so doing, companies communicate to employees, contractors, shareholders, and consumers their commitment to the Principles: (1) through sharing of best practices and lessons learned with one another, and (2) by collaborating on difficult issues.

20.3 Observations and Baseline Conditions

Project related activities might result in the increase of risks associated with those who live near the Project site or may visit areas in and around active Project sites.

There is not any settlement within the sanitary buffer zone (500m around the project area) according to drawings provided by the project owner. The closest residential receptors to the project site are about 1.8 kms away from the project's north west border. Beside settlements, project is expected to have direct impact on Uchkizil Reservoir's water quality during construction, commissioning and operation phases.

Uchkizil and Kattakum villages are located within 5km area of influence of the project which is defined in Chapter 4. However, other settlements within 10 km radius around the project area are listed below

- Bahor
- Dehqonbirlashuv
- Ilgor
- Karvon
- Ayran
- Madaniyat
- Markaz
- Qoshtegirmon
- Tallashqon

- Zang Gilambop
- Zartepa
- Namuna
- Orol
- Khalqobod

20.3.1 Sanitary Protection Zone

To fulfil the requirements, set out in SanPiN No 0350-17 of establishing a 500 m sanitary protection zone, consultation letters shall be sent out to the Director of the Agency for Sanitary and Epidemiology Surveillance of the Ministry of Health of the Republic of Uzbekistan. The sanitary protection zone for the Project site is as given in Figure 28.

20.4 Potential Impacts, Mitigation, Management & Residual Impact

20.4.1 Construction Phase

Permanent staff including contractors, sub-contractors, specialists, supply chain personnel will be hired during construction phase of the project. During construction, this need is expected to lead an increase in the population as it is the case on such sites.

During the construction phase, safety fencing, security and equipment associated with the construction phase will be fenced and trespasses will be restricted to the project area. The project area will occupy only 0,3 kms of reservoir's shore. There may be informal tracks or pathways used by community members to access reservoir or for recreational purposes such as fishing and swimming. These activities will be limited for users.

20.4.1.1 Accommodation

The Project construction will require involvement of significant workforce and the maximum workforce will be around 2050 during the peak construction period. Approximately 30% of the workforce will be unskilled and the remaining will be either skilled or semi-qualified staff. It is anticipated that 50% of the workforce will be third-party nationals. Temporary migration of such work force might lead conflicts between local community and project workers due to cultural, religious and behavioral issues.

The provision of accommodation for self-sufficient worker accommodation will be responsibility of the contractor. It is expected that the workforce required for the construction activities will accommodate in nearby cities and there will no accommodation in the project area. All worker accommodation facilities will be designed and operated in accordance with IFC Workers Accommodation Guidance. The workforce will be transferred to the project area by shuttle buses.

The adverse risks or impacts of off-site accommodation on the nearby district centres, such as increased demands on infrastructure, services and utilities, development of illicit trade activities, inflation in local rent and other subsistence items or risk of gender-based violence and harassment



(GBVH), as well as the potential benefits on the economies of the nearby settlements and district centres (e.g. rental incomes, supply of goods and materials, etc.), are anticipated to be temporary.

The Contractor will arrange service busses for the personnel to be transported to the work sites either from camp sites or their local houses including rental houses in the nearby district or neighbourhoods/villages.

In the construction phase, camps will typically include preparation and installation of canteens/mess halls, material storage, water tanks, clean water treatment plant, generators, workshops and maintenance areas, laboratories, fuel storage, offices, clinics, recreation areas, parking areas, and a precast and work area. provision of worker's accommodation is often associated with the importation of an external workforce into an area.

It is anticipated that 50% of the workforce will be third-party nationals. Temporary migration of such work force might lead conflicts between local community and project workers due to cultural, religious and behavioral issues.

20.4.1.2 Illnesses and Diseases

Due to expected increase in local population and close-knit mixing of workers on sites and in accommodation facilities, there is a great risk of increase in number of communicable diseases and illnesses within the project. This may also impact upon communities where interactions take place. Such diseases include Sexually Transmitted Illnesses (STIs), skin infections, waterborne diseases. Vector borne diseases are not expected to see in the project. Since 2011, zero autochthonous malaria cases were reported in the Uzbekistan. In 2016, the country requested WHO's technical assistance to prepare for the certification of malaria elimination (WHO,2014). There will also be a potential risk of transmitting COVID-19 between the workers and the communities near the project site and off-site accommodation areas.

There is also potential for construction excavation activities on the site to create breeding grounds for bacteria and parasites which will not only affect the workers but the local communities too. Any potential contamination from the site such spillage of raw sewage or hazardous materials could potentially result into water related and water borne diseases through contamination of surface and groundwater.

20.4.1.3 Sexually Transmitted Diseases

The increase in population due to the influx of a large number of employees into the project area could lead to an increase in the transmission rate of sexually transmitted diseases. It is expected that employees will come from different regions of Uzbekistan and some international employees will be separated from their families, posing a health risk to both employees and the community. Therefore, during the construction, testing, commissioning and operation phases of the project, the contractor will launch several campaigns for the community and project staff to avoid negative impacts of STD influx. Free condoms will also be provided to the project workers

20.4.1.4 Storage of Hazardous Materials and Chemicals

Risks associated with hazardous materials or chemical storages will be managed during construction phase according to good international industrial practices on HAZMAT management, Environmental and Social Emergency Response Procedure and as defined in ESMP. Environmental and Social Emergency Response procedure shall have Environmental and Social Emergency scenarios including but not limited to flood, fire, accidental spills, accidents and public protests and traffic accidents involving community members. Contractor will avoid and/or minimise the potential for community



exposure to hazardous materials and substances that may be used within the Project activities and will establish mitigation measures to minimise the exposure of workers and communities to the impacts of hazardous materials within the scope of the Hazardous Materials Management Plan.

Hazardous Materials Management Plan to be developed and implemented by the Contractor, will include the management of pesticide usage, in case pesticides use is practices as a control method for vegetation at camp sites or other work areas.

20.4.1.5 Traffic and Pedestrian Safety

Material transport vehicles, shuttle buses and vehicles transporting the waste generated at construction sites may result an increased traffic on off-site roads during the construction period. According to the project schedule, early site works and mobilization will start in November 2022 and the commissioning activities will start in August 2024. Thus, material transportation will be spread over time reducing the intensity of Project-related traffic due to material transport but lengthening the duration of the impact.

Children, elderly people and pedestrians are at greatest risk when the Project vehicles are using roads near or through the settlements. In such cases, it is important to prioritise designating alternative access routes to avoid use of village roads, where feasible. Therefore, the EPC Contractor will develop a Traffic Management Plan.

20.4.1.6 Security Personnel

The project area will require site-based security at the gates and on patrol around the site and access road during construction in order to prevent the public from trespassing to the construction areas. This is so as to minimize the potential for construction site incidents or damage of construction machinery. It is anticipated that the security personnel will be unarmed. The security officers will be subjected to a basic training which includes following aspects;

- Security Measures
- Security Systems and Devices
- Basic First Aid
- Fire Safety and Natural Disaster Response Style
- Information on Drugs
- Effective Communication
- Crowd Management
- Person Protection (against the risk of assassination)
- Relations with General Law Enforcement
- Information on Weapon and Shooting Practice

There is also a risk that the security personnel who are mandated with providing protection to the workers can abuse their position of power and status and become perpetrators of GBVH either to the members of the workforce or the community.

Following suitable security risk assessment by the EPC Contractor, the security arrangements will require to be guided by UN Code of Conducts for law enforcement officials, the IFC's Good Practice Handbook on the Use of Security Forces: Assessing and Managing Risks and Impacts, IFC's and the UN Basic Principles on the use of Force and Firearms by law enforcement officials in case security at the site will be armed and Voluntary Principles on Security and Human Rights.



In addition to this, security personnel will receive internal training in regard to receiving grievances, reporting such grievances and conduct for dialogue with any members of the local community. The workers on the project site will additionally receive cultural awareness training with regard to local customs as such guidance can provide a ready resource on the do's and don'ts of culture centred behaviour.

20.4.1.7 Worker Influx with Gender Based Violence and Harassment (GBVH)

Influx in workers from outside the Project region will increase the likelihood of Gender Based Violence (GBV). The constructions workers are likely to be predominantly young male coming from other regions of Uzbekistan and outside the country. These workers will be away from their families and removed from their normal social spheres. This could potentially result into peer pressure and involvement in unlawful behaviour such as harassment of local women, young girls and boys or women within the Project workforce. Such behaviour can lead to increase in exploitative sexual relationships and unwanted aggressive advances and harassment. This could also lead to disintegration of relationships in local households impacted by GBV.

During the construction phase, workers will also be vulnerable to various forms of harassment, exploitation and abuse, aggravated by traditionally male working environment. GBVH is likely to be committed by co-workers or construction supervisors and can be attributed to gender stereotypes about the sexual availability of female construction workers. In addition, income earning opportunities for women through direct employment during the construction phase or through indirect employment has the potential to increase household tensions and expose women to harassment and violence in their homes or communities.

Some of the male workers who will be transporting Project machinery and equipment and goods will also be involved in long distance travel which in some cases will be between different countries. There is a risk that they can also be involved in GBVH on the routes they use and at track stops associated with the Project even if it is outside the Project boundary.

In order to communicate the project's approach to prevention of gender-based violence and harassment (GBVH) and raise awareness among the project staff, contractor and subcontractor personnel using off-site accommodation facilities will receive special training on, among other things, the project's social policy and contractor's code of conduct. As part of internal audit system to be established and implemented by the Contractor during the construction phase, potential risks of impacts of the Project due to off-site accommodation will be monitored and managed. Through the external and internal grievance mechanisms, such risks, if any, will be continuously identified, evaluated and managed to be operated as part of Project SEP implementation.

It will be crucial to regulate labor and working conditions given the nature and size of the Project. The Project is required to provide adequate working and accommodation conditions, promote fair treatment, nondiscrimination and equal opportunities to all personnel, including both the direct workers of the Contractor and contracted workers of the subcontractors. Due to the high number of potential lower-tier subcontractors to be involved in the Project, additional management and monitoring measures are anticipated to be required to ensure that the Project Standards are consistently fulfilled by the Project subcontractors.

Off-site accommodation will be covered by the Project-Specific Labour Management Plan, which will be developed and put into effect to control any potential effects during the construction phase. Contractor and subcontractor personnel using off-site accommodation facilities will be provided with special training on, inter alia, Project's Social Policy and Contractor's Code of Conduct to communicate Project's approach to prevention of GBVH and raise awareness among the Project personnel. As part

of internal audit system to be established and implemented by the Contractor during the construction phase, potential risks of impacts of the Project due to off-site accommodation will be monitored and managed. Such risks will further be continuously monitored, evaluated and managed through the external and internal grievance mechanisms to be operated as part of Project SEP implementation.

The potential benefits on the economies of the nearby settlements and district centers (such as rental incomes, supply of goods and materials, etc.), as well as the negative risks or impacts on the nearby district centers (such as increased demands on infrastructure, services, and utilities, development of illicit trade activities, inflation in local rent and other subsistence items, or risk of gender-based violence and harassment (GBVH), are anticipated.

The EPC Contractor's and subcontractor's personnel will be provided with training on Project's Social Policy and Contractor's Code of Conduct covering Project's approach to prevention of gender-based violence and harassment (GBVH) and sexual harassment and abuse (SHA), at the time of employment (refresher training will be provided annually and as required).

Trainings will cover but not limited to:

- - Definition of violence against women in national and international documents,
- - Types of violence (physical, sexual, economic, emotional), and
- - Legal sanctions.

Workers will be trained on the laws and regulations that make sexual harassment and gender-based violence a criminal offence punishable by law. Mandatory and regular training for workers will be delivered on required lawful conduct in host communities and the legal consequences for non-compliance, including dismissal and local service procurement.

20.4.1.8 Sexual Harassment and Sexual Exploitation and Abuse

The infrastructure sector presents a high-risk environment for incidents of sexual exploitation and abuse and sexual harassment.

Gender Based Violation (GBV) is an umbrella term for any harmful act that is perpetrated against a person's will and that is based on socially ascribed (that is, gender) differences between male and female individuals. GBV includes acts that inflict physical, mental, or sexual harm or suffering; threats of such acts; and coercion and other deprivations of liberty, whether occurring in public or in private life (IASC, 2015). Manifestations of GBV includes, but is not limited to, physical violence, such as slapping, kicking, hitting, and the use weapons; emotional abuse, such as systematic humiliation, controlling behaviour, degrading treatment, insults, and threats; sexual violence, which includes any form of non-consensual sexual contact; forced marriage, which is the marriage of an individual against her or his will; and denial of resources, services, and opportunities, also known as economic abuse, such as restricting access to financial, health, educational, or other resources with the purpose of controlling or subjugating a person (Arango et al. 2013). Trafficking, abduction and coerced transactional sex may also constitute forms of GBV.

Sexual exploitation and abuse (SEA) is a facet of GBV that is defined as any actual or attempted abuse of a position of vulnerability, differential power, or trust for sexual purposes, including but not limited to, profiting monetarily, socially or politically from the sexual exploitation of another. Sexual abuse is further defined as "The actual or threatened physical intrusion of a sexual nature, whether by force or under unequal or coercive conditions" (IASC, 2016). In the context of Bank-supported projects, SEA occurs against a beneficiary or member of the community.

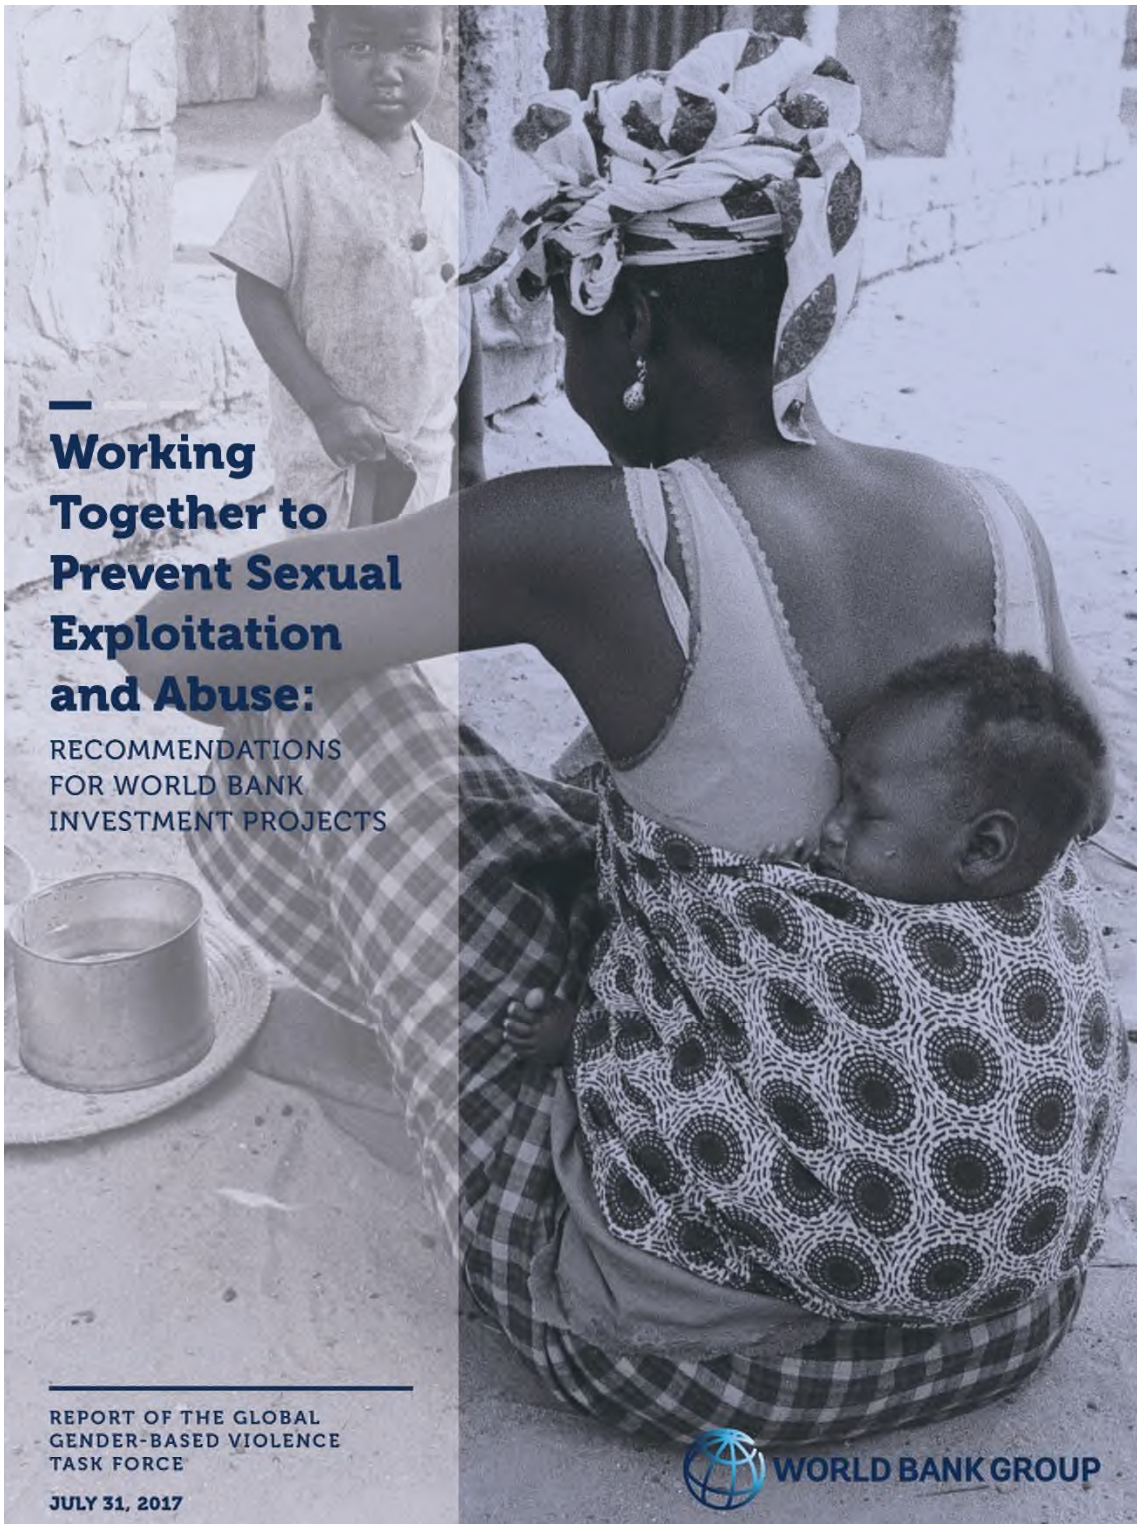


Figure 197: Recommendations for Prevention of Sexual Abuse WB



The proposed project will lead to an influx of workers during the construction phase majority of whom will be young men who will be away from their families. This may increase the demand for sex workers and put women from other regions in Uzbekistan at the risk of being trafficked to the Project area for the purposes of sex work. Influx of workers could pose a risk to young adolescent girls who may be at risk of being forced into early marriages to project workers who are perceived to have better wages. It could also increase the risk of violence and sexual abuse against the children in the community who have no ability to give consent, are not empowered to refuse any sexual advances made towards them or anticipate the implications of any actions against them.

In addition, the presence of young men in the project area could also lead to shift in the community's power dynamics and within households. This may be manifested through male jealousy if the workers are believed to be interacting with the women in the community triggering violence towards the women.

Table 233: Impacts Significance of the Community Health, Safety and Security during– Construction Phase

Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
Labor Influx	Project Affected Community	Medium	Medium	Moderate	<p>Worker accommodation areas will be managed in accordance with the IFC Workers' Accommodation: Processes and Standards.</p> <p>The provision of good quality living accommodation, services and amenities will likely reduce the need for mixing with local communities.</p> <p>Project induction training will include a section on code of conduct when engaging with local community members. This will include an overview of culturally and religious appropriate measures and etiquette to bear in mind.</p> <p>Sexual harassment or violence in and out of the Project site will not be tolerated and the EPC Contractor will work with local community leaders, gender-based organizations and government officials to ensure that any complaints are addressed in accordance with the law.</p> <p>The Contractor will develop a Worker Influx Management Plan to provide a clear set of actions that will be undertaken for the management and mitigation, monitoring and evaluation of impacts related to worker influx in the Project area.</p> <p>Additional management and mitigation measures will be in accordance with the World Bank guidance note on Managing the Risks of Adverse Impacts on Communities from Temporary Project Induced Labor Influx (WB, 2016).</p>	Minor
Community Health	Project Affected Community	Medium	Medium	Moderate	<p>The Project should develop an STD Management Plan designed to minimize the spread of HIV infection and other STDs. The plan should be prepared with the assistance of a specialist in sexually transmitted diseases. A typical plan would include, among other things, the following measures:</p> <p>An HIV/AIDS training course and on-going education on transmission of HIV/AIDS and STDs, to employees, through workshops, posters and informal information sessions;</p> <p>Encouragement of employees to determine their HIV status;</p> <p>Supply of condoms/ femidoms at the construction site(s)/ Construction Camp; and</p> <p>Development of a comprehensive Construction Camp Management Plan, including rules for on-site behavior, entrance and exit policies and prohibition of sex workers on site.</p> <p>As part of STD Management Plan, information should be provided to workers on STD prevalence rates in Uzbekistan and/ or the relevant Counties as well as the expectations of local communities if a woman is made pregnant by a worker (e.g., marriage, financial implications etc.).</p> <p>Workers should have access to confidential health care for the treatment of STDs through medical facilities/ health care at Project sites.</p> <p>Workers will be thought on how to access testing in public hospitals.</p> <p>Information regarding the transmission of HIV/AIDS will be prepared and disclosed in a culturally sensitive manner and targeted towards young adults of consenting age.</p> <p>A Grievance Mechanism should be developed, whereby affected people can raise issues and concerns associated with social vices, prostitution and the behavior of workers and drivers.</p> <p>As part of the SEP, the Project should consult with local leaders such as Area leaders and village elders, amongst others. The consultations should be aimed at finding ways of ensuring social vices such as prostitution are minimized either through punitive or rehabilitative measures.</p>	Minor

Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
					<p>During construction, staff will have access to medical professionals and suitable medical facilities, which will aim to prevent the spread of diseases internally and externally. Site personnel will only be cleared for work after with a medical fitness certificate from an authorized medical center.</p> <p>Any reportable disease will be diagnosed by the authorized occupation health center doctor. Diagnosis includes identifying any new symptoms, or any significant worsening of existing symptoms.</p> <p>Any external and internal spreading diseases will be diagnosed and taken the precautions as per the instructions from the national/ local medical authority.</p> <p>The potential for exposure to water-borne, water-based, vector-borne diseases and communicable diseases as a result from project activities will be avoided or minimized.</p> <p>Potholes within the site, access road and wells excavated in the area will be filled immediately to prevent the breeding of bacteria and parasites that may pose a risk to the health of the communities near the site.</p> <p>The Contractor in coordination with the local authorities will conduct awareness campaigns regarding the transmission of STIs in the communities near the Project site.</p> <p>The Project shall prepare a site Community Response Action Plan which shall define the site action to support community stakeholders in planning, responding and recovering from the COVID-19 outbreak especially when outbreaks are directly linked to the Project workers.</p> <p>Due to the health risk posed by COVID-19, workers will be screened in accordance with the Uzbekistan guidelines and WHO. They will also be provided with PPE and training on how to safely use them during induction and as part of the toolbox talks.</p> <p>If any cases of COVID-19 are reported on site, the Contractor will notify the relevant health officials and isolation of concern individuals performed immediately.</p> <p>The workers will ensure minimal interaction with community members as long as COVID-19 continues to be a health risk. In addition, community members working on the site will be trained on how to ensure proper hygiene when working on the site and when they go home.</p>	
Community Safety	Project Affected Community	High	High	Major	<p>The employees during the construction phase shall undergo a Code of Conduct training to ensure smooth coordination with the neighboring community.</p> <p>Risks to public safety will be appropriately addressed and prepared for in the construction phase 'Emergency Preparedness and Response Plan' and training.</p> <p>The plan will include the appropriate procedure to respond to any such incidents, as well as site specific contact details and details of external agencies who may be required.</p> <p>Project induction training will include a section on code of conduct when engaging with local community members. This will include an overview of culturally appropriate measures and etiquette to bear in mind.</p> <p>All high-risk areas including fuel storage areas will be secured with internal fencing and will be patrolled by security throughout the day.</p> <p>Smoking will be prohibited at chemical and fuel storage areas.</p> <p>Appropriate mechanisms for emergency control (e.g. well-equipped firefighting equipment) will be placed at suitable positions around the site.</p>	Moderate
Community Security	Project Affected Community	Medium	Medium	Moderate	<p>The project will employ its own security staff who will provide 24/7 security control across the Project site and dedicated security staff at gatehouses.</p>	Minor

Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
"Sexual Harrassment and Sexual Exploitation and Abuse"	Severe	High	High	Major	<p>The security personnel will be regularly trained on GBVH code of conduct including how to handle grievances related to GBVH from the community.</p> <p>All vehicles entering the site will require pre-approved clearance and will need to be registered. Project security will record all instances of incoming vehicles.</p> <p>CCTV will be installed at key locations around the site and at gatehouses.</p> <p>Appropriate lighting will be provided at gatehouses for security personnel to prevent unauthorized access.</p> <p>Project personnel will only be provided access to the construction site with valid ID cards and permits to work in line with HSE requirements.</p> <p>Security risk based on</p> <p>Project security personnel must be trained based on Voluntary Principles on Security and Human Rights (VPSHR, 2021). The training program must cover following topics;</p> <p>Global human rights framework and security practices</p> <p>Human rights and ethics</p> <p>Roles and responsibility of security personnel</p> <p>Use of force</p> <p>Crowd control</p> <p>Background check must be done for any security personnel to be hired during hiring process. In case any criminal record finds of applicant, hiring process should be canceled.</p>	High
				Major	<p>The contractor will conduct a SEA/SH risk assessment in consultation with relevant stakeholders including women leaders and those working with young adolescent girls and boys. This will also include the identification of potential interventions and risk mitigation measures.</p> <p>Awareness training will be mandatory for all Project workers regarding the SE/SH risks and the workers responsibilities and the legal consequences of being a sexual or violence perpetrator.</p> <p>Training will be provided to the community members on the risks of SEA/SH and information provided on how to report any cases of SEA/SH and the services that will be made available to offer support to any of the survivors.</p> <p>Trainings on code of conduct, gender sensitivities (including GBVH and SHA) and local cultural sensitivities will be provided to security personnel or the company the security service is procured from will provide evidence that the personnel received these trainings from qualified trainers. The trainings will ensure force is used only for preventive and defensive purposes and in proportion to the threat.</p> <p>Approach towards SEA/SH prevention, mitigation and response will be survivor centered and ensure confidentiality, dignity and respect to them.</p> <p>The Project staff will be trained on how to preserve the safety of the women, girls, boys when interviewing them and collecting information about their experiences on SEA/SH.</p> <p>The Project will provide essential services for survivors such as access to counselling services, support groups, legal support etc. at no cost to them.</p> <p>All identified cases of SEA/SH will be referred to relevant legal entities in the Project area for further investigation and prosecution.</p> <p>The project grievance mechanism will be made available to project workers and community members and will ensure that survivors' information is confidential and kept anonymous.</p> <p>All cases relating to SEA/SH shall be documented and closed.</p>	Moderate



Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Significance of Impact (without Impact Mitigation Measures)	Mitigation and Management Measures	Significance of Residual Impact
					The Project will prepare and implement a SEA & SH Prevention and Response Action Plan which will put necessary protocols and mechanisms to address the risks of SEA/SH and how to address any allegations that may arise in accordance with the World Bank Good Practice Note on Addressing SEA/SH in Investment Project Financing involving Major Civil Works.	
Grievance Mechanism	Project Affected Community	Medium	Medium	Moderate	<p>The project will implement an appropriate system to allow external parties to raise grievances in regard to the Project.</p> <p>The Grievance Mechanism will be clearly defined, transparent and accessible to identified stakeholders.</p> <p>Contractor will appoint a community liaison officer preferably from the local community who will maintain communication with the local leaders and community members.</p> <p>The grievance mechanism will be confidential and provide referral and support system for any workers reporting cases of GBVH</p>	Minor

20.4.2 Operation Phase

20.4.2.1 Community Safety

During the operation phase, the project will have various risks that might have negative impact capability on the receiving communities. These impacts might be transferred to the outside of the project due to nature of the risks. Such impacts might be fires, NOx in exhaust gases, explosions, security breaches or spillage of pollutants.

In some of above-mentioned impacts, third party company involvement for the solution might be needed such as fire department, police department, consultants etc.

Public risks during operation have the potential to result in incidents, which could have a significant impact upon neighboring communities and populations. Risks to public safety will be appropriately addressed and prepared for in the operational phase 'Emergency Preparedness and Response Plan' and via appropriate training of staff.

20.4.2.2 Security Personnel

Due to the generation of power, the project is considered a vital facility. Site-based security will be present at the project's main entrance and on patrol throughout the site.

As is consistent with the construction phase, the Contractor will undertake a security risk assessment to determine the appropriate level of security required at the facility. Security arrangements should be guided by UN Code of conducts for law enforcement officials, Voluntary Principles on Security and Human Rights and UN basic principles on the use of Force and Firearms by law enforcement officials if security personnel will be armed.

Beside the requirements set in above guidelines and principles, security personnel will have in house training in regards of grievance and reporting such grievances and dialogue with any members of the local community

20.4.2.3 Sexual Exploitation and Abuse (SEA) and Sexual Harassment (SH)

Even though the Project's employment will be reduced throughout the operational phase, the risk of sexual exploitation and abuse, including sexual harassment, will persist, particularly for women, children, and boys. The operational phase team and the host community will still have a limited amount of interaction.

As a result, measures will be taken to avoid and address exploitative sexual relationships, as well as undesired aggressive advances and harassment.

Table 234: Impacts Significance of the Community Health, Safety and Security during – Operation Phase

Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Significance of Impact		Significance of Residual Impact
				(without Impact Mitigation Measures)	Mitigation and Management Measures	
Community Security	Project Affected Community	Medium	Medium	Moderate	<p>The project will employ its own security staff who will provide 24/7 security control across the Project site and dedicated security staff at gatehouses.</p> <p>The security personnel will be regularly trained on GBVH code of conduct including how to handle grievances related to GBVH from the community.</p> <p>All vehicles entering the site will require pre-approved clearance and will need to be registered. Project security will record all instances of incoming vehicles.</p> <p>CCTV will be installed at key locations around the site and at gatehouses.</p> <p>Appropriate lighting will be provided at gatehouses for security personnel to prevent unauthorized access.</p> <p>Project personnel will only be provided access to the construction site with valid ID cards and permits to work in line with HSE requirements.</p>	Minor
Community Health and Safety	Project Affected Community	Medium	Medium	Moderate	<p>Risks to public safety will be appropriately addressed and prepared for in the operational phase 'Emergency Preparedness and Response Plan' and training.</p> <p>The plan will include the appropriate procedure to respond to any such incidents, as well as site specific contact details and details of external agencies who may be required.</p> <p>The employees during the operational phase shall undergo a Code of Conduct training to ensure smooth coordination with the neighboring community.</p> <p>Appropriate mechanisms for emergency control (e.g. firefighting equipment) will be placed at suitable positions around the site.</p> <p>Grievance Redressal Mechanism shall be made accessible to the community to ensure that community members raise grievances to the Project leadership.</p> <p>Sexual harassment or violence in and out of the Project site will not be tolerated and the O&M Company will work with local community leaders and government officials to ensure that any complaints are addressed in accordance with the law.</p> <p>The Health and Safety teams on site will provide advice during training/inductions on exposure to disease including preventative measures e.g. TB, STDs and HIV/AIDS.</p>	Minor

Potential Impacts	Receptor	Sensitivity of receptor	Magnitude of impact	Significance of Impact		Significance of Residual Impact
				(without Impact Mitigation Measures)	Mitigation and Management Measures	
Human Rights	Project Affected Community	Medium	Medium	Moderate	<p>In addition to adhering to the national human rights requirements, the contractor will put in place a human right's policy in line with the UN Guiding Principles on Business and Human Rights. The statement policy will:</p> <ul style="list-style-type: none"> Be approved at the most senior level of the company; Informed by relevant internal and external expertise; Stipulate the Contractor's Human rights expectations of personnel, local communities and other suppliers directly linked to the operational phase of the project; Be publicly available and communicated internally and to the relevant stakeholders; Be reflected in the other policies and procedures to embed it throughout the operational phase activities. 	Minor
Sexual Exploitation and Abuse (SEA) and Sexual Harassment (SH)	Project Affected Community	Medium	Medium	Moderate	<p>The Project Company and the contractor will conduct a SEA/SH risk assessment in consultation with relevant stakeholders including women leaders and those working with young adolescent girls and boys. This will also include the identification of potential interventions and risk mitigation measures.</p> <p>Awareness training will be mandatory for all Project workers regarding the SEA/SH risks and the workers responsibilities and the legal consequences of being a sexual or violence perpetrator.</p> <p>Training will be provided to the community members on the risks of SEA/SH on culturally sensitive manner and information provided on how to report any cases of SEA/SH and the services that will be made available to offer support to any of the survivors.</p> <p>Approach towards SEA/SH prevention, mitigation and response will be survivor centered and ensure confidentiality, dignity and respect to them.</p> <p>The Project staff will be trained on how to preserve the safety of the women, girls, boys when interviewing them and collecting information about their experiences on SEA/SH.</p> <p>The Project will provide essential services for survivors such as access to counselling services, support groups, legal support etc. at no cost to them.</p> <p>All identified cases of SEA/SH will be referred to relevant legal entities in the Project area for further investigation and prosecution</p>	Minor



21. HUMAN RIGHTS IMPACT ASSESSMENT

As mentioned earlier, additional social site survey is being performed to interview with relevant parties not only limited to collect social baseline data but also to scan human right issues. The Final ESIA Report will reassess the impacts on human rights.

21.1 Overview

With new additions to Equator Principles 4, assessment of adverse Human Rights impacts become mandatory as part of ESIA. Human rights standards of the project shall be in line with the United Nations Guiding Principles on Business and Human Rights (UNGPs)

Human Rights are described in international standards aimed at securing dignity and equality for all. Every human being is entitled to enjoy them without discrimination. As a minimum, relevant human rights are those expressed in the International Bill of Human Rights – meaning the Universal Declaration of Human Rights, the International Covenant on Civil and Political Rights and the International Covenant on Economic, Social and Cultural Rights and the principles concerning fundamental rights set out in the International Labor Organization's Declaration on Fundamental Principles and Rights at Work.

The project should respect human rights within its area of influence and shall ensure that third party companies are respecting human rights too, including sub-contractors, sub-sub-contractors and suppliers. This means that they should avoid infringing on the human rights of others and should address adverse human rights impacts with which they are involved.

21.2 Standards and Regulations

21.2.1 National Context and Regulations

Uzbekistan, as a UN member, supports and implements all of the UN's major international instruments relating to the protection of human rights and freedoms, including the UN Universal Declaration of Human Rights, Human Rights Council Resolution No. 30/15 on human rights and preventing and countering violent extremism, and the Convention on the Elimination of All Forms of Discrimination.

The State Policy on Human Rights in Uzbekistan aims to prevent infringement of human rights and freedoms, as well as to develop the necessary organizational, legal, social, economic, spiritual, and moral grounds for human rights protection

21.2.1.1 Constitution of the Republic of Uzbekistan (1992)

The constitution asserts that "democracy in the Republic of Uzbekistan shall be based upon common human principles, according to which the highest values shall be the human being, his life, freedom, honor, dignity and other inalienable rights."



Also, the constitution has a dedicated chapter for "Guarantees of human rights". The chapter X Guarantees of human rights and freedoms has following articles;

- Article 43. The state shall safeguard the rights and freedoms of citizens proclaimed by the Constitution and laws.
- Article 44. Everyone shall be entitled to legally defend his rights and freedoms, and shall have the right to appeal any unlawful action of state bodies, officials and public associations.
- Article 45. The rights of minors, the disabled and the single elderly shall be protected by the state.
- Article 46. Women and men shall have equal rights.
- The Oily Majlis (parliament) has an elected and authorized person to deal with human rights issues. The authorized person is a part of republic of Uzbekistan's Legislative Chamber.

21.2.1.2 The Protection of Women Against Harassment and Violence Act (2019).

- The Act defines the various forms of violence - sexual, physical, economic, psychological against women. Protection from harassment and violence is defined as a system of urgent measures of economic, social, legal, organizational, psychological and other nature in order to eliminate the danger to women's life and health, to ensure their safety and to prevent repeated illegal actions against them.
- Other relevant legislations include:
 - The National Human Rights Strategy was approved by Presidential Decree on 22 June 2020. No. PD-6012;
 - Law on guaranteeing equal rights and opportunities for women and men (2019);
 - The Law on Mediation (2018);
 - Law on Public Control (2018); and
 - Law on Administrative Procedures (2018)

21.2.2 Lender Requirements

21.2.2.1 Equator Principle IV

The equator principles states; We, the EPFIs, have adopted the Equator Principles in order to ensure that the Projects we finance and advise on are developed in a manner that is socially responsible and reflects sound environmental management practices. EPFIs acknowledge that the application of the Equator Principles can contribute to delivering on the objectives and outcomes of the United Nations Sustainable Development Goals (SDGs). Specifically, we believe that negative impacts on Project-affected ecosystems, communities, and the climate should be avoided where possible. If these impacts are unavoidable they should be minimized and mitigated, and where residual impacts remain, clients should provide remedy for human



rights impacts or offset environmental impacts as appropriate. In this regard, when financing Projects:

- We will fulfill our responsibility to respect Human Rights in line with the United Nations Guiding Principles on Business and Human Rights (UNGPs) by carrying out human rights due diligence;
- We support the objectives of the 2015 Paris Agreement and recognize that EPFIs have a role to play in improving the availability of climate-related information, such as the Recommendations of the Task Force on Climate-related Financial Disclosures (TCFD) when assessing the potential transition and physical risks of Projects financed under the Equator Principles; and
- We support conservation including the aim of enhancing the evidence base for research and decisions relating to biodiversity.

In addition to above preamble related with Human rights, other principles related with human rights, corporate social responsibility and responsibilities of corporates responsibilities on community according to EP are as following;

- Principle 11: Business enterprises should avoid infringing on the human rights of others and should address adverse human rights impacts with which they are involved.
- Principle 12: The responsibility of business enterprises to respect human rights refers to internationally recognized human rights – understood, at a minimum, as those expressed in the International Bill of Human Rights and the principles concerning fundamental rights set out in the International Labor Organization’s Declaration on Fundamental Principles and Rights at Work
- Principle-13: The responsibility to respect human rights requires that business enterprises avoid causing or contributing to adverse human rights impacts through their activities, and address such impacts when they occur;
- Principle-14: The responsibility of business enterprises to respect human rights applies to all enterprises regardless of their size, sector, operational context, ownership and structure. Nevertheless, the scale and complexity of the means through which enterprises meet that responsibility may vary according to these factors and with the severity of the enterprise’s adverse human rights impacts
- Principle-15: Business enterprises should have policies and processes appropriate to their size and circumstances in place, including:

The following Operational principles should also be taken into consideration.

- Principle-16: Policy commitment
- Principle-17 to 21: Human rights due diligence
- Principle 22: Remediation



21.2.2.2 United Nations Guiding Principles on Business and Human Rights (UNGP)

The UNGP is the key framework for the project's assessment of human rights and to set management system.

The responsibility to respect human rights is a global standard of expected conduct for all business enterprises wherever they operate. It exists independently of States' abilities and/or willingness to fulfil their own human rights obligations, and does not diminish those obligations. And it exists over and above compliance with national laws and regulations protecting human rights.

Addressing adverse human rights impacts requires taking adequate measures for their prevention, mitigation and, where appropriate, remediation.

Business enterprises may undertake other commitments or activities to support and promote human rights, which may contribute to the enjoyment of rights. But this does not offset a failure to respect human rights throughout their operations.

Business enterprises should not undermine States' abilities to meet their own human rights obligations, including by actions that might weaken the integrity of judicial processes.

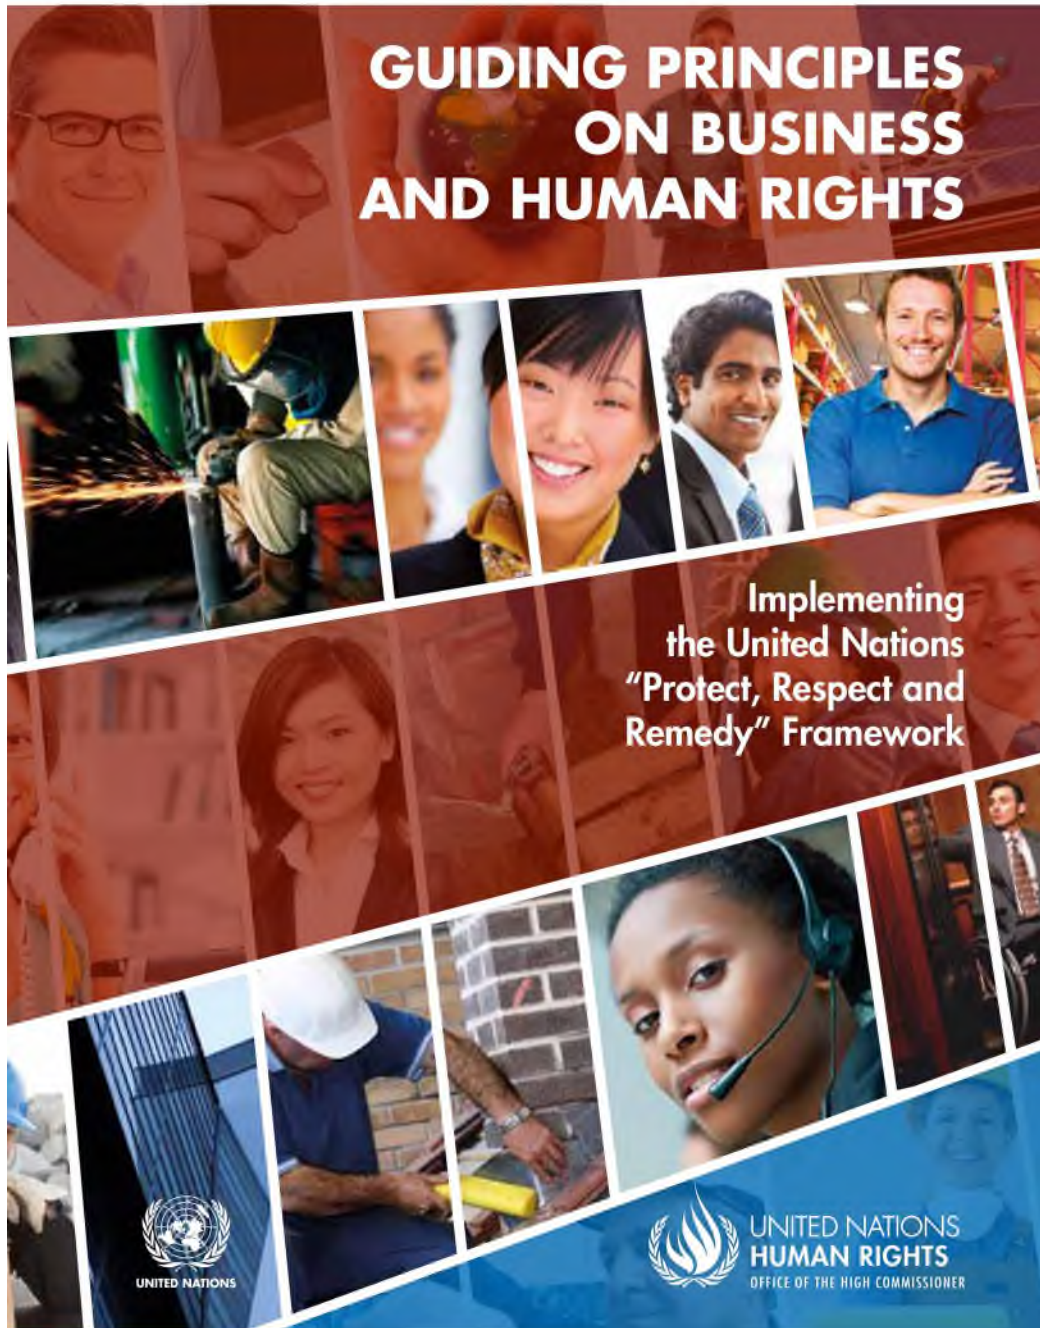


Figure 198: UN Guiding Principles on Business and Human Rights



21.3 Potential Impacts upon Human Rights

21.3.1 Construction

Note: Several of the potential impacts on Human Rights, in particular, those affecting workers have already been assessed with mitigation included in section 18 "Labor and Working Conditions".

21.3.1.1 Indigenous Peoples

Under the UN Guiding principles, the rights of indigenous people should be protected. This includes ensuring prior, free informed consent is provided before any Project development is allowed to take place on their land.

Uzbekistan is Central Asia's most populous country. The last census was conducted in 1989, but according to official estimates updated in 2017, out of a total of 32.1 million people, the ethnic Uzbek majority totaled just over 26.9 million (83.8 per cent of the population) while ethnic Tajiks made up 1,544,700 (4.8 per cent). Other sizable minorities include Kazakhs 803,400 (2.5 per cent), Russians 750,000 (2.3 per cent), Karakalpaks 708,800 (2.2 per cent), Kyrgyz 274,400 (0.9 per cent), Tatars 195,000 (0.6 per cent), Turkmens 192,000 (0.6 per cent), Koreans 176,900 (0.6 per cent) and Ukrainians 70,700 (0.2 per cent). (MRGI, 2021)

Other minorities include Meskhetian Turks and Jews.

The bulk of citizens are at least nominally Sunni Muslim while most of the Russian minority is nominally Orthodox Christian; in practice many citizens of all ethnicities identify with smaller movements like Sufism, Ahmadiyya and various forms of evangelical Christianity.

While the nominally autonomous republic of Karakalpakstan occupies 37 per cent of the country's territory, ethnic Karakalpaks represent about a third of the Karakalpakstan's population, and a very slight proportion of the country's total population.

The ethnic Tajik population is widely thought to be much greater than official statistics indicate, given that many Tajiks and Tajik speakers may classify themselves as Uzbeks to improve their career opportunities.

Uzbekistan is made up of a number of traditional populations of Turkic (Uzbeks, Kazakhs, Karakalpaks), Semitic (Bukhara Jews), and Iranian origins (Tajiks), as well as more recent minorities which arrived in the country during the Russian and Soviet domination (Russians, Crimean Tatars, Meskhetian Turks, Koreans and some Jews).

Since 1991 however, there has been a two-way flow of population which is continuing the dramatic change to the country's demographics. While there are thousands of ethnic Uzbeks who had been working outside of the country have been returning to Uzbekistan from Russia and other neighboring countries, other minorities which are of more recent origin such as the Russians, Crimean Tatars and others have also been emigrating in large numbers.

Only ethnic group known in the area are Ethnic Turkmens. There are over 150,000 ethnic Turkmen live in border regions of Uzbekistan including Khorezm, Surkhandarya and Karakalpakstan. (IWPR, 2010)



However, as part of the consultation process, desktop researches, no indigenous people or ethnic minorities have been identified in or nearby the Project location. Therefore, no further assessment has been undertaken in regards to indigenous people or ethnic minorities.

21.3.1.2 Local Communities

The Project site is located nearby in a lake. The closest settlements are at least 0.9kms away from project border. Based on the Project's area of influence (as per potential impacts upon different environmental and social parameters), there are expected to be specific Project impacts to communities relating to health, safety and security etc. Impacts on community health and safety and mitigation measures are discussed in previous chapter 19 Community Health and Safety. The impacts related with human rights on community will be kept under control by implementing and improving maturity of grievance redress and stakeholder engagement processes.

21.3.1.3 Project Workers

The project will have several parties during the construction and test and commissioning phases. As mentioned in the preamble of this section, many human rights impacts on project personnel are covered in the "Section 18 Labor and Working Conditions". There will likely be various internal processes and protocols related to HR and worker management for each party. The project shall ensure that compliance to Human rights issues are achieved in sub-contractors, Sub-contractor's sub-contractor and suppliers.

Certain parties will also engage contract staff (e.g. from agencies), where additional manpower is required. There will also be suppliers/service providers (e.g. for deliveries, waste management) who will have access to the site and will be exposed to certain risks of exploitation.

ILO's "2020 third-party monitoring of child labour and forced labour during the cotton harvest in Uzbekistan" (ILO, 2021) reports have shown that there were instances of forced labor, labor with poor contracting conditions, or lacking processes in 2020. As previously assessed, this is a potential impact for the Project, especially for contract staff, or those of sub-contractors. Such risks will need to be carefully safeguarded through policy and internal processes (including monitoring and audit) including sub-contractors, sub-sub-contractors and suppliers.

21.3.2 Operational Phase

It is approximated that there will be limited workers compared with construction phase during operational phase of the Project which will be a big reduction compared to the construction phase. As a result, the only potential impact on human rights that could potentially be expected is the exploitation of workers.

21.3.2.1 Local Community

No adverse impact to the community Human Rights is expected during the operation phase. However, the company shall be in touch with local community elders, leaders and local governments to collect grievances efficiently as explained in "Chapter 19 Community Health and Safety" of this report



21.3.2.2 Project Workers

As the vast majority of staff will be direct employees of the Project Company the potential risks associate with worker exploitation are expected to be limited due to consistent processes in place as part of the respective HR management systems, assuming they are appropriately designed and have adequate resources. However, where there is an agency/contract staff the risks of exploitation (particularly forced and child labour) may be more prevalent.



22. REFERENCES

- [1] Reproduced from LCP BREF, Figure 3.56: Schematic of a combined-cycle power plant with a Heat Recovery Steam Generator (HRSG), pp.271.
- [2] The ABCs of ACCs and ZLD: Air Cooled Condensers have an important role in Zero Liquid Discharge Installations Published by Alex Filar.
<https://www.fossilconsulting.com/2020/10/14/the-abcs-of-accs-and-zld-air-cooled-condensers-have-an-important-role-in-zero-liquid-discharge-installations/>
- [3] IFC official web site
https://www.ifc.org/wps/wcm/connect/topics_ext_content/ifc_external_corporate_site/sustainability-at-ifc/publications/publications_gpn_workersaccommodation
- [4] National Database of Legislation of the Republic of Uzbekistan.
<https://www.lex.uz/>
- [5] <https://invest.gov.uz/ru/mediacenter/news/the-president-instructed-to-create-31-clusters-for-the-collection-and-processing-of-waste-in-the-regions-and-the-republic-of-karakalpakstan/>
- [6] <http://www.adolatqzt.uz/economy/5000>
- [7] <https://lex.uz/docs/-4593348?type=doc>
- [8] Solid Waste Management Improvement Project (RRP UZB 45366), Sector Assessment (Summary): Water And Other Municipal Infrastructure And Services, Asian Development Bank, 2022.
<https://www.adb.org/sites/default/files/linked-documents/45366-004-ssa.pdf>
- [9] Wastewater Management Appraisal Report for Termez City, Asian Development Bank, 2009.
- [10] <https://lex.uz/uz/docs/2705046>
- [11] 15838-Uzbekistan Country Profile-WEB.pdf (worldbank.org).
- [12] REF NEHRP, National Earthquake Hazard Reduction Program, (1994). Recommended provisions for seismic regulations of new buildings: Part I, Provisions, FEMA 222A, Federal Emergency Management Agency, Washington, D.C.
- [13] International Finance Corporation (IFC), Environmental, Health and Safety Guidelines, Thermal Power Plants, 2008, page:2
https://www.ifc.org/wps/wcm/connect/f82a5f06-f3f7-4033-8ea6b767523cda8e/FINAL_Thermal%2BPower.pdf?MOD=AJPERES&CVID=jqeD9Eq&id=1323162579734
- [14] Landscape Institute and the Institute of Environmental Management & Assessment (2013), Guidelines for Landscape and Visual Impact Assessment, 3rd Edition (GLVIA3)
- [15] http://www.cawater-info.net/surkhandarya/i/pz_middle_uz_3_e.gif
- [16] Nikitin A.M. Reservoirs of Central Asia/ Leningrad, Gidrometizdat, 1991, 163 p.
- [17] Mirzaev U. T. Morpho-ecological features of acclimatized pike-perch in irrigation reservoirs in the south of Uzbekistan: Abstract of diss. ... Cand. biol. sciences. - Tashkent: Institute of Zoology of the Academy of Sciences of the Republic of Uzbekistan, 1994, 21 p.
- [18] IFC Environmental, Health, and Safety Guidelines, Thermal Power Plants, Draft for Second Public Consultation—May/June 2017.



- [19] National Database of Legislation of the Republic of Uzbekistan.
<https://www.lex.uz/>
- [20] Asia Köppen Climate Classification Map.
<https://www.plantmaps.com/koppen-climate-classification-map-asia.php>
- [21] Tsaruk O.I., Chikin Yu.A. Descriptions of territorial divisions of ECONET elements of the Republic of Uzbekistan. Project report. 2005.
- [22] International Plant Name Index (IPNI).
<https://www.ipni.org/>
- [23] The Plant List (TPL).
<http://www.theplantlist.org/>
- [24] Kew Royal Botanic Gardens.
<http://www.plantsoftheworldonline.org/>
- [25] Khassanov F.O, 2015. Conspectus Florae Asiae Mediae. Editio Academiae Scientiarum, Tashkent.
- [26] International Finance Corporation's Guidance Note 6: Biodiversity Conservation and Sustainable Management of Living Natural Resources, 2019.
- [27] Bing Maps in Google Earth.
<https://ge-map-overlays.appspot.com/bing-maps>
- [28] Botanical Journal of the Linnean Society, Volume 181, Issue 1, May 2016, pages 1–20.
<https://doi.org/10.1111/boj.12385>
- [29] Nikitin A.M. Reservoirs of Central Asia/ Leningrad, Gidrometizdat, 1991, 163 p.
- [30] Invasive Species Specialist Group.
<http://www.issg.org/>
- [31] IUCN Red List of Threatened Species.
<https://www.iucnredlist.org/>
- [32] Convention on International Trade in Endangered Species of Wild Fauna and Flora.
<https://cites.org/eng>
- [33] Convention on the Conservation of European Wildlife and Natural Habitats - Bern Convention.
<https://www.coe.int/en/web/conventions/full-list?module=treaty-detail&treaty-num=104>
- [34] Convention on the Conservation of Migratory Species of Wild Animals
<https://www.cms.int/>
- [35] Red Book of the Republic of Uzbekistan, II volume: Animals; edited by Zh.A. Azimov. T., 2019, 374 p.
- [36] Amanov A.A. Ichthyofauna of water bodies of the Surkhandarya river basin: Abstract of dis. . Cand. biol. sciences. - Frunze: Kyrgyz State University, 1963, 18 p.
- [37] Ergasheva M.T. Morpho-ecological features of the Amudarya trout *Salmo trutta oxianus* and the common marinka *Schizothorax intermedius* of the Surkhandarya river basin of Uzbekistan: Abstract of the diss. Cand. biol. sciences. - Tashkent: Institute of Zoology, 1997, 20 p



- [38] The EU Water Framework Directive - integrated river basin management for Europe.
https://ec.europa.eu/environment/water/water-framework/index_en.html
- [39] Berg L.S. Fish of fresh waters of the USSR and neighbouring countries. Part 2. - Moscow, 1949, p. 470-925.
- [40] Mirzaev U.T., Kuvatov A.K. Annotated list of fish of the Chirchik river // Zoological science of Uzbekistan: modern problems and development prospects: Materials of the republican scientific-practical conference. - Tashkent, 2020, p. 184-188.
- [41] Bulgakov G.P. Macrozoobenthos of the Boshkyzylsay river and its tributaries // Proceedings of the reserves of Uzbekistan. - Tashkent: Mekhnat, 1997, pp. 7-29.
- [42] V.I. Popchenko. Monitoring of macrozoobenthos. / IN AND. Popchenko, G.P. Bulgakov, V.N. Talskikh // Guidelines for hydrobiological monitoring of ecosystems. -Gidrometeoizdat. -S. Petersburg. - 1992, p. 64-104.
- [43] Lepneva S.G. Fauna of the USSR. Caddisflies. Vol. 2, Issue 1, M.-L., Nauka Publishing House, 1964.
- [44] A. V. Makrushin. Bibliographic index on the topic "Biological analysis of water quality" with a list of organisms-indicators of pollution. - L., Science, 1974, 60 p.
- [45] Kiselev I.A. Plankton of seas and continental bodies of water. (Plankton of the seas and continental reservoirs) in 2 volumes, L., Nauka, 1969. V.1. Pp. 123-258; T. 2.P. 658.
- [46] Recommendations. Methods of hydrobiological monitoring of water bodies in the Central Asian region: Ed. V.N. Talskikh, RUz 52.25.32-97. -Tashkent. -1997, P. 67.
- [47] Usachev P.I. A quantitative technique for collecting and processing phytoplankton. Proceedings of VGBO, 1961, vol. 11, p. 411-415.
- [48] Khalilov S.A., Shoyakubov R.Sh., Mustafaeva Z.A., Ergasheva Kh.E., Karimov B.K., Tojibaev T.Zh., Alimzhanova Kh.A. Keys to volvox algae in Uzbekistan. - Namangan, 2014, 215 p.
- [49] Fedorov V. D., Kapkov V. I. Practical hydrobiology of freshwater ecosystems. - Moscow, Moscow State University, 2006, 365 p.
- [50] V. I. Monchenko. Nutcracker cyclopodi. Cyclops (Cyclopidae) / Fauna of Ukraine. In 40 volumes - Kiev: N. Dumka, 1974.Vol. 23. S. 12-230.
- [51] Zabelina M.M., Kiselev I.A., Proshkina-Lavrenko A.I., Sheshchukova V.S. Keys to freshwater algae of the USSR. Volume 4. Diatoms - M., Soviet Science, issue 2. 1953; 620 p.
- [52] Barinova S.S., Medvedeva L.A., Anisimova O.V. Biodiversity of algae as indicators of the environment. Tel Aviv, 2006; 498 p
- [53] Talskikh V.N. Ecological modifications of biocenoses of transformed aquatic ecosystems in the Central Asian region under drought conditions. Climate change, causes, consequences and adaptation measures, Uzhydromet, UNEP. // Bulletin No. 9. - Tashkent, 2015, P.53-63.
- [54] Amanov A.A. Ichthyofauna of water bodies of the Surkhandarya river basin: Abstract of dis. ... Cand. biol. sciences. - Frunze: Kyrgyz State University, 1963; 18 p.
- [55] Amanov A.A. Fish ecology of reservoirs in the south of Uzbekistan and neighbouring republics. - Tashkent: Fan, 1985; 160 p.
- [56] Dinesman L. G., Kaletskaya M. L. 1952. Methods of quantitative accounting of amphibians and reptiles // Methods of accounting and geographical distribution of terrestrial fauna. M.: Publishing House of the Academy of Sciences of the USSR. pp. 329-341.
- [57] Makeev V.M., Bozhansky A.T. Methodical approaches to the study of the number of reptiles // Rare and little-studied animals of Turkmenistan. Ashgabat: Ylym, 1988, pp. 117-127.



- [58] Shcherbak N. N. Quantitative accounting // Guide to the study of amphibians and reptiles. Kyiv: "Naukova Dumka", 1989. S. 121-125.
- [59] Bondarenko D.A., Chelintsev N.G. Comparative evaluation of various methods of route accounting of desert reptiles // Bul. MOIP, 1996. Dep. biol. T. 101, no. 3. S. 26-35.
- [60] Vashetko E.V., Khodjaev A.F., Nuridjanov A.S., Chikin Yu.A.. Resources of Testudo horsefieldii in Uzbekistan. // Congress of Testudo. Gonfaron, France, 2001.
- [61] Bibby C.J., Burgess N.D. et Hill D.A., 2000: Bird Census Techniques. - Academic Press, London, 2nd edition.
- [62] Simon Delany Guidance on waterbird monitoring methodology: Field Protocol for waterbird counting.- Wetlands International, 2010 – 25 p.
- [63] Uzbekistan Energy Profile. Country report — April 2020. Retrieved from <https://www.iea.org/reports/uzbekistan-energy-profile>;
- [64] The Concept note for ensuring electricity supply in Uzbekistan in 2020-2030. Ministry of Energy of the Republic of Uzbekistan. Retrieved from <https://minenergy.uz/ru/lists/view/77>;
- [65] "Preparatory Survey (F/S) For Tashkent Thermal Power Cogeneration Plant Construction Project and Master Plan Study in The Republic of Uzbekistan". 2016. Japan International Cooperation Agency (JICA). Available at: <https://openjicareport.jica.go.jp/pdf/12260816.pdf> .
- [66] Syrdarya Power Project, Project Description". European Bank For Reconstruction And Development. Available at: (<https://www.ebrd.com/work-with-us/projects/psd/51963.html>). Last Access date:27 July 2021.
- [67] World Bank (2016). World Bank Environmental and Social Framework. World Bank, Washington, DC. Retrieved from <https://documents1.worldbank.org/curated/en/383011492423734099/pdf/The-World-Bank-Environmental-and-Social-Framework.pdf>;
- [68] International Finance Corporation (2012). IFC Performance Standards on Environmental and Social Sustainability. Washington DC: World Bank. Retrieved from https://www.ifc.org/wps/wcm/connect/c02c2e86-e6cd-4b55-95a2-b3395d204279/IFC_Performance_Standards.pdf?MOD=AJPERES&CVID=kTjHBzk;
- [69] EBRD (2019). Environmental and Social Policy. European Bank for Reconstruction and Development. London. UK. Retrieved from <https://www.developmentaid.org/api/frontend/cms/file/2021/04/ebrd-environmental-and-social-policy-2019.pdf>;
- [70] The Government Portal of the Republic of Uzbekistan. Territory. Retrieved from <https://www.gov.uz/en/pages/territory>;
- [71] Open data portal of the Republic of Uzbekistan. Administrative divisions of the Republic of Uzbekistan. Retrieved from <https://data.gov.uz/ru/datasets/13061>;
- [72] Sanitary norms and rules for the protection of atmospheric air in populated areas of the Republic of Uzbekistan -SanPiN No.0350 17 (2017). Retrieved from https://nrm.uz/contentf?doc=538239_k_sanpin_ruz_n_0350-17;
- [73] Climate Change Factors 28/2016, CO2 Emission Factors for Fossil Fuels, Kristina Juhrich Emissions Situation (Section I 2.6) German Environment Agency (UBA) June 2016.
- [74] Urinboyev, R. (2012). Bridging the State and Society: Case Study of Mahalla Institutions in Uzbekistan. SSRN Electronic Journal, December. <https://doi.org/10.2139/ssrn.2165651>;
- [75] Bektemirov, K., & Rahimov, E. (2018). Local Government in Uzbekistan. Global Encyclopedia of Public Administration, Public Policy, and Governance, 1–7. https://doi.org/10.1007/978-3-319-31816-5_3665-1;



- [76] Mahalla – a Unique Social Structure, Retrieved from https://uzbekembassy.com.my/eng/news_press/society/mahalla_a_unique_social_structure.html;
- [77] Decree of the president of the Republic of Uzbekistan № PF-5938 of February 18, 2020. "On measures to improve the social and spiritual atmosphere in society, further support of the mahalla institute, and also rise to a new level of the system of work with families and women". Retrieved from <https://lex.uz/docs/4740347>;
- [78] State Committee of the Republic of Uzbekistan on Statistics. (2018). Socio-Economic Situation in The Republic of Uzbekistan. January-December 2020. Retrieved from <https://stat.uz/files/325/qr2020-december/1424/January-December-2020.pdf>
- [79] State Committee of the Republic of Uzbekistan on Statistics. Surkhandarya Regional Statistical Department. (2021). Statistical Newsletter of Surkhandarya Region. Retrieved from <https://www.surxonstat.uz/files/100/2020-yilning-asosiy-ijtimoiy-iqtisodiy-ko-rsatkichlari/1483/Surxondaryo-viloyatining-Statistik-axborotnomasi.pdf>;
- [80] Anarbekov, O.; Gaipnazarov, N.; Akramov, I.; Djumaboev, K.; Gafurov, Z.; Solieva, U.; Khodjaev, S.; Eltazarov, S.; Tashmatova, M. 2018. Overview of existing river basins in Uzbekistan and the selection of pilot basins. [Project Report of the Sustainable Management of Water Resources in Rural Areas in Uzbekistan. Component 1: National policy framework for water governance and integrated water resources management and supply part]. Colombo, Sri Lanka: International Water Management Institute (IWMI). 89p. doi. 10.5337/2018.203. Retrieved from http://centralasia.iwmi.cgiar.org/regional-content/central_asia/pdf/overview_of_existing_river_basins_in_uzbekistan_and_the_selection_of_pilot_basins.pdf;
- [81] Majidov H. (2021). Watching to EAEU: perspective for Labor Migration from Uzbekistan (+ infographics). Center for Economic Research and Reform. Retrieved from <https://review.uz/en/post/eoiini-kuzatib-mehnat-migraciyasi-sohasi-istiqbollari>;
- [82] International Labour Office. (2021). Uzbekistan. Retrieved from <https://www.iom.int/countries/uzbekistan>;
- [83] State Committee of the Republic of Uzbekistan on Statistics. Demographic situation in Uzbekistan (2021). Retrieved from <https://stat.uz/en/press-center/news-of-committee/10479-demographic-situation-january-march2021-2>
- [84] Hokimiyat of Surkhandarya. (2021) Age categories of Surkhandarya. In Uzbek "Ёшлар-2020 йиллик". MS Excel file.
- [85] United Nations, Department of Economic and Social Affairs, Population Division. (2015). World Population Ageing 2015 (ST/ESA/SER. A/390). United Nations. New York. Retrieved from https://www.un.org/en/development/desa/population/publications/pdf/ageing/WPA2015_Report.pdf;
- [86] World Bank. (2018). Uzbekistan Education Sector Analysis. World Bank. Retrieved from <https://documents1.worldbank.org/curated/en/379211551844192053/pdf/Uzbekistan-Education-Sector-Analysis.pdf>;
- [87] State Committee of the Republic of Uzbekistan on Statistics. Surkhandarya Regional Statistical Department (2021). Minimum indicators of social sphere, guarantees of children's rights. Retrieved from <https://www.surxonstat.uz/uz/rasmiy-statistika/social-protection-2>;
- [88] State Committee of the Republic of Uzbekistan on Statistics. (2021). Minimum indicators of social sphere, guarantees of children's rights. Retrieved from <https://stat.uz/uz/rasmiy-statistika/social-protection-2>;
- [89] Council, H. R. (2020). Report of the Special Rapporteur on the right to education (Issue May).
- [90] Hokimiyat of Angor. (2021). Passport of Angor district. Unpublished document;
- [91] Hokimiyat of Termez. (2021). Passport of Termez district. Unpublished document;



- [92] Ministry of preschool education. (n.d.). Retrieved August 9, 2021, from <https://mdo.uz/en/>
- [93] Ministry of health. Ўзбекистонда янги давр тиббиётига асос солинмоқда (November 2, 2020) Retrieved from <https://ssv.uz/uz/news/zbekistonda-jangi-davr-tibbietiga-asos-solinmoda>
- [94] State Committee of the Republic of Uzbekistan on Statistics. (2021). Demography. The main demographic indicators. Life expectancy at birth. <https://api.stat.uz/api/v1.0/data/tugilishda-kutilayotgan-umr-davomiyligi?lang=uz&format=pdf;>
- [95] Institute of Air Quality Management, Guidance on the Assessment of Dust from Demolition and Construction Version 1.1, 2014, pp.13 (<http://iaqm.co.uk/text/guidance/construction-dust-2014.pdf>)
- [96] Review of World Water Resources by Country. Water Reports 23, <https://www.fao.org/3/Y4473E/y4473e.pdf>
- [97] Sustainable Management of Water Resources in Rural Areas in Uzbekistan, [Overview of Existing River Basins in Uzbekistan and the Selection of Pilot Basins \(cgjar.org\)](#)
- [98] Mountains of Central Asia' project of Critical Ecosystem Partnership Fund (CEPF) <https://www.cepf.net/our-work/biodiversity-hotspots/mountains-central-asia>
- [99] Birdlife National-Maps. <http://datazone.birdlife.org/site/mapsearch>
- [100] United Nations Economic Commission for Europe, Uzbekistan Environmental Performance Reviews, Third Review, 2020.
- [101] Vos, T., Lim, S. S., Abbafati, C., Abbas, K. M., Abbasi, M., Abbasifard, M., .. & Bhutta, Z. A. (2020). Global burden of 369 diseases and injuries in 204 countries and territories, 1990–2019: a systematic analysis for the Global Burden of Disease Study 2019. The Lancet, 396(10258), 1204-1222. <https://www.thelancet.com/action/showPdf?pii=S0140-6736%2820%2930752-2>
<http://www.healthdata.org/uzbekistan>
- [102] COVID-19 Emergency Response Project (RRP UZB 54282-001). (2020). Summary Assessment of Damage and Needs.
- [103] Presidential Decree PQ-4063 on 18.12.2018. Measures for the prevention of non-infectious diseases, supporting a healthy lifestyle and increasing the level of physical activity of the population. retrieved from <https://www.lex.uz/docs/-4111365;>
- [104] Hokimiyat of Angor. (2021). The total number of registered diseases among the population of Angor district in 6 months of 2016, 2017, 2018, 2019, 2020, 2021 and morbidity rates per 100,000 population. Unpublished document.
- [105] Ministry of Health of the Republic of Uzbekistan (2014). Data Collection Survey on Health Sector in the Republic of Uzbekistan. Final Report. Japan International Cooperation Agency (JICA) System Science Consultants Inc. <https://openjicareport.jica.go.jp/pdf/1000038771.pdf;>
- [106] Surkhandarya hokimiyat. (2021). Passport of Surkhandarya province. Unpublished document



- [107] Xalq so'zi online (2018) A gem in the heart of Uchqizil district. Uzbek "Uchqizil mavzesi bag'ridagi marvarid".
<https://xs.uz/uz/post/nermiz-uchqizil>;
- [108] World Bank (2019) Uzbekistan. Building Blocks for Integrated Transport and Logistics Development. Policy paper. World Bank.
<https://openknowledge.worldbank.org/bitstream/handle/10986/34160/Uzbekistan-Building-Blocks-for-Integrated-Transport-and-Logistics-Development-Policy-Paper.pdf?sequence=4&isAllowed=y>;
- [109] Ministry of Energy of the Republic of Uzbekistan. (2019). Electricity Sector.
<https://minenergy.uz/en/lists/view/22>;
- [110] Presidential Decree No. PP-4422 of 22 August 2019. On accelerated measures to increase energy efficiency of economy and social sectors, introduction of energy-saving technologies and development of renewable energy sources.
<https://lex.uz/ru/docs/4486127>;
- [111] International Energy Agency. (2020). Uzbekistan energy profile. Country report — April 2020.
<https://www.iea.org/reports/uzbekistan-energy-profile>;
- [112] International Labour Office. (2016). Key Indicators of the Labour Market. Ninth edition. International Labour Office. Geneva.
https://www.ilo.org/wcmsp5/groups/public/---dgreports/---stat/documents/publication/wcms_498929.pdf;
- [113] International Labour Office. (2013). Employment-to-population ratio (pp. 2013–2016).
- [114] Ministry of Employment and Labor Relations of the Republic of Uzbekistan. (n.d.). August 13, 2021.
<https://mehnat.uz/en>;
- [115] State Committee of the Republic of Uzbekistan on Statistics. (2021). Labor market.
<https://stat.uz/uz/rasmiy-statistika/labor-market-2>;
- [116] State Committee of the Republic of Uzbekistan on Statistics. Surkhandarya Regional Statistical Department (2021). Labor market.
<https://www.surxonstat.uz/uz/rasmiy-statistika/labor-market-2>
- [117] Labor force participation rate, total (% of total population ages 15+) (national estimate) - Uzbekistan | Data. (n.d.). Retrieved August 12, 2021.
<https://data.worldbank.org/indicator/SL.TLF.CACT.NE.ZS?locations=UZ>;
- [118] International Labor Organization, "Supplier Guidance on Preventing, Identifying and Addressing Child Labour", 2020.
https://www.ilo.org/wcmsp5/groups/public/---ed_norm/---ipecc/documents/publication/wcms_792211.pdf
- [119] A



[120] A

[121]